

Ratings and Safety Standards

Items	Specifications
UL, CSA	10A 250V AC
SEMKO	6A / 96A 250V ~ , 10 (6) / 250 ~
VDE	6A / 96A 250V ~ , 10 (6) / 250 ~
BS	6A / 96A 250V ~ , 10 (6) / 250 ~
Ratings satisfying local electrical appliance and material safety law	125V 10A $\nless$

Product Line

Circuit arrangement	Travel (mm)	Operating force	Mounting method	Terminal configuration	Frame	Marking (Knob)	Minimum order unit (pcs.)		Product No.	Drawing No.
							Japan	Export		
SPST	3.4	3 ± 2N	Snap-in	For Lead	Without	Without	100	2,000	SDDJE11600	1
				Right angle	With			1,250	SDDJE12200	2
				For Lead	Without	● mark		2,000	SDDJE10300	1
				Right angle	With			1,250	SDDJE12300	2
				For Lead	Without	IO mark		2,000	SDDJE10700	1
				Right angle	With			1,250	SDDJE12400	2
				For Lead	Without	— O mark		2,000	SDDJE11200	1
				Right angle	With			1,250	SDDJE12500	2
DPST		6 ± 3N		For Lead	Without	Without		2,000	SDDJE31600	3
				Right angle	With			1,250	SDDJE32000	5
				For Lead	Without	● mark		2,000	SDDJE30100	3
				For PC board					SDDJE32700	6
				Right angle	With				SDDJE30200	4
				Right angle					1,250	SDDJE32100
				For Lead	Without	IO mark		2,000	SDDJE30300	3
				For PC board					SDDJE33300	6
				Right angle	With				SDDJE30500	4
				Right angle					1,250	SDDJE30400
	For Lead	Without	— O mark	2,000	SDDJE30700	3				

Notes

1. The lead terminals are also used as tab terminals#187 (Use a positive lock connector type) .
2. The lead terminal type can be mounted onto a board.(Manual soldering required)
3. Standard products apply Grade V-2 material (Flame Class) . For Grade V-0 type please contact us.
4. Products other than those listed in the above chart are also available. Please contact our us for details.

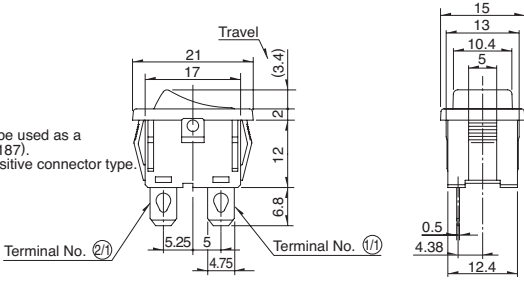
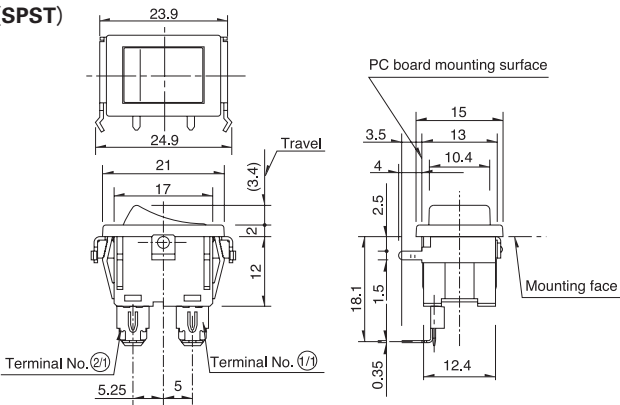

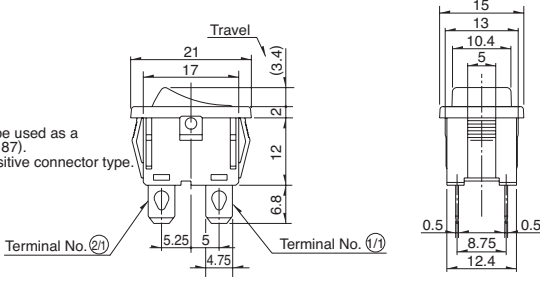
Packing Specifications

Bulk

Product No.	Number of packages (pcs.)		Export package measurements (mm)
	1 case / Japan	1 case / export packing	
SDDJE11600, SDDJE10300, SDDJE10700, SDDJE11200, SDDJE31600, SDDJE30100, SDDJE32700, SDDJE30200, SDDJE30300, SDDJE33300, SDDJE30500, SDDJE30700	400	2,000	411 $\times$ 328 $\times$ 379
SDDJE12200, SDDJE12300, SDDJE12400, SDDJE12500, SDDJE32000, SDDJE32100, SDDJE30400	250	1,250	

Dimensions

Unit:mm

No.	Configuration (ON position)	
1	For Lead (SPST) 	
2	Right angle (SPST) With frame 	PC board mounting hole dimensions 
3	For Lead (DPST) 	

Detector

Slide

Push

Rotary

Encoders

Power

Dual-in-line
Package Type

TACT Switch™

Push
Type

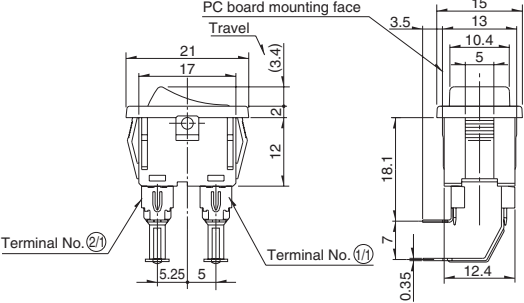

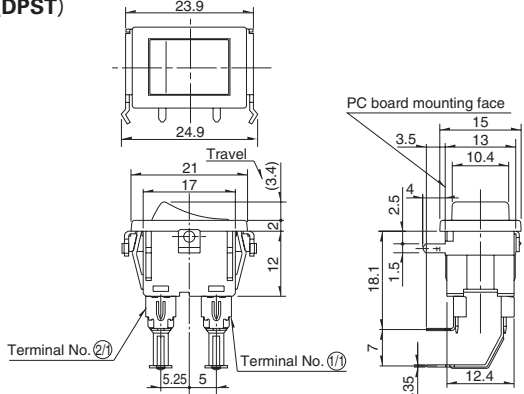

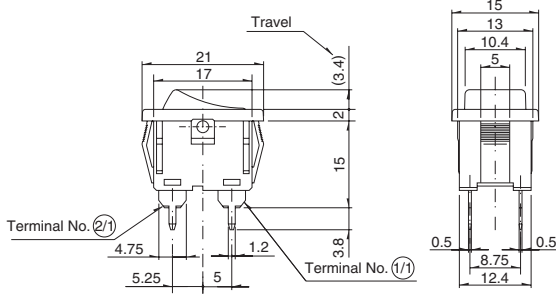

Rocker
Type

Slide
Type



Rotary
Type

Dimensions

Unit:mm

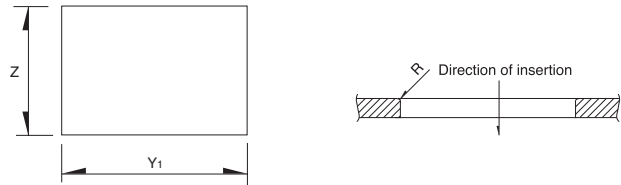
No.	Style (ON position)	PC board mounting hole dimensions
4	Right angle (DPST) 	
5	Right angle (DPST) With frame 	
6	For PC board (DPST) 	

Circuit Diagram

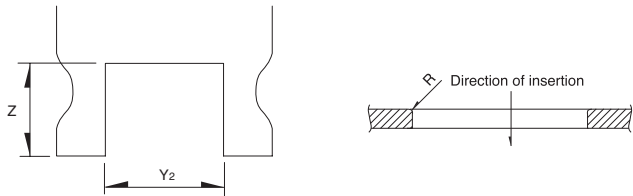
SPST	DPST
	

■ Mounting Hole Dimensions

Square-shaped Hole			Unit:mm
Thickness of mounting board	Y ₁	Z	
0.75 to 1.25	19.2 ⁰ _{-0.1}	12.9 ^{+0.1} ₀	
1.25 to 2.00	19.4 ⁰ _{-0.1}		







U-shaped Hole			Unit:mm
Thickness of mounting board	Y ₂	Z	
0.75 to 1.1	19.5 ⁰ _{-0.1}	12.9 ^{+0.1} ₀	
1.1 to 1.7	19.7 ⁰ _{-0.1}		
1.7 to 2	19.9 ⁰ _{-0.1}		



Note

Verify the performance under actual product conditions before use.

■ Marking Variety

Without marking	With ● marking	With I, O marking	With —, O marking
			

Detector

Slide

Push

Rotary

Encoders

Power

Dual-in-line
Package Type

TACT Switch™

Push
Type

Rocker
Type

Slide
Type

Rotary
Type

Power Switches

List of Varieties

Type		Push			Rocker	
Series		SDKN	SDKR	SDDH	SDDJE ※ 1 ※ 2	SDDJF ※ 1 ※ 2
Photo						
Rating		0.25A 250V AC 0.5A 125V AC 5mA 5V DC	0.5A 250V AC 1A 125V AC 10mA 5V DC	Rating (max.): 4.5A 12V DC (lamp load: 27W x 2) Rating (min.): 10mA 12V DC (Resistive load)	10A 250V AC 6A / 96A 250V~	16A 250V AC 16 (6) / 250~
Operating life		5,200cycles	100,000cycles	100,000 cycles	10,000cycles	
		0.25A 250V AC	0.5A 250V AC		10A 250V AC	16A 250V AC
Travel (mm)		9 9.7	1.5	3.7	3.4	5.2
Features		—	Water-proof type With signal circuit	Water-proof (IP68 rating)	—	—
Operating temperature range		-20°C to +60°C	-10°C to +85°C	-15°C to +80°C	-10°C to +55°C	
Automotive use		—	—	●	○	○
Life cycle (availability)						
Electrical performance	Contact resistance	100mΩ max.	100mΩ max. (ACswitch) 500mΩ max. (DCswitch)	500mΩ max.	100mΩ max.	
	Insulation resistance	100MΩ min. 500V DC	500MΩ min. 500V DC (ACswitch) 100MΩ min. 100V DC (DCswitch)	10MΩ min. 500V DC	500MΩ min. 500V DC	
	Voltage proof	600V AC for 1minute	1000V AC for 1minute (ACswitch) 100V AC for 1minute (DCswitch)	500V AC for 1minute	2,000V AC for 1minute	
Mechanical performance	Terminal strength		50N for 1minute	5N for 1minute	Slider pull-out strength: 100N MIN	50N for 1minute (lead terminal) 5N for 1minute (right-angle terminal) 60N for 1minute (lead terminal) 10N for 1minute (right-angle terminal)
	Actuator strength	Operating direction	20N	100N	—	25N
		Perpendicular direction	30N	20N	—	25N
Environmental performance	Cold		-30±2°C for 192h	-20±2°C for 240h	-15±2°C for 96h	-20±2°C for 96h
	Dry heat		70±2°C for 192h	85±2°C for 240h	80±2°C for 96h	85±2°C for 96h
	Damp heat		40±2°C, 90to95%RH for 192h	60±2°C, 90to95%RH for 1000h	40±2°C, 90to95%RH for 96h	
Page		198	200	201	202	206

- Power Switches Soldering Conditions 215
- Power Switches Cautions 215
- Power Switches Safety Standard 215

Notes

- ※ 1. Dip soldering can be used on SDDJE for PC board terminal and SDDJF right angle terminal types only.
- ※ 2. The operating temperature range for automotive applications can be raised upon request. Please contact us for details.
- indicates applicability to all products in the series, while ○ indicates applicability to some products in the series.

Power Switches Soldering Conditions

Reference for Hand Soldering

Series	Soldering temperature	Soldering time
SDDJE, SDDJF, SDKP, SDDJF1A, SDKZ, SDDE	350±10℃	3+1 / 0s
SDKT	350±10℃	3±0.5s
SDKR	300±10℃	3±0.5s

Reference for Dip Soldering

(For PC board terminal types and SDDJF right-angle terminal types)

Series	Dip soldering	
	Soldering temperature	Duration of immersion
SDKR, SDDJE, SDDJF, SDKP, SDKT, SDKZ, SDDE	260±5℃	10±1s

Power Switches Cautions

- The primary power supply switching is subject to the safety regulations, and the provisions differ by each destination. Consult with us for non-standard use cases.
- An unstable contact may occur if the switch current is lower than 0.5A. For this case, consult with us.
- These power switches were produced for alternating current. For direct current, consult with us.
- Applying load to terminals during soldering under certain conditions may cause deformation and electrical property degradation.
- Avoid use of water-soluble soldering flux, since it may corrode the switches.
- When soldering twice, wait until the first soldered portion cools to normal temperature. Continuous heating will deform the external portions, loosen or dislodge terminals, or may deteriorate their electrical characteristics.
- Before soldering switches with locking mechanism, release the locks. If they are soldered without releasing the locks, the soldering heat may deform the locking mechanism.
- Be sure to release the locks before removing the knobs. Otherwise, the locking mechanism may be broken.
- Be sure to use the switch with forced travel positioned as close to the total travel as possible.
- Tighten the mounting screws by applying the specified torque. Tightening with a larger torque than the specified will result in malfunction or breakage of screws.
- Corrosive gas if generated by peripheral parts of a set, malfunction such as imperfect contact may occur. Thorough investigation shall be required beforehand.
- Storage
 - Store the products as delivered, at a normal temperature and humidity, without direct sunshine and corrosive gas ambient. Use them at an earliest possible timing, not later than six months upon receipt.
 - After breaking the seal, keep the products in a plastic bag to shut out ambient air, store them in the same environment as above, and use them up as soon as possible.
 - Do not stack too many switches.

Power Switches Safety Standards

1. Safety Standards Outline

Safety standards are established by a country or an organization representing it to protect general users from electrical shock and fire hazards. It establishes standards for electrical devices and components. For electrical equipment manufacturers, utilizing switches that have been safety-approved ensures the safety of the switch. The use of a safety-approved switch also simplifies at least one part of the process of obtaining certification by safety testing.

2. Major Safety Standards

(1) Electrical Appliance and Material Safety Law

The conventional [Electrical Appliance and Material Control Law] has changed to [Electrical Appliance and Material Safety Law] and has been enforced since April 1, 2001. Electrical appliances are categorized into special electric appliances and parts (formerly Class A) and Electrical appliances other than the special electric appliances (formerly Class B). Special electric appliances are required to receive goodness of fit test at a certified test agency and to store the certificate. Also, penal provisions have been reinforced.

(2) UL (Underwriters Laboratories Inc.)

Underwriters Laboratories Inc. (UL) is the American safety approving organization. Its purpose is to ensure consumer safety and protect them from fire hazards. State law requires that equipment to be exported to the United States utilize UL approved power switches or power switches meeting UL standards and capable of passing UL tests.

Detector

Slide

Push

Rotary

Encoders

Power

Dual-in-line
Package Type

TACT Switch™

Push
Type

Rocker
Type

Slide
Type

Rotary
Type