

# No $R_{SENSE}^{\text{TM}}$ Constant Frequency Current Mode Boost/Flyback/SEPIC DC/DC Controller

## FEATURES

- $V_{IN}$  and  $V_{OUT}$  Limited Only by External Components
- Internal or Programmable External Soft-Start
- Constant Frequency 200kHz Operation
- Adjustable Current Limit
- Current Sense Resistor Optional
- Maximum 60V on SW Node with  $R_{DS(ON)}$  Sensing
- $\pm 1.5\%$  Voltage Reference Accuracy
- Current Mode Operation for Excellent Line and Load Transient Response
- Low Quiescent Current: 300 $\mu$ A
- Low Profile (1mm) ThinSOT<sup>TM</sup> and (0.75mm) 2mm  $\times$  3mm DFN Package

## APPLICATIONS

- Telecom Power Supplies
- 42V and 12V Automotive Power Supplies
- Portable Electronic Equipment

## DESCRIPTION

The LTC<sup>®</sup>3873 is a constant frequency current mode, boost, flyback or SEPIC DC/DC controller that drives an N-channel power MOSFET in high input and output voltage converter applications. Soft-start can be programmed using an external capacitor.

The LTC3873 provides  $\pm 1.5\%$  output voltage accuracy and consumes only 300 $\mu$ A quiescent current during normal operation and only 55 $\mu$ A during micropower start-up. Using a 9.3V internal shunt regulator, the LTC3873 can be powered from a high input voltage through a resistor or it can be powered directly from a low impedance DC voltage of 9V or less.


The LTC3873 is available in 8-lead ThinSOT and 2mm  $\times$  3mm DFN packages.

| PARAMETER                | LTC3873 | LTC3873-5 |
|--------------------------|---------|-----------|
| $V_{CC}$ UV <sup>+</sup> | 8.4V    | 3.9V      |
| $V_{CC}$ UV <sup>-</sup> | 4V      | 2.9V      |


 , LT, LTC and LTM are registered trademarks of Linear Technology Corporation. No  $R_{SENSE}$  and ThinSOT are trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

## TYPICAL APPLICATION

5V Output Nonisolated Telecom Power Supply

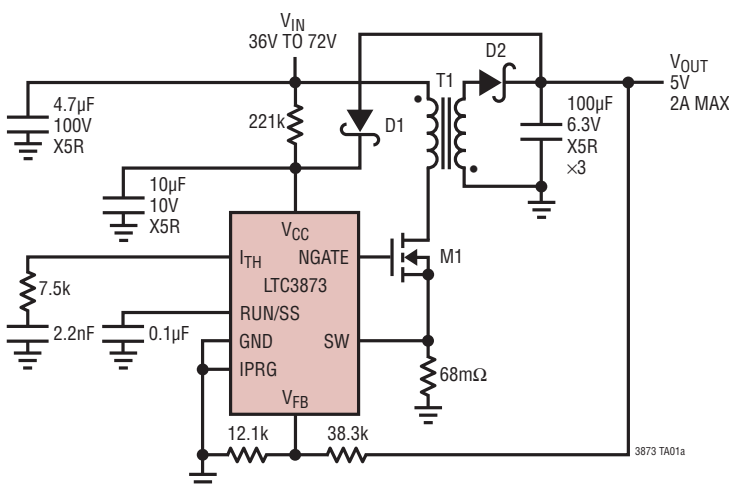

Efficiency and Power Loss vs Load Current

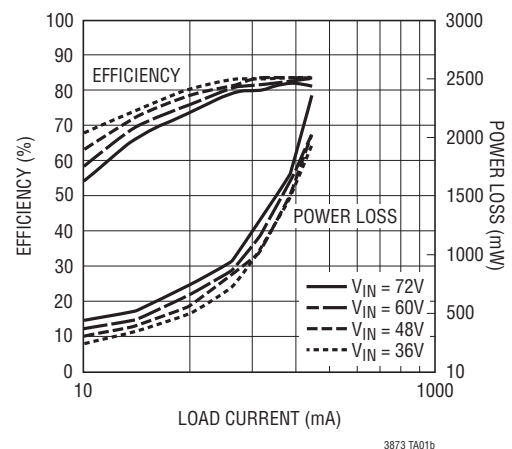



# ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ .  $V_{CC} = 9\text{V}$  unless otherwise noted. (Note 2)

| PARAMETER                                            | CONDITIONS                                                                                     |   | MIN   | TYP   | MAX   | UNITS         |
|------------------------------------------------------|------------------------------------------------------------------------------------------------|---|-------|-------|-------|---------------|
| Input DC Supply Current                              | Typicals                                                                                       |   |       |       |       |               |
| Normal Operation                                     | $V_{\text{ITH}} = 1.9\text{V}$                                                                 |   |       | 300   | 400   | $\mu\text{A}$ |
| Shutdown                                             | $V_{\text{RUN/SS}} = 0\text{V}$                                                                |   |       | 55    | 100   | $\mu\text{A}$ |
| UVLO                                                 | $V_{\text{CC}} = \text{UVLO Threshold} - 100\text{mV}$ , $V_{\text{RUN/SS}} = V_{\text{CC}}$   |   |       | 45    | 60    | $\mu\text{A}$ |
| Undervoltage Lockout Threshold                       | $V_{\text{CC}}$ Rising                                                                         | ● | 7.9   | 8.4   | 8.8   | V             |
|                                                      | $V_{\text{CC}}$ Falling                                                                        | ● | 3.5   | 4.0   | 4.4   | V             |
|                                                      | $V_{\text{CC}}$ Hysteresis                                                                     | ● | 4.0   | 4.4   | 4.8   | V             |
| Shutdown Threshold (at RUN/SS)                       | $V_{\text{RUN/SS}}$ Falling                                                                    | ● | 0.5   | 0.7   | 0.9   | V             |
|                                                      | $V_{\text{RUN/SS}}$ Rising                                                                     |   | 0.6   | 0.8   | 1.0   | V             |
| Regulated Feedback Voltage                           | (Note 5)                                                                                       | ● | 1.182 | 1.2   | 1.218 | V             |
| Feedback Voltage Line Regulation                     | $5.6\text{V} < V_{\text{CC}} < 9\text{V}$ (Note 5)                                             |   |       | 0.12  |       | mV/V          |
| Feedback Voltage Load Regulation                     | $V_{\text{ITH}} = 1.6\text{V}$ (Note 5)                                                        |   |       | 0.05  |       | %             |
|                                                      | $V_{\text{ITH}} = 1\text{V}$ (Note 5)                                                          |   |       | -0.05 |       | %             |
| $V_{\text{FB}}$ Input Current                        | (Note 5)                                                                                       |   |       | 25    | 50    | nA            |
| Maximum Duty Cycle                                   |                                                                                                |   | 70    | 78    | 84    | %             |
| RUN/SS Pull-Up Current                               | $V_{\text{RUN/SS}} = 0\text{V}$                                                                |   | 1.5   | 3     | 4.5   | $\mu\text{A}$ |
|                                                      | $V_{\text{RUN/SS}} = 1.3\text{V}$                                                              |   | 5     | 15    | 25    | $\mu\text{A}$ |
| $I_{\text{SLMAX}}$ , Peak Slope Compensation Current |                                                                                                |   |       | 20    |       | $\mu\text{A}$ |
| Oscillator Frequency                                 |                                                                                                |   | 160   | 200   | 240   | kHz           |
| Gate Drive Rise Time                                 | $C_{\text{LOAD}} = 3000\text{pF}$ (Note 6)                                                     |   |       | 40    |       | ns            |
| Gate Drive Fall Time                                 | $C_{\text{LOAD}} = 3000\text{pF}$ (Note 6)                                                     |   |       | 40    |       | ns            |
| Peak Current Sense Voltage                           | IPRG = GND                                                                                     | ● | 95    | 110   | 125   | mV            |
|                                                      | IPRG = Float                                                                                   | ● | 165   | 185   | 210   | mV            |
|                                                      | IPRG = $V_{\text{IN}}$                                                                         | ● | 265   | 295   | 325   | mV            |
| $V_{\text{IN}}$ Shunt Regulator Voltage              | $I_{\text{IN}} = 1\text{mA}$ , $I_{\text{IN}} = 25\text{mA}$ , $V_{\text{RUN/SS}} = 0\text{V}$ | ● | 9     | 9.3   | 9.6   | V             |
| Default Internal Soft-Start                          |                                                                                                |   |       | 3.3   |       | ms            |

**Note 1:** Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

**Note 2:** The LTC3873E is guaranteed to meet performance specifications from  $0^\circ\text{C}$  to  $85^\circ\text{C}$  junction temperature. Specifications over the  $-40^\circ\text{C}$  to  $85^\circ\text{C}$  operating junction temperature range are assured by design, characterization and correlation with statistical process controls.

**Note 3:**  $T_J$  is calculated from the ambient temperature  $T_A$  and power dissipation  $P_D$  according to the following formula:

$$T_J = T_A + (P_D \cdot \theta_{JA})$$


**Note 4:** The dynamic input supply current is higher due to power MOSFET gate charging ( $Q_G \cdot f_{\text{OSC}}$ ). See Applications Information.

**Note 5:** The LTC3873 is tested in a feedback loop which serves  $V_{\text{FB}}$  to the reference voltage with the  $I_{\text{TH}}$  pin forced to the midpoint of its voltage range ( $0.7\text{V} \leq V_{\text{ITH}} \leq 1.9\text{V}$ , midpoint =  $1.3\text{V}$ ).

**Note 6:** Rise and fall times are measured at 10% and 90% levels.  $V_{\text{CC}} = 5.6\text{V}$ .


## TYPICAL PERFORMANCE CHARACTERISTICS

Feedback Voltage vs Temperature

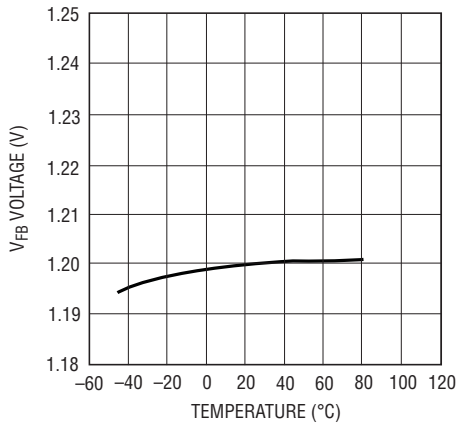


3873 G01

Feedback Voltage Line Regulation

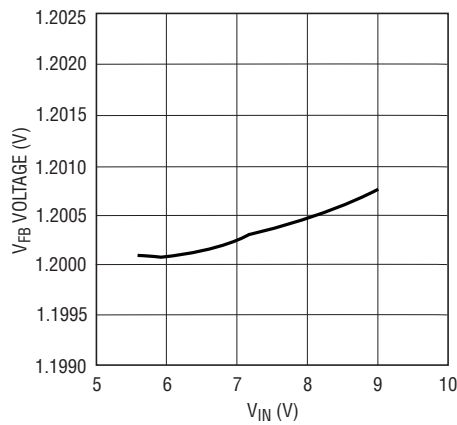


3873 G02

$I_{TH}$  Voltage vs RUN/SS Voltage

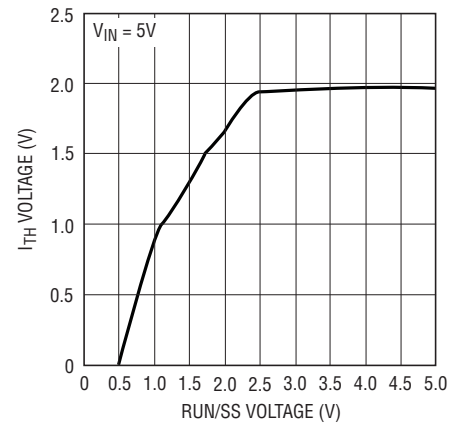


3873 G03

Shutdown Mode  $I_Q$  vs  $V_{IN}$

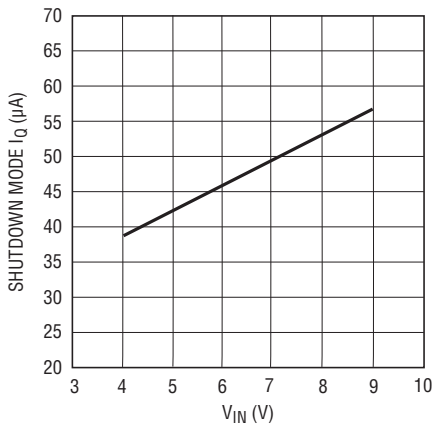


3873 G04

Shutdown  $I_Q$  vs Temperature

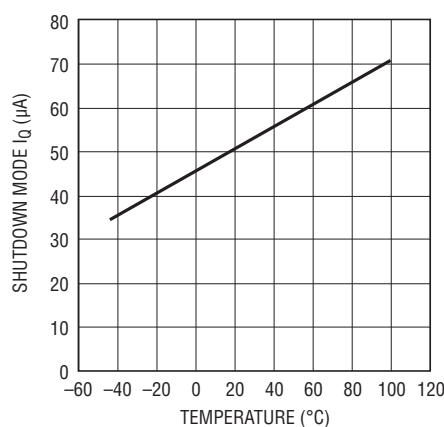


3873 G05

Gate Drive Rise and Fall Time vs  $C_{LOAD}$

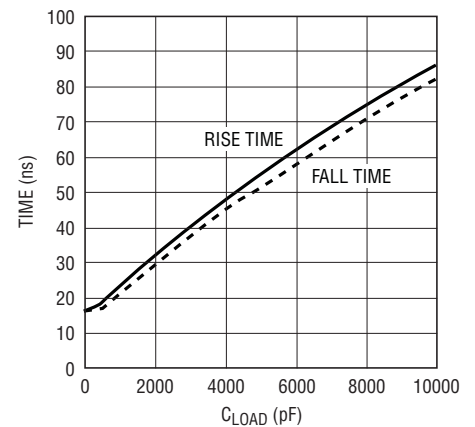


3873 G06

RUN Threshold vs Temperature

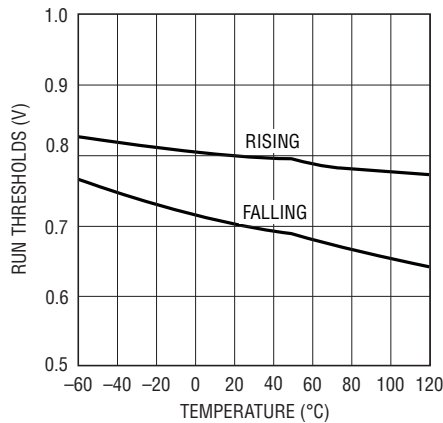


3873 G07

Shunt Regulation Voltage vs  $I_{SHUNT}$

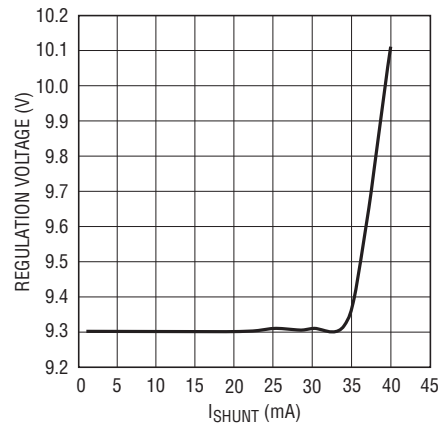


3873 G08

## TYPICAL PERFORMANCE CHARACTERISTICS

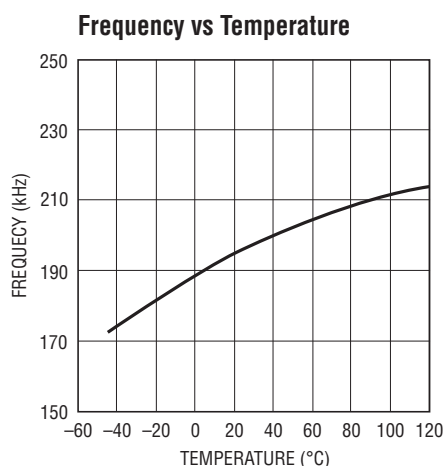

3873 G09

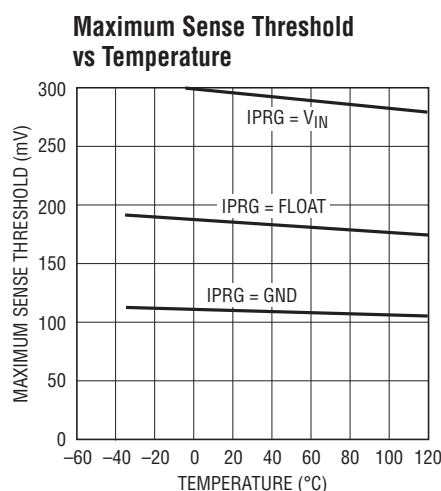

3873 G10

## PIN FUNCTIONS (TS8/DDB)

**IPRG (Pin 1/Pin 4):** Current Sense Limit Select Pin.

**$I_{TH}$  (Pin 2/Pin 3):** This pin serves as the error amplifier compensation point. Nominal voltage range for this pin is 0.7V to 1.9V.

**$V_{FB}$  (Pin 3/Pin 2):** This pin receives the feedback voltage from an external resistor divider across the output.

**GND (Pin 4/Pin 1):** Ground Pin.

**NGATE (Pin 5/Pin 8):** Gate Drive for the External N-Channel MOSFET. This pin swings from 0V to  $V_{IN}$ .


**$V_{CC}$  (Pin 6/Pin 7):** Supply Pin. This pin must be closely decoupled to GND (Pin 4).

**RUN/SS (Pin 7/Pin 6):** Shutdown and External Soft-Start Pin. In shutdown, all functions are disabled and the NGATE pin is held low.

**SW (Pin 8/Pin 5):** Switch node connection to inductor and current sense input pin through external slope compensation resistor. Normally, the external N-channel MOSFET's drain is connected to this pin.

**Exposed Pad (NA/Pin 9):** Ground. Must be soldered to PCB for electrical contact and rated thermal performance.

FUNCTIONAL DIAGRAM

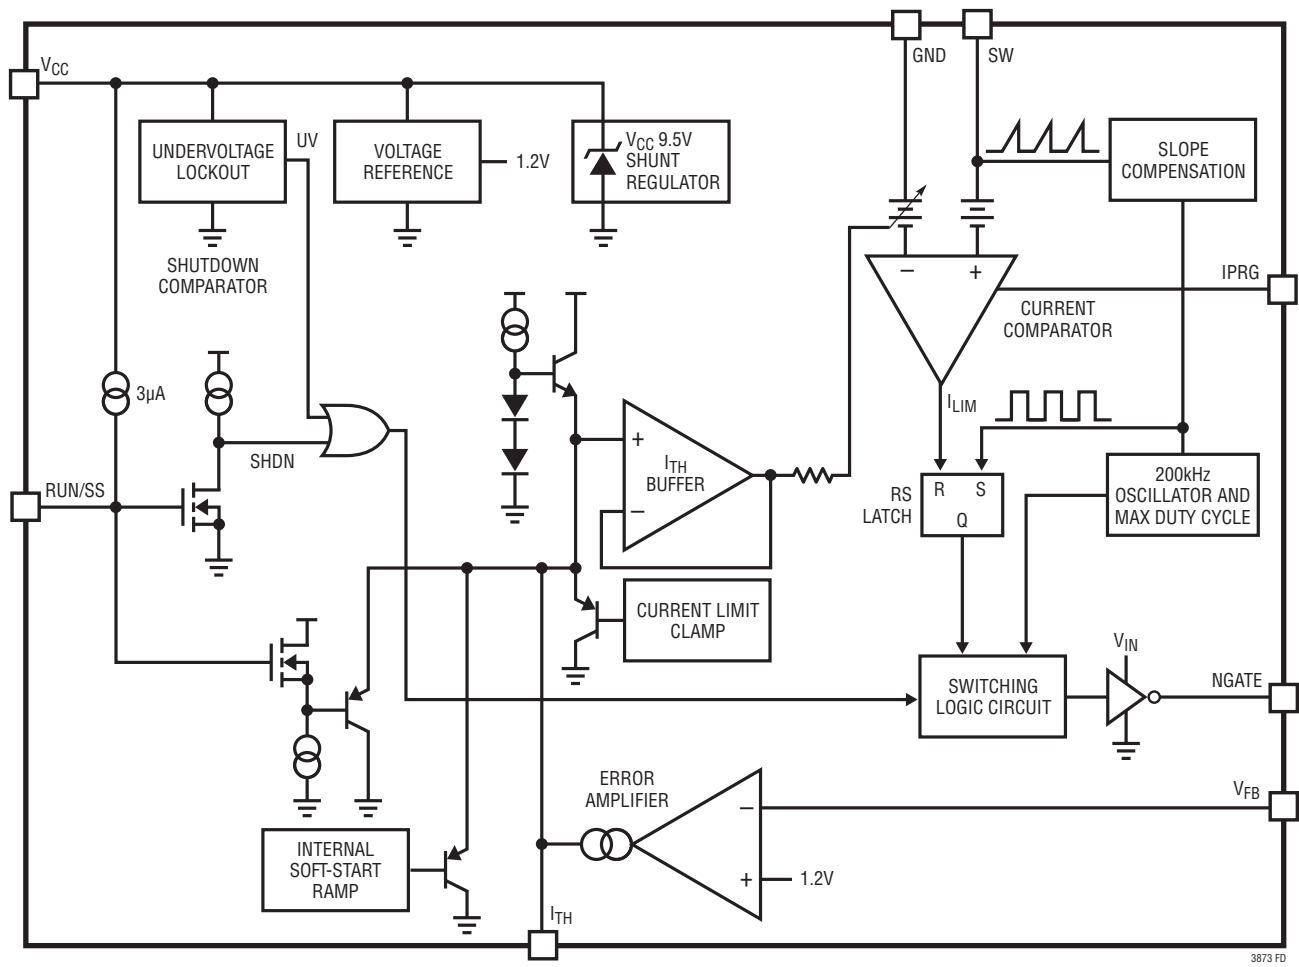

3873 FD

## OPERATION

### Main Control Loop

The LTC3873 is a general purpose N-channel switching DC/DC converter for boost, flyback and SEPIC applications. Its No  $R_{SENSE}$  sensing technique improves efficiency, increases power density and reduces the cost of the overall solution.

For circuit operation, please refer to the Functional Diagram of the IC and the Typical Application on the front page. During normal operation, the power MOSFET is turned on when the oscillator sets the PWM latch and is turned off when the current comparator resets the latch. The divided-down output voltage is compared to an internal 1.2V reference by the error amplifier, which outputs an error signal at the  $I_{TH}$  pin. The voltage on the  $I_{TH}$  pin sets the current comparator input threshold. When the load current increases, a fall in the  $V_{FB}$  voltage relative to the reference voltage causes the  $I_{TH}$  pin to rise, causing the current comparator to trip at a higher peak inductor current value. The average inductor current will therefore rise until it equals the load current, thereby maintaining output regulation.

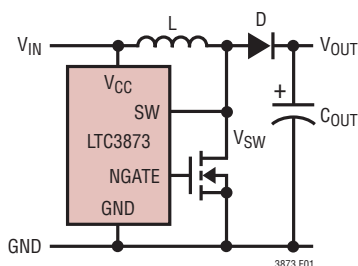


Figure 1. SW Pin (Internal Sense Pin) Connection for Maximum Efficiency

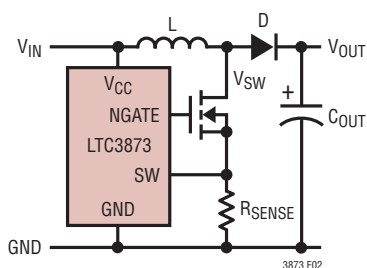


Figure 2. SW Pin (Internal Sense Pin) Connection for Sensing Resistor

The LTC3873 can be used either by sensing the voltage drop across the power MOSFET or by connecting the SW pin to a conventional sensing resistor in the source of the power MOSFET. Sensing the voltage across the power MOSFET maximizes converter efficiency and minimizes the component count; the maximum rating for this pin, 60V, allows MOSFET sensing in a wide output voltage range.

### Shunt Regulator

A built-in shunt regulator from the  $V_{CC}$  pin to GND limits the voltage on the  $V_{CC}$  pin to approximately 9.3V as long as the shunt regulator is not forced to sink more than 25mA. The shunt regulator permits the use of a wide variety of powering schemes that exceed the LTC3873's absolute maximum ratings. Further details on powering schemes are described in the Application Information section.

### Start-Up/Shutdown

The LTC3873 has two shutdown mechanisms to disable and enable operation: an undervoltage lockout on the  $V_{CC}$  supply pin voltage and a threshold RUN/SS pin. The LTC3873 transitions into and out of shutdown according to the state diagram shown in Figure 3.

The undervoltage lockout (UVLO) mechanism prevents the LTC3873 from trying to drive a MOSFET with insufficient voltage. The voltage at the  $V_{CC}$  pin must exceed  $V_{TURNON}$

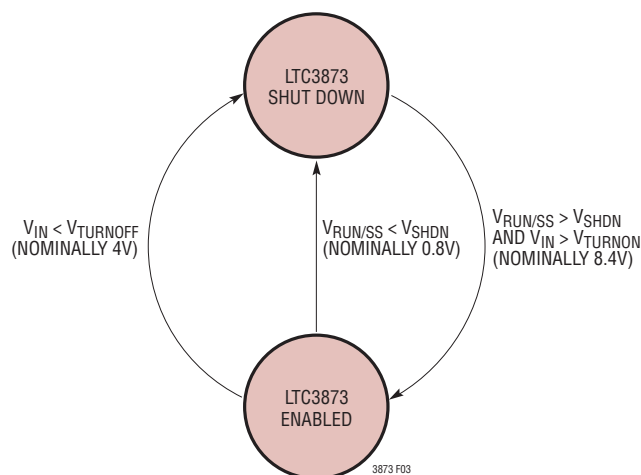


Figure 3. Start-Up/Shutdown State Diagram

## OPERATION

(nominally 8.4V) at least momentarily to enable LTC3873 operation. The  $V_{CC}$  voltage is then allowed to fall to  $V_{TURNOFF}$  (nominally 4V) before undervoltage lockout disables the LTC3873. This wide UVLO hysteresis range supports the use of trickle charger on the flyback transformer to power the LTC3873—see the section,  $V_{CC}$  Bias Power. The RUN/SS pin can be driven below  $V_{SHDN}$  (nominally 0.7V) to force the LTC3873 into shutdown. When the chip is off, the input supply current is typically only 55 $\mu$ A.

### Soft-Start


Leave the RUN/SS pin open to use the internal 3.3ms soft-start. During the internal soft-start, a voltage ramp limits the  $V_{ITH}$ . 3.3ms is required for  $I_{TH}$  to ramp from zero current level to full current level. The soft-start can be lengthened by placing an external capacitor from the RUN/SS pin to the GND. A 3 $\mu$ A current will charge the capacitor, pulling the RUN/SS pin above the shutdown threshold and a 15 $\mu$ A pull-up current will continue to ramp RUN/SS to limit  $V_{ITH}$  during the start-up. When RUN/SS is driven by an external logic, a minimum of 2.75V logic is recommended to allow the maximum  $I_{TH}$  range.

### Light Load Operation

Under very light load current conditions, the  $I_{TH}$  pin voltage will be very close to the zero current level of 0.85V. As the load current decreases further, an internal offset at the current comparator input will assure that the current comparator remains tripped (even at zero load current) and the regulator will start to skip cycles in order to maintain regulation. This behavior allows the regulator to maintain constant frequency down to very light loads, resulting in low output ripple as well as low audible noise and reduced RF interference while providing high light load efficiency.

### Current Sense

During the switch on-time, the control circuit limits the maximum voltage drop across the current sense component to about 295mV, 110mV and 185mV at low duty cycle with IPRG tied to  $V_{IN}$ , GND or left floating respectively. It is reduced with increasing duty cycle as shown in Figure 4.

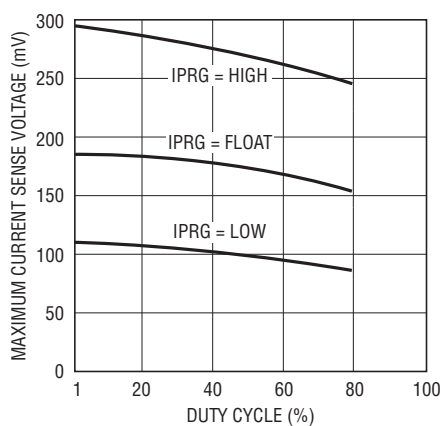

3873 F04

Figure 4. Maximum SENSE Threshold Voltage vs Duty Cycle



## APPLICATIONS INFORMATION

The circuit in Figure 6 shows a third way to power the LTC3873. An external series pre-regulator consisting of series pass transistor Q1, zener diode D1 and bias resistor  $R_B$  brings  $V_{CC}$  to at least 7.6V nominal, well above the maximum rated  $V_{CC}$  turn-off threshold of 4V. Resistor  $R_{START}$  momentarily charges the  $V_{CC}$  node up to the  $V_{CC}$  turn-on threshold, enabling the LTC3873.




Figure 6

### Slope Compensation

The LTC3873 has built-in internal slope compensation to stabilize the control loop against sub-harmonic oscillation. It also provides the ability to externally increase slope compensation by injecting a ramping current out of its SW pin into an external slope compensation resistor ( $R_{SL}$  in Figure 5). This current ramp starts at zero right after the NGATE pin has been set high. The current rises linearly towards a peak of 20µA at the maximum duty cycle of 80%, shutting off once the NGATE pin goes low. A series resistor ( $R_{SL}$ ) connecting the SW pin to the current sense resistor ( $R_{SENSE}$ ) thus develops a ramping voltage drop. From the perspective of the SW pin, this ramping voltage adds to the voltage across the sense resistor, effectively reducing the current comparator threshold in proportion to duty cycle. The amount of reduction in the current comparator threshold ( $\Delta V_{SENSE}$ ) can be calculated using the following equation:

$$\Delta V_{SENSE} = \frac{\text{Duty Cycle} - 6\%}{80\%} 20\mu\text{A} \cdot R_{SLOPE}$$

Note the external programmable slope compensation is only needed when the internal slope compensation is not sufficient. In most applications  $R_{SL}$  can be shorted. For the LTC3873, when the  $R_{DS(ON)}$  sensing technique is used, the

ringing on the SW pin disrupts the tiny slope compensation current out of the pin. It is not recommended to add external slope compensation in this case.

### Output Voltage Programming

The output voltage is set by a resistor divider according to the following formula:

$$V_O = 1.2\text{V} \cdot \left(1 + \frac{R_2}{R_1}\right)$$

The external resistor divider is connected to the output as shown in Figure 5, allowing remote voltage sensing. Choose resistance values for  $R_1$  and  $R_2$  to be as large as possible in order to minimize any efficiency loss due to the static current drawn from  $V_{OUT}$ , but just small enough so that when  $V_{OUT}$  is in regulation, the error caused by the nonzero input current to the  $V_{FB}$  pin is less than 1%. A good rule of thumb is to choose  $R_1$  to be 24k or less.

### Transformer Design Considerations

Transformer specification and design is perhaps the most critical part of applying the LTC3873 successfully. In addition to the usual list of caveats dealing with high frequency power transformer design, the following should prove useful.

### Turns Ratios

Due to the use of the external feedback resistor divider ratio to set output voltage, the user has relative freedom in selecting a transformer turns ratio to suit a given application. Simple ratios of small integers, e.g., 1:1, 2:1, 3:2, etc. can be employed which yield more freedom in setting total turns and mutual inductance. Simple integer turns ratios also facilitate the use of “off-the-shelf” configurable transformers such as the Coiltronics VERSA-PAC series in applications with high input-to-output voltage ratios. For example, if a 6-winding VERSA-PAC is used with three windings in series on the primary and three windings in parallel on the secondary, a 3:1 turns ratio will be achieved. Turns ratio can be chosen on the basis of desired duty cycle. However, remember that the input supply voltage

## APPLICATIONS INFORMATION

plus the secondary-to-primary referred voltage of the flyback pulse (including leakage spike) must not exceed the allowed external MOSFET breakdown rating.

### Leakage Inductance

Transformer leakage inductance (on either the primary or secondary) causes a voltage spike to occur after the output switch (Q1) turn-off. This is increasingly prominent at higher load currents where more stored energy must be dissipated. In some cases a “snubber” circuit will be required to avoid overvoltage breakdown at the MOSFET’s drain node. Application Note 19 is a good reference on snubber design. A bifilar or similar winding technique is a good way to minimize troublesome leakage inductances. However, remember that this will limit the primary-to-secondary breakdown voltage, so bifilar winding is not always practical.

### Power MOSFET Selection

The power MOSFET serves two purposes in the LTC3873: it represents the main switching element in the power path and its  $R_{DS(ON)}$  represents the current sensing element for the control loop. Important parameters for the power MOSFET include the drain-to-source breakdown voltage ( $BV_{DSS}$ ), the threshold voltage ( $V_{GS(TH)}$ ), the on-resistance ( $R_{DS(ON)}$ ) versus gate-to-source voltage, the gate-to-source and gate-to-drain charges ( $Q_{GS}$  and  $Q_{GD}$ , respectively), the maximum drain current ( $I_{D(MAX)}$ ) and the MOSFET’s thermal resistances ( $R_{TH(JC)}$  and  $R_{TH(JA)}$ ).

For boost applications with  $R_{DS(ON)}$  sensing, refer to the LTC3872 data sheet for the selection of MOSFET  $R_{DS(ON)}$ .

MOSFETs have conduction losses ( $I^2R$ ) and switching losses. For  $V_{DS} < 20V$ , high current efficiency generally improves with large MOSFETs with low  $R_{DS(ON)}$ , while for  $V_{DS} > 20V$  the transition losses rapidly increase to the point that the use of a higher  $R_{DS(ON)}$  device with lower reverse transfer capacitance,  $C_{RSS}$ , actually provides higher efficiency.

### Output Capacitors

The output capacitor is normally chosen by its effective series resistance (ESR), which determines output ripple voltage and affects efficiency. Low ESR ceramic capacitors are often used to minimize the output ripple. Boost regulators have large RMS ripple current in the output capacitor that must be rated to handle the current. The output ripple current (RMS) is:

$$I_{RMS(COUT)} \approx I_{OUT(MAX)} \cdot \sqrt{\frac{V_{OUT} - V_{IN(MIN)}}{V_{IN(MIN)}}}$$

Output ripple is then simply:

$$V_{OUT} = R_{ESR}(\Delta I_{L(RMS)})$$

The output capacitor for flyback converter should have a ripple current rating greater than:

$$I_{RMS} = I_{OUT} \cdot \sqrt{\frac{D_{MAX}}{1 - D_{MAX}}}$$

### Input Capacitors

The input capacitor of a boost converter is less critical due to the fact that the input current waveform is triangular, and does not contain large square wave currents as found in the output capacitor. The input voltage source impedance determines the size of the capacitor that is typically 10 $\mu$ F to 100 $\mu$ F. A low ESR is recommended although not as critical as the output capacitor can be on the order of 0.3 $\Omega$ .

The RMS input ripple current for a boost converter is:

$$I_{RMS(CIN)} = 0.3 \cdot \frac{V_{IN(MIN)}}{L \cdot f} \cdot D_{MAX}$$

Please note that the input capacitor can see a very high surge current when a battery is suddenly connected to the input of the converter and solid tantalum capacitors can fail catastrophically under these conditions.

## APPLICATIONS INFORMATION

In a flyback converter, the input flows in pulses placing severe demands on the input capacitors. Select an input capacitor with a ripple current rating greater than:

$$I_{RMS} = \frac{P_{IN}}{V_{IN(MIN)}} \sqrt{\frac{1-D_{MAX}}{D_{MAX}}}$$

### Duty Cycle Considerations

The LTC3873 imposes a maximum duty cycle limit of 80% typical. For a flyback converter, the maximum duty cycle prevents the transformer core from saturation. In a boost converter application, however, it sets a limit on the maximum step-up ratio or maximum output voltage with the given input voltage of:

$$V_{OUT(MAX)} = \frac{V_{IN(MIN)}}{1-0.8} - V_D$$

Current and voltage stress on the power switch and synchronous rectifiers, input and output capacitor RMS currents and transformer utilization (size vs power) are

impacted by duty factor. Unfortunately duty factor cannot be adjusted to simultaneously optimize all of these requirements. In general, avoid extreme duty factors since this severely impacts the current stress on most of the components. A reasonable target for duty factor is 50% at nominal input voltage. Using this rule of thumb, the ideal transformer turns ratio is:

$$N_{IDEAL} = \frac{V_{OUT}}{V_{IN}} \cdot \frac{1-D}{D} = \frac{V_{OUT}}{V_{IN}}$$

### Output Diode Selection

To maximize efficiency, a fast switching diode with low forward drop and low reverse leakage is desired. The output diode in a boost converter conducts current during the switch off-time. The peak reverse voltage that the diode must withstand is equal to the regulator output voltage. The average forward current in normal operation is equal to the output current, and the peak current is equal to the peak inductor current.


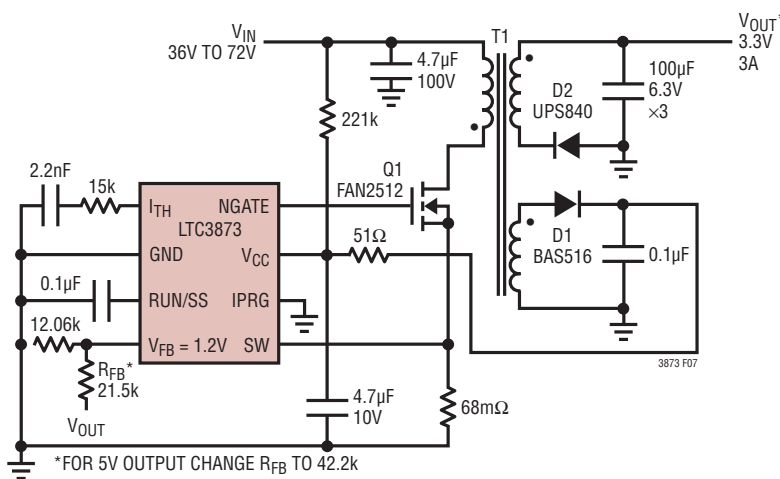


Figure 7. 3.3V Output Nonisolated Telecom DC/DC Converter

[illegible]

## PACKAGE DESCRIPTION

**TS8 Package**  
**8-Lead Plastic TSOT-23**  
 (Reference LTC DWG # 05-08-1637)

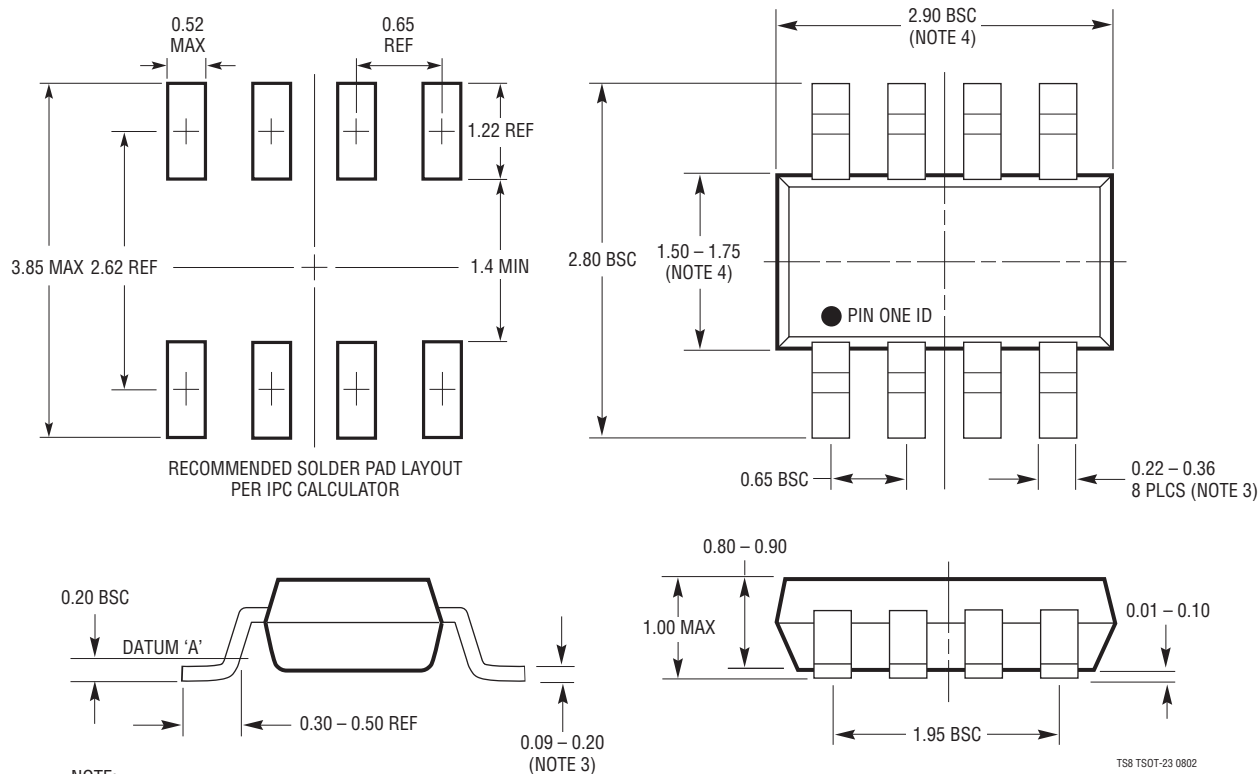

- NOTE:
1. DIMENSIONS ARE IN MILLIMETERS
  2. DRAWING NOT TO SCALE
  3. DIMENSIONS ARE INCLUSIVE OF PLATING
  4. DIMENSIONS ARE EXCLUSIVE OF MOLD FLASH AND METAL BURR
  5. MOLD FLASH SHALL NOT EXCEED 0.254mm
  6. JEDEC PACKAGE REFERENCE IS MO-193

TS8 TSOT-23 0802



## RELATED PARTS

| PART NUMBER          | DESCRIPTION                                                      | COMMENTS                                                                                             |
|----------------------|------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| LT <sup>®</sup> 1619 | Current Mode PWM Controller                                      | 300kHz Fixed Frequency, Boost, SEPIC, Flyback Topology                                               |
| LTC1624              | Current Mode DC/DC Controller                                    | SO-8; 300kHz Operating Frequency; Buck, Boost, SEPIC Design; $V_{IN}$ Up to 36V                      |
| LTC1700              | No $R_{SENSE}$ Synchronous Step-Up Controller                    | Up to 95% Efficiency, Operating as Low as 0.9V Input                                                 |
| LTC1871-7            | Wide Input Range Controller                                      | No $R_{SENSE}$ , 7V Gate Drive, Current Mode Control                                                 |
| LTC1872/LTC1872B     | SOT-23 Boost Controller                                          | Delivers Up to 5A, 550kHz Fixed Frequency, Current Mode                                              |
| LT1930               | 1.2MHz, SOT-23 Boost Converter                                   | Up to 34V Output, 2.6V $V_{IN}$ 16V, Miniature Design                                                |
| LT1931               | Inverting 1.2MHz, SOT-23 Converter                               | Positive-to Negative DC/DC Conversion, Miniature Design                                              |
| LTC3401/LTC3402      | 1A/2A 3MHz Synchronous Boost Converters                          | Up to 97% Efficiency, Very Small Solution, $0.5V \leq V_{IN} \leq 5V$                                |
| LTC3704              | Positive-to Negative DC/DC Controller                            | No $R_{SENSE}$ , Current Mode Control, 50kHz to 1MHz                                                 |
| LTC1871/LTC1871-7    | No $R_{SENSE}$ , Wide Input Range DC/DC Boost Controller         | No $R_{SENSE}$ , Current Mode Control, $2.5V \leq V_{IN} \leq 36V$                                   |
| LTC3703/LTC3703-5    | 100V Synchronous Controller                                      | Step-Up or Step Down, 600kHz, SSOP-16, SSOP-28                                                       |
| LTC3803/LTC3803-5    | 200kHz Flyback DC/DC Controller                                  | $V_{IN}$ and $V_{OUT}$ Limited Only by External Components                                           |
| LTC3805              | Adjustable Frequency Flyback Controller                          | $V_{IN}$ and $V_{OUT}$ Limited Only by External Components                                           |
| LT3825               | Isolated No-Opto Synchronous Flyback Controller                  | $V_{IN}$ : 24V to 75V, Up to 80W, Current Mode Control                                               |
| LT3837               | Isolated No-Opto Synchronous Flyback Controller                  | $V_{IN}$ : 4.5V to 20V, Up to 60W, Current Mode Control                                              |
| LTC3872              | No $R_{SENSE}$ Boost Controller                                  | 550kHz Fixed Frequency, ThinSOT or DFN, $2.75V \leq V_{IN} \leq 9.8V$                                |
| LTC3873              | No $R_{SENSE}$ Constant Frequency Boost/Flyback/SEPIC Controller | $V_{IN}$ and $V_{OUT}$ Limited Only by External Components, 200kHz Frequency, ThinSOT or DFN Package |