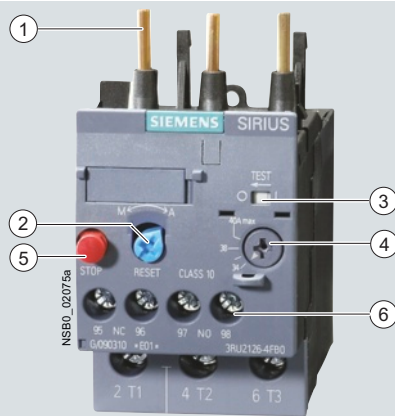


Overload Relays

SIRIUS 3RU2 Thermal Overload Relays

General data

Overview



- ① Connection for mounting onto contactors:
Optimally adapted in electrical, mechanical and design terms to the contactors. The overload relay can be connected directly to these contactor using these pins. Stand-alone installation is possible as an alternative (in conjunction with a terminal bracket for stand-alone installation).
- ② Selector switch for manual/automatic RESET and RESET button:
With this switch you can choose between manual and automatic RESET. A device set to manual RESET can be reset locally by pressing the RESET button. A remote RESET is possible using the RESET modules (accessories), which are independent of size.
- ③ Switch position indicator and TEST function of the wiring:
Indicates a trip and enables the wiring test.
- ④ Motor current setting:
Setting the device to the rated motor current is easy with the large rotary knob.
- ⑤ STOP button:
If the STOP button is pressed, the NC contact is opened. This switches off the contactor downstream. The NC contact is closed again when the button is released.
- ⑥ Supply terminals:
Depending on the device version, the terminals for screw, spring-type or ring lug terminal connection are configured for the main and auxiliary circuit.

A sealable transparent cover can be optionally mounted (accessory). It secures the motor current setting against adjustment.

3RU21 26-4FB00 thermal overload relays

The 3RU21 thermal overload relays up to 40 A have been designed for current-dependent protection of loads with normal starting (for "Function" see note on [Technical Information on page 5/1](#)) against excessive temperature rises due to overload or phase failure.

An overload or phase failure results in an increase of the motor current beyond the set rated motor current. Via heating elements, this current rise heats up the bimetal strips inside the device which then bend and as a result trigger the auxiliary contacts by means of a tripping mechanism. The auxiliary contacts then switch off the load by means of a contactor. The switch-off time depends on the ratio between the tripping current and set current I_e and is stored in the form of a long-term stable tripping characteristic (for "Characteristic Curves" see the note on [Technical Information on page 5/1](#)).

The "tripped" status is signaled by means of a switch position indicator. Resetting takes place either manually or automatically after a recovery time has elapsed (for "Function" see note on [Technical Information on page 5/1](#)).

The devices are manufactured in accordance with environmental guidelines and contain environmentally friendly and reusable materials.

They comply with all important worldwide standards and approvals.

"Increased safety" type of protection EEx e according to ATEX directive 94/9/EC

The 3RU21 thermal overload relays are suitable for the overload protection of explosion-proof motors with "increased safety" type of protection EEx e. The relays meet the requirements of EN 60079-7 (Electrical apparatus for areas subject to explosion hazards – Increased safety "e"); see [Chapter 9 "Appendix" --> "Standards and approvals" --> "Type overview of approved devices for explosion-protected areas \(ATEX Explosion Protection\)"](#).

EC type test certificate for Category (2) G/D has been submitted. More details on request.

Benefits

The most important features and benefits of the 3RU21 thermal overload relays are listed in the overview table (see ["General data" on page 5/34](#)).

Overload Relays

SIRIUS 3RU2 Thermal Overload Relays

General data

Application

Industries

The 3RU21 thermal overload relays are suitable for customers from all industries who want to guarantee optimum current-dependent protection of their electrical loads (e. g. motors) under normal starting conditions (CLASS 10).

Application

The 3RU21 thermal overload relays have been designed for the protection of three-phase and single-phase AC and DC motors.

If single-phase AC or DC loads are to be protected by the 3RU21 thermal overload relays, all three bimetal strips must be heated. For this purpose, all main current paths of the relay must be connected in series.

Ambient conditions

The 3RU21 thermal overload relays have temperature compensation in accordance with IEC 60947-4-1 for the temperature range of -40 to +60 °C. For temperatures from +60 to +80 °C the upper set value of the setting range must be reduced by the factor listed in the table below.

Ambient temperature °C	Derating factor for the upper set value	
	Current ranges 0.11 ... 20 A	17 ... 40 A
+60	1.0	1.0
+65	0.94	0.97
+70	0.87	0.94
+75	0.81	0.90
+80	0.73	0.86

Accessories

The following optional accessories are available for the 3RU21 thermal overload relays:

- Terminal bracket for stand-alone installation with screw or spring-type terminals for each size
- Mechanical RESET for all sizes
- Cable release for resetting devices which are difficult to access for all sizes
- Electrical remote RESET module in three voltage variants for all sizes
- Sealable cover for all sizes
- Terminal covers for devices with ring lug terminal connection

More information

Order No. scheme

Digit of the Order No.	1st - 3rd	4th	5th	6th	7th	8th	9th	10th	11th
	☐ ☐ ☐	☐	☐	☐	☐	-	☐	☐	☐
Thermal overload relays	3 R U								
SIRIUS 2nd generation		2							
Device series			☐						
Size, rated operational current and power				☐	☐				
Setting range of the overload release						☐	☐		
Connection method								☐	
Installation type									☐
Example	3 R U	2	1	1	6	-	0	A	B 0

Note:


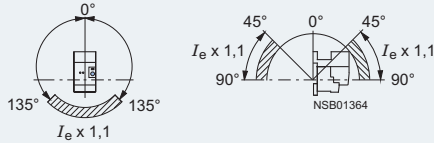

The Order No. scheme is presented here merely for information purposes and for better understanding of the logic behind the order numbers.

For your orders, please use the order numbers quote in the catalog under the Selection and ordering data section.

Overload Relays

SIRIUS 3RU2 Thermal Overload Relays

General data

Type Size Dimensions (W x H x D) (overload relay with stand-alone installation support) • Screw terminals • Spring-type terminals		3RU21 16 S00	3RU21 26 S0
	mm	45 x 89 x 79	45 x 97 x 95
	mm	45 x 102 x 80	45 x 114 x 97
General technical specifications			
Trips in the event of		Overload and phase failure	
Trip class acc. to IEC 60947-4-1		CLASS	10
Phase failure sensitivity		Yes	
Overload warning		No	
Reset and recovery • Reset options after tripping • Recovery time - For automatic RESET - For manual RESET - For remote RESET			Manual, automatic and remote RESET ¹⁾ Depends on the strength of the tripping current and characteristic Depends on the strength of the tripping current and characteristic Depends on the strength of the tripping current and characteristic
Features • Display of operating state on device • TEST function • RESET button • STOP button			Yes, by means of TEST function/switch position indicator slide Yes Yes Yes
Safe operation of motors with "increased safety" type of protection EC type test certificate number acc. to directive 94/9/EC (ATEX)		On request	
Ambient temperature • Storage/transport • Operation • Temperature compensation • Permissible rated current at - Temperature inside control cabinet 60 °C - Temperature inside control cabinet 70 °C		°C °C °C %	-55 ... +80 -40 ... +70 Up to 60 100 (over +60 °C current reduction is not required) 87
Repeat terminals • Coil repeat terminals • Auxiliary contact repeat terminal		Yes Yes	Not required Not required
Degree of protection acc. to IEC 60529		IP20	
Touch protection acc. to IEC 61140		Screw and spring-type terminals: Finger-safe Ring lug terminal connection: Finger-safe only with optional terminal covers	
Shock resistance with sine acc. to IEC 60068-2-27		g/ms	15/11 ²⁾
Electromagnetic compatibility (EMC) – Interference immunity • Conductor-related interference - Burst acc. to IEC 61000-4-4 (corresponds to degree of severity 3) - Surge acc. to IEC 61000-4-5 (corresponds to degree of severity 3) • Electrostatic discharge acc. to IEC 61000-4-2 (corresponds to degree of severity 3) • Field-related interference acc. to IEC 61000-4-3 (corresponds to degree of severity 3)		kV kV kV V/m	EMC interference immunity is not relevant for thermal overload relays EMC interference immunity is not relevant for thermal overload relays EMC interference immunity is not relevant for thermal overload relays EMC interference immunity is not relevant for thermal overload relays
Electromagnetic compatibility (EMC) – Emitted interference		EMC interference immunity is not relevant for thermal overload relays	
Resistance to extreme climates – Air humidity		%	90
Dimensions		For "Dimensional drawings" see the note on Technical Information on page 5/1.	
Installation altitude above sea level		m	Up to 2000; above this, please enquire
Mounting position		The diagrams show the permissible mounting positions for mounting onto contactors and stand-alone installation. For installation in the shaded area, a setting correction of 10 % must be implemented. Stand-alone installation:  Contactor + overload relay: 	
Type of mounting		Mounting onto contactor/stand-alone installation with terminal bracket ³⁾	

¹⁾ Remote RESET in combination with the appropriate accessories.

²⁾ Auxiliary contacts 95/96 and 97/98: 8 g/11 ms.


³⁾ For screw and snap-on mounting on TH 35 standard mounting rail.

For the technical specifications of the terminal brackets see the note on Technical Information on page 5/1.

Overload Relays

SIRIUS 3RU2 Thermal Overload Relays

General data

Type		3RU21 16	3RU21 26
Size		S00	S0
Width		45 mm	45 mm
Main circuit			
Rated insulation voltage U_i (pollution degree 3)	V	690	
Rated impulse withstand voltage U_{imp}	kV	6	
Rated operational voltage U_e	V	690	
Type of current			
• Direct current		Yes	
• Alternating current		Yes, frequency range up to 400 Hz	
Current setting	A	0.11 ... 0.16 to 11 ... 16	1.8 ... 2.5 to 34 ... 40
Power loss per unit (max.)	W	3.9 ... 6.6	3.9 ... 6
Short-circuit protection			
• With fuse without contactor		See "Selection and ordering data"	
• With fuse and contactor		See "Technical specifications" --> "Short-circuit protection with fuses/motor starters protectors for motor starters", see note on Technical Information on page 5/1.	
Protective separation between main and auxiliary conducting path acc. to IEC 60947-1	V	≥ 440	
Conductor cross-sections of main circuit			
Connection type screw terminals		 Screw terminals	
Terminal screw		M3, Pozidriv size 2	M4, Pozidriv size 2
Operating devices	mm	∅ 5 ... 6	∅ 5 ... 6
Prescribed tightening torque	Nm	0.8 ... 1.2	2 ... 2.5
Conductor cross-sections (min./max.), 1 or 2 conductors can be connected			
• Solid	mm ²	2 x (0.5 ... 1.5) ¹⁾ , 2 x (0.75 ... 2.5) ¹⁾ , 2 x (0.5 ... 4) ¹⁾	2 x (1 ... 2.5) ¹⁾ , 2 x (2.5 ... 10) ¹⁾
• Finely stranded with end sleeves (DIN 46228 T1)	mm ²	2 x (0.5 ... 1.5) ¹⁾ , 2 x (0.75 ... 2.5) ¹⁾	2 x (1 ... 2.5) ¹⁾ , 2 x (2.5 ... 6) ¹⁾ , max. 1 x 10
• AWG cables, solid or stranded	AWG	2 x (20 ... 16) ¹⁾ , 2 x (18 ... 14) ¹⁾ , 2 x 12	2 x (16 ... 12) ¹⁾ , 2 x (14 ... 8) ¹⁾
Connection type spring-type terminals		 Spring-type terminals	
Operating devices	mm	3.0 x 0.5 and 3.5 x 0.5	
Conductor cross-sections (min./max.)			
• Solid	mm ²	1 x (0.5 ... 4)	1 x (1 ... 10)
• Finely stranded without end sleeve	mm ²	1 x (0.5 ... 2.5)	1 x (1 ... 6)
• Finely stranded with end sleeves (DIN 46228 T1)	mm ²	1 x (0.5 ... 2.5)	1 x (1 ... 6)
• AWG cables, solid or stranded	AWG	1 x (20 ... 12)	1 x (18 ... 8)
Connection type ring lug terminals		 Ring lug terminal connection	
Terminal screw		M3, Pozidriv size 2	M4, Pozidriv size 2
Operating devices	mm	∅ 5 ... 6	∅ 5 ... 6
Prescribed tightening torque	Nm	0.8 ... 1.2	2 ... 2.5
Usable ring lug terminals	mm	$d_2 = \text{min. } 3.2,$ $d_3 = \text{max. } 7.5$	$d_2 = \text{min. } 4.3,$ $d_3 = \text{max. } 12.2$
• DIN 46234 without insulation sleeve • DIN 46225 without insulation sleeve • DIN 46237 with insulation sleeve • JIS C2805 Type R without insulation sleeve • JIS C2805 Type RAV with insulation sleeve • JIS C2805 Type RAP with insulation sleeve 			

¹⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in the range specified. If identical cross-sections are used, this restriction does not apply.

Overload Relays

SIRIUS 3RU2 Thermal Overload Relays

General data


Type		3RU21 16	3RU21 26
Size		S00	S0
Width		45 mm	45 mm
Auxiliary circuit			
Number of NO contacts		1	
Number of NC contacts		1	
Auxiliary contacts – Assignment		1 NO for the signal "tripped", 1 NC for disconnecting the contactor	
Rated insulation voltage U_i (pollution degree 3)	V	690	
Rated impulse withstand voltage U_{imp}	kV	6	
Contact rating of the auxiliary contacts			
- NC contact with alternating current AC-14/AC-15, rated operational current I_e at U_e: - 24 V A 4 - 120 V A 4 - 125 V A 4 - 230 V A 3 - 400 V A 2 - 600 V A 0.75 - 690 V A 0.75 - NO contact with alternating current AC-14/AC-15, rated operational current I_e at U_e: - 24 V A 3 - 120 V A 3 - 125 V A 3 - 230 V A 2 - 400 V A 1 - 600 V A 0.75 - 690 V A 0.75 - NC contact, NO contact with direct current DC-13, rated operational current I_e at U_e: - 24 V A 1 - 60 V A On request - 110 V A 0.22 - 125 V A 0.22 - 220 V A 0.11 - Conventional thermal current I_{th} A 6 - Contact reliability (suitability for PLC control; 17 V, 5 mA) Yes			
Short-circuit protection			
- With fuse - Operational class gG A 6 - Quick A 10 - With miniature circuit breaker (C characteristic) A 6¹⁾			
Protective separation between main and auxiliary conducting path acc. to IEC 60947-1	V	≥ 440	
CSA, UL, UR rated data			
Auxiliary circuit – Switching capacity		B600, R300	

¹⁾ Up to $I_k \leq 0.5$ kA; ≤ 260 V.

Overload Relays

SIRIUS 3RU2 Thermal Overload Relays

General data

Type		3RU21 16	3RU21 26
Size		S00	S0
Width		45 mm	45 mm
Conductor cross-sections for auxiliary circuit			
Connection type screw terminals		 Screw terminals	
Terminal screw		M3, Pozidriv size 2	
Operating devices	mm	ø 5 ... 6	
Prescribed tightening torque	Nm	0.8 ... 1.2	
Conductor cross-sections (min./max.), 1 or 2 conductors can be connected			
• Solid	mm ²	2 x (0.5 ... 1.5) ¹⁾ , 2 x (0.75 ... 2.5) ¹⁾	
• Finely stranded with end sleeves (DIN 46228 T1)	mm ²	2 x (0.5 ... 1.5) ¹⁾ , 2 x (0.75 ... 2.5) ¹⁾	
• AWG cables, solid or stranded	AWG	2 x (20 ... 16) ¹⁾ , 2 x (18 ... 14) ¹⁾	
Connection type spring-type terminals		 Spring-type terminals	
Operating devices	mm	3.0 x 0.5 and 3.5 x 0.5	
Conductor cross-sections (min./max.)			
• Solid	mm ²	2 x (0.5 ... 2.5)	
• Finely stranded without end sleeve	mm ²	2 x (0.5 ... 1.5)	
• Finely stranded with end sleeves (DIN 46228 T1)	mm ²	2 x (0.5 ... 1.5)	
• AWG cables, solid or stranded	AWG	2 x (20 ... 14)	
Connection type ring terminal end		 Ring lug terminal connection	
Terminal screw		M3, Pozidriv size 2	
Operating devices	mm	ø 5 ... 6	
Prescribed tightening torque	Nm	0.8 ... 1.2	
Usable ring lug terminals	mm		
• DIN 46234 without insulation sleeve		d ₂ = min. 3.2, d ₃ = max. 7.5	
• DIN 46225 without insulation sleeve			
• DIN 46237 with insulation sleeve			
• JIS C2805 Type R without insulation sleeve			
• JIS C2805 Type RAV with insulation sleeve			
• JIS C2805 Type RAP with insulation sleeve			

¹⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in the range specified. If identical cross-sections are used, this restriction does not apply.

Overload Relays

SIRIUS 3RU2 Thermal Overload Relays

3RU2 up to 40 A
for standard applications

Selection and ordering data

3RU21 thermal overload relays for mounting onto contactor¹⁾, CLASS 10

Features and technical specifications:

- Screw, spring-type or ring lug terminal connection²⁾
- Overload and phase failure protection
- Auxiliary contacts 1 NO + 1 NC
- Manual and automatic RESET
- Switch position indicators
- TEST function
- STOP button
- Sealable covers (optional accessory)
- Terminal covers for devices with ring lug terminal connection (optional accessory)



3RU21 16-4AB0



3RU21 16-4AC0



3RU21 26-4FB0



3RU21 26-4AC0

Size contactor ³⁾	Current setting value of the current-dependent overload release	Screw terminals		Weight approx.	Spring-type terminals		Weight approx.
		Order No.		kg	Order No.		kg
A				kg			kg
Size S00							
S00	0.11 ... 0.16	3RU21 16-0AB0		0.130	3RU21 16-0AC0		0.150
	0.14 ... 0.2	3RU21 16-0BB0		0.130	3RU21 16-0BC0		0.150
	0.18 ... 0.25	3RU21 16-0CB0		0.130	3RU21 16-0CC0		0.150
	0.22 ... 0.32	3RU21 16-0DB0		0.130	3RU21 16-0DC0		0.150
	0.28 ... 0.4	3RU21 16-0EB0		0.130	3RU21 16-0EC0		0.150
	0.35 ... 0.5	3RU21 16-0FB0		0.130	3RU21 16-0FC0		0.150
	0.45 ... 0.63	3RU21 16-0GB0		0.130	3RU21 16-0GC0		0.150
	0.55 ... 0.8	3RU21 16-0HB0		0.130	3RU21 16-0HC0		0.150
	0.7 ... 1	3RU21 16-0JB0		0.130	3RU21 16-0JC0		0.150
	0.9 ... 1.25	3RU21 16-0KB0		0.130	3RU21 16-0KC0		0.150
	1.1 ... 1.6	3RU21 16-1AB0		0.130	3RU21 16-1AC0		0.150
	1.4 ... 2	3RU21 16-1BB0		0.130	3RU21 16-1BC0		0.150
	1.8 ... 2.5	3RU21 16-1CB0		0.130	3RU21 16-1CC0		0.150
	2.2 ... 3.2	3RU21 16-1DB0		0.130	3RU21 16-1DC0		0.150
	2.8 ... 4	3RU21 16-1EB0		0.130	3RU21 16-1EC0		0.150
	3.5 ... 5	3RU21 16-1FB0		0.130	3RU21 16-1FC0		0.150
	4.5 ... 6.3	3RU21 16-1GB0		0.130	3RU21 16-1GC0		0.150
	5.5 ... 8	3RU21 16-1HB0		0.130	3RU21 16-1HC0		0.150
	7 ... 10	3RU21 16-1JB0		0.130	3RU21 16-1JC0		0.150
	9 ... 12.5	3RU21 16-1KB0		0.130	3RU21 16-1KC0		0.150
	11 ... 16	3RU21 16-4AB0		0.130	3RU21 16-4AC0		0.150
Size S0							
S0	1.8 ... 2.5	3RU21 26-1CB0		0.160	3RU21 26-1CC0		0.220
	2.2 ... 3.2	3RU21 26-1DB0		0.160	3RU21 26-1DC0		0.220
	2.8 ... 4	3RU21 26-1EB0		0.160	3RU21 26-1EC0		0.220
	3.5 ... 5	3RU21 26-1FB0		0.160	3RU21 26-1FC0		0.220
	4.5 ... 6.3	3RU21 26-1GB0		0.160	3RU21 26-1GC0		0.220
	5.5 ... 8	3RU21 26-1HB0		0.160	3RU21 26-1HC0		0.220
	7 ... 10	3RU21 26-1JB0		0.160	3RU21 26-1JC0		0.220
	9 ... 12.5	3RU21 26-1KB0		0.160	3RU21 26-1KC0		0.220
	11 ... 16	3RU21 26-4AB0		0.160	3RU21 26-4AC0		0.220
	14 ... 20	3RU21 26-4BB0		0.160	3RU21 26-4BC0		0.220
	17 ... 22	3RU21 26-4CB0		0.160	3RU21 26-4CC0		0.220
	20 ... 25	3RU21 26-4DB0		0.160	3RU21 26-4DC0		0.220
	23 ... 28	3RU21 26-4NB0		0.160	3RU21 26-4NC0		0.220
	27 ... 32	3RU21 26-4EB0		0.160	3RU21 26-4EC0		0.220
	30 ... 36	3RU21 26-4PB0		0.160	3RU21 26-4PC0		0.220
	34 ... 40	3RU21 26-4FB0		0.160	3RU21 26-4FC0		0.220

¹⁾ For matching terminal brackets see "Accessories" on page 5/45.

²⁾ The 3RU21 overload relays are also available with ring lug terminal connection. The Order No. must be changed in the 10th position to "J":
e. g. 3RU21 16-0AJ0.

³⁾ Observe maximum rated operational current of the devices.

Overload Relays

SIRIUS 3RU2 Thermal Overload Relays

3RU2 up to 40 A
for standard applications

3RU21 thermal overload relays for stand-alone installation¹⁾, CLASS 10

Features and technical specifications:

- Screw or spring-type terminals
- Overload and phase failure protection
- Auxiliary contacts 1 NO + 1 NC
- Manual and automatic RESET
- Switch position indicators
- TEST function
- STOP button
- Sealable covers (optional accessory)



3RU21 16-4AB1



3RU21 16-4AC1



3RU21 26-4FB1



3RU21 26-4FC1

Size contactor ²⁾	Current setting value of the current-dependent overload release	Screw terminals 	Weight approx.	Spring-type terminals 	Weight approx.
	A	Order No.	kg	Order No.	kg
Size S00					
S00	0.11 ... 0.16	3RU21 16-0AB1	0.170	3RU21 16-0AC1	0.190
	0.14 ... 0.2	3RU21 16-0BB1	0.170	3RU21 16-0BC1	0.190
	0.18 ... 0.25	3RU21 16-0CB1	0.170	3RU21 16-0CC1	0.190
	0.22 ... 0.32	3RU21 16-0DB1	0.170	3RU21 16-0DC1	0.190
	0.28 ... 0.4	3RU21 16-0EB1	0.170	3RU21 16-0EC1	0.190
	0.35 ... 0.5	3RU21 16-0FB1	0.170	3RU21 16-0FC1	0.190
	0.45 ... 0.63	3RU21 16-0GB1	0.170	3RU21 16-0GC1	0.190
	0.55 ... 0.8	3RU21 16-0HB1	0.170	3RU21 16-0HC1	0.190
	0.7 ... 1	3RU21 16-0JB1	0.170	3RU21 16-0JC1	0.190
	0.9 ... 1.25	3RU21 16-0KB1	0.170	3RU21 16-0KC1	0.190
	1.1 ... 1.6	3RU21 16-1AB1	0.170	3RU21 16-1AC1	0.190
	1.4 ... 2	3RU21 16-1BB1	0.170	3RU21 16-1BC1	0.190
	1.8 ... 2.5	3RU21 16-1CB1	0.170	3RU21 16-1CC1	0.190
	2.2 ... 3.2	3RU21 16-1DB1	0.170	3RU21 16-1DC1	0.190
	2.8 ... 4	3RU21 16-1EB1	0.170	3RU21 16-1EC1	0.190
	3.5 ... 5	3RU21 16-1FB1	0.170	3RU21 16-1FC1	0.190
	4.5 ... 6.3	3RU21 16-1GB1	0.170	3RU21 16-1GC1	0.190
	5.5 ... 8	3RU21 16-1HB1	0.170	3RU21 16-1HC1	0.190
	7 ... 10	3RU21 16-1JB1	0.170	3RU21 16-1JC1	0.190
	9 ... 12.5	3RU21 16-1KB1	0.170	3RU21 16-1KC1	0.190
	11 ... 16	3RU21 16-4AB1	0.170	3RU21 16-4AC1	0.280
Size S0					
S0	14 ... 20	3RU21 26-4BB1	0.200	3RU21 26-4BC1	0.280
	17 ... 22	3RU21 26-4CB1	0.200	3RU21 26-4CC1	0.280
	20 ... 25	3RU21 26-4DB1	0.200	3RU21 26-4DC1	0.280
	23 ... 28	3RU21 26-4NB1	0.200	3RU21 26-4NC1	0.280
	27 ... 32	3RU21 26-4EB1	0.200	3RU21 26-4EC1	0.280
	30 ... 36	3RU21 26-4PB1	0.200	3RU21 26-4PC1	0.280
	34 ... 40	3RU21 26-4FB1	0.200	3RU21 26-4FC1	0.280

¹⁾ Screw and snap-on mounting onto TH 35 standard mounting rail

²⁾ Observe maximum rated operational current of the devices.

Overload Relays

SIRIUS 3RU2 Thermal Overload Relays

Accessories

Overview

Overload relays for standard applications

The following optional accessories are available for the 3RU21 thermal overload relays:

- Terminal bracket for stand-alone installation with screw or spring-type terminals for each size
- Mechanical RESET for all sizes
- Cable release for resetting devices which are difficult to access for all sizes
- Electrical remote RESET module in three voltage variants for all sizes
- Sealable cover for all sizes
- Terminal covers for devices with ring lug terminal connection

Selection and ordering data

Version	Size	Order No.	Weight approx. kg
Terminal brackets for stand-alone installation ¹⁾			
 3RU29 16-3AA01	Terminal brackets for overload relays with screw terminals For separate mounting of the overload relays; screw and snap-on mounting onto TH 35 standard mounting rail	Screw terminals 3RU29 16-3AA01 3RU29 26-3AA01	 0.040 0.050
 3RU29 26-3AA01			
 3RU29 16-3AC01	Terminal brackets for overload relays with spring-type terminals For separate mounting of the overload relays; screw and snap-on mounting onto TH 35 standard mounting rail	Spring-type terminals 3RU29 16-3AC01 3RU29 26-3AC01	 0.040 0.060
 3RU29 26-3AC01			
Mechanical RESET			
 3RU29 00-1A with pushbutton and extension plunger	Resetting plungers, holders and formers	3RU29 00-1A	0.038
	Pushbuttons with extended stroke (12 mm), IP65, Ø 22 mm	3SB30 00-0EA11	0.020
	Extension plungers For compensation of the distance between the pushbutton and the unlatching button of the relay	3SX1 335	0.004
Cable releases with holder for RESET			
 3RU29 00-1.	For Ø 6.5 mm hole in the control panel; max. control panel thickness 8 mm		
	- Length 400 mm - Length 600 mm	3RU29 00-1B 3RU29 00-1C	0.063 0.073

¹⁾ The accessories are identical to those of the 3RB30/3RB31 solid-state overload relays.

