



## R-12 Single Contact Bayonet Base

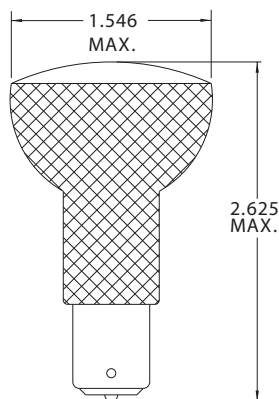


| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM1384      | 6.0            | 3.30 | -    | 300        | C-8           |
| CM1383      | 13.0           | 1.50 | -    | 300        | C-8           |
| CM1385      | 28.0           | .72  | -    | 300        | CC-8          |
| CM1387      | 28.0           | .72  | -    | 300        | CC-8          |

## R-12 Double Contact Bayonet Base

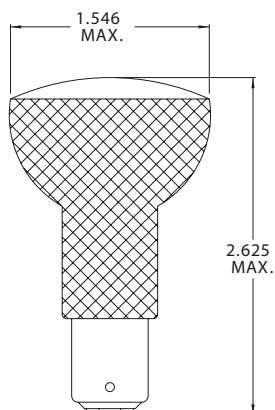

| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM1388      | 24.0           | .83  | -    | 500        | CC-8          |
| CM1380      | 28.0           | 1.35 | -    | 100        | CC-2V         |
|             | 28.0           | 1.35 | -    | 100        | CC-2V         |

## G-6 Candelabra Screw Base

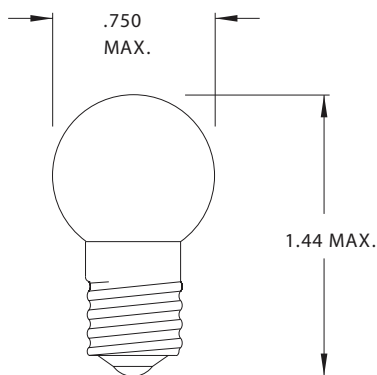

| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM81K       | 6.5            | 1.02 | 6.0  | 500        | C-2R          |
| CM63K       | 7.0            | .63  | 3.0  | 1,000      | C-2R          |
| CM1471      | 12.0           | .26  | 2.3  | 250        | C-2V          |
| CM89K       | 13.0           | .58  | 6.0  | 750        | C-2R          |
| CM67K       | 13.5           | .59  | 4.0  | 5,000      | C-2R          |
| CM529       | 14.0           | .26  | 2.9  | 250        | C-2V          |
| CM2621      | 14.0           | .27  | 1.6  | 500        | C-2R          |
| CM71K       | 22.0           | .18  | 3.0  | 200        | C-2V          |
| CM509K      | 24.0           | .18  | 2.8  | 1,000      | C-2F          |
| CM1224K     | 32.0           | .16  | 3.8  | 200        | C-2F          |