
HA12211NT

Audio Signal Processor for Cassette Deck (Deck 1 Chip)

HITACHI

ADE-207-223A (Z)
2nd. Edition
June 1997

Description

HA12211NT is silicon monolithic bipolar IC providing REC equalizer system, PB equalizer system and each electronic control switch in one chip.





Functions

- PB equalizer × 2 channel
- REC equalizer × 2 channel
- Each electronical control switch to change equalizer characteristics
- REC mute
- REC head return switch

Features

- REC equalizer is very small number of external parts.(4 types of frequency characteristics built-in)
- PB equalizer built-in. (A/B input changing system, 4 types of frequency characteristics)
- Independent PB sensitivity for A deck, B deck.
- Normal-speed/high-speed, normal tape/chrome tape switching built-in.
- Controllable from direct micro-computer output.
- Available to reduce substrate-area because of high integration and small external parts.





Pin Description, Equivalent Circuit ($V_{CC} = 10.5V$, $V_{ref} = 5.25V$, $T_a = 25^{\circ}C$, No signal, The value in the table show typical value.)

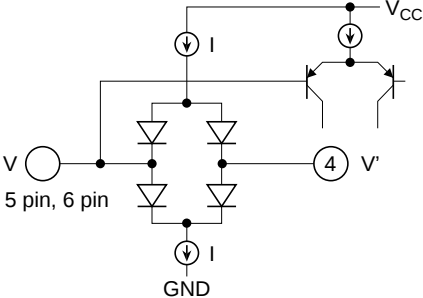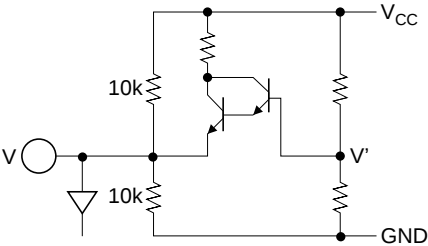Pin No.	Pin Name	Note	Equivalent Circuit	Pin Description
1	V_{CC}	$V = V_{CC}$		V_{CC} Pin
2	RECOUT (L)	$V = V_{ref}$		REC-EQ output
3	RECOUT (R)			
4	REC-RETURN	$V = V_{ref}$ $V' = V_{ref}$		REC Return
5	PB-IN B (L)			PB B Deck input
6	PB-IN B (R)			
7	VREF	$V = V_{ref}$ $V' = V_{CC} / 2$		Reference
8	PB-IN A(L)	$V = V_{ref}$		PB A Deck input
9	PB-IN A(R)			


Pin Description, Equivalent Circuit ($V_{CC} = 10.5V$, $V_{ref} = 5.25V$, $T_a = 25^{\circ}C$, No signal, The value in the table show typical value.) (cont)

Pin No.	Pin Name	Note	Equivalent Circuit	Pin Description
10	PB-NF (L)	$V = V_{ref}$		PB EQ Feed back
11	PB-NF (R)			
12	PB-EQ (L)	$V = V_{ref}$		NAB Output
13	PB-EQ (R)			
14	PB-Cal A(L)	$V = V_{ref}$		Feed back input for gain adjustment
15	PB-Cal A(R)			
16	PB-Cal B(R)			
17	PB-Cal B(L)			
26	AUX (R)	$V = V_{ref}$		REC-EQ input
27	AUX (L)			
28	TAPE (R)			
29	TAPE (L)			

Pin Description, Equivalent Circuit ($V_{CC} = 10.5V$, $V_{ref} = 5.25V$, $T_a = 25^{\circ}C$, No signal, The value in the table show typical value.) (cont)

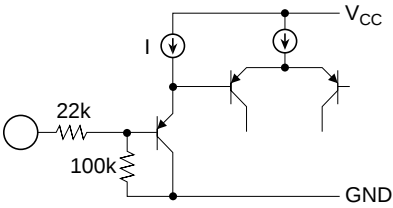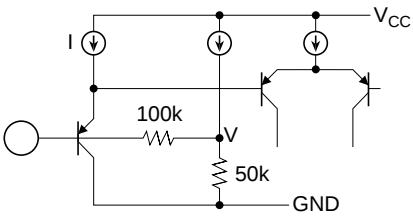Pin No.	Pin Name	Note	Equivalent Circuit	Pin Description
18	PBOUT (R)	$V = V_{ref}$		PB output
19	PBOUT (L)			
20	A/B	$I = 20\mu A$		Mode control input
21	HSP			
22	Acr			
23	Bcr			
24	REC-SEL	$I = 20\mu A$ $V = 2.5V$		Mode control input
25	IREF	$V = 1.2V$		Equalizer reference current input
30	GND			GND Pin

Block Diagram

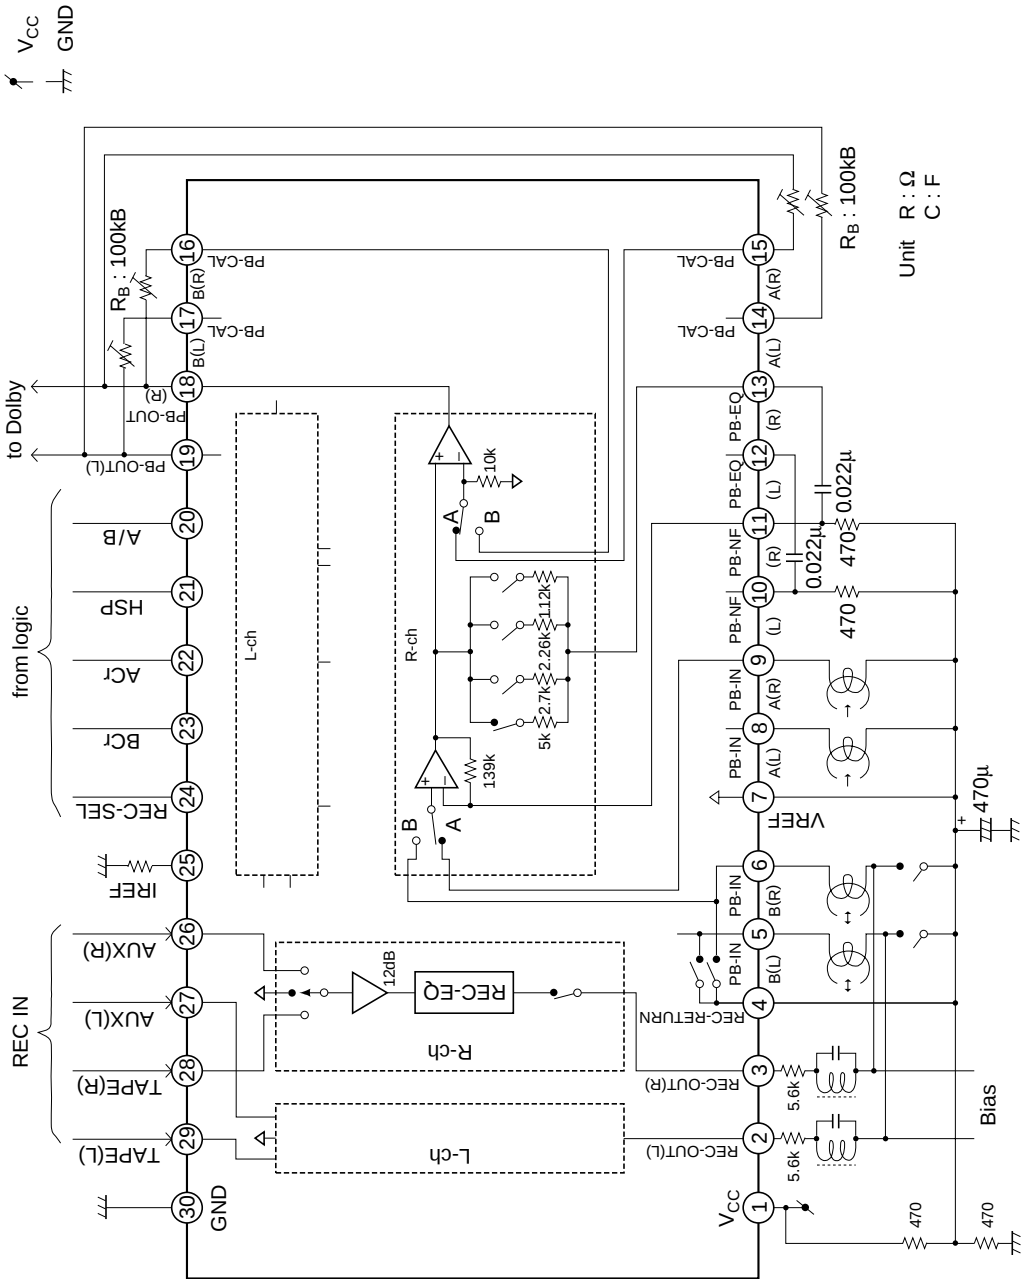

Unit	R : Ω
	C : F

Parallel Data Format

Pin No.	Pin Name	L	M	H
22	A CrO2	*1, *3	—	*1
23	B CrO2	*1, *2, *3	—	*1, *2
21	HSP	Normal speed *3	—	Hi speed
20	A/B	Ain active *1, *3	—	Bin active *1
		Return SW ON *3	—	Return SW OFF
		REC OUT active *3	—	REC OUT Hiz
24	REC IN SEL	TAPE	MUTE *3	AUX

Note: 1. PB-EQ LOGIC

		HSP			
		L		H	
		A/B			
A CrO2	B CrO2	L	H	L	H
L	L	120μ	120μ	60μ	60μ
L	H	120μ	70μ	60μ	35μ
H	L	70μ	120μ	35μ	60μ
H	H	70μ	70μ	35μ	35μ

2. REC-EQ LOGIC

HSP		
B CrO2	L	H
L	Normal speed TAPE I	High speed TAPE I
H	Normal speed TAPE II	High speed TAPE II

3. Unforced pin state

Functional Description

Power Supply Range

This IC is designed to operate on single supply, shown by table 1.

Table 1 Sply Voltage

Item	Power Supply Range
Single Supply	9.5V to 15.0V

Reference Voltage

So little is the current drivability of AC reference (Vref) that the Vref voltage may be altered by A/B switching of PB-EQ.

Provided it causes you anxiety, please use the constant 1/2 V_{CC} voltage circuit, for example, figure 1.

In addition, this IC has a capacitor charger for Vref pin.

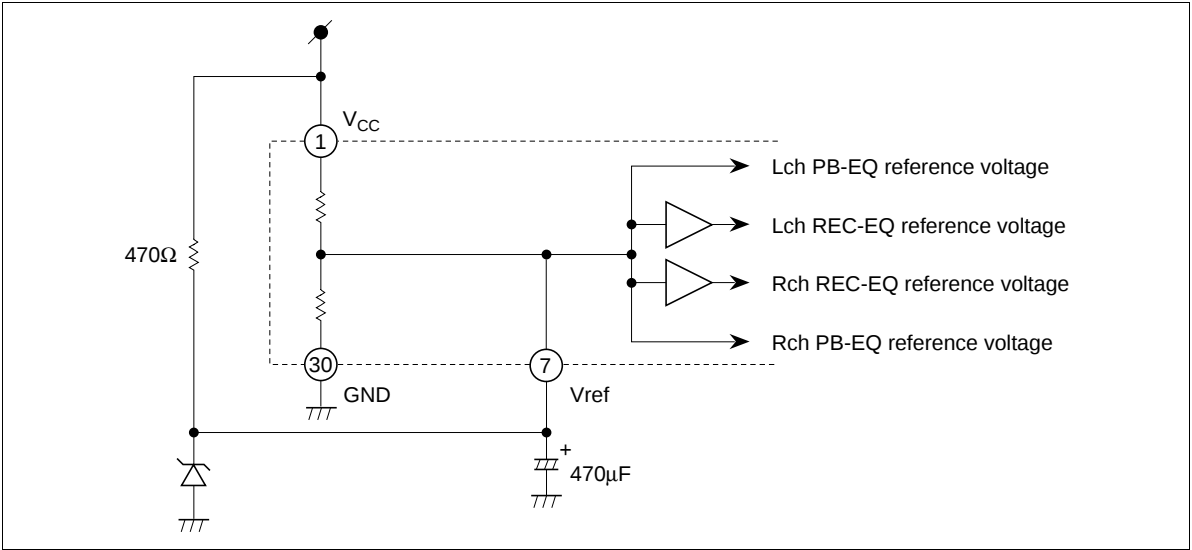



Figure 1 Reference Voltage Circuit

Operating Mode Control

This IC provides fully electronic switching circuits. And each operating mode control is controlled by parallel data (DC voltage).

Table 2 Threshold Voltage (Vth)

Pin No.	Lo	Mid	Hi	Unit	Test Condition
20, 21, 22, 23	0.0 to 2.5	—	4.0 to V _{CC}	V	
24	0.0 to 1.0	2.0 to 3.0	4.0 to V _{CC}	V	

- Note:
- 1. 20 to 23 pins are pulled down Lo level, and 24 pin is pulled to Mid level by the inside resistor 100kΩ.
 - 2. Over shoot level and under shoot level of input signal must be the standardized.
(High: V_{CC}, Low: -0.2V)

Block Diagram

This IC can be constructed for simple system which has little external parts by used the head serving both as Recording and Play back because of REC return SW built-in.

With output Hi-Z of REC-EQ and input muting, this IC is realized not only REC mute attenuation sufficiently but reducing pop noise in REC muting.

Note: Referring to Parallel Data Format also.

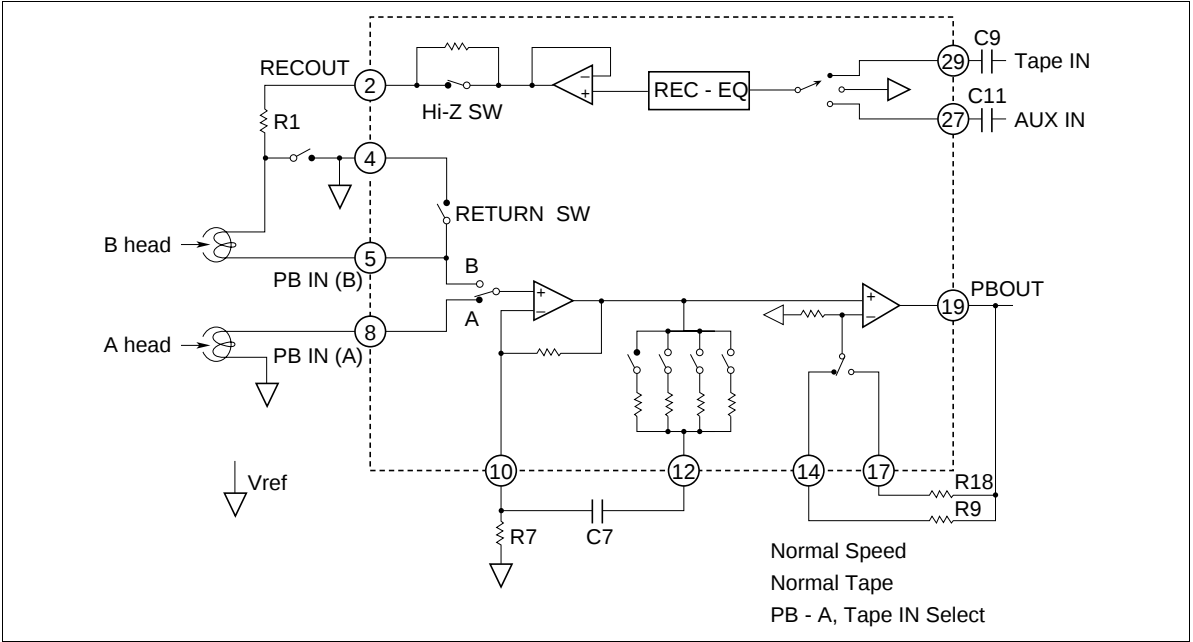


Figure 2 Block Diagram (Lch)

Level Diagram

It is the target that total play back output level is adjusted to 300mV; Dolby level, which the PB system gain in all is included of external amplifier's (Dolby IC etc.) as follows figure 3. Though A head adjustment is independent of B, select the value of R9, R18 adequately.

Regarding REC-EQ adjust the gain in front of input to this IC.

The level diagram at 1kHz is shown by figure 4.

- Note:
1. R1 needs the value more than 1kHz.
 2. Depending on the employed REC/PB head and test tape characteristics, there is rare case that the REC-EQ frequency characteristics of this IC can not be matched to the required characteristics because of built-in resistors which determined the REC-EQ parameters in this case, please inquire the responsible agent because of the adjustment of built-in resistors is necessary.

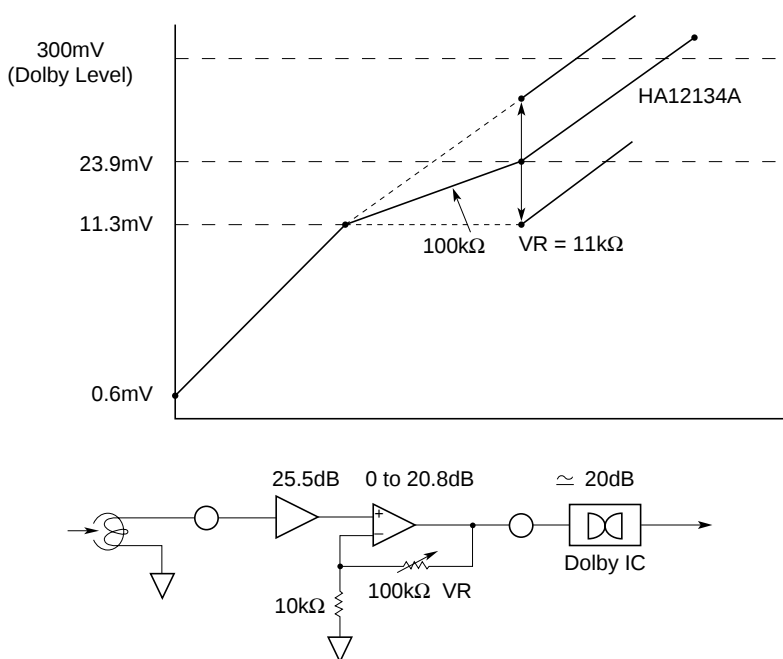


Figure 3 PB Level Diagram (Normal Speed, Normal Tape, 1kHz)

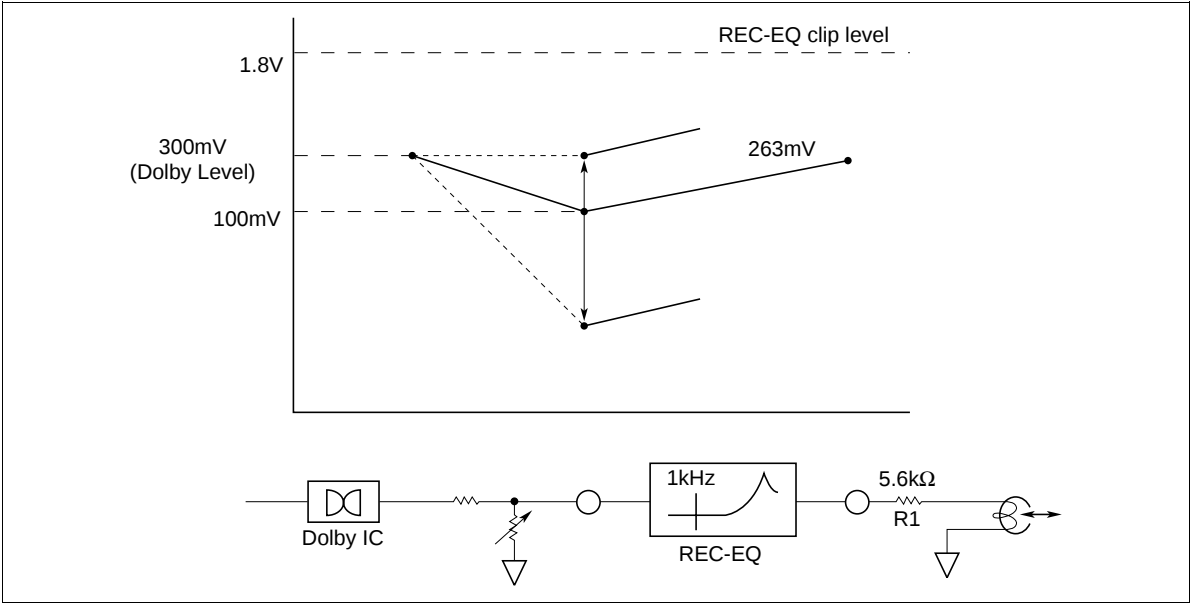


Figure 4 REC Level Diagram (Normal Speed, Normal Tape, 1kHz)

Absolute Maximum Rating (Ta = 25°C)

Item	Symbol	Rating	Unit	Note
Max supply voltage	V _{cc} max	16	V	
Power dissipation	P _T	500	mW	Ta ≤ 75°C
Operating temperature	Topr	−40 to +75	°C	
Storage temperature	Tstg	−55 to +125	°C	
Operating voltage	Vopr	9.5 to 15	V	

Electrical Characteristics (Ta = 25°C, V_{CC} = 10.5V, V_{ref} = 5.25V, PB-EQ standard DC gain 55.9dB (R9, R10, R18, R19 = 11.0kΩ))

Test Condition										Application Terminal					
IC Condition										Input		Output			
Item	Symbol	Min	Typ	Max	Unit	A/B	HSP	A CrO2 B CrO2 IN SEL	REC fin	Vin	R	L	R	L	COM
Quiescent current	I _Q	16.0	22.8	32.0	mA	A	Norm	TYPE I TYPE I Mute	—	No signal	—	—	—	—	1
Logical threshold	V _{IL1}	−0.2	—	2.5	V	—	—	—	—	—	—	—	—	—	20 to 23
	V _{IL2}	−0.2	—	1.0	V	—	—	—	—	—	—	—	—	—	24
	V _{IM}	2.0	—	3.0	V	—	—	—	—	—	—	—	—	—	24
	V _{IH}	4.0	—	V _{CC}	V	—	—	—	—	—	—	—	—	—	20 to 24
PB-REC Crosstalk	CT PB/REC(1)	50	60	—	dB	A/B	Norm	TYPE I TYPE I Tape/ AUX	1k	*1	27/ 29	26/ 28	18	19	
	CT PB/REC(2)	60	70	—	dB	A	Norm	TYPE I TYPE I Tape/ AUX	1k	*1	9	8	3	2	
PB-EQ Gain	G _V PB (1)	29.0	32.0	35.0	dB	A/B	Norm	TYPE I TYPE I Tape	1k	0.6	9/6	8/5	18	19	
	G _V PB (2)	25.0	28.0	31.0	dB	A/B	Norm	TYPE I TYPE I Tape	10k	0.6	9/6	8/5	18	19	
	G _V PB (3)	20.8	23.8	26.8	dB	A/B	Norm	TYPE II TYPE II Tape	10k	0.6	9/6	8/5	18	19	
	G _V PB (4)	19.4	22.4	25.4	dB	A/B	High	TYPE I TYPE I Tape	20k	0.6	9/6	8/5	18	19	
	G _V PB (5)	14.8	17.8	20.8	dB	A/B	High	TYPE II TYPE II Tape	20k	0.6	9/6	8/5	18	19	
PB-EQ Maximum output	V _{omax} PB	0.3	2.0	—	Vrms	A/B	Norm	TYPE I TYPE I Tape	1k	—	THD=1%*2	9/6	8/5	18	19
PB-EQ THD	THD PB	—	0.1	0.5	%	A/B	Norm	TYPE I TYPE I Tape	1k	0.6	9/6	8/5	18	19	
PB-EQ Noise voltage	V _N PB	—	38	70	μVrms	A/B	Norm	TYPE I TYPE I Tape	—	—	Rg=820Ω, DIN-AUDIO	9/6	8/5	18	19
PB-EQ Channel separation	CT R/L (1)	50	60	—	dB	A/B	Norm	TYPE I TYPE I Tape	1k	*1	8/5	9/6	18	19	
PB-EQ Crosstalk	CT A/B	60	70	—	dB	A	Norm	TYPE I TYPE I Tape	1k	*1	11	10	18	19	
						B					9	8			


Note: 1. Large level without clipping
2. V_{CC} = 9.5V, V_{ref} = 4.75V, R9, R10, R18, R19 = 56kΩ

Electrical Characteristics (Ta = 25°C, V_{CC} = 10.5V, V_{ref} = 5.25V, EQIN standard level = 100mV = 0dB) (cont)



Test Condition										Application Terminal						
IC Condition										Input		Output				
Item	Symbol	Min	Typ	Max	Unit	A/B	HSP	A CrO2 B CrO2 IN SEL	REC fin (Hz)	Vin (mVrms)	Other	R	L	R	L	COM
REC-EQ Frequency response Normal speed TYPE I	G _V REC-NN 1	6.7	8.2	9.7	dB	A	Norm	TYPE I TYPE I Tape/ AUX	1k	10		26/ 28	27/ 29	3	2	
	G _V REC-NN 2	9.3	11.3	13.3	dB	A	Norm	TYPE I TYPE I Tape/ AUX	5k	10		26/ 28	27/ 29	3	2	
	G _V REC-NN 3	17.3	20.3	23.3	dB	A	Norm	TYPE I TYPE I Tape/ AUX	10k	10		26/ 28	27/ 29	3	2	
REC-EQ Frequency response Normal speed TYPE II	G _V REC-NC 1	9.8	11.3	12.8	dB	A	Norm	TYPE I TYPE II Tape/ AUX	1k	10		26/ 28	27/ 29	3	2	
	G _V REC-NC 2	14.2	16.2	18.2	dB	A	Norm	TYPE I TYPE II Tape/ AUX	5k	10		26/ 28	27/ 29	3	2	
	G _V REC-NC 3	20.5	23.5	26.5	dB	A	Norm	TYPE I TYPE II Tape/ AUX	10k	10		26/ 28	27/ 29	3	2	
REC-EQ Frequency response High speed TYPE I	G _V REC-HN 1	7.0	8.5	10.0	dB	A	High	TYPE I TYPE I Tape/ AUX	2k	10		26/ 28	27/ 29	3	2	
	G _V REC-HN 2	10.9	12.9	14.9	dB	A	High	TYPE I TYPE I Tape/ AUX	10k	10		26/ 28	27/ 29	3	2	
	G _V REC-HN 3	18.7	21.7	24.7	dB	A	High	TYPE I TYPE I Tape/ AUX	20k	10		26/ 28	27/ 29	3	2	
REC-EQ Frequency response High speed TYPE II	G _V REC-HC 1	11.0	12.5	14.0	dB	A	High	TYPE I TYPE II Tape/ AUX	2k	10		26/ 28	27/ 29	3	2	
	G _V REC-HC 2	16.2	18.2	20.2	dB	A	High	TYPE I TYPE II Tape/ AUX	10k	10		26/ 28	27/ 29	3	2	
	G _V REC-HC 3	23.7	26.7	29.7	dB	A	High	TYPE I TYPE II Tape/ AUX	20k	10		26/ 28	27/ 29	3	2	
REC-EQ Channel separation	CT R/L (2)	50	60	—	dB	A	Norm	TYPE I TYPE I Tape/ AUX	1k	*1		26/ 28	27/ 29	3	2	
REC-EQ Crosstalk	CT Tape/AUX	50	60	—	dB	A	Norm	TYPE I TYPE I Tape/ AUX	1k	*1		26/ 28	27/ 29	3	2	
REC-EQ Attenuation	R-MUTE ATT	70	80	—	dB	A	Norm	TYPE I TYPE I Mute	1k	*1		26/ 28	27/ 29	3	2	
REC-EQ Maximum output	Vomax REC	1.2	1.8	—	Vrms	A	Norm	TYPE I TYPE I Tape/ AUX	1k	—	THD=1%*2	26/ 28	27/ 29	3	2	
REC-EQ THD	THD REC	—	0.35	0.7	%	A	Norm	TYPE I TYPE I Tape/ AUX	1k	100		26/ 28	27/ 29	3	2	
REC-EQ S/N	S/N REC	52	56	—	dB	A	Norm	TYPE I TYPE I Tape/ AUX	—	—	Rg=5.1kΩ, A-WTG	26/ 28	27/ 29	3	2	



Note: 1. Large level without clipping
2. V_{CC} = 9.5V, V_{ref} = 4.75V



Test Circuit


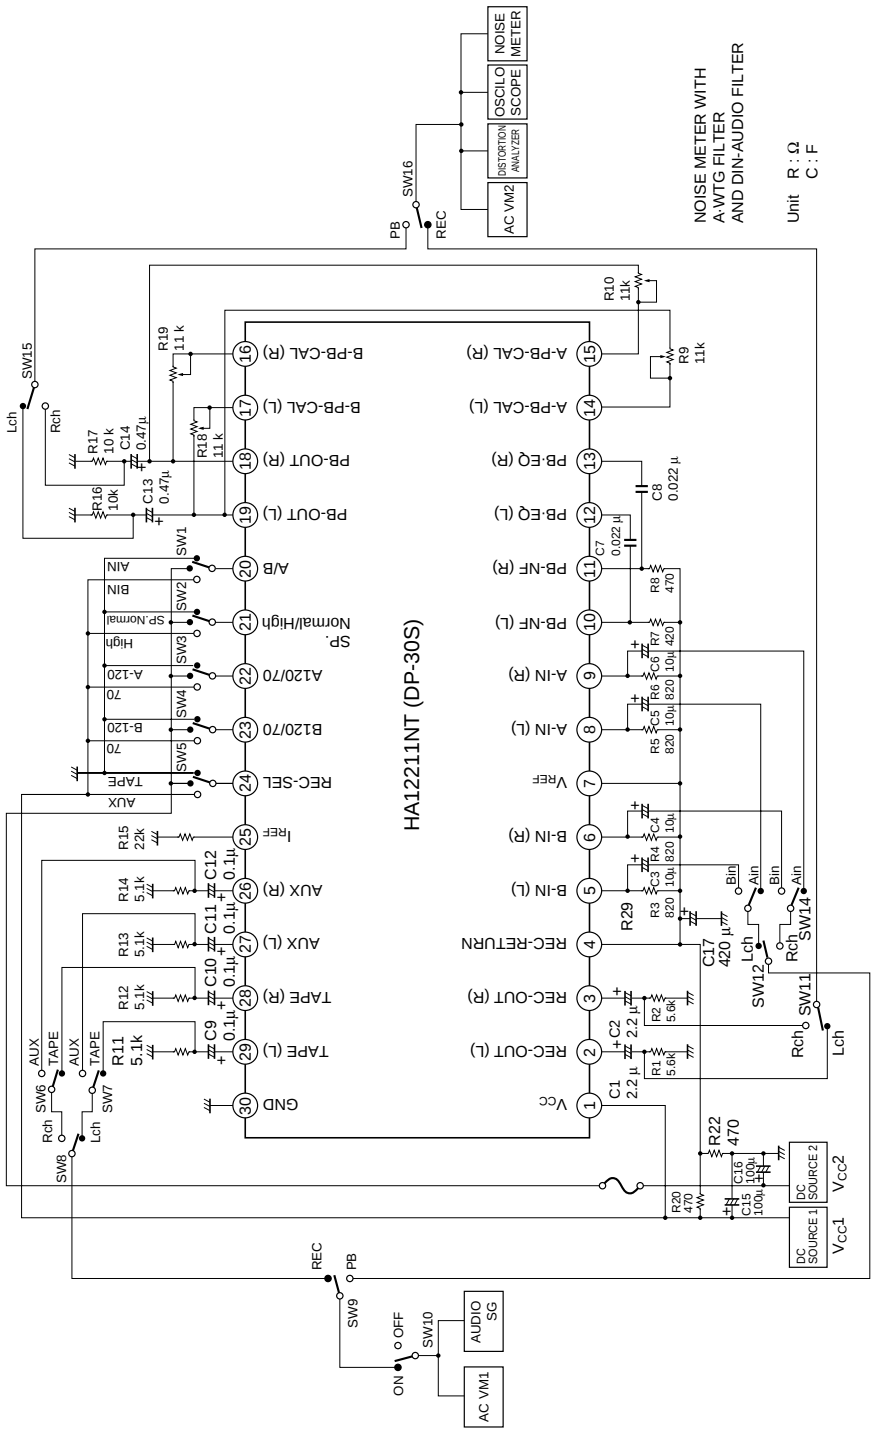




Characteristics Curve

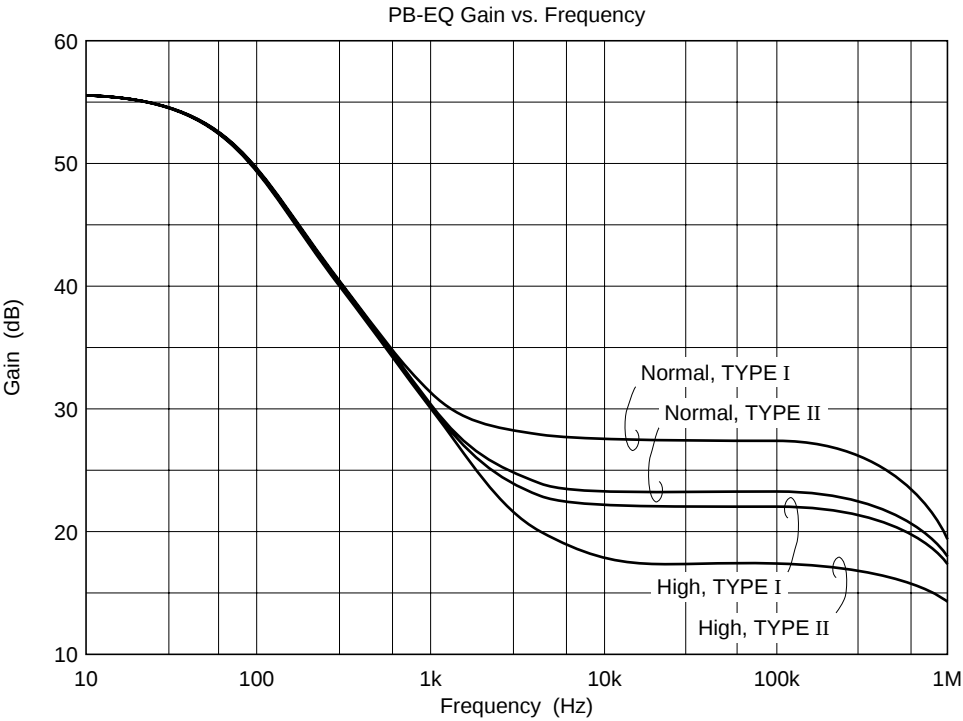
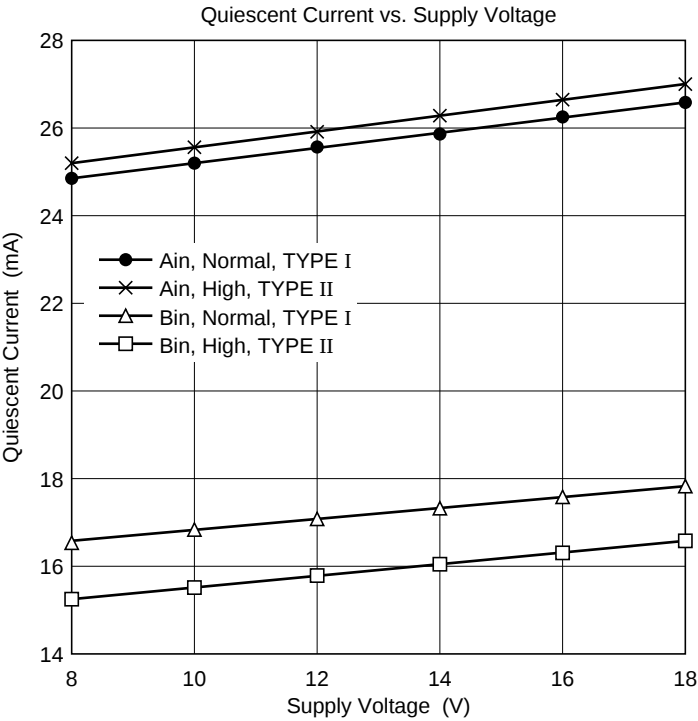


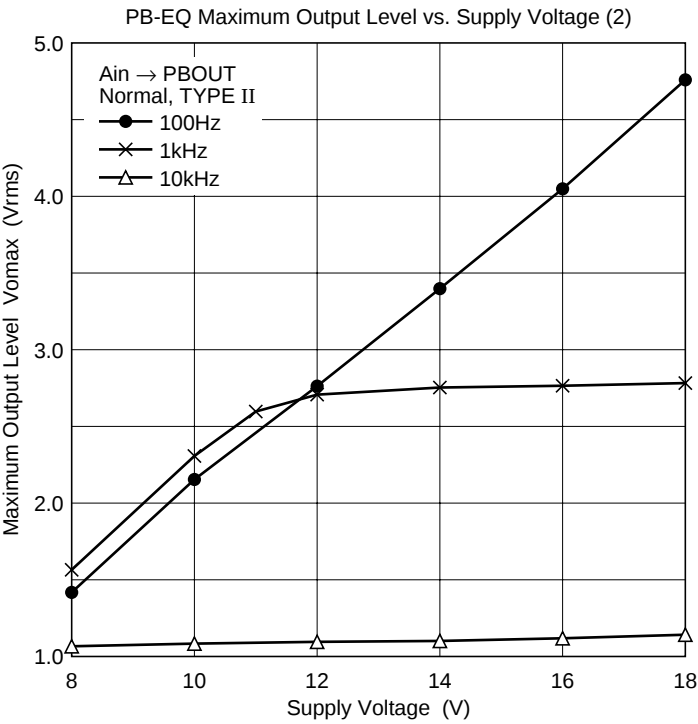
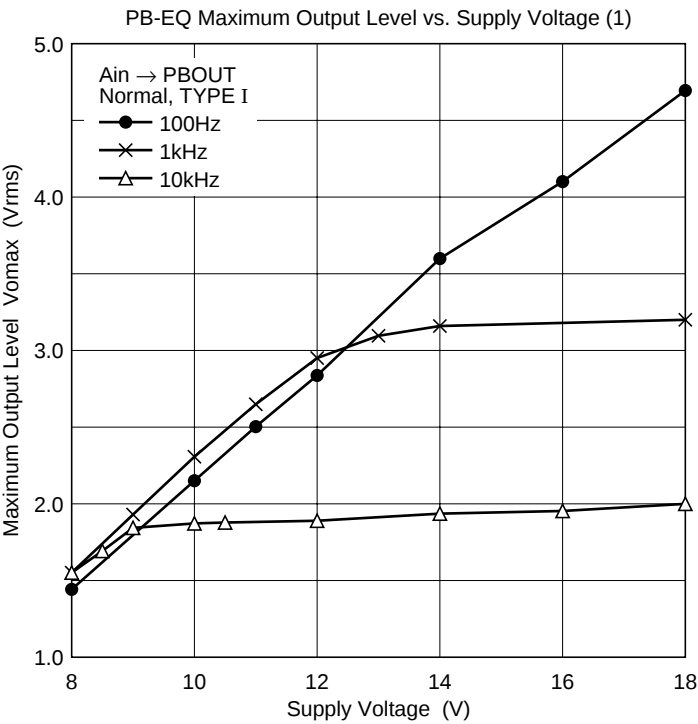


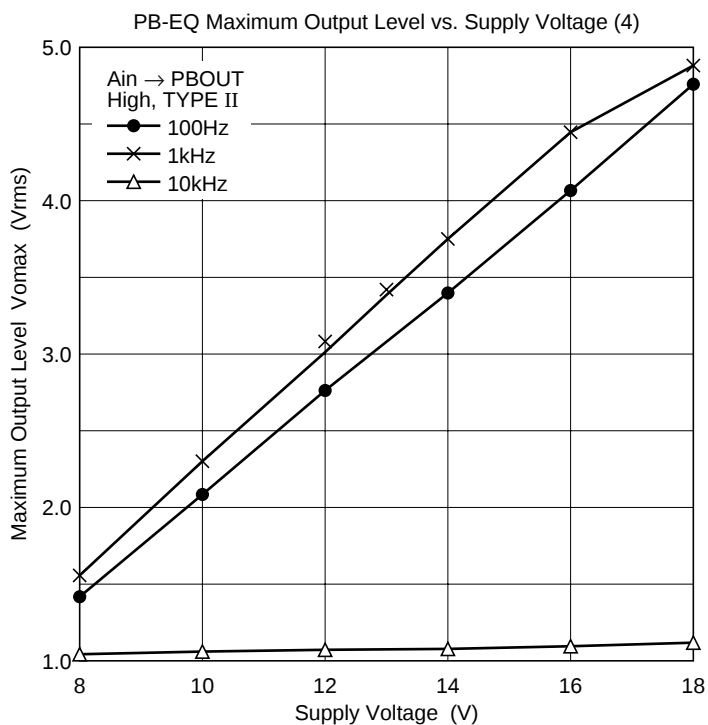
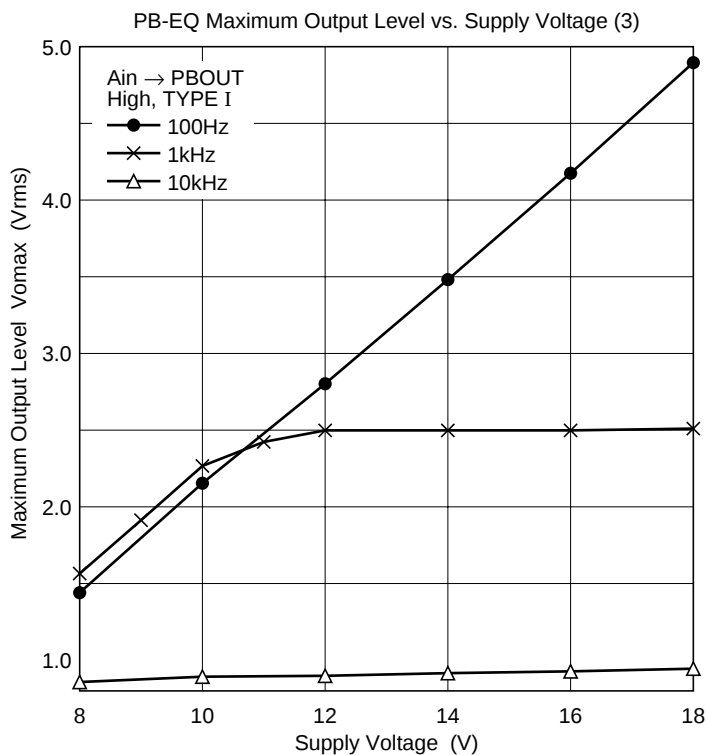


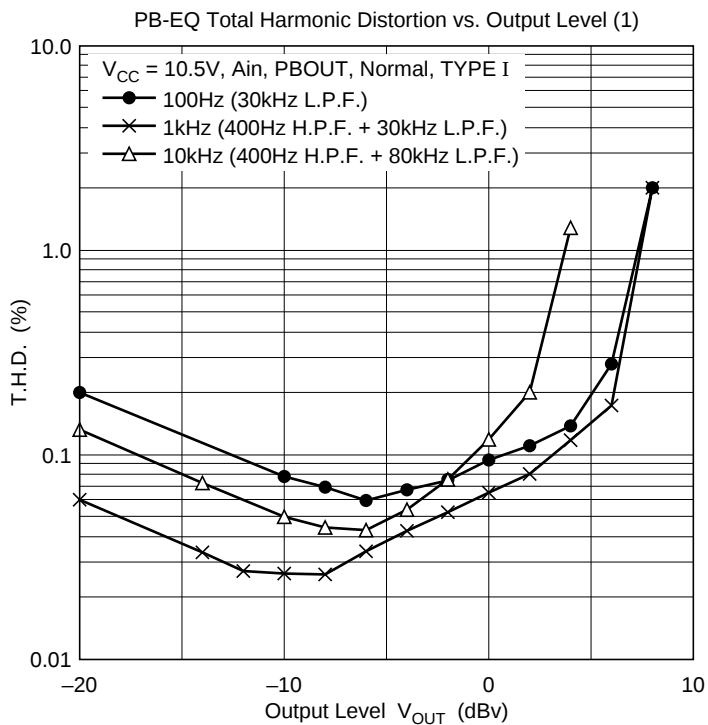
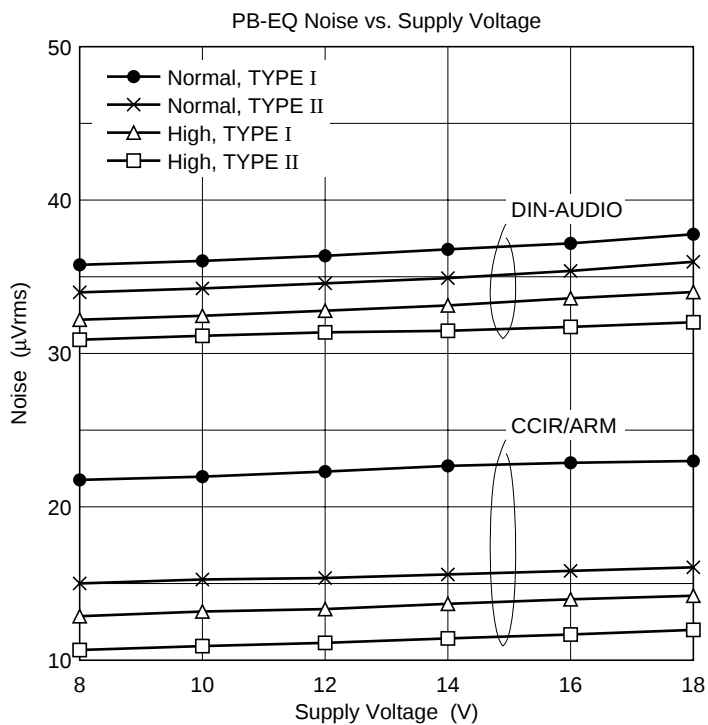


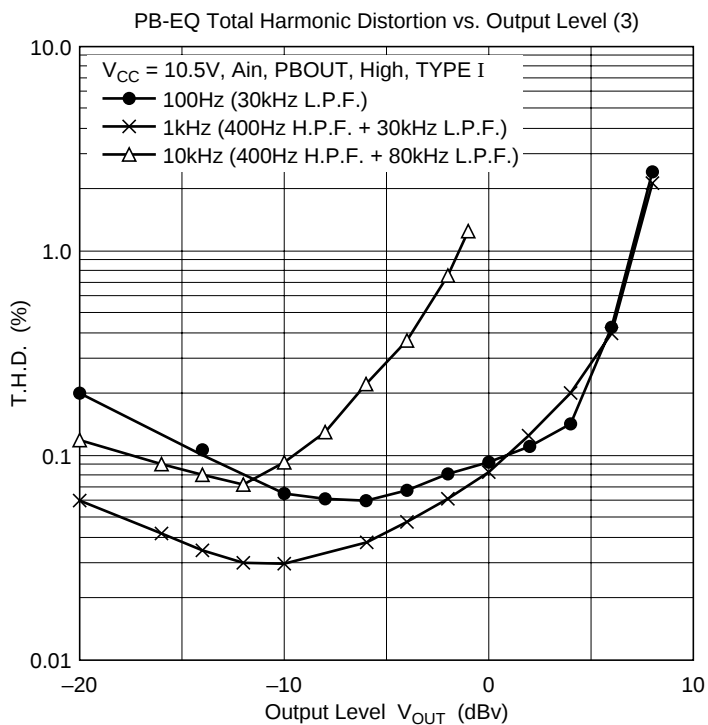
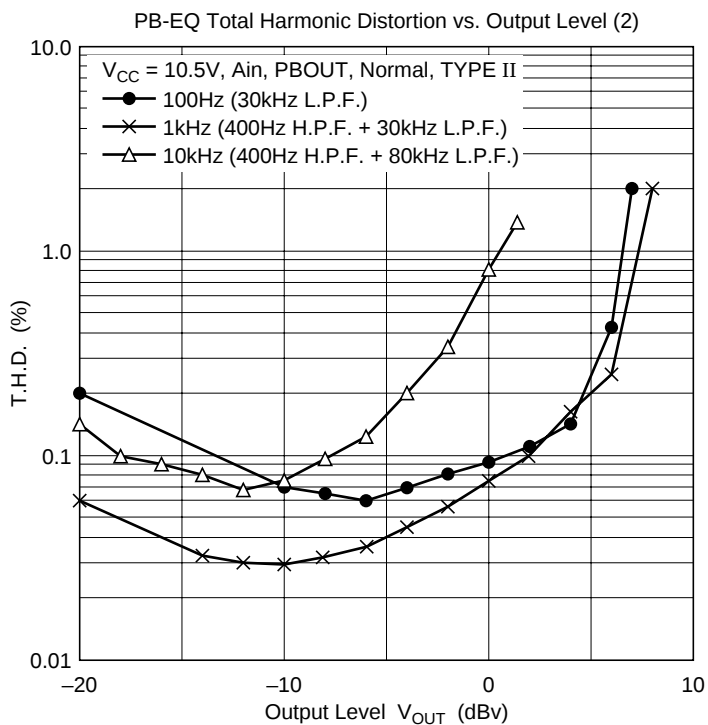


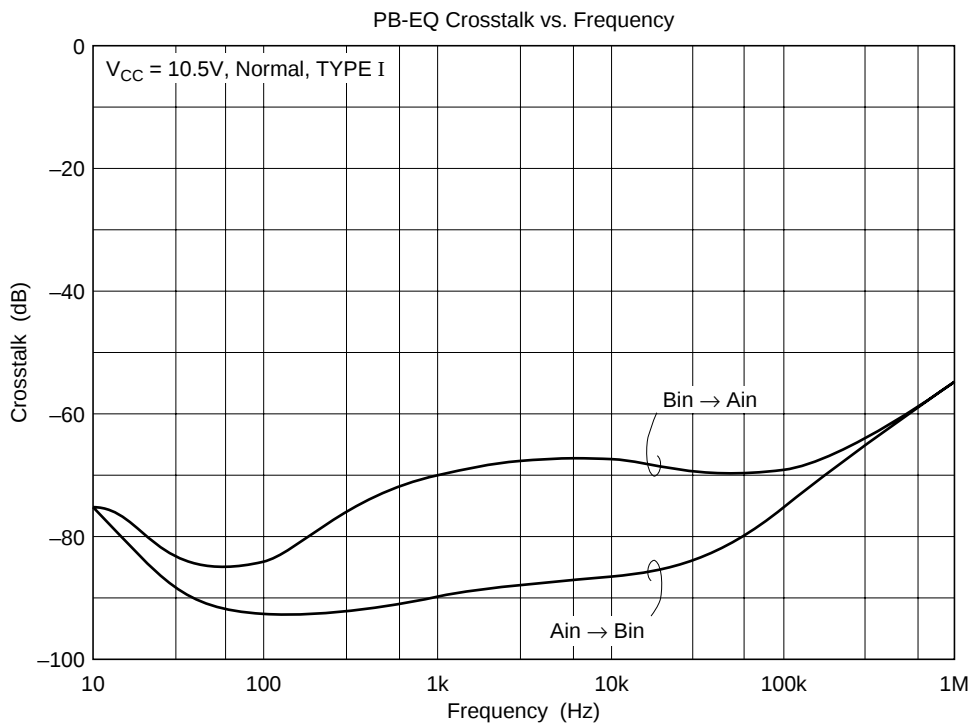
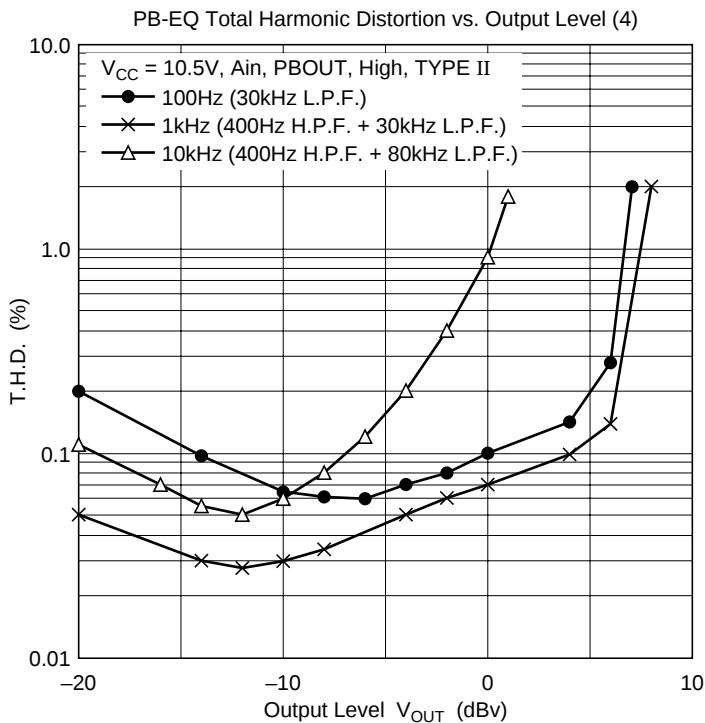


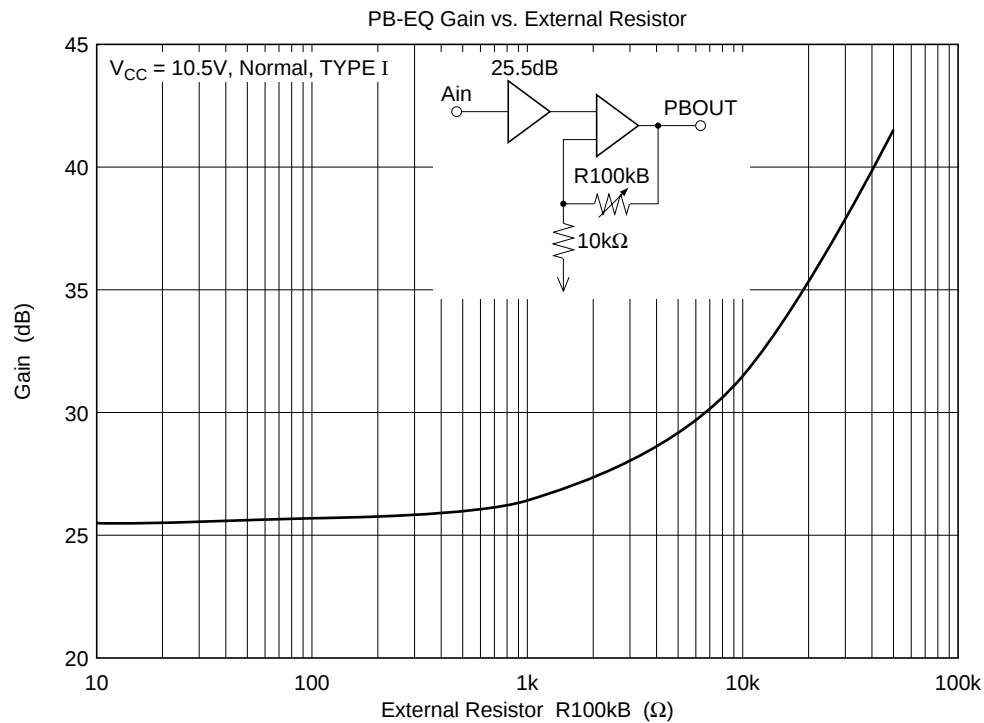
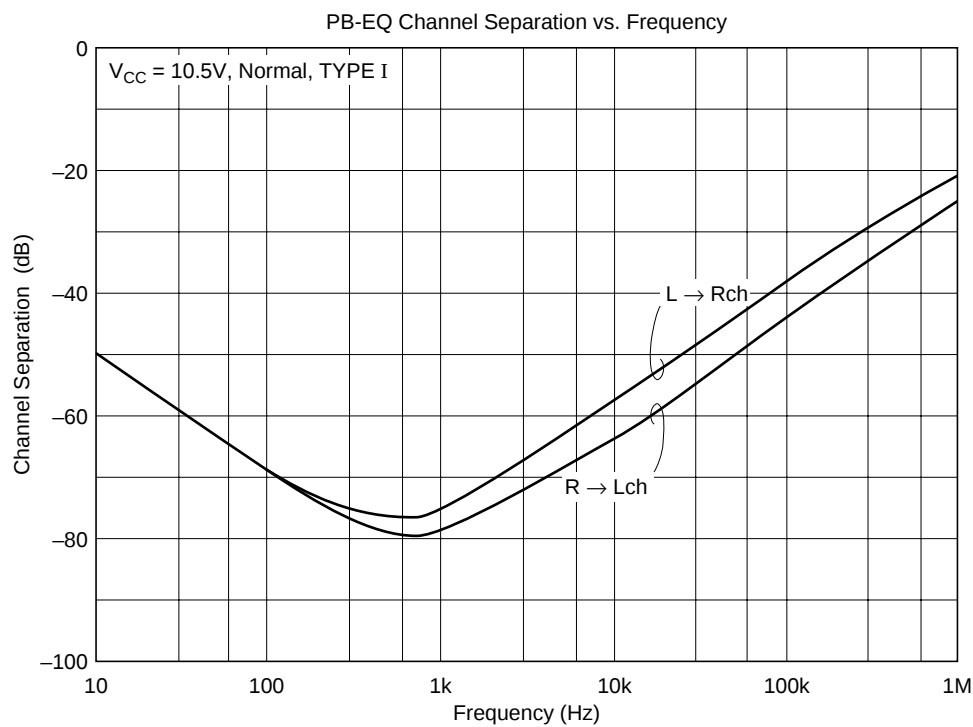


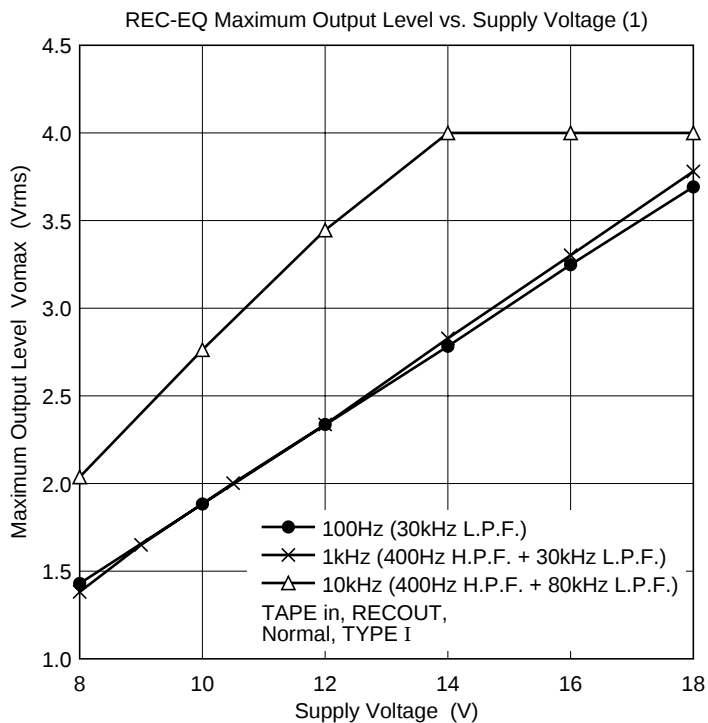
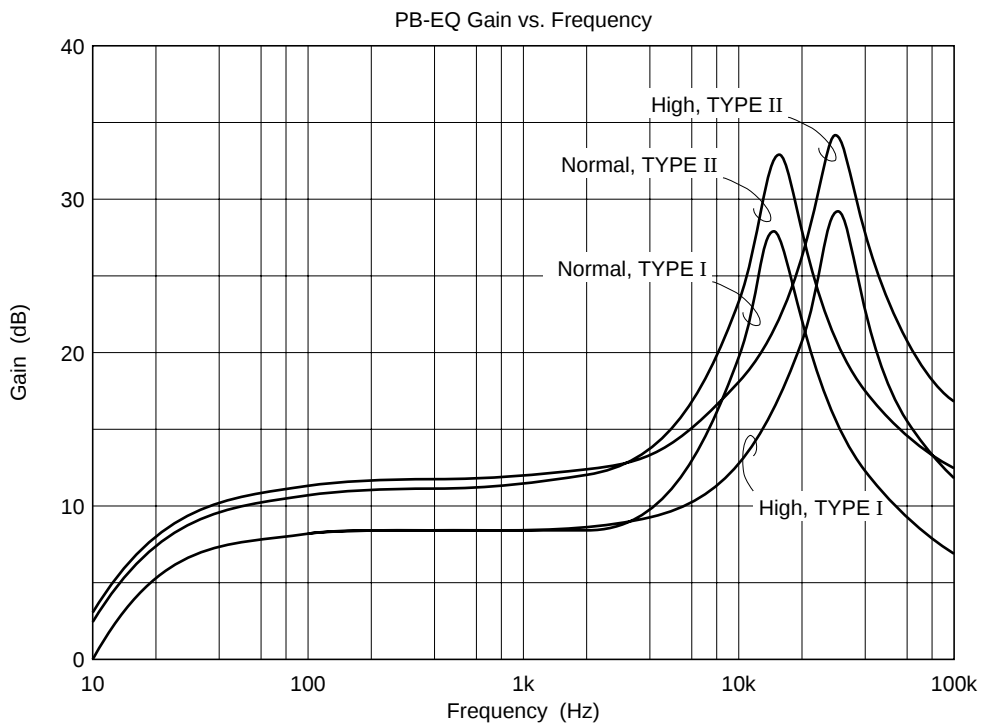


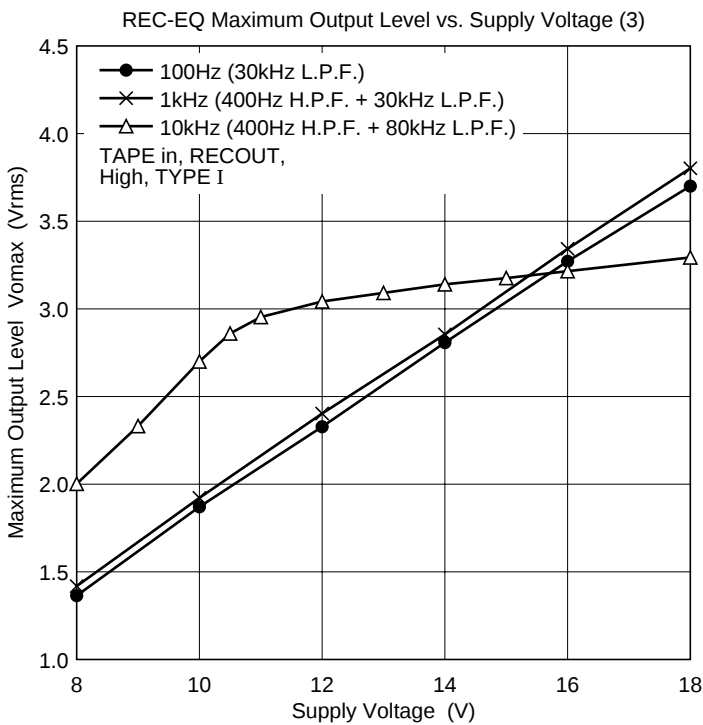
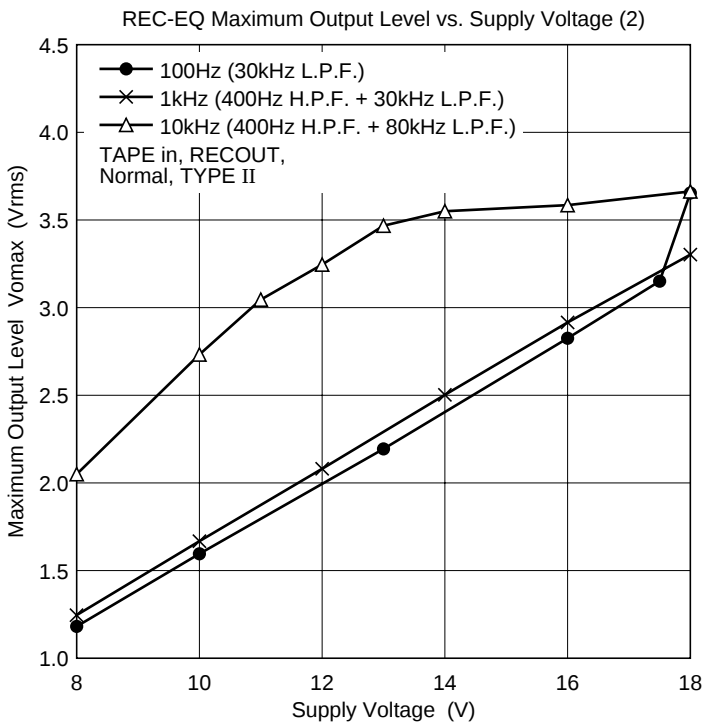


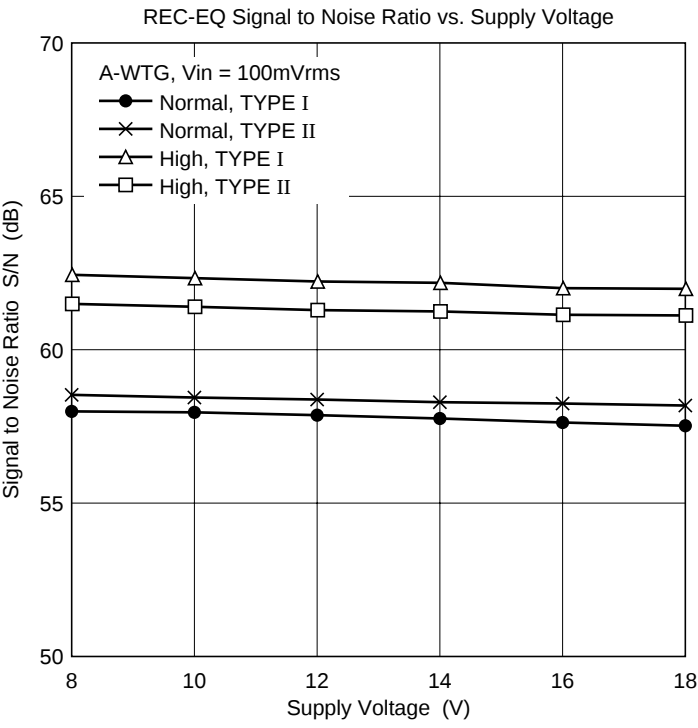
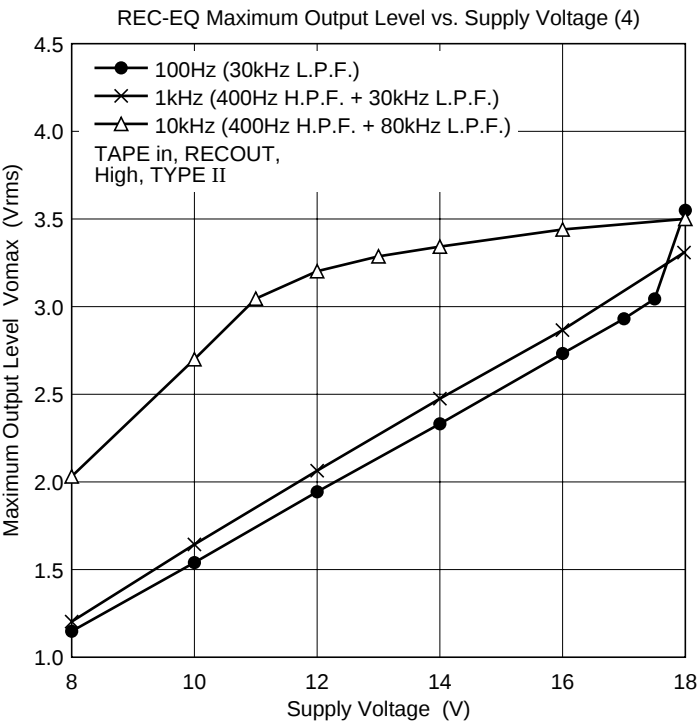


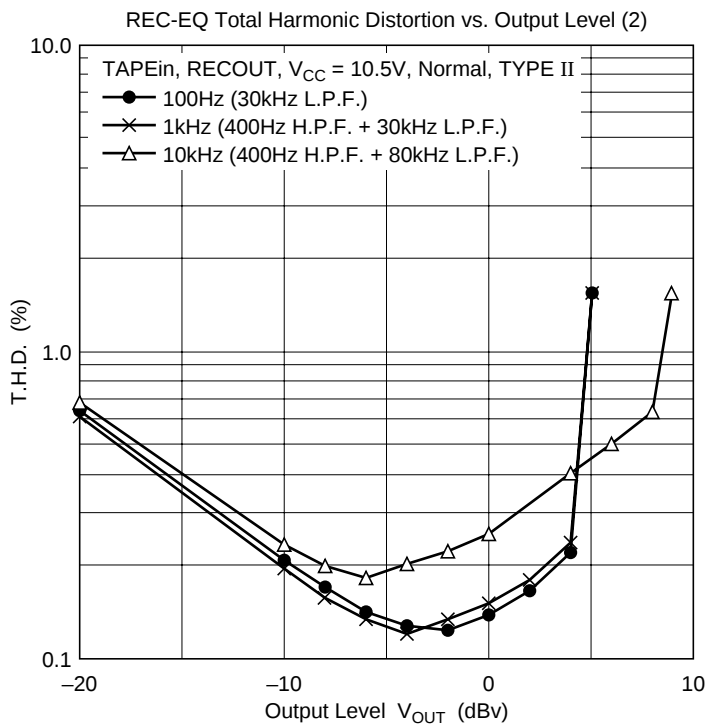
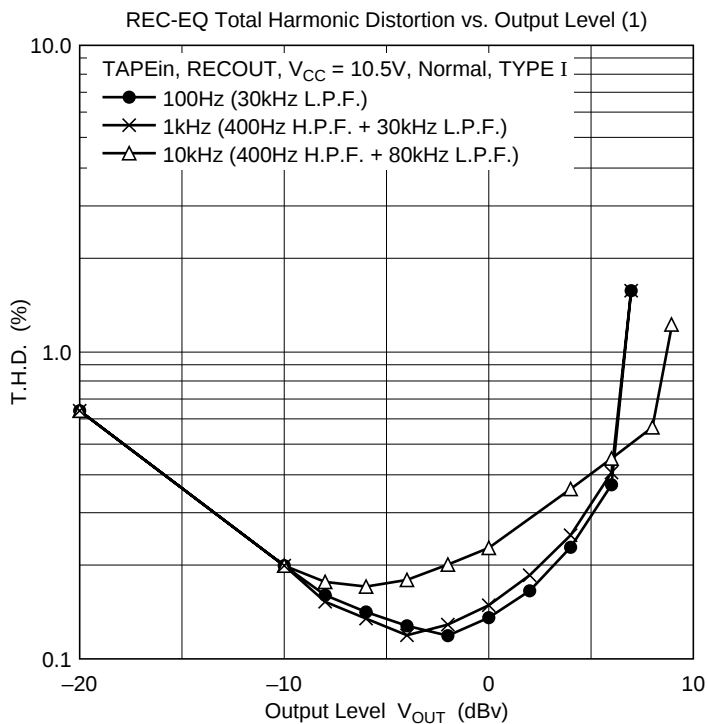


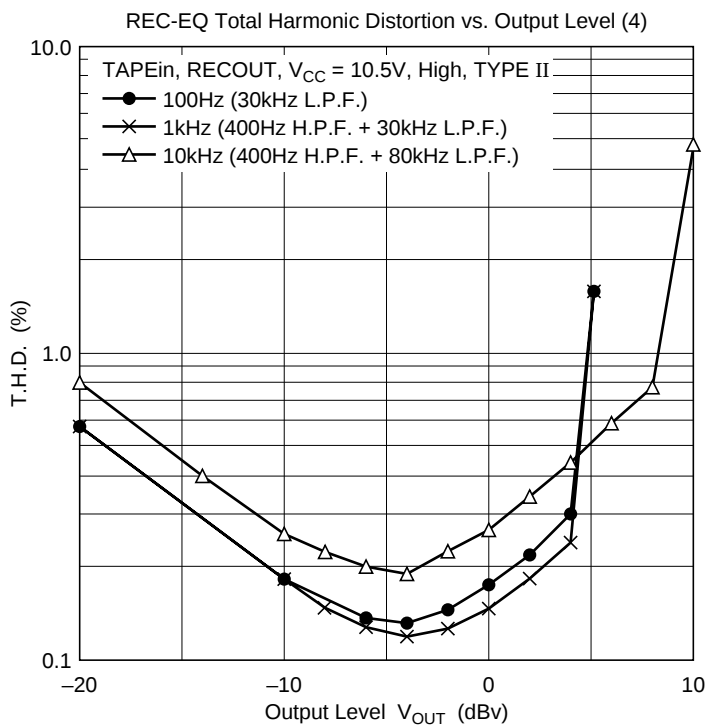
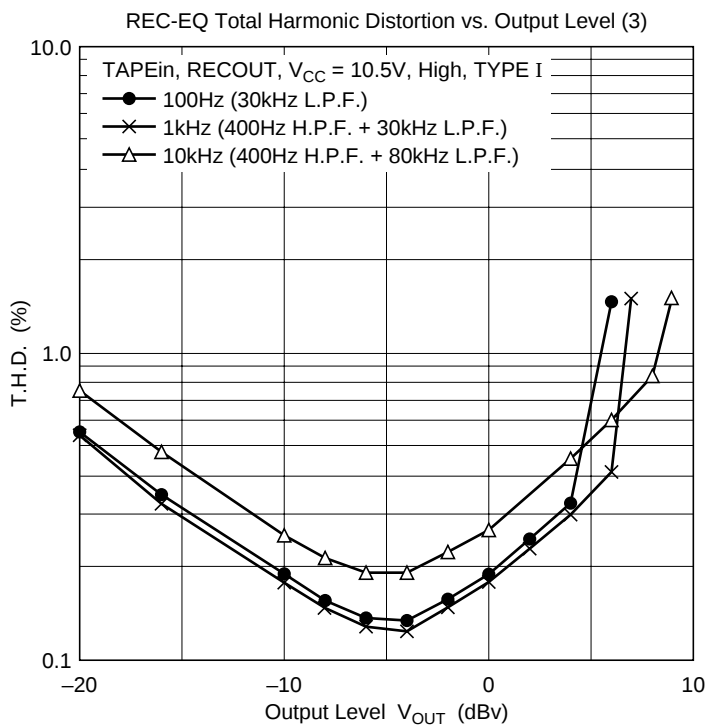


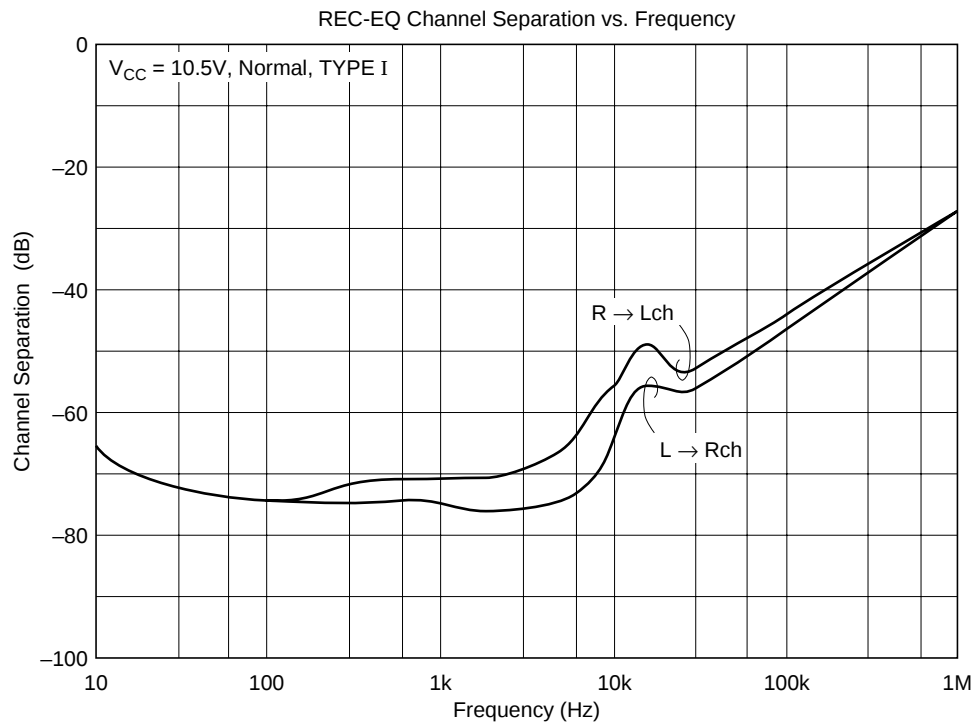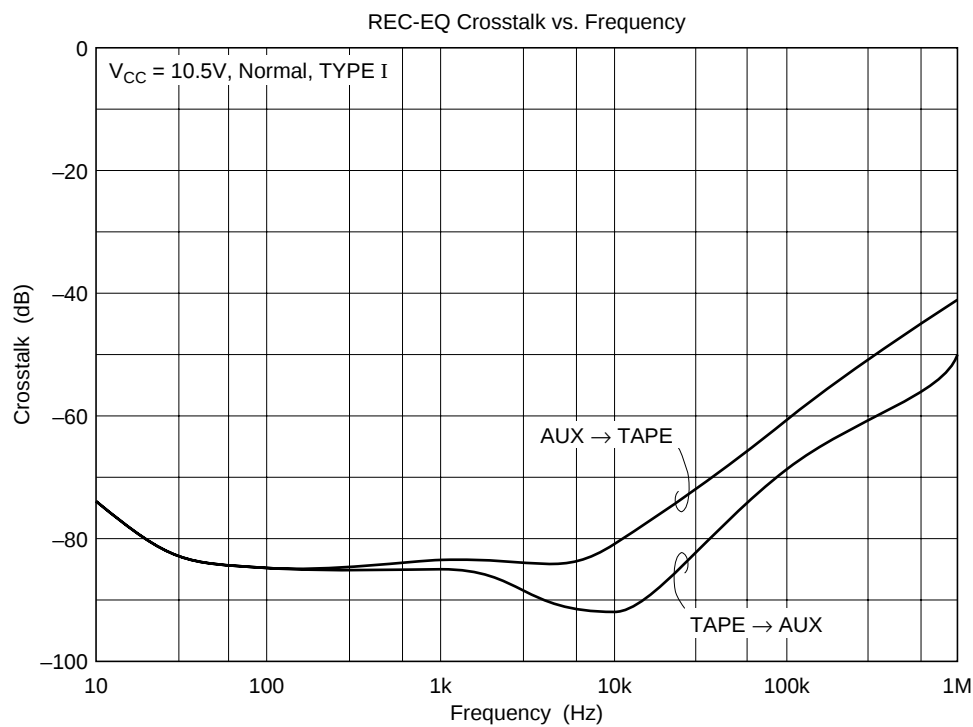


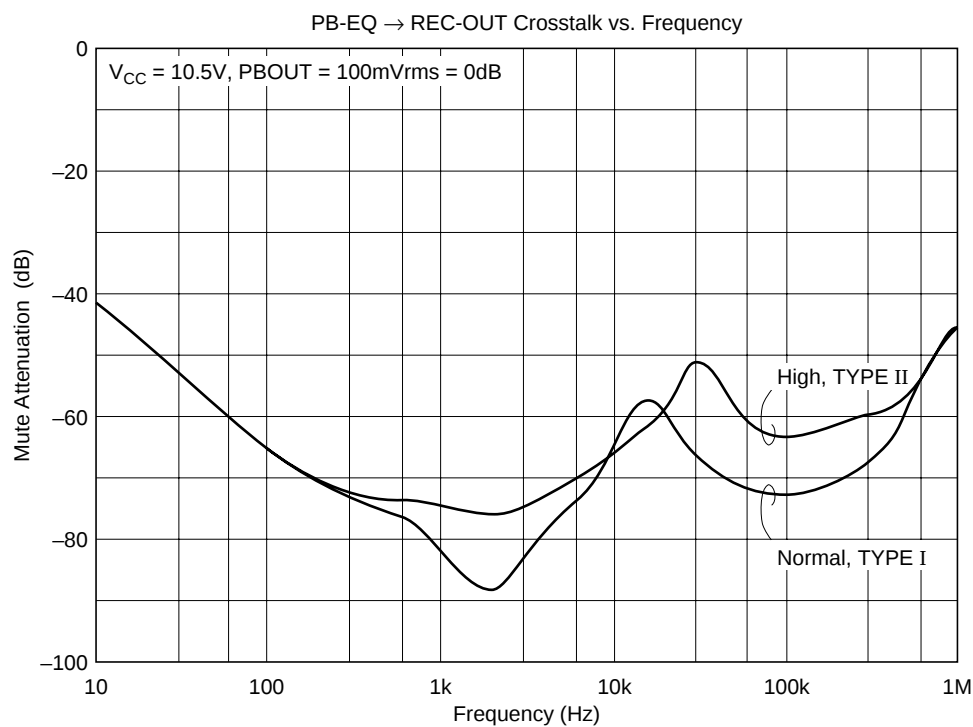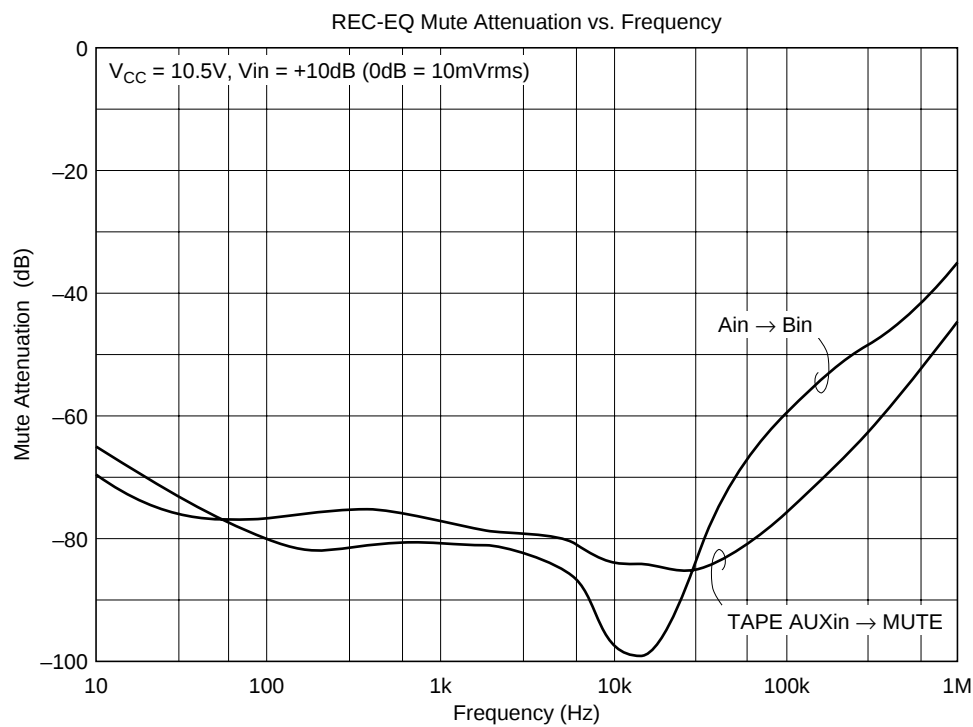

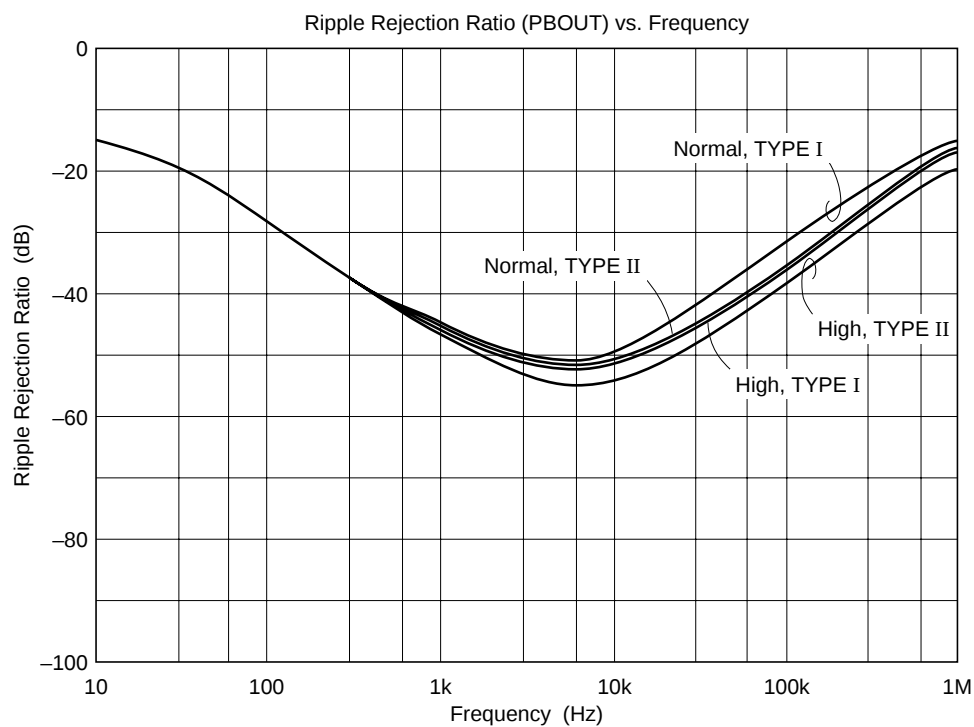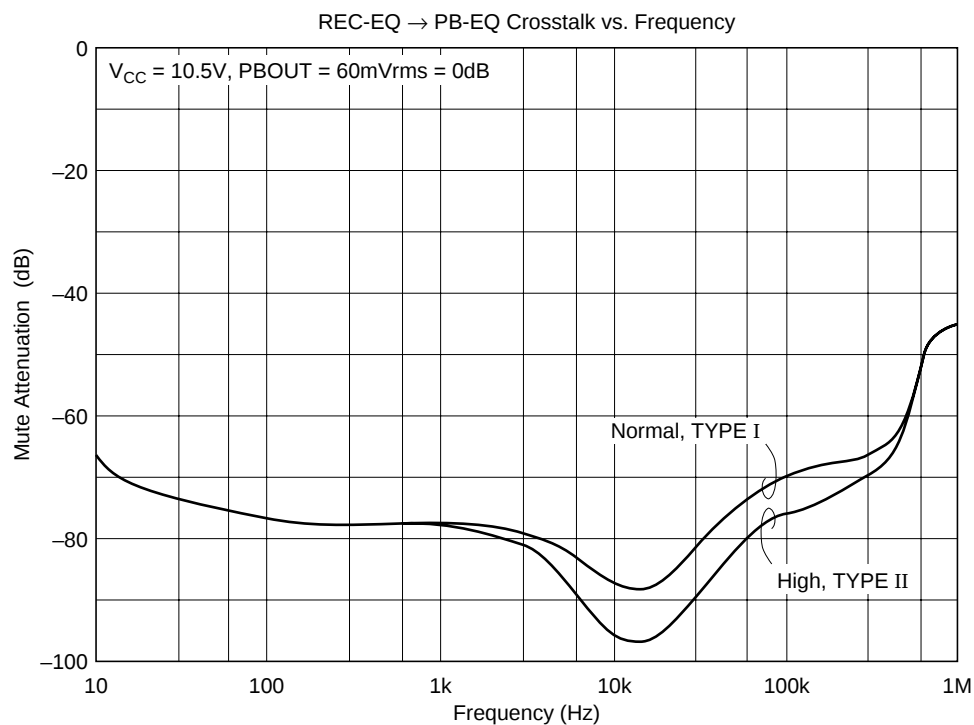

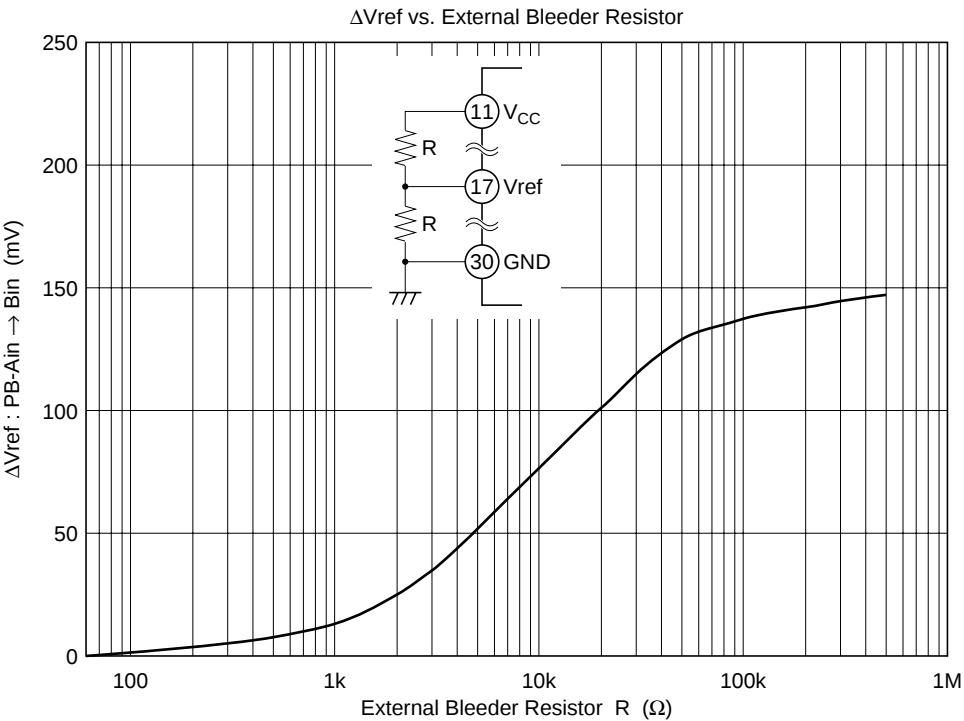
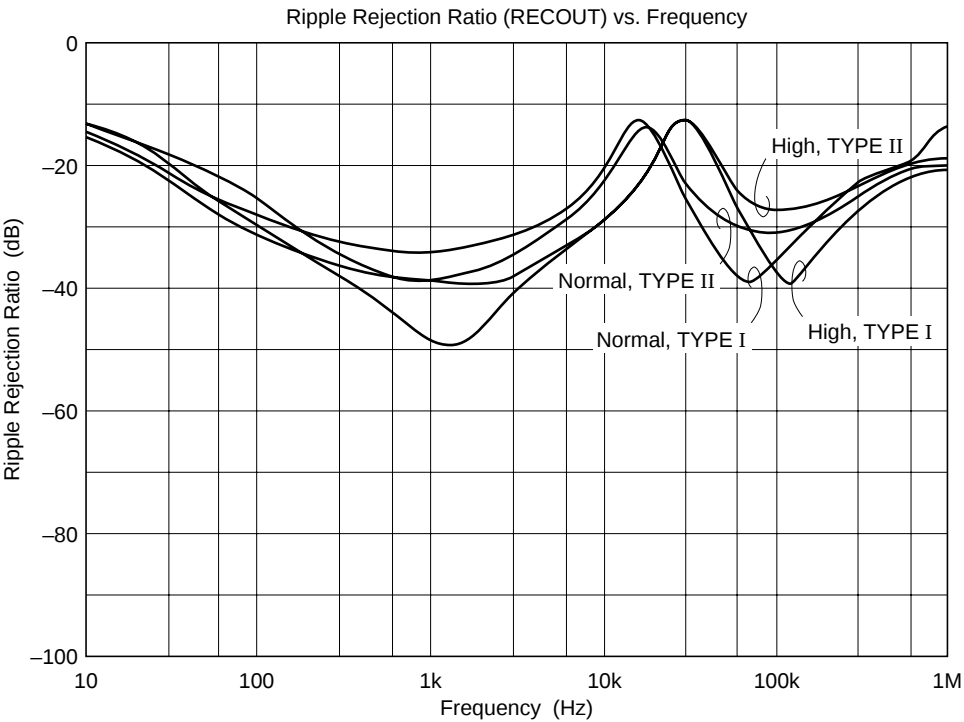


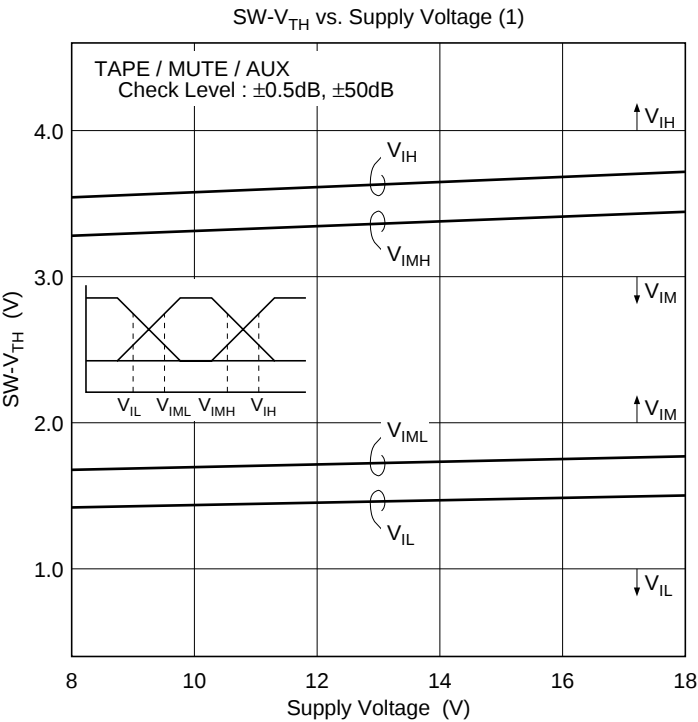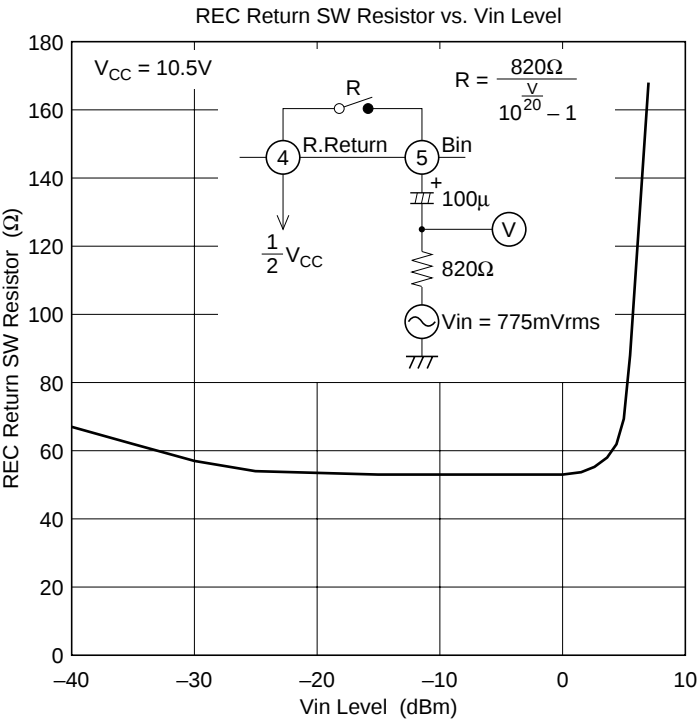

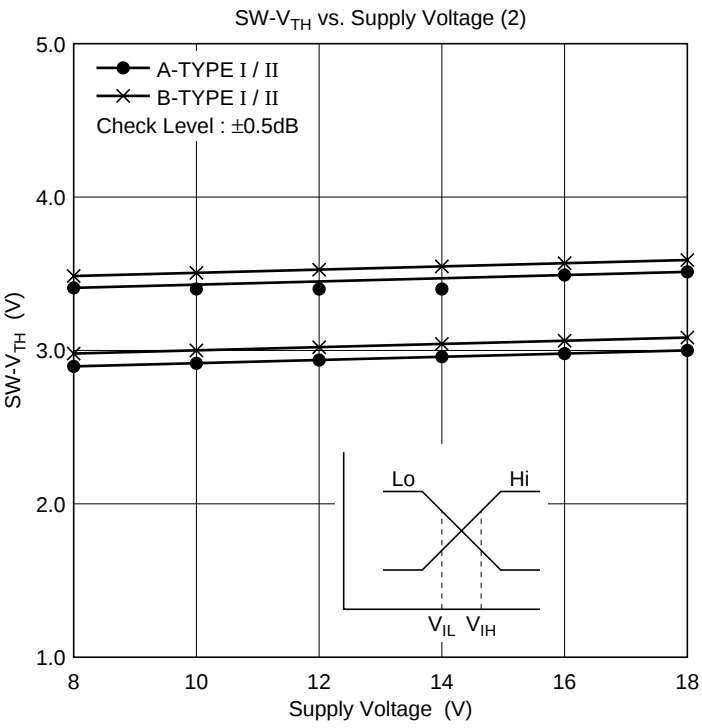

Package Dimensions

Unit: mm

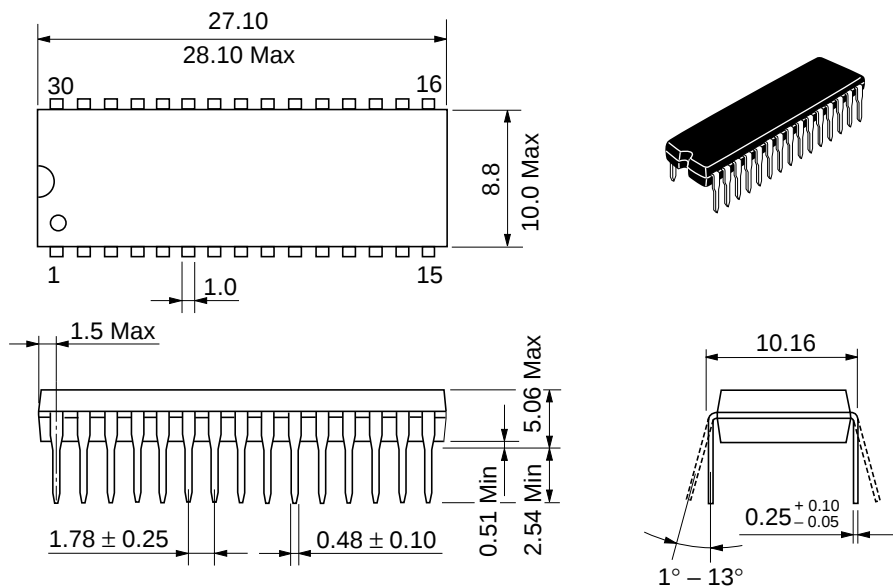

Hitachi Code	DP-30S
JEDEC Code	—
EIAJ Code	SC-549-30
Weight	1.98 g

Cautions

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

HITACHI

Hitachi, Ltd.

Semiconductor & Integrated Circuits.
Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan
Tel: Tokyo (03) 3270-2111 Fax: (03) 3270-5109

URL	NorthAmerica	:	http://semiconductor.hitachi.com/
	Europe	:	http://www.hitachi-eu.com/hel/ecg
	Asia (Singapore)	:	http://www.has.hitachi.com.sg/grp3/sicd/index.htm
	Asia (Taiwan)	:	http://www.hitachi.com.tw/E/Product/SICD_Frame.htm
	Asia (HongKong)	:	http://www.hitachi.com.hk/eng/bo/grp3/index.htm
	Japan	:	http://www.hitachi.co.jp/Sicd/indx.htm

For further information write to:

Hitachi Semiconductor (America) Inc. 179 East Tasman Drive, San Jose, CA 95134 Tel: <1> (408) 433-1990 Fax: <1> (408) 433-0223	Hitachi Europe GmbH Electronic components Group Dornacher Straße 3 D-85622 Feldkirchen, Munich Germany Tel: <49> (89) 9 9180-0 Fax: <49> (89) 9 29 30 00 Hitachi Europe Ltd. Electronic Components Group. Whitebrook Park Lower Cookham Road Maidenhead Berkshire SL6 8YA, United Kingdom Tel: <44> (1628) 585000 Fax: <44> (1628) 778322
--	---

Hitachi Asia Pte. Ltd.
16 Collyer Quay #20-00
Hitachi Tower
Singapore 049318
Tel: 535-2100
Fax: 535-1533

Hitachi Asia Ltd.
Taipei Branch Office
3F, Hung Kuo Building, No.167,
Tun-Hwa North Road, Taipei (105)
Tel: <886> (2) 2718-3666
Fax: <886> (2) 2718-8180

Hitachi Asia (Hong Kong) Ltd.
Group III (Electronic Components)
7/F., North Tower, World Finance Centre,
Harbour City, Canton Road, Tsim Sha Tsui,
Kowloon, Hong Kong
Tel: <852> (2) 735 9218
Fax: <852> (2) 730 0281
Telex: 40815 HITEC HX

Copyright ' Hitachi, Ltd., 1999. All rights reserved. Printed in Japan.