

MB95410H/470H is a series of general-purpose, single-chip microcontrollers. In addition to a compact instruction set, the microcontrollers of this series contain a variety of peripheral resources.

## Features

### F<sup>2</sup>MC-8FX CPU core

Instruction set optimized for controllers

- Multiplication and division instructions
- 16-bit arithmetic operations
- Bit test branch instructions
- Bit manipulation instructions, etc.

### Clock

- Selectable main clock source
  - Main OSC clock (up to 16.25 MHz, maximum machine clock frequency: 8.125 MHz)
  - External clock (up to 32.5 MHz, maximum machine clock frequency: 16.25 MHz)
  - Main CR clock (1/8/10/12.5 MHz ±2%, maximum machine clock frequency: 12.5 MHz)
  - Main PLL clock (up to 16.25 MHz, maximum machine clock frequency: 16.25 MHz)
- Selectable subclock source
  - Sub-OSC clock (32.768 kHz)
  - External clock (32.768 kHz)
  - Sub-CR clock (Typ: 100 kHz, Min: 50 kHz, Max: 200 kHz)

### Timer

- 8/16-bit composite timer × 2 channels
- 8/16-bit PPG × 2 channels
- 16-bit reload timer × 1 channel
- Event counter × 1 channel
- Time-base timer × 1 channel
- Watch prescaler × 1 channel

### UART-SIO

- Capable of clock-asynchronous (UART) serial data transfer and clock-synchronous (SIO) serial data transfer
- Full duplex double buffer

### I<sup>2</sup>C

Built-in wake-up function

### External interrupt

- Interrupt by edge detection (rising edge, falling edge, and both edges can be selected)
- Can be used to wake up the device from different low power consumption (standby) modes

### 8/10-bit A/D converter

- 8-bit or 10-bit resolution can be selected

### LCD controller (LCDC)

- On MB95F414H/F414K/F416H/F416K/F418H/F418K, LCD output can be selected from 40 SEG × 4 COM to 36 SEG × 8 COM.
- On MB95F474H/F474K/F476H/F476K/F478H/F478K, LCD output can be selected from 32 SEG × 4 COM to 28 SEG × 8 COM.
- Internal divider resistor whose resistance value can be selected from 10 kΩ or 100 kΩ through software
- Interrupt in sync with the LCD module frame frequency
- Blinking function
- Inverted display function

### Low power consumption (standby) modes

- Stop mode
- Sleep mode
- Watch mode
- Time-base timer mode

### I/O port

- MB95F414H/F416H/F418H (maximum no. of I/O ports: 74)
  - General-purpose I/O ports (N-ch open drain) : 3
  - General-purpose I/O ports (CMOS I/O) : 71
- MB95F414K/F416K/F418K (maximum no. of I/O ports: 75)
  - General-purpose I/O ports (N-ch open drain) : 4
  - General-purpose I/O ports (CMOS I/O) : 71
- MB95F474H/F476H/F478H (maximum no. of I/O ports: 58)
  - General-purpose I/O ports (N-ch open drain) : 3
  - General-purpose I/O ports (CMOS I/O) : 55
- MB95F474K/F476K/F478K (maximum no. of I/O ports: 59)
  - General-purpose I/O ports (N-ch open drain) : 4
  - General-purpose I/O ports (CMOS I/O) : 55

### On-chip debug

- 1-wire serial control
- Serial writing supported (asynchronous mode)

### Hardware/software watchdog timer

- Built-in hardware watchdog timer
- Built-in software watchdog timer

**Low-voltage detection reset circuit**

Built-in low-voltage detector

**Clock supervisor counter**

Built-in clock supervisor counter function

**Programmable port input voltage level**

CMOS input level / hysteresis input level

**Dual operation Flash memory**

The program/erase operation and the read operation can be executed in different banks (upper bank/lower bank) simultaneously.

**Flash memory security function**

Protects the content of the Flash memory

**Contents**

|  |           |  |           |
|--|-----------|--|-----------|
| <b>Product Line-up</b> .....                     | <b>4</b>  | <b>I/O Map (MB95470H Series)</b> .....           | <b>39</b> |
| <b>Oscillation Stabilization Wait Time</b> ..... | <b>8</b>  | <b>Interrupt Source Table</b> .....              | <b>45</b> |
| <b>Packages And Corresponding Products</b> ..... | <b>8</b>  | <b>Electrical Characteristics</b> .....          | <b>46</b> |
| <b>Differences among Products and Notes</b>      |           | Absolute Maximum Ratings .....                   | 46        |
| <b>on Product Selection</b> .....                | <b>9</b>  | Recommended Operating Conditions .....           | 48        |
| <b>Pin Assignment</b> .....                      | <b>10</b> | DC Characteristics .....                         | 49        |
| <b>Pin Description (MB95410H Series)</b> .....   | <b>12</b> | AC Characteristics .....                         | 53        |
| <b>Pin Description (MB95470H Series)</b> .....   | <b>18</b> | A/D Converter .....                              | 67        |
| <b>I/O Circuit Type</b> .....                    | <b>23</b> | Flash Memory Program/Erase Characteristics ..... | 71        |
| <b>Notes on Device Handling</b> .....            | <b>28</b> | <b>Sample Characteristics</b> .....              | <b>72</b> |
| <b>Pin Connection</b> .....                      | <b>28</b> | <b>Mask Options</b> .....                        | <b>78</b> |
| <b>Block Diagram (MB95410H Series)</b> .....     | <b>30</b> | <b>Ordering Information</b> .....                | <b>79</b> |
| <b>Block Diagram (MB95470H Series)</b> .....     | <b>31</b> | <b>Package Dimension</b> .....                   | <b>80</b> |
| <b>CPU Core</b> .....                            | <b>32</b> | <b>Major Changes</b> .....                       | <b>83</b> |
| <b>I/O Map (MB95410H Series)</b> .....           | <b>33</b> | <b>Document History</b> .....                    | <b>84</b> |

**1. Product Line-up**
**MB95410H Series**

| Part number                      | MB95F414H  | MB95F416H  | MB95F418H  | MB95F414K  | MB95F416K  | MB95F418K  |
|----------------------------------|--|------------|------------|--|------------|------------|
| <b>Package</b>                   |  |            |            |  |            |            |
| Type                             | Flash memory product   |            |            |  |            |            |
| Clock supervisor counter         | It supervises the main clock oscillation.  |            |            |  |            |            |
| Program ROM capacity             | 20 Kbyte   | 36 Kbyte   | 60 Kbyte   | 20 Kbyte   | 36 Kbyte   | 60 Kbyte   |
| RAM capacity                     | 496 bytes  | 1008 bytes | 2032 bytes | 496 bytes  | 1008 bytes | 2032 bytes |
| Low-voltage detection reset      | No   |            |            | Yes  |            |            |
| Reset input                      | Dedicated  |            |            | Selected through software  |            |            |
| CPU functions                    | <ul style="list-style-type: none"> <li>• Number of basic instructions : 136</li> <li>• Instruction bit length : 8 bits</li> <li>• Instruction length : 1 to 3 bytes</li> <li>• Data bit length : 1, 8 and 16 bits</li> <li>• Minimum instruction execution time : 61.5 ns (machine clock frequency = 16.25 MHz)</li> <li>• Interrupt processing time : 0.6 μs (machine clock frequency = 16.25 MHz)</li> </ul>   |            |            |  |            |            |
| General-purpose I/O              | <ul style="list-style-type: none"> <li>• I/O ports (Max) : 74</li> <li>• CMOS I/O : 71</li> <li>• N-ch open drain : 3</li> </ul>   |            |            | <ul style="list-style-type: none"> <li>• I/O ports (Max) : 75</li> <li>• CMOS I/O : 71</li> <li>• N-ch open drain : 4</li> </ul> |            |            |
| Time-base timer                  | Interval time: 0.256 ms - 8.3 s (external clock frequency = 4 MHz)   |            |            |  |            |            |
| Hardware/software watchdog timer | <ul style="list-style-type: none"> <li>• Reset generation cycle</li> <li>  Main oscillation clock at 10 MHz: 105 ms (Min)</li> <li>• The sub-CR clock can be used as the source clock of the hardware watchdog timer.</li> </ul>   |            |            |  |            |            |
| Wild register                    | It can be used to replace three bytes of data.   |            |            |  |            |            |
| I <sup>2</sup> C                 | 1 channel  |            |            |  |            |            |
|                                  | <ul style="list-style-type: none"> <li>• Master/Slave sending and receiving</li> <li>• Bus error function and arbitration function</li> <li>• Detecting transmitting direction function</li> <li>• Start condition repeated generation and detection functions</li> <li>• Built-in wake-up function</li> </ul>   |            |            |  |            |            |
| UART/SIO                         | 3 channels   |            |            |  |            |            |
|                                  | <ul style="list-style-type: none"> <li>• Data transfer with UART/SIO is enabled.</li> <li>• It has a full duplex double buffer, variable data length (5/6/7/8 bits), a built-in baud rate generator and an error detection function.</li> <li>• It uses the NRZ type transfer format.</li> <li>• LSB-first data transfer and MSB-first data transfer are available to use.</li> <li>• Clock-asynchronous (UART) serial data transfer and clock-synchronous (SIO) serial data transfer is enabled.</li> </ul> |            |            |  |            |            |
| 8/10-bit A/D converter           | 8 channels   |            |            |  |            |            |
|                                  | 8-bit or 10-bit resolution can be selected.  |            |            |  |            |            |

*(Continued)*

(Continued)

| Part number              | MB95F414H   | MB95F416H | MB95F418H | MB95F414K | MB95F416K | MB95F418K |
|--------------------------|---|-----------|-----------|-----------|-----------|-----------|
| <b>Package</b>           |   |           |           |           |           |           |
| 8/16-bit composite timer | 2 channels<br><ul style="list-style-type: none"> <li>Each timer can be configured as an "8-bit timer × 2 channels" or a "16-bit timer × 1 channel".</li> <li>It has built-in timer function, PWC function, PWM function and input capture function.</li> <li>Count clock: it can be selected from internal clocks (seven types) and external clocks.</li> <li>It can output square wave.</li> </ul>   |           |           |           |           |           |
| LCD controller (LCDC)    | <ul style="list-style-type: none"> <li>COM output: 4 or 8 (selectable)</li> <li>SEG output: 36 or 40 (selectable)               <ul style="list-style-type: none"> <li>If the number of COM outputs is 4, the maximum number of SEG outputs is 40, and the maximum number of pixels that can be displayed 160 (4×40).</li> <li>If the number of COM outputs is 8, the maximum number of SEG outputs is 36, and the maximum number of pixels that can be displayed 288 (8×36).</li> </ul> </li> <li>LCD drive power supply (bias) pins: 5 (Max)</li> <li>Duty LCD mode</li> <li>LCD standby mode</li> <li>Blinking function</li> <li>Internal divider resistor whose resistance value can be selected from 10 kΩ or 100 kΩ through software</li> <li>Interrupt in sync with the LCD module frame frequency</li> <li>Inverted display function</li> </ul> |           |           |           |           |           |
| 16-bit reload timer      | 1 channel<br><ul style="list-style-type: none"> <li>Two clock modes and two counter operating modes can be selected</li> <li>Square waveform output</li> <li>Count clock: it can be selected from internal clocks (seven types) and external clocks.</li> <li>Counter operating mode: reload mode or one-shot mode can be selected</li> </ul>   |           |           |           |           |           |
| Event counter            | By configuring the 16-bit reload timer and the 8/16-bit composite timer ch. 1, event counter function can be implemented. When the event counter function is used, the 16-bit reload timer and the 8/16-bit composite timer ch. 1 are unavailable.  |           |           |           |           |           |
| 8/16-bit PPG             | 2 channels<br><ul style="list-style-type: none"> <li>Each channel of the PPG can be used as "8-bit PPG × 2 channels" or "16-bit PPG × 1 channel"</li> <li>Counter operating clock: Eight selectable clock sources</li> </ul>  |           |           |           |           |           |
| Watch counter            | <ul style="list-style-type: none"> <li>Count clock: Four selectable clock sources (125 ms, 250 ms, 500 ms or 1 s)</li> <li>Counter value can be set from 0 to 63. (Capable of counting for 1 minute when the clock source is 1 second and the counter value is to 60)</li> </ul>  |           |           |           |           |           |
| External interrupt       | 8 channels<br><ul style="list-style-type: none"> <li>Interrupt by edge detection (The rising edge, falling edge, or both edges can be selected.)</li> <li>It can be used to wake up the device from the standby mode.</li> </ul>  |           |           |           |           |           |
| On-chip debug            | <ul style="list-style-type: none"> <li>1-wire serial control</li> <li>It supports serial writing. (asynchronous mode)</li> </ul>  |           |           |           |           |           |
| Watch prescaler          | Eight different time intervals can be selected.<br>(62.5 ms, 125 ms, 250 ms, 500 ms, 1 s, 2 s, 4 s, 8 s)  |           |           |           |           |           |
| Flash memory             | <ul style="list-style-type: none"> <li>It supports automatic programming, Embedded Algorithm, program/erase/erase-suspend/erase-resume commands.</li> <li>It has a flag indicating the completion of the operation of Embedded Algorithm.</li> <li>Number of program/erase cycles: 100000</li> <li>Data retention time: 20 years</li> <li>Flash security feature for protecting the content of the Flash memory</li> </ul>  |           |           |           |           |           |
| Standby mode             | Sleep mode, stop mode, watch mode, time-base timer mode   |           |           |           |           |           |
| Package                  | FPT-80P-M37   |           |           |           |           |           |

**MB95470H Series**

| Part number                      | MB95F474H  | MB95F476H  | MB95F478H  | MB95F474K  | MB95F476K  | MB95F478K  |
|----------------------------------|--|------------|------------|--|------------|------------|
| Package                          |  |            |            |  |            |            |
| Type                             | Flash memory product   |            |            |  |            |            |
| Clock supervisor counter         | It supervises the main clock oscillation.  |            |            |  |            |            |
| Program ROM capacity             | 20 Kbyte   | 36 Kbyte   | 60 Kbyte   | 20 Kbyte   | 36 Kbyte   | 60 Kbyte   |
| RAM capacity                     | 496 bytes  | 1008 bytes | 2032 bytes | 496 bytes  | 1008 bytes | 2032 bytes |
| Low-voltage detection reset      | No   |            |            | Yes  |            |            |
| Reset input                      | Dedicated  |            |            | Selected through software  |            |            |
| CPU functions                    | <ul style="list-style-type: none"> <li>• Number of basic instructions : 136</li> <li>• Instruction bit length : 8 bits</li> <li>• Instruction length : 1 to 3 bytes</li> <li>• Data bit length : 1, 8 and 16 bits</li> <li>• Minimum instruction execution time : 61.5 ns (machine clock frequency = 16.25 MHz)</li> <li>• Interrupt processing time : 0.6 <math>\mu</math>s (machine clock frequency = 16.25 MHz)</li> </ul>  |            |            |  |            |            |
| General-purpose I/O              | <ul style="list-style-type: none"> <li>• I/O ports (Max) : 58</li> <li>• CMOS I/O : 55</li> <li>• N-ch open drain : 3</li> </ul>   |            |            | <ul style="list-style-type: none"> <li>• I/O ports (Max) : 59</li> <li>• CMOS I/O : 55</li> <li>• N-ch open drain : 4</li> </ul> |            |            |
| Time-base timer                  | Interval time: 0.256 ms - 8.3 s (external clock frequency = 4 MHz)   |            |            |  |            |            |
| Hardware/software watchdog timer | <ul style="list-style-type: none"> <li>• Reset generation cycle</li> <li>• Main oscillation clock at 10 MHz: 105 ms (Min)</li> <li>• The sub-CR clock can be used as the source clock of the hardware watchdog timer.</li> </ul>   |            |            |  |            |            |
| Wild register                    | It can be used to replace three bytes of data.   |            |            |  |            |            |
| I <sup>2</sup> C                 | 1 channel  |            |            |  |            |            |
|                                  | <ul style="list-style-type: none"> <li>• Master/Slave sending and receiving</li> <li>• Bus error function and arbitration function</li> <li>• Detecting transmitting direction function</li> <li>• Start condition repeated generation and detection functions</li> <li>• Built-in wake-up function</li> </ul>   |            |            |  |            |            |
| UART/SIO                         | 3 channels   |            |            |  |            |            |
|                                  | <ul style="list-style-type: none"> <li>• Data transfer with UART/SIO is enabled.</li> <li>• It has a full duplex double buffer, variable data length (5/6/7/8 bits), a built-in baud rate generator and an error detection function.</li> <li>• It uses the NRZ type transfer format.</li> <li>• LSB-first data transfer and MSB-first data transfer are available to use.</li> <li>• Clock-asynchronous (UART) serial data transfer and clock-synchronous (SIO) serial data transfer is enabled.</li> </ul> |            |            |  |            |            |
| 8/10-bit A/D converter           | 8 channels   |            |            |  |            |            |
|                                  | 8-bit or 10-bit resolution can be selected.  |            |            |  |            |            |
| 8/16-bit composite timer         | 2 channels   |            |            |  |            |            |
|                                  | <ul style="list-style-type: none"> <li>• Each timer can be configured as an "8-bit timer <math>\times</math> 2 channels" or a "16-bit timer <math>\times</math> 1 channel".</li> <li>• It has built-in timer function, PWC function, PWM function and input capture function.</li> <li>• Count clock: it can be selected from internal clocks (seven types) and external clocks.</li> <li>• It can output square wave.</li> </ul>  |            |            |  |            |            |

*(Continued)*

(Continued)

| Part number           | MB95F474H   | MB95F476H | MB95F478H | MB95F474K | MB95F476K | MB95F478K |
|-----------------------|---|-----------|-----------|-----------|-----------|-----------|
| <b>Package</b>        |   |           |           |           |           |           |
| LCD controller (LCDC) | <ul style="list-style-type: none"> <li>• COM output: 4 or 8 (selectable)</li> <li>• SEG output: 28 or 32 (selectable) <ul style="list-style-type: none"> <li>- If the number of COM outputs is 4, the maximum number of SEG outputs is 32, and the maximum number of pixels that can be displayed 128 (4×32).</li> <li>- If the number of COM outputs is 8, the maximum number of SEG outputs is 28, and the maximum number of pixels that can be displayed 224 (8×28).</li> </ul> </li> <li>• LCD drive power supply (bias) pins: 4 (Max)</li> </ul> |           |           |           |           |           |
|                       | <ul style="list-style-type: none"> <li>• Duty LCD mode</li> <li>• LCD standby mode</li> <li>• Blinking function</li> <li>• Internal divider resistor whose resistance value can be selected from 10 kΩ or 100 kΩ through software</li> <li>• Inverted display function</li> </ul>   |           |           |           |           |           |
| 16-bit reload timer   | 1 channel <ul style="list-style-type: none"> <li>• Two clock modes and two counter operating modes can be selected</li> <li>• Square waveform output</li> <li>• Count clock: it can be selected from internal clocks (seven types) and external clocks.</li> <li>• Counter operating mode: reload mode or one-shot mode can be selected</li> </ul>  |           |           |           |           |           |
| Event counter         | By configuring the 16-bit reload timer and the 8/16-bit composite timer ch. 1, event counter function can be implemented. When the event counter function is used, the 16-bit reload timer and the 8/16-bit composite timer ch. 1 are unavailable.  |           |           |           |           |           |
| 8/16-bit PPG          | 2 channels <ul style="list-style-type: none"> <li>• Each channel of the PPG can be used as “8-bit PPG × 2 channels” or “16-bit PPG × 1 channel”</li> <li>• Counter operating clock: Eight selectable clock sources</li> </ul>   |           |           |           |           |           |
| Watch counter         | <ul style="list-style-type: none"> <li>• Count clock: Four selectable clock sources (125 ms, 250 ms, 500 ms or 1 s)</li> <li>• Counter value can be set from 0 to 63. (Capable of counting for 1 minute when the clock source is 1 second and the counter value is to 60)</li> </ul>  |           |           |           |           |           |
| External interrupt    | 8 channels <p>Interrupt by edge detection (The rising edge, falling edge, or both edges can be selected.)<br/>It can be used to wake up the device from the standby mode.</p>   |           |           |           |           |           |
| On-chip debug         | <ul style="list-style-type: none"> <li>• 1-wire serial control</li> <li>• It supports serial writing. (asynchronous mode)</li> </ul>  |           |           |           |           |           |
| Watch prescaler       | Eight different time intervals can be selected.<br>(62.5 ms, 125 ms, 250 ms, 500 ms, 1 s, 2 s, 4 s, 8 s)  |           |           |           |           |           |
| Flash memory          | <ul style="list-style-type: none"> <li>• It supports automatic programming, Embedded Algorithm, program/erase/erase-suspend/erase-resume commands.</li> <li>• It has a flag indicating the completion of the operation of Embedded Algorithm.</li> <li>• Number of program/erase cycles: 100000</li> <li>• Data retention time: 20 years</li> <li>• Flash security feature for protecting the content of the Flash memory</li> </ul>  |           |           |           |           |           |
| Standby mode          | Sleep mode, stop mode, watch mode, time-base timer mode   |           |           |           |           |           |
| Package               | FPT-64P-M38<br>FPT-64P-M39  |           |           |           |           |           |

## 2. Oscillation Stabilization Wait Time

The main CR clock oscillation stabilization wait time is fixed to the maximum value. Below is the maximum value.

| Oscillation stabilization wait time | Remarks   |
|-------------------------------------|---|
| $(2^{10} - 2) / F_{CRH}$            | Approx. 128 $\mu$ s (when the main CR clock is 8 MHz) |

The main PLL clock oscillation stabilization wait time is fixed to the maximum value. Below is the maximum value.

| Oscillation stabilization wait time | Remarks  |
|-------------------------------------|--|
| $(2^{14} - 2) / F_{CH}$             | Approx. 14.1 ms (when the main PLL clock is 4 MHz) |

## 3. Packages And Corresponding Products

| Part number | MB95F414H | MB95F416H | MB95F418H | MB95F414K | MB95F416K | MB95F418K |
|-------------|-----------|-----------|-----------|-----------|-----------|-----------|
| Package     |           |           |           |           |           |           |
| FPT-80P-M37 |           |           |           | ○         |           |           |

| Part number | MB95F474H | MB95F476H | MB95F478H | MB95F474K | MB95F476K | MB95F478K |
|-------------|-----------|-----------|-----------|-----------|-----------|-----------|
| Package     |           |           |           |           |           |           |
| FPT-64P-M38 |           |           |           | ○         |           |           |
| FPT-64P-M39 |           |           |           | ○         |           |           |

○: Available



## **4. Differences among Products and Notes on Product Selection**

### **Current consumption**

When using the on-chip debug function, take account of the current consumption of flash erase/write.

For details of current consumption, see “17. Electrical Characteristics”.

### **Package**

For details of information on each package, see “3. Packages And Corresponding Products” and “21. Package Dimension”.

### **Operating voltage**


The operating voltage varies, depending on whether the on-chip debug function is used or not.

For details of the operating voltage, see “17. Electrical Characteristics”.

### **On-chip debug function**


The on-chip debug function requires that  $V_{CC}$ ,  $V_{SS}$  and 1 serial-wire be connected to an evaluation tool. For details of the connection method, refer to “Chapter 31 Example Of Serial Programming Connection” in the hardware manual of the MB95410H/470H Series.

## 5. Pin Assignment

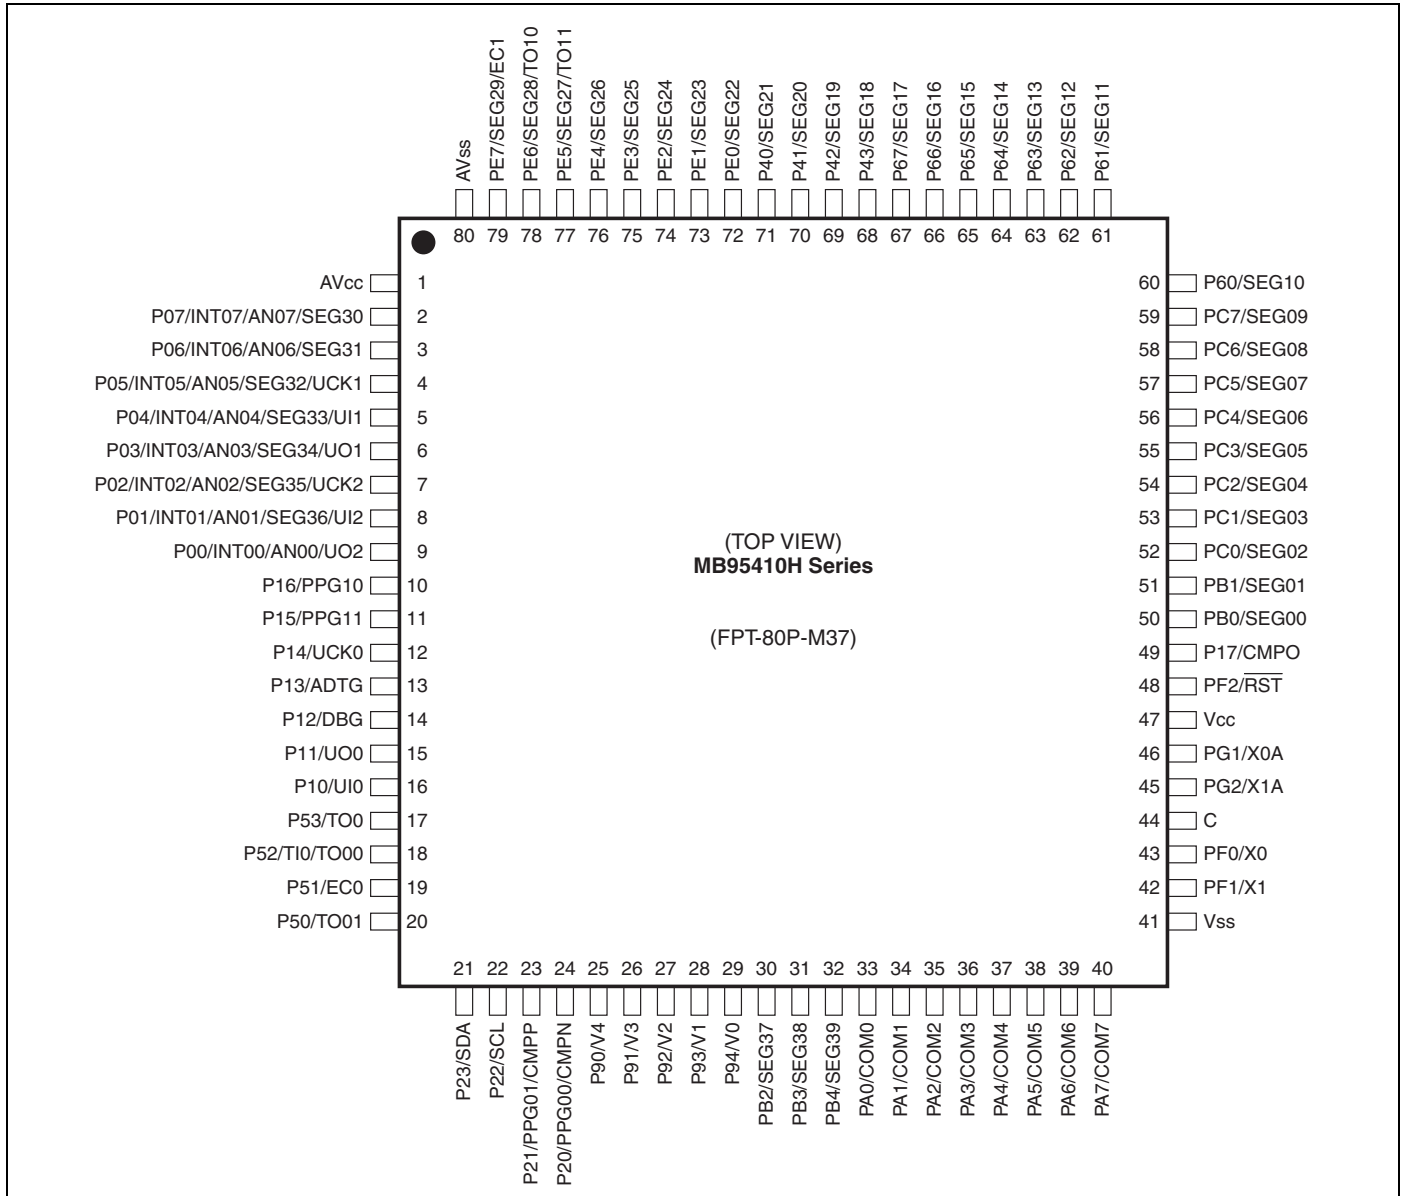

*(Continued)*

(Continued)

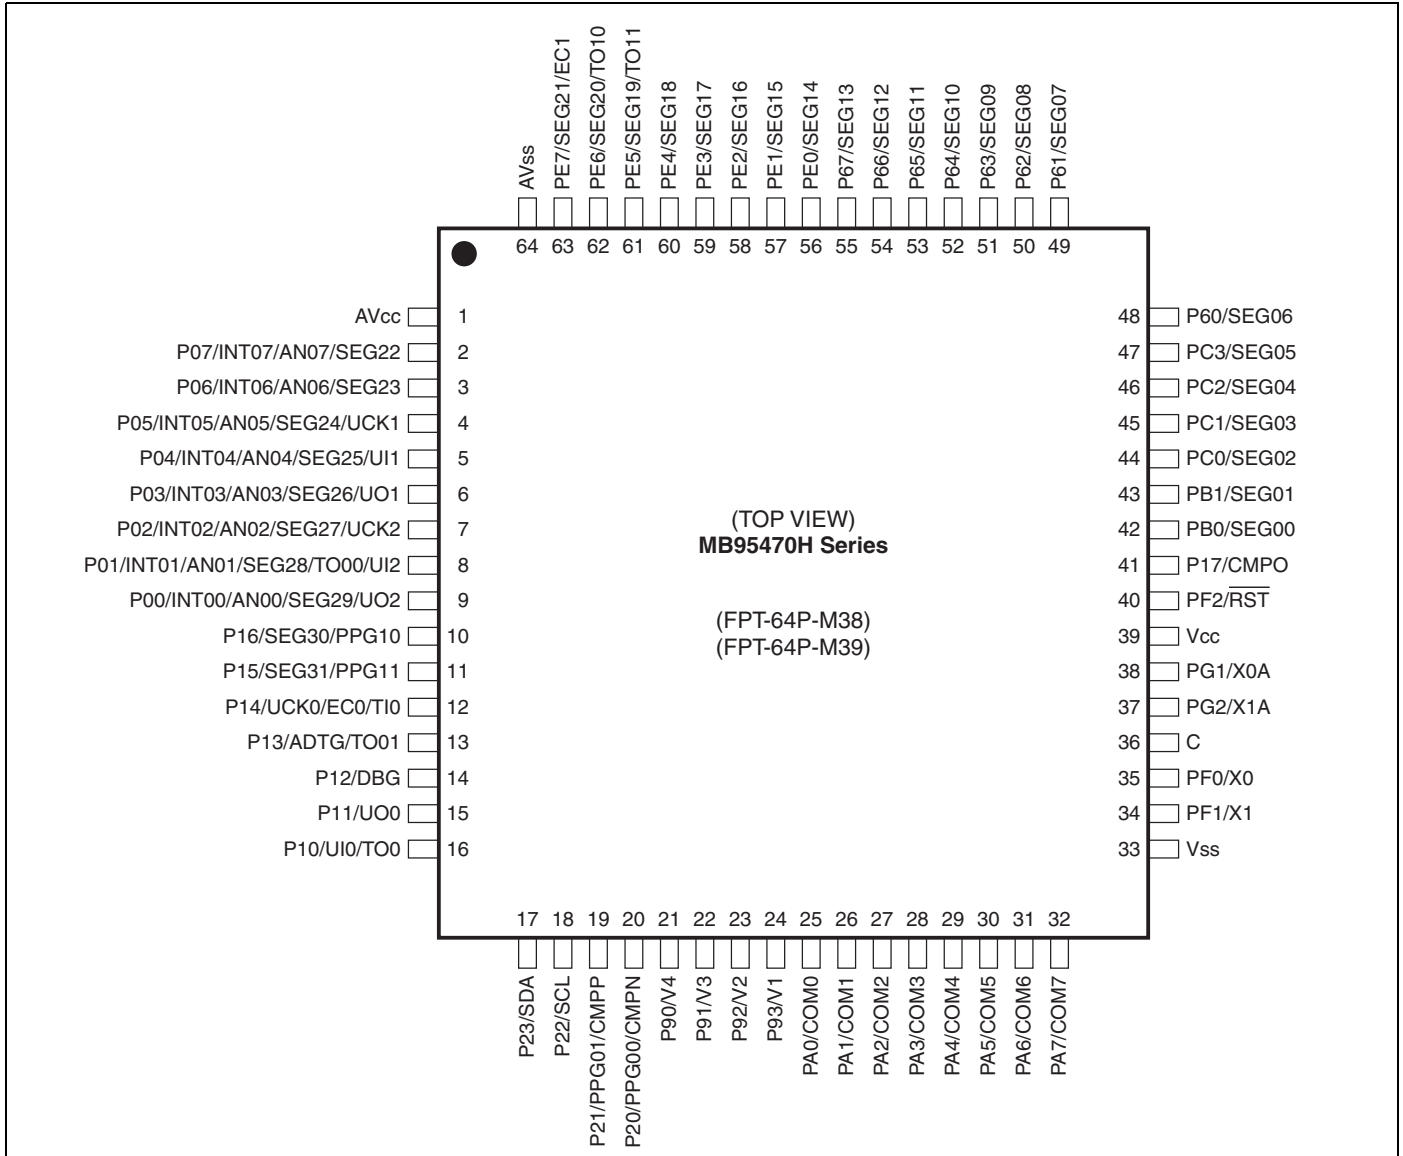

**6. Pin Description (MB95410H Series)**

| Pin no. | Pin name         | I/O circuit type* | Function                       |
|---------|------------------|-------------------|--------------------------------|
| 1       | AV <sub>CC</sub> | —                 | A/D converter power supply pin |
| 2       | P07              | S                 | General-purpose I/O port       |
|         | INT07            |                   | External interrupt input pin   |
|         | AN07             |                   | A/D analog input pin           |
|         | SEG30            |                   | LCDC SEG output pin            |
| 3       | P06              | S                 | General-purpose I/O port       |
|         | INT06            |                   | External interrupt input pin   |
|         | AN06             |                   | A/D analog input pin           |
|         | SEG31            |                   | LCDC SEG output pin            |
| 4       | P05              | S                 | General-purpose I/O port       |
|         | INT05            |                   | External interrupt input pin   |
|         | AN05             |                   | A/D analog input pin           |
|         | SEG32            |                   | LCDC SEG output pin            |
|         | UCK1             |                   | UART/SIO ch. 1 clock I/O pin   |
| 5       | P04              | V                 | General-purpose I/O port       |
|         | INT04            |                   | External interrupt input pin   |
|         | AN04             |                   | A/D analog input pin           |
|         | SEG33            |                   | LCDC SEG output pin            |
|         | UI1              |                   | UART/SIO ch. 1 data input pin  |
| 6       | P03              | S                 | General-purpose I/O port       |
|         | INT03            |                   | External interrupt input pin   |
|         | AN03             |                   | A/D analog input pin           |
|         | SEG34            |                   | LCDC SEG output pin            |
|         | UO1              |                   | UART/SIO ch. 1 data output pin |
| 7       | P02              | S                 | General-purpose I/O port       |
|         | INT02            |                   | External interrupt input pin   |
|         | AN02             |                   | A/D analog input pin           |
|         | SEG35            |                   | LCDC SEG output pin            |
|         | UCK2             |                   | UART/SIO ch. 2 clock I/O pin   |
| 8       | P01              | V                 | General-purpose I/O port       |
|         | INT01            |                   | External interrupt input pin   |
|         | AN01             |                   | A/D analog input pin           |
|         | SEG36            |                   | LCDC SEG output pin            |
|         | UI2              |                   | UART/SIO ch. 2 data input pin  |

*(Continued)*

| Pin no. | Pin name | I/O circuit type* | Function                                       |
|---------|----------|-------------------|--|
| 9       | P00      | W                 | General-purpose I/O port                       |
|         | INT00    |                   | External interrupt input pin                   |
|         | AN00     |                   | A/D analog input pin                           |
|         | UO2      |                   | UART/SIO ch. 2 data output pin                 |
| 10      | P16      | Y                 | General-purpose I/O port                       |
|         | PPG10    |                   | 8/16-bit PPG ch. 1 output pin                  |
| 11      | P15      | Y                 | General-purpose I/O port                       |
|         | PPG11    |                   | 8/16-bit PPG ch. 1 output pin                  |
| 12      | P14      | H                 | General-purpose I/O port                       |
|         | UCK0     |                   | UART/SIO ch. 0 clock I/O pin                   |
| 13      | P13      | H                 | General-purpose I/O port                       |
|         | ADTG     |                   | A/D trigger input (ADTG) pin                   |
| 14      | P12      | D                 | General-purpose I/O port                       |
|         | DBG      |                   | DBG input pin                                  |
| 15      | P11      | H                 | General-purpose I/O port                       |
|         | UO0      |                   | UART/SIO ch. 0 data output pin                 |
| 16      | P10      | G                 | General-purpose I/O port                       |
|         | UI0      |                   | UART/SIO ch. 0 data input pin                  |
| 17      | P53      | H                 | General-purpose I/O port                       |
|         | TO0      |                   | 16-bit reload timer output pin                 |
| 18      | P52      | H                 | General-purpose I/O port                       |
|         | TI0      |                   | 16-bit reload timer input pin                  |
|         | TO00     |                   | 8/16-bit composite timer ch. 0 output pin      |
| 19      | P51      | H                 | General-purpose I/O port                       |
|         | EC0      |                   | 8/16-bit composite timer ch. 0 clock input pin |
| 20      | P50      | H                 | General-purpose I/O port                       |
|         | TO01     |                   | 8/16-bit composite timer ch. 0 output pin      |
| 21      | P23      | I                 | General-purpose I/O port                       |
|         | SDA      |                   | I <sup>2</sup> C data I/O pin                  |
| 22      | P22      | I                 | General-purpose I/O port                       |
|         | SCL      |                   | I <sup>2</sup> C clock I/O pin                 |
| 23      | P21      | T                 | General-purpose I/O port                       |
|         | PPG01    |                   | 8/16-bit PPG ch. 0 output pin                  |
|         | CMPP     |                   | Voltage comparator input pin                   |
| 24      | P20      | T                 | General-purpose I/O port                       |
|         | PPG00    |                   | 8/16-bit PPG ch. 0 output pin                  |
|         | CMPN     |                   | Voltage comparator input pin                   |

*(Continued)*

| Pin no. | Pin name        | I/O circuit type* | Function                    |
|---------|-----------------|-------------------|-----------------------------|
| 25      | P90             | R                 | General-purpose I/O port    |
|         | V4              |                   | LCDC drive power supply pin |
| 26      | P91             | R                 | General-purpose I/O port    |
|         | V3              |                   | LCDC drive power supply pin |
| 27      | P92             | R                 | General-purpose I/O port    |
|         | V2              |                   | LCDC drive power supply pin |
| 28      | P93             | R                 | General-purpose I/O port    |
|         | V1              |                   | LCDC drive power supply pin |
| 29      | P94             | R                 | General-purpose I/O port    |
|         | V0              |                   | LCDC drive power supply pin |
| 30      | PB2             | M                 | General-purpose I/O port    |
|         | SEG37           |                   | LCDC SEG output pin         |
| 31      | PB3             | M                 | General-purpose I/O port    |
|         | SEG38           |                   | LCDC SEG output pin         |
| 32      | PB4             | M                 | General-purpose I/O port    |
|         | SEG39           |                   | LCDC SEG output pin         |
| 33      | PA0             | M                 | General-purpose I/O port    |
|         | COM0            |                   | LCDC COM output pin         |
| 34      | PA1             | M                 | General-purpose I/O port    |
|         | COM1            |                   | LCDC COM output pin         |
| 35      | PA2             | M                 | General-purpose I/O port    |
|         | COM2            |                   | LCDC COM output pin         |
| 36      | PA3             | M                 | General-purpose I/O port    |
|         | COM3            |                   | LCDC COM output pin         |
| 37      | PA4             | M                 | General-purpose I/O port    |
|         | COM4            |                   | LCDC COM output pin         |
| 38      | PA5             | M                 | General-purpose I/O port    |
|         | COM5            |                   | LCDC COM output pin         |
| 39      | PA6             | M                 | General-purpose I/O port    |
|         | COM6            |                   | LCDC COM output pin         |
| 40      | PA7             | M                 | General-purpose I/O port    |
|         | COM7            |                   | LCDC COM output pin         |
| 41      | V <sub>SS</sub> | —                 | Power supply pin (GND)      |
| 42      | PF1             | B                 | General-purpose I/O port    |
|         | X1              |                   | Main clock oscillation pin  |
| 43      | PF0             | B                 | General-purpose I/O port    |
|         | X0              |                   | Main clock oscillation pin  |

*(Continued)*

| Pin no. | Pin name        | I/O circuit type* | Function  |
|---------|-----------------|-------------------|---|
| 44      | C               | —                 | Capacitor connection pin                                  |
| 45      | PG2             | C                 | General-purpose I/O port                                  |
|         | X1A             |                   | Subclock oscillation pin (32 kHz)                         |
| 46      | PG1             | C                 | General-purpose I/O port                                  |
|         | X0A             |                   | Subclock oscillation pin (32 kHz)                         |
| 47      | V <sub>CC</sub> | —                 | Power supply pin  |
| 48      | PF2             | A                 | General-purpose I/O port                                  |
|         | RST             |                   | Reset pin<br>Dedicate reset pin for MB95F414H/F416H/F418H |
| 49      | P17             | H                 | General-purpose I/O port                                  |
|         | CMPO            |                   | Voltage comparator output pin                             |
| 50      | PB0             | M                 | General-purpose I/O port                                  |
|         | SEG00           |                   | LCDC SEG output pin                                       |
| 51      | PB1             | M                 | General-purpose I/O port                                  |
|         | SEG01           |                   | LCDC SEG output pin                                       |
| 52      | PC0             | M                 | General-purpose I/O port                                  |
|         | SEG02           |                   | LCDC SEG output pin                                       |
| 53      | PC1             | M                 | General-purpose I/O port                                  |
|         | SEG03           |                   | LCDC SEG output pin                                       |
| 54      | PC2             | M                 | General-purpose I/O port                                  |
|         | SEG04           |                   | LCDC SEG output pin                                       |
| 55      | PC3             | M                 | General-purpose I/O port                                  |
|         | SEG05           |                   | LCDC SEG output pin                                       |
| 56      | PC4             | M                 | General-purpose I/O port                                  |
|         | SEG06           |                   | LCDC SEG output pin                                       |
| 57      | PC5             | M                 | General-purpose I/O port                                  |
|         | SEG07           |                   | LCDC SEG output pin                                       |
| 58      | PC6             | M                 | General-purpose I/O port                                  |
|         | SEG08           |                   | LCDC SEG output pin                                       |
| 59      | PC7             | M                 | General-purpose I/O port                                  |
|         | SEG09           |                   | LCDC SEG output pin                                       |
| 60      | P60             | M                 | General-purpose I/O port                                  |
|         | SEG10           |                   | LCDC SEG output pin                                       |
| 61      | P61             | M                 | General-purpose I/O port                                  |
|         | SEG11           |                   | LCDC SEG output pin                                       |
| 62      | P62             | M                 | General-purpose I/O port                                  |
|         | SEG12           |                   | LCDC SEG output pin                                       |

*(Continued)*

| Pin no. | Pin name | I/O circuit type* | Function                                  |
|---------|----------|-------------------|---|
| 63      | P63      | M                 | General-purpose I/O port                  |
|         | SEG13    |                   | LCDC SEG output pin                       |
| 64      | P64      | M                 | General-purpose I/O port                  |
|         | SEG14    |                   | LCDC SEG output pin                       |
| 65      | P65      | M                 | General-purpose I/O port                  |
|         | SEG15    |                   | LCDC SEG output pin                       |
| 66      | P66      | M                 | General-purpose I/O port                  |
|         | SEG16    |                   | LCDC SEG output pin                       |
| 67      | P67      | M                 | General-purpose I/O port                  |
|         | SEG17    |                   | LCDC SEG output pin                       |
| 68      | P43      | M                 | General-purpose I/O port                  |
|         | SEG18    |                   | LCDC SEG output pin                       |
| 69      | P42      | M                 | General-purpose I/O port                  |
|         | SEG19    |                   | LCDC SEG output pin                       |
| 70      | P41      | M                 | General-purpose I/O port                  |
|         | SEG20    |                   | LCDC SEG output pin                       |
| 71      | P40      | M                 | General-purpose I/O port                  |
|         | SEG21    |                   | LCDC SEG output pin                       |
| 72      | PE0      | M                 | General-purpose I/O port                  |
|         | SEG22    |                   | LCDC SEG output pin                       |
| 73      | PE1      | M                 | General-purpose I/O port                  |
|         | SEG23    |                   | LCDC SEG output pin                       |
| 74      | PE2      | M                 | General-purpose I/O port                  |
|         | SEG24    |                   | LCDC SEG output pin                       |
| 75      | PE3      | M                 | General-purpose I/O port                  |
|         | SEG25    |                   | LCDC SEG output pin                       |
| 76      | PE4      | M                 | General-purpose I/O port                  |
|         | SEG26    |                   | LCDC SEG output pin                       |
| 77      | PE5      | M                 | General-purpose I/O port                  |
|         | SEG27    |                   | LCDC SEG output pin                       |
|         | TO11     |                   | 8/16-bit composite timer ch. 1 output pin |
| 78      | PE6      | M                 | General-purpose I/O port                  |
|         | SEG28    |                   | LCDC SEG output pin                       |
|         | TO10     |                   | 8/16-bit composite timer ch. 1 output pin |

*(Continued)*



(Continued)

| Pin no. | Pin name         | I/O circuit type* | Function                                       |
|---------|------------------|-------------------|--|
| 79      | PE7              | M                 | General-purpose I/O port                       |
|         | SEG29            |                   | LCDC SEG output pin                            |
|         | EC1              |                   | 8/16-bit composite timer ch. 1 clock input pin |
| 80      | AV <sub>SS</sub> | —                 | A/D converter power supply pin (GND)           |

\*: For the I/O circuit types, see “8. I/O Circuit Type”.

**7. Pin Description (MB95470H Series)**

| Pin no. | Pin name         | I/O circuit type* | Function                                  |
|---------|------------------|-------------------|---|
| 1       | AV <sub>CC</sub> | —                 | A/D converter power supply pin            |
| 2       | P07              | S                 | General-purpose I/O port                  |
|         | INT07            |                   | External interrupt input pin              |
|         | AN07             |                   | A/D analog input pin                      |
|         | SEG22            |                   | LCDC SEG output pin                       |
| 3       | P06              | S                 | General-purpose I/O port                  |
|         | INT06            |                   | External interrupt input pin              |
|         | AN06             |                   | A/D analog input pin                      |
|         | SEG23            |                   | LCDC SEG output pin                       |
| 4       | P05              | S                 | General-purpose I/O port                  |
|         | INT05            |                   | External interrupt input pin              |
|         | AN05             |                   | A/D analog input pin                      |
|         | SEG24            |                   | LCDC SEG output pin                       |
|         | UCK1             |                   | UART/SIO ch. 1 clock I/O pin              |
| 5       | P04              | V                 | General-purpose I/O port                  |
|         | INT04            |                   | External interrupt input pin              |
|         | AN04             |                   | A/D analog input pin                      |
|         | SEG25            |                   | LCDC SEG output pin                       |
|         | UI1              |                   | UART/SIO ch. 1 data input pin             |
| 6       | P03              | S                 | General-purpose I/O port                  |
|         | INT03            |                   | External interrupt input pin              |
|         | AN03             |                   | A/D analog input pin                      |
|         | SEG26            |                   | LCDC SEG output pin                       |
|         | UO1              |                   | UART/SIO ch. 1 data output pin            |
| 7       | P02              | S                 | General-purpose I/O port                  |
|         | INT02            |                   | External interrupt input pin              |
|         | AN02             |                   | A/D analog input pin                      |
|         | SEG27            |                   | LCDC SEG output pin                       |
|         | UCK2             |                   | UART/SIO ch. 2 clock I/O pin              |
| 8       | P01              | V                 | General-purpose I/O port                  |
|         | INT01            |                   | External interrupt input pin              |
|         | AN01             |                   | A/D analog input pin                      |
|         | SEG28            |                   | LCDC SEG output pin                       |
|         | TO00             |                   | 8/16-bit composite timer ch. 0 output pin |
|         | UI2              |                   | UART/SIO ch. 2 data input pin             |

*(Continued)*

| Pin no. | Pin name | I/O circuit type* | Function                                       |
|---------|----------|-------------------|--|
| 9       | P00      | S                 | General-purpose I/O port                       |
|         | INT00    |                   | External interrupt input pin                   |
|         | AN00     |                   | A/D analog input pin                           |
|         | SEG29    |                   | LCDC SEG output pin                            |
|         | UO2      |                   | UART/SIO ch. 2 data output pin                 |
| 10      | P16      | M                 | General-purpose I/O port                       |
|         | SEG30    |                   | LCDC SEG output pin                            |
|         | PPG10    |                   | 8/16-bit PPG ch. 1 output pin                  |
| 11      | P15      | M                 | General-purpose I/O port                       |
|         | SEG31    |                   | LCDC SEG output pin                            |
|         | PPG11    |                   | 8/16-bit PPG ch. 1 output pin                  |
| 12      | P14      | H                 | General-purpose I/O port                       |
|         | UCK0     |                   | UART/SIO ch. 0 clock I/O pin                   |
|         | EC0      |                   | 8/16-bit composite timer ch. 0 clock input pin |
|         | T10      |                   | 16-bit reload timer input pin                  |
| 13      | P13      | H                 | General-purpose I/O port                       |
|         | ADTG     |                   | A/D trigger input (ADTG) pin                   |
|         | TO01     |                   | 8/16-bit composite timer ch. 0 output pin      |
| 14      | P12      | D                 | General-purpose I/O port                       |
|         | DBG      |                   | DBG input pin                                  |
| 15      | P11      | H                 | General-purpose I/O port                       |
|         | UO0      |                   | UART/SIO ch. 0 data output pin                 |
| 16      | P10      | G                 | General-purpose I/O port                       |
|         | UI0      |                   | UART/SIO ch. 0 data input pin                  |
|         | TO0      |                   | 16-bit reload timer output pin                 |
| 17      | P23      | I                 | General-purpose I/O port                       |
|         | SDA      |                   | I <sup>2</sup> C data I/O pin                  |
| 18      | P22      | I                 | General-purpose I/O port                       |
|         | SCL      |                   | I <sup>2</sup> C clock I/O pin                 |
| 19      | P21      | T                 | General-purpose I/O port                       |
|         | PPG01    |                   | 8/16-bit PPG ch. 0 output pin                  |
|         | CMPP     |                   | Voltage comparator input pin                   |
| 20      | P20      | T                 | General-purpose I/O port                       |
|         | PPG00    |                   | 8/16-bit PPG ch. 0 output pin                  |
|         | CMPN     |                   | Voltage comparator input pin                   |

*(Continued)*

| Pin no. | Pin name        | I/O circuit type* | Function   |
|---------|-----------------|-------------------|--|
| 21      | P90             | R                 | General-purpose I/O port                                   |
|         | V4              |                   | LCDC drive power supply pin                                |
| 22      | P91             | R                 | General-purpose I/O port                                   |
|         | V3              |                   | LCDC drive power supply pin                                |
| 23      | P92             | R                 | General-purpose I/O port                                   |
|         | V2              |                   | LCDC drive power supply pin                                |
| 24      | P93             | R                 | General-purpose I/O port                                   |
|         | V1              |                   | LCDC drive power supply pin                                |
| 25      | PA0             | M                 | General-purpose I/O port                                   |
|         | COM0            |                   | LCDC COM output pin  |
| 26      | PA1             | M                 | General-purpose I/O port                                   |
|         | COM1            |                   | LCDC COM output pin  |
| 27      | PA2             | M                 | General-purpose I/O port                                   |
|         | COM2            |                   | LCDC COM output pin  |
| 28      | PA3             | M                 | General-purpose I/O port                                   |
|         | COM3            |                   | LCDC COM output pin  |
| 29      | PA4             | M                 | General-purpose I/O port                                   |
|         | COM4            |                   | LCDC COM output pin  |
| 30      | PA5             | M                 | General-purpose I/O port                                   |
|         | COM5            |                   | LCDC COM output pin  |
| 31      | PA6             | M                 | General-purpose I/O port                                   |
|         | COM6            |                   | LCDC COM output pin  |
| 32      | PA7             | M                 | General-purpose I/O port                                   |
|         | COM7            |                   | LCDC COM output pin  |
| 33      | V <sub>SS</sub> | —                 | Power supply pin (GND)                                     |
| 34      | PF1             | B                 | General-purpose I/O port                                   |
|         | X1              |                   | Main clock oscillation pin                                 |
| 35      | PF0             | B                 | General-purpose I/O port                                   |
|         | X0              |                   | Main clock oscillation pin                                 |
| 36      | C               | —                 | Capacitor connection pin                                   |
| 37      | PG2             | C                 | General-purpose I/O port                                   |
|         | X1A             |                   | Subclock oscillation pin (32 kHz)                          |
| 38      | PG1             | C                 | General-purpose I/O port                                   |
|         | X0A             |                   | Subclock oscillation pin (32 kHz)                          |
| 39      | V <sub>CC</sub> | —                 | Power supply pin   |
| 40      | PF2             | A                 | General-purpose I/O port                                   |
|         | RST             |                   | Reset pin<br>Dedicated reset pin for MB95F474H/F476H/F478H |

*(Continued)*

| Pin no. | Pin name | I/O circuit type* | Function                      |
|---------|----------|-------------------|-------------------------------|
| 41      | P17      | H                 | General-purpose I/O port      |
|         | CMPO     |                   | Voltage comparator output pin |
| 42      | PB0      | M                 | General-purpose I/O port      |
|         | SEG00    |                   | LCDC SEG output pin           |
| 43      | PB1      | M                 | General-purpose I/O port      |
|         | SEG01    |                   | LCDC SEG output pin           |
| 44      | PC0      | M                 | General-purpose I/O port      |
|         | SEG02    |                   | LCDC SEG output pin           |
| 45      | PC1      | M                 | General-purpose I/O port      |
|         | SEG03    |                   | LCDC SEG output pin           |
| 46      | PC2      | M                 | General-purpose I/O port      |
|         | SEG04    |                   | LCDC SEG output pin           |
| 47      | PC3      | M                 | General-purpose I/O port      |
|         | SEG05    |                   | LCDC SEG output pin           |
| 48      | P60      | M                 | General-purpose I/O port      |
|         | SEG06    |                   | LCDC SEG output pin           |
| 49      | P61      | M                 | General-purpose I/O port      |
|         | SEG07    |                   | LCDC SEG output pin           |
| 50      | P62      | M                 | General-purpose I/O port      |
|         | SEG08    |                   | LCDC SEG output pin           |
| 51      | P63      | M                 | General-purpose I/O port      |
|         | SEG09    |                   | LCDC SEG output pin           |
| 52      | P64      | M                 | General-purpose I/O port      |
|         | SEG10    |                   | LCDC SEG output pin           |
| 53      | P65      | M                 | General-purpose I/O port      |
|         | SEG11    |                   | LCDC SEG output pin           |
| 54      | P66      | M                 | General-purpose I/O port      |
|         | SEG12    |                   | LCDC SEG output pin           |
| 55      | P67      | M                 | General-purpose I/O port      |
|         | SEG13    |                   | LCDC SEG output pin           |
| 56      | PE0      | M                 | General-purpose I/O port      |
|         | SEG14    |                   | LCDC SEG output pin           |
| 57      | PE1      | M                 | General-purpose I/O port      |
|         | SEG15    |                   | LCDC SEG output pin           |

(Continued)

*(Continued)*






| Pin no. | Pin name         | I/O circuit type* | Function                                       |
|---------|------------------|-------------------|--|
| 58      | PE2              | M                 | General-purpose I/O port                       |
|         | SEG16            |                   | LCDC SEG output pin                            |
| 59      | PE3              | M                 | General-purpose I/O port                       |
|         | SEG17            |                   | LCDC SEG output pin                            |
| 60      | PE4              | M                 | General-purpose I/O port                       |
|         | SEG18            |                   | LCDC SEG output pin                            |
| 61      | PE5              | M                 | General-purpose I/O port                       |
|         | SEG19            |                   | LCDC SEG output pin                            |
|         | TO11             |                   | 8/16-bit composite timer ch. 1 output pin      |
| 62      | PE6              | M                 | General-purpose I/O port                       |
|         | SEG20            |                   | LCDC SEG output pin                            |
|         | TO10             |                   | 8/16-bit composite timer ch. 1 output pin      |
| 63      | PE7              | M                 | General-purpose I/O port                       |
|         | SEG21            |                   | LCDC SEG output pin                            |
|         | EC1              |                   | 8/16-bit composite timer ch. 1 clock input pin |
| 64      | AV <sub>SS</sub> | —                 | A/D converter power supply pin (GND)           |

\*: For the I/O circuit types, see "8. I/O Circuit Type".

8. I/O Circuit Type





| Type | Circuit | Remarks  |
|------|---------|--|
| A    |         | <ul style="list-style-type: none"> <li>• N-ch open drain output</li> <li>• Hysteresis input</li> <li>• Reset output</li> </ul>   |
| B    |         | <ul style="list-style-type: none"> <li>• Oscillation circuit</li> <li>• High-speed side Feedback resistance: approx. 1 MΩ</li> <li>• CMOS output</li> <li>• Hysteresis input</li> </ul>                                      |
| C    |         | <ul style="list-style-type: none"> <li>• Oscillation circuit</li> <li>• Low-speed side Feedback resistance: approx. 10 MΩ</li> <li>• CMOS output</li> <li>• Hysteresis input</li> <li>• Pull-up control available</li> </ul> |

(Continued)

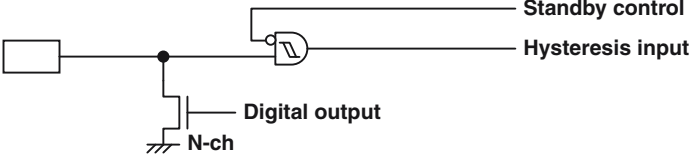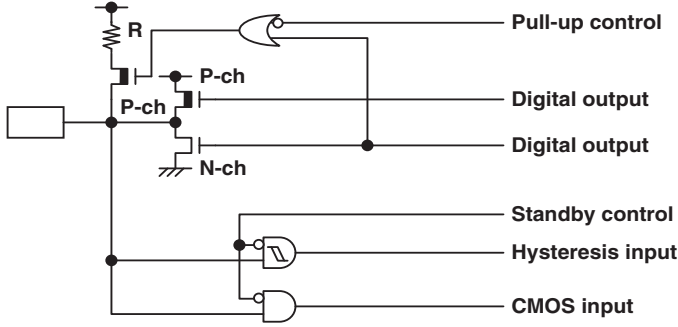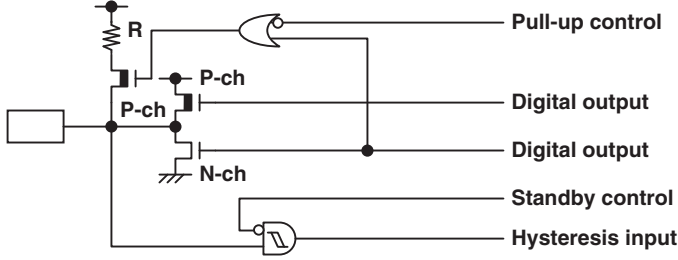
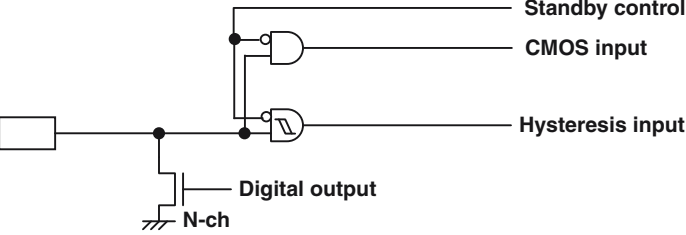
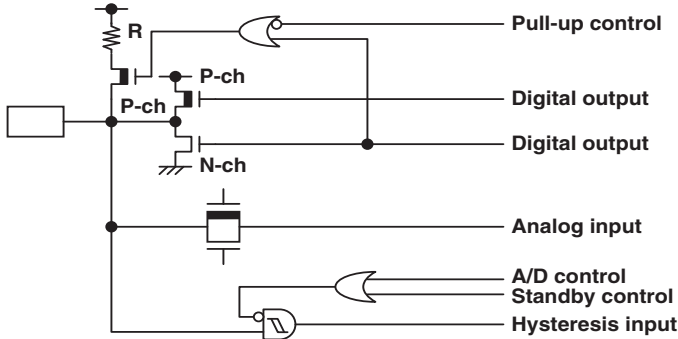
| Type | Circuit   | Remarks  |
|------|---|--|
| D    |    | <ul style="list-style-type: none"> <li>• N-ch open drain output</li> <li>• Hysteresis input</li> </ul>   |
| G    |    | <ul style="list-style-type: none"> <li>• CMOS output</li> <li>• Hysteresis input</li> <li>• CMOS input</li> <li>• Pull-up control available</li> </ul>   |
| H    |   | <ul style="list-style-type: none"> <li>• CMOS output</li> <li>• Hysteresis input</li> <li>• Pull-up control available</li> </ul>                         |
| I    |  | <ul style="list-style-type: none"> <li>• N-ch open drain output</li> <li>• CMOS input</li> <li>• Hysteresis input</li> </ul>                             |
| J    |  | <ul style="list-style-type: none"> <li>• CMOS output</li> <li>• Hysteresis input</li> <li>• Analog input</li> <li>• Pull-up control available</li> </ul> |

*(Continued)*

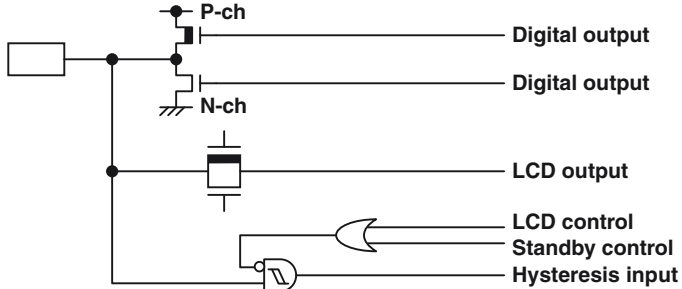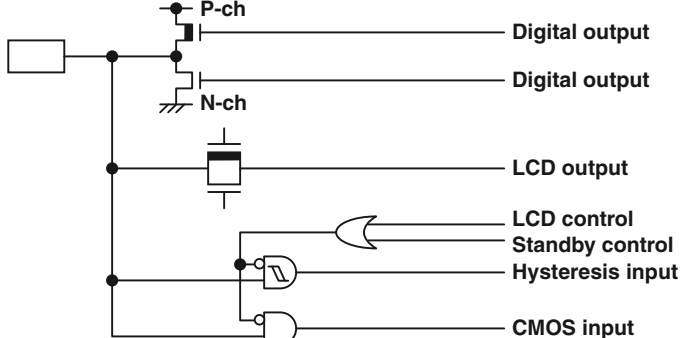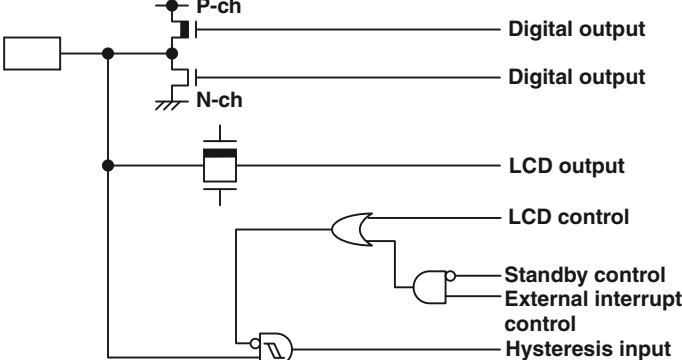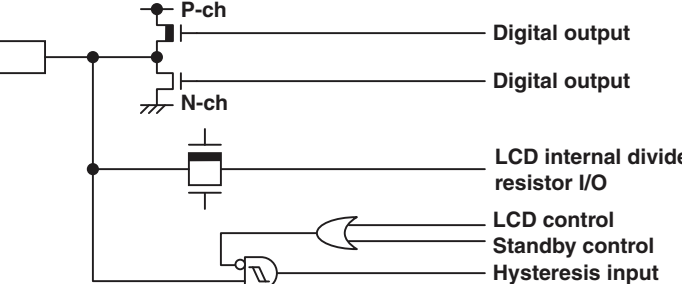



| Type | Circuit   | Remarks   |
|------|---|---|
| M    |    | <ul style="list-style-type: none"> <li>• CMOS output</li> <li>• LCD output</li> <li>• Hysteresis input</li> </ul>                       |
| N    |   | <ul style="list-style-type: none"> <li>• CMOS output</li> <li>• LCD output</li> <li>• Hysteresis input</li> <li>• CMOS input</li> </ul> |
| Q    |  | <ul style="list-style-type: none"> <li>• CMOS output</li> <li>• LCD output</li> <li>• Hysteresis input</li> </ul>                       |
| R    |  | <ul style="list-style-type: none"> <li>• CMOS output</li> <li>• LCD power supply</li> <li>• Hysteresis input</li> </ul>                 |

(Continued)
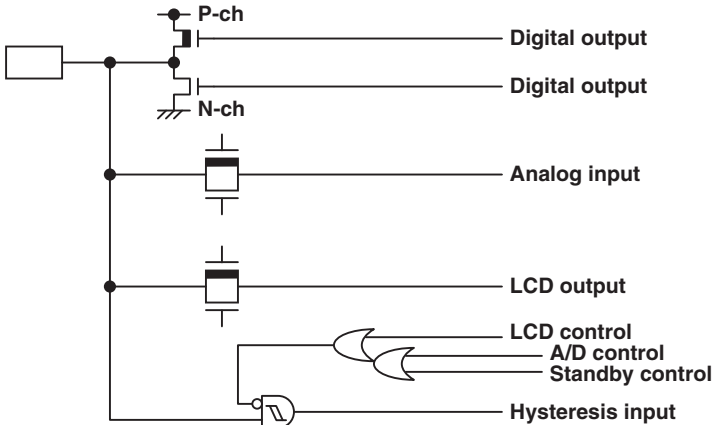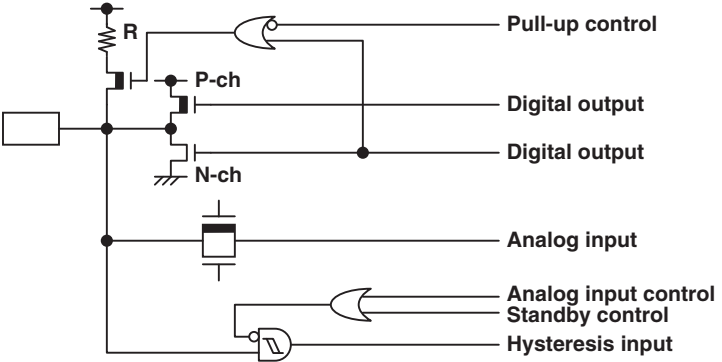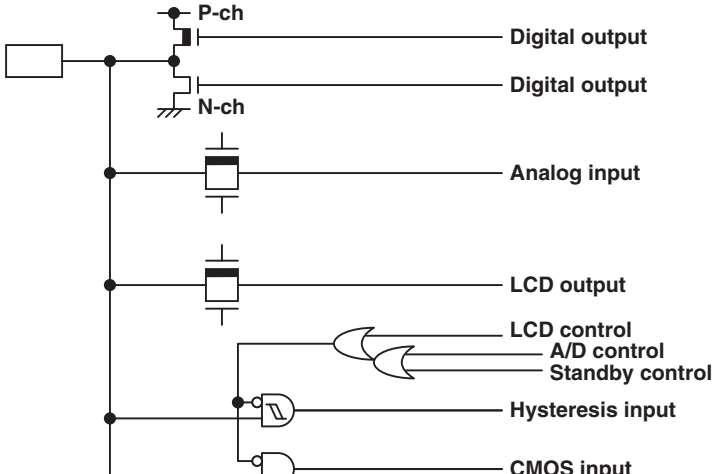
| Type | Circuit   | Remarks   |
|------|---|---|
| S    |    | <ul style="list-style-type: none"> <li>• CMOS output</li> <li>• LCD output</li> <li>• Hysteresis input</li> <li>• Analog input</li> </ul>                       |
| T    |   | <ul style="list-style-type: none"> <li>• CMOS output</li> <li>• Hysteresis input</li> <li>• Analog input</li> <li>• Pull-up control available</li> </ul>        |
| V    |  | <ul style="list-style-type: none"> <li>• CMOS output</li> <li>• LCD output</li> <li>• Hysteresis input</li> <li>• Analog input</li> <li>• CMOS input</li> </ul> |

(Continued)

(Continued)
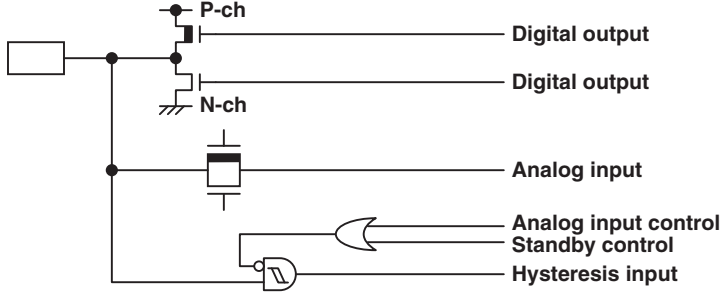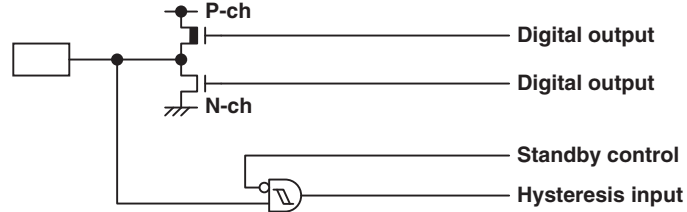
| Type | Circuit  | Remarks   |
|------|--|---|
| W    |  <p>             P-ch<br/>             Digital output<br/>             Digital output<br/>             N-ch<br/>             Analog input<br/>             Analog input control<br/>             Standby control<br/>             Hysteresis input           </p> | <ul style="list-style-type: none"> <li>• CMOS output</li> <li>• Hysteresis input</li> <li>• Analog input</li> </ul> |
| Y    |  <p>             P-ch<br/>             Digital output<br/>             Digital output<br/>             N-ch<br/>             Standby control<br/>             Hysteresis input           </p>   | <ul style="list-style-type: none"> <li>• CMOS output</li> <li>• Hysteresis input</li> </ul>                         |

## 9. Notes on Device Handling

### Preventing latch-ups

When using the device, ensure that the voltage applied does not exceed the maximum voltage rating.

In a CMOS IC, if a voltage higher than  $V_{CC}$  or a voltage lower than  $V_{SS}$  is applied to an input/output pin that is neither a medium-withstand voltage pin nor a high-withstand voltage pin, or if a voltage out of the rating range of power supply voltage mentioned in "17.1 Absolute Maximum Ratings" of "17. Electrical Characteristics" is applied to the  $V_{CC}$  pin or the  $V_{SS}$  pin, a latch-up may occur.

When a latch-up occurs, power supply current increases significantly, which may cause a component to be thermally destroyed.

### Stabilizing supply voltage

Supply voltage must be stabilized.

A malfunction may occur when power supply voltage fluctuates rapidly even though the fluctuation is within the guaranteed operating range of the  $V_{CC}$  power supply voltage.

As a rule of voltage stabilization, suppress voltage fluctuation so that the fluctuation in  $V_{CC}$  ripple (p-p value) at the commercial frequency (50 Hz/60 Hz) does not exceed 10% of the standard  $V_{CC}$  value, and the transient fluctuation rate does not exceed 0.1 V/ms at a momentary fluctuation such as switching the power supply.

### Notes on using the external clock

When an external clock is used, oscillation stabilization wait time is required for power-on reset, wake-up from subclock mode or stop mode.

## 10. Pin Connection

### Treatment of unused input pins

If an unused input pin is left unconnected, a component may be permanently damaged due to malfunctions or latch-ups. Always pull up or pull down an unused input pin through a resistor of at least 2 k $\Omega$ . Set an unused input/output pin to the output state and leave it unconnected, or set it to the input state and treat it the same as an unused input pin. If there is an unused output pin, leave it unconnected.

### Power supply pins

To reduce unnecessary electro-magnetic emission, prevent malfunctions of strobe signals due to an increase in the ground level, and conform to the total output current standard, always connect the  $V_{CC}$  pin and the  $V_{SS}$  pin to the power supply and ground outside the device. In addition, connect the current supply source to the  $V_{CC}$  pin and the  $V_{SS}$  pin with low impedance.

It is also advisable to connect a ceramic capacitor of approximately 0.1  $\mu$ F as a bypass capacitor between the  $V_{CC}$  pin and the  $V_{SS}$  pin at a location close to this device.

### DBG pin

Connect the DBG pin directly to an external pull-up resistor.

To prevent the device from unintentionally entering the debug mode due to noise, minimize the distance between the DBG pin and the  $V_{CC}$  or  $V_{SS}$  pin when designing the layout of the printed circuit board.

The DBG pin should not stay at "L" level after power-on until the reset output is released.

### $\overline{RST}$ pin

Connect the  $\overline{RST}$  pin directly to an external pull-up resistor.

To prevent the device from unintentionally entering the reset mode due to noise, minimize the distance between the  $\overline{RST}$  pin and the  $V_{CC}$  or  $V_{SS}$  pin when designing the layout of the printed circuit board.

The PF2/ $\overline{RST}$  pin functions as the reset input/output pin after power-on. In addition, the reset output function of the PF2/ $\overline{RST}$  pin can be enabled by the RSTOE bit in the SYSC register, and the reset input function or the general purpose I/O function can be selected by the RSTEN bit in the SYSC register.

### Analog power supply

Always set the same potential to  $AV_{CC}$  and  $V_{CC}$  pins. When  $V_{CC}$  is larger than  $AV_{CC}$ , the current may flow through the AN00 to AN07 pins.


### Treatment of power supply pins on the A/D converter

Ensure that  $AV_{CC}$  is equal to  $V_{CC}$  and  $AV_{SS}$  equal to  $V_{SS}$  even when the A/D converter is not in use.


Noise riding on the  $AV_{CC}$  pin may cause accuracy degradation. Therefore, connect a ceramic capacitor of 0.1  $\mu\text{F}$  (approx.) as a bypass capacitor between the  $AV_{CC}$  pin and the  $AV_{SS}$  pin in the vicinity of this device.

### C pin


Use a ceramic capacitor or a capacitor with equivalent frequency characteristics. The bypass capacitor for the  $V_{CC}$  pin must have a capacitance larger than  $C_S$ . For the connection to a smoothing capacitor  $C_S$ , see the diagram below. To prevent the device from unintentionally entering an unknown mode due to noise, minimize the distance between the C pin and  $C_S$  and the distance between  $C_S$  and the  $V_{SS}$  pin when designing the layout of a printed circuit board.

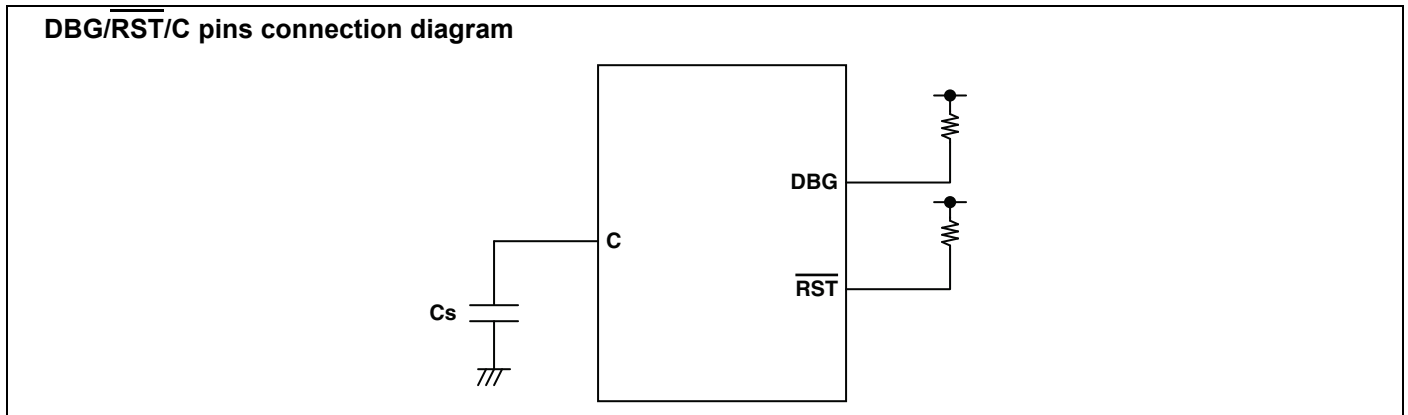

### 11. Block Diagram (MB95410H Series)

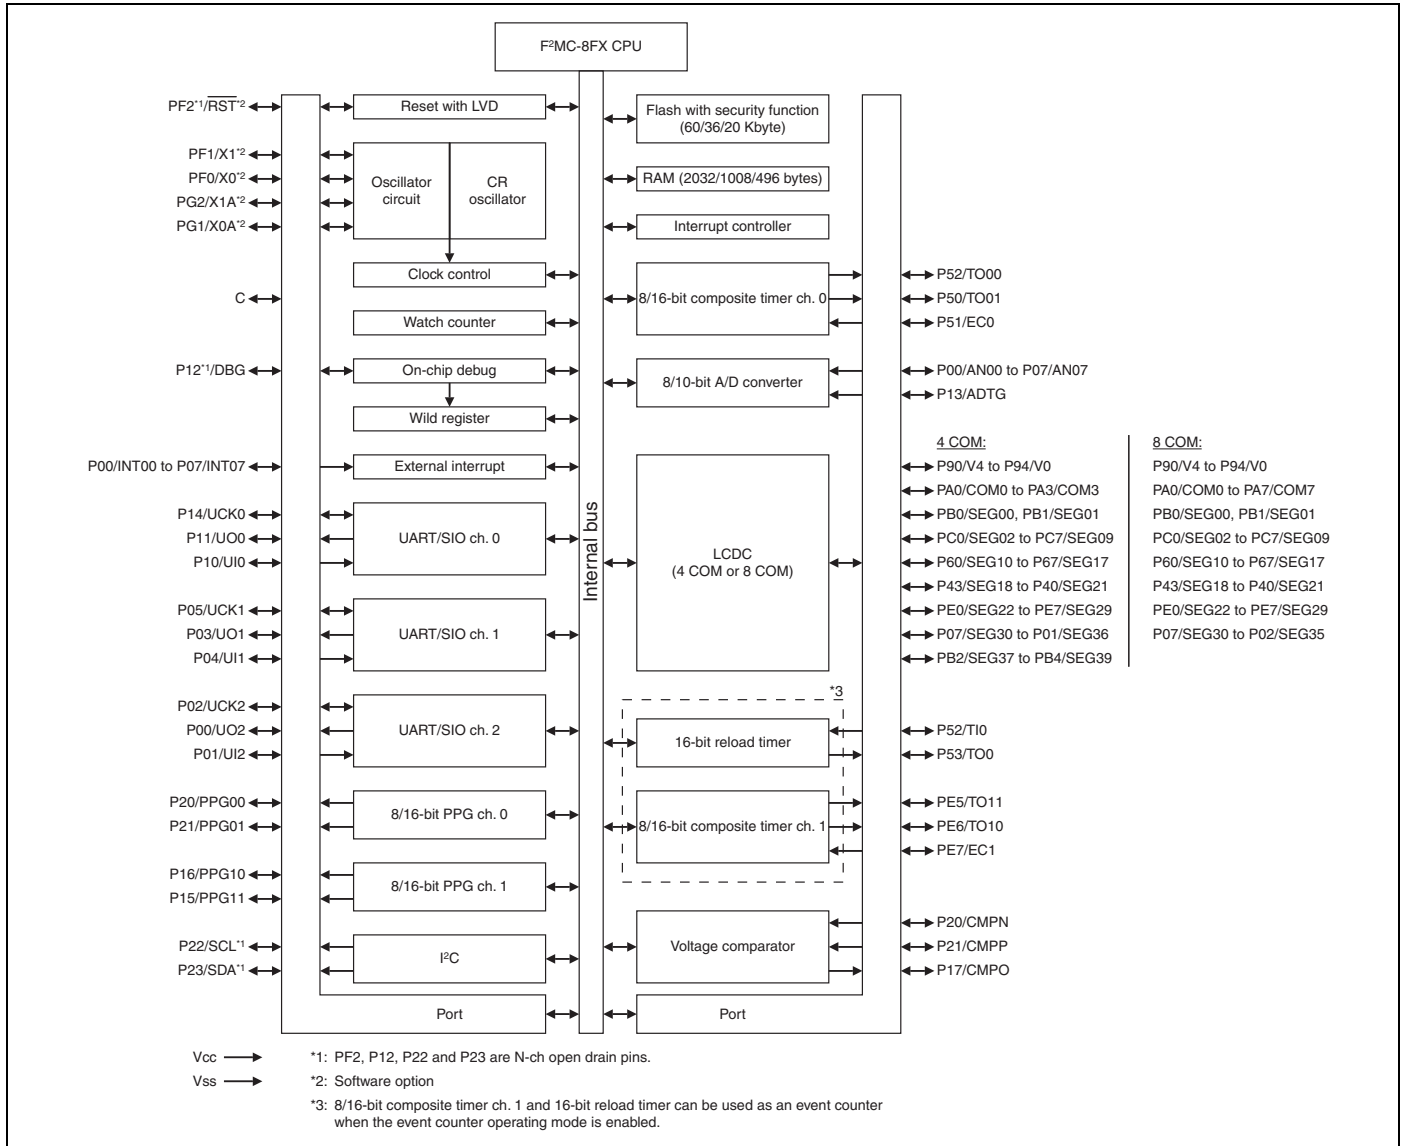

## 12. Block Diagram (MB95470H Series)

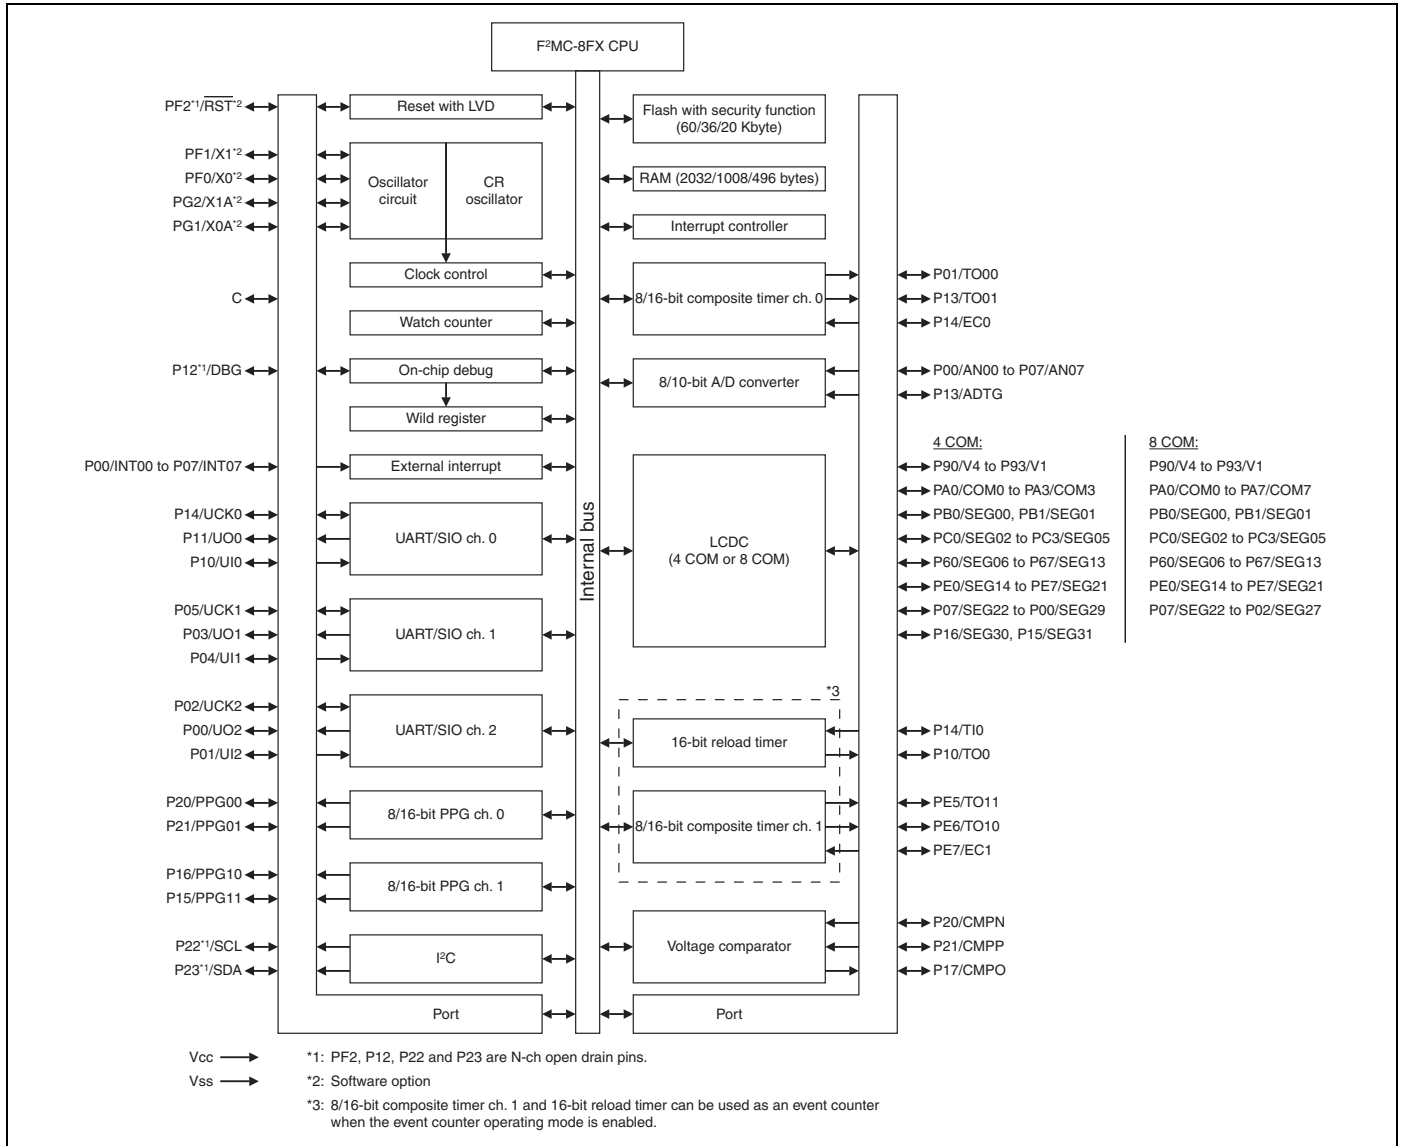


## 13. CPU Core

### Memory Space

The memory space of the MB95410H/470H Series is 64 Kbyte in size, and consists of an I/O area, a data area, and a program area. The memory space includes areas intended for specific purposes such as general-purpose registers and a vector table. The memory maps of the MB95410H/470H Series are shown below.

### Memory Maps

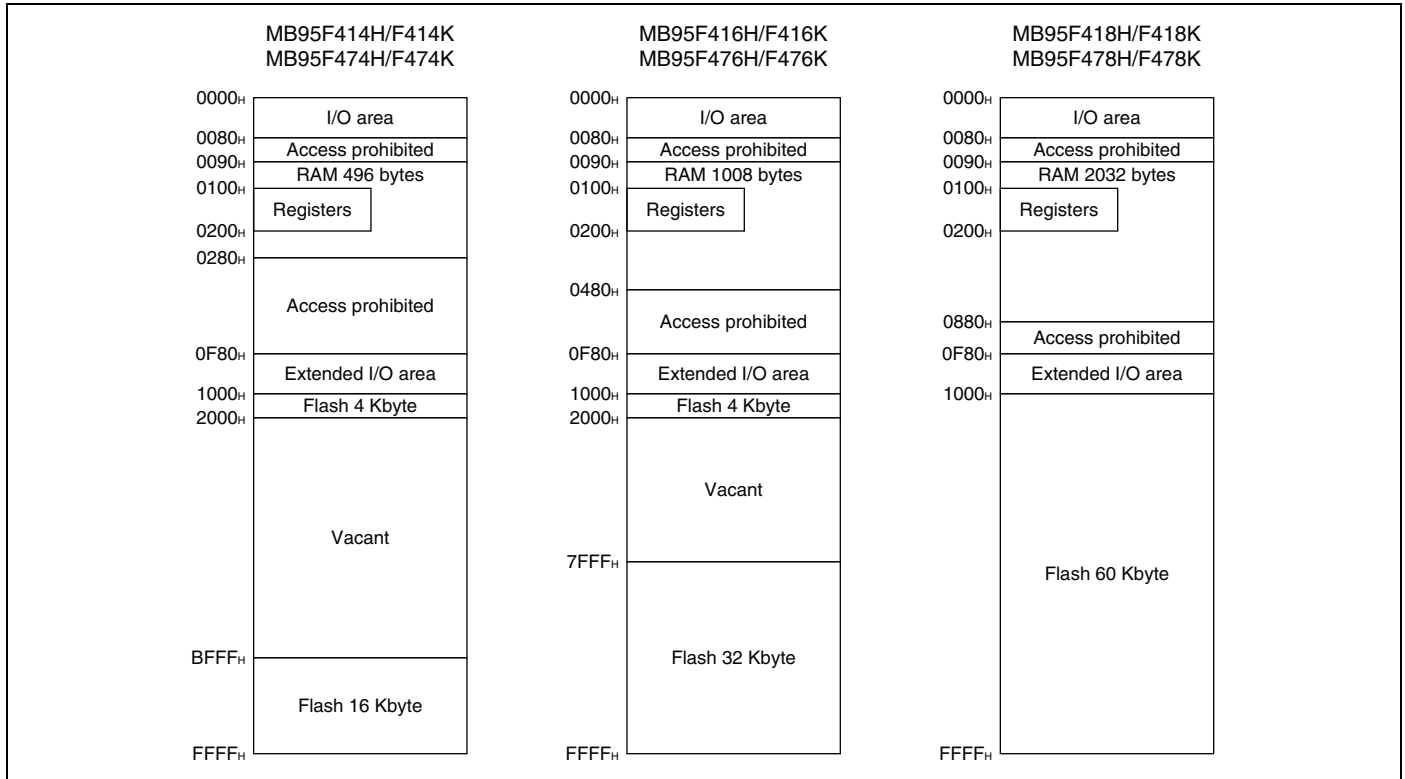



**14. I/O Map (MB95410H Series)**

| Address                                   | Register abbreviation | Register name  | R/W | Initial value         |
|---|-----------------------|--|-----|-----------------------|
| 0000 <sub>H</sub>                         | PDR0                  | Port 0 data register                                 | R/W | 00000000 <sub>B</sub> |
| 0001 <sub>H</sub>                         | DDR0                  | Port 0 direction register                            | R/W | 00000000 <sub>B</sub> |
| 0002 <sub>H</sub>                         | PDR1                  | Port 1 data register                                 | R/W | 00000000 <sub>B</sub> |
| 0003 <sub>H</sub>                         | DDR1                  | Port 1 direction register                            | R/W | 00000000 <sub>B</sub> |
| 0004 <sub>H</sub>                         | —                     | (Disabled)   | —   | —                     |
| 0005 <sub>H</sub>                         | WATR                  | Oscillation stabilization wait time setting register | R/W | 11111111 <sub>B</sub> |
| 0006 <sub>H</sub>                         | PLLC                  | PLL control register                                 | R/W | 00000000 <sub>B</sub> |
| 0007 <sub>H</sub>                         | SYCC                  | System clock control register                        | R/W | XXXXXX11 <sub>B</sub> |
| 0008 <sub>H</sub>                         | STBC                  | Standby control register                             | R/W | 0000XXXX <sub>B</sub> |
| 0009 <sub>H</sub>                         | RSRR                  | Reset source register                                | R/W | 00XXXXXX <sub>B</sub> |
| 000A <sub>H</sub>                         | TBTC                  | Time-base timer control register                     | R/W | 00000000 <sub>B</sub> |
| 000B <sub>H</sub>                         | WPCR                  | Watch prescaler control register                     | R/W | 00000000 <sub>B</sub> |
| 000C <sub>H</sub>                         | WDTC                  | Watchdog timer control register                      | R/W | 00000000 <sub>B</sub> |
| 000D <sub>H</sub>                         | SYCC2                 | System clock control register 2                      | R/W | XX100011 <sub>B</sub> |
| 000E <sub>H</sub>                         | PDR2                  | Port 2 data register                                 | R/W | 00000000 <sub>B</sub> |
| 000F <sub>H</sub>                         | DDR2                  | Port 2 direction register                            | R/W | 00000000 <sub>B</sub> |
| 0010 <sub>H</sub> ,<br>0011 <sub>H</sub>  | —                     | (Disabled)   | —   | —                     |
| 0012 <sub>H</sub>                         | PDR4                  | Port 4 data register                                 | R/W | 00000000 <sub>B</sub> |
| 0013 <sub>H</sub>                         | DDR4                  | Port 4 direction register                            | R/W | 00000000 <sub>B</sub> |
| 0014 <sub>H</sub>                         | PDR5                  | Port 5 data register                                 | R/W | 00000000 <sub>B</sub> |
| 0015 <sub>H</sub>                         | DDR5                  | Port 5 direction register                            | R/W | 00000000 <sub>B</sub> |
| 0016 <sub>H</sub>                         | PDR6                  | Port 6 data register                                 | R/W | 00000000 <sub>B</sub> |
| 0017 <sub>H</sub>                         | DDR6                  | Port 6 direction register                            | R/W | 00000000 <sub>B</sub> |
| 0018 <sub>H</sub> to<br>001B <sub>H</sub> | —                     | (Disabled)   | —   | —                     |
| 001C <sub>H</sub>                         | PDR9                  | Port 9 data register                                 | R/W | 00000000 <sub>B</sub> |
| 001D <sub>H</sub>                         | DDR9                  | Port 9 direction register                            | R/W | 00000000 <sub>B</sub> |
| 001E <sub>H</sub>                         | PDRA                  | Port A data register                                 | R/W | 00000000 <sub>B</sub> |
| 001F <sub>H</sub>                         | DDRA                  | Port A direction register                            | R/W | 00000000 <sub>B</sub> |
| 0020 <sub>H</sub>                         | PDRB                  | Port B data register                                 | R/W | 00000000 <sub>B</sub> |
| 0021 <sub>H</sub>                         | DDRB                  | Port B direction register                            | R/W | 00000000 <sub>B</sub> |
| 0022 <sub>H</sub>                         | PDRC                  | Port C data register                                 | R/W | 00000000 <sub>B</sub> |
| 0023 <sub>H</sub>                         | DDRC                  | Port C direction register                            | R/W | 00000000 <sub>B</sub> |
| 0024 <sub>H</sub> ,<br>0025 <sub>H</sub>  | —                     | (Disabled)   | —   | —                     |

*(Continued)*

| Address                                   | Register abbreviation | Register name   | R/W | Initial value         |
|---|-----------------------|---|-----|-----------------------|
| 0026 <sub>H</sub>                         | PDRE                  | Port E data register                                    | R/W | 00000000 <sub>B</sub> |
| 0027 <sub>H</sub>                         | DDRE                  | Port E direction register                               | R/W | 00000000 <sub>B</sub> |
| 0028 <sub>H</sub>                         | PDRF                  | Port F data register                                    | R/W | 00000000 <sub>B</sub> |
| 0029 <sub>H</sub>                         | DDRF                  | Port F direction register                               | R/W | 00000000 <sub>B</sub> |
| 002A <sub>H</sub>                         | PDRG                  | Port G data register                                    | R/W | 00000000 <sub>B</sub> |
| 002B <sub>H</sub>                         | DDRG                  | Port G direction register                               | R/W | 00000000 <sub>B</sub> |
| 002C <sub>H</sub>                         | —                     | (Disabled)  | —   | —                     |
| 002D <sub>H</sub>                         | PUL1                  | Port 1 pull-up register                                 | R/W | 00000000 <sub>B</sub> |
| 002E <sub>H</sub>                         | PUL2                  | Port 2 pull-up register                                 | R/W | 00000000 <sub>B</sub> |
| 002F <sub>H</sub> ,<br>0030 <sub>H</sub>  | —                     | (Disabled)  | —   | —                     |
| 0031 <sub>H</sub>                         | PUL5                  | Port 5 pull-up register                                 | R/W | 00000000 <sub>B</sub> |
| 0032 <sub>H</sub> to<br>0034 <sub>H</sub> | —                     | (Disabled)  | —   | —                     |
| 0035 <sub>H</sub>                         | PULG                  | Port G pull-up register                                 | R/W | 00000000 <sub>B</sub> |
| 0036 <sub>H</sub>                         | T01CR1                | 8/16-bit composite timer 01 status control register 1   | R/W | 00000000 <sub>B</sub> |
| 0037 <sub>H</sub>                         | T00CR1                | 8/16-bit composite timer 00 status control register 1   | R/W | 00000000 <sub>B</sub> |
| 0038 <sub>H</sub>                         | T11CR1                | 8/16-bit composite timer 11 status control register 1   | R/W | 00000000 <sub>B</sub> |
| 0039 <sub>H</sub>                         | T10CR1                | 8/16-bit composite timer 10 status control register 1   | R/W | 00000000 <sub>B</sub> |
| 003A <sub>H</sub>                         | PC01                  | 8/16-bit PPG01 control register                         | R/W | 00000000 <sub>B</sub> |
| 003B <sub>H</sub>                         | PC00                  | 8/16-bit PPG00 control register                         | R/W | 00000000 <sub>B</sub> |
| 003C <sub>H</sub>                         | PC11                  | 8/16-bit PPG11 control register                         | R/W | 00000000 <sub>B</sub> |
| 003D <sub>H</sub>                         | PC10                  | 8/16-bit PPG10 control register                         | R/W | 00000000 <sub>B</sub> |
| 003E <sub>H</sub>                         | TMCSRH0               | 16-bit reload timer control status register upper       | R/W | 00000000 <sub>B</sub> |
| 003F <sub>H</sub>                         | TMCSRL0               | 16-bit reload timer control status register lower       | R/W | 00000000 <sub>B</sub> |
| 0040 <sub>H</sub> to<br>0047 <sub>H</sub> | —                     | (Disabled)  | —   | —                     |
| 0048 <sub>H</sub>                         | EIC00                 | External interrupt circuit control register ch. 0/ch. 1 | R/W | 00000000 <sub>B</sub> |
| 0049 <sub>H</sub>                         | EIC10                 | External interrupt circuit control register ch. 2/ch. 3 | R/W | 00000000 <sub>B</sub> |
| 004A <sub>H</sub>                         | EIC20                 | External interrupt circuit control register ch. 4/ch. 5 | R/W | 00000000 <sub>B</sub> |
| 004B <sub>H</sub>                         | EIC30                 | External interrupt circuit control register ch. 6/ch. 7 | R/W | 00000000 <sub>B</sub> |
| 004C <sub>H</sub> to<br>004E <sub>H</sub> | —                     | (Disabled)  | —   | —                     |
| 004F <sub>H</sub>                         | LCDCC2                | LCDC control register 2                                 | R/W | 00010100 <sub>B</sub> |
| 0050 <sub>H</sub>                         | CMR0                  | Voltage comparator control register                     | R/W | 000X0001 <sub>B</sub> |
| 0051 <sub>H</sub> to<br>0055 <sub>H</sub> | —                     | (Disabled)  | —   | —                     |

*(Continued)*

| Address           | Register abbreviation | Register name   | R/W | Initial value         |
|-------------------|-----------------------|---|-----|-----------------------|
| 0056 <sub>H</sub> | SMC10                 | UART/SIO serial mode control register 1 ch. 0                     | R/W | 00000000 <sub>B</sub> |
| 0057 <sub>H</sub> | SMC20                 | UART/SIO serial mode control register 2 ch. 0                     | R/W | 00100000 <sub>B</sub> |
| 0058 <sub>H</sub> | SSR0                  | UART/SIO serial status register ch. 0                             | R/W | 00000001 <sub>B</sub> |
| 0059 <sub>H</sub> | TDR0                  | UART/SIO serial output data register ch. 0                        | R/W | 00000000 <sub>B</sub> |
| 005A <sub>H</sub> | RDR0                  | UART/SIO serial input data register ch. 0                         | R   | 00000000 <sub>B</sub> |
| 005B <sub>H</sub> | SMC11                 | UART/SIO serial mode control register 1 ch. 1                     | R/W | 00000000 <sub>B</sub> |
| 005C <sub>H</sub> | SMC21                 | UART/SIO serial mode control register 2 ch. 1                     | R/W | 00100000 <sub>B</sub> |
| 005D <sub>H</sub> | SSR1                  | UART/SIO serial status register ch. 1                             | R/W | 00000001 <sub>B</sub> |
| 005E <sub>H</sub> | TDR1                  | UART/SIO serial output data register ch. 1                        | R/W | 00000000 <sub>B</sub> |
| 005F <sub>H</sub> | RDR1                  | UART/SIO serial input data register ch. 1                         | R   | 00000000 <sub>B</sub> |
| 0060 <sub>H</sub> | IBCR00                | I <sup>2</sup> C bus control register 0                           | R/W | 00000001 <sub>B</sub> |
| 0061 <sub>H</sub> | IBCR10                | I <sup>2</sup> C bus control register 1                           | R/W | 00000000 <sub>B</sub> |
| 0062 <sub>H</sub> | IBCR0                 | I <sup>2</sup> C bus status register                              | R   | 00000000 <sub>B</sub> |
| 0063 <sub>H</sub> | IDDR0                 | I <sup>2</sup> C data register                                    | R/W | 00000000 <sub>B</sub> |
| 0064 <sub>H</sub> | IAAR0                 | I <sup>2</sup> C address register                                 | R/W | 00000000 <sub>B</sub> |
| 0065 <sub>H</sub> | ICCR0                 | I <sup>2</sup> C clock control register                           | R/W | 00000000 <sub>B</sub> |
| 0066 <sub>H</sub> | SMC12                 | UART/SIO serial mode control register 1 ch. 2                     | R/W | 00000000 <sub>B</sub> |
| 0067 <sub>H</sub> | SMC22                 | UART/SIO serial mode control register 2 ch. 2                     | R/W | 00100000 <sub>B</sub> |
| 0068 <sub>H</sub> | SSR2                  | UART/SIO serial status register ch. 2                             | R/W | 00000001 <sub>B</sub> |
| 0069 <sub>H</sub> | TDR2                  | UART/SIO serial output data register ch. 2                        | R/W | 00000000 <sub>B</sub> |
| 006A <sub>H</sub> | RDR2                  | UART/SIO serial input data register ch. 2                         | R   | 00000000 <sub>B</sub> |
| 006B <sub>H</sub> | —                     | (Disabled)  | —   | —                     |
| 006C <sub>H</sub> | ADC1                  | 8/10-bit A/D converter control register 1                         | R/W | 00000000 <sub>B</sub> |
| 006D <sub>H</sub> | ADC2                  | 8/10-bit A/D converter control register 2                         | R/W | 00000000 <sub>B</sub> |
| 006E <sub>H</sub> | ADDH                  | 8/10-bit A/D converter data register upper                        | R/W | 00000000 <sub>B</sub> |
| 006F <sub>H</sub> | ADDL                  | 8/10-bit A/D converter data register lower                        | R/W | 00000000 <sub>B</sub> |
| 0070 <sub>H</sub> | WCSR                  | Watch counter status register                                     | R/W | 00000000 <sub>B</sub> |
| 0071 <sub>H</sub> | FSR2                  | Flash memory status register 2                                    | R/W | 00000000 <sub>B</sub> |
| 0072 <sub>H</sub> | FSR                   | Flash memory status register                                      | R/W | 000X0000 <sub>B</sub> |
| 0073 <sub>H</sub> | SWRE0                 | Flash memory sector write control register 0                      | R/W | 00000000 <sub>B</sub> |
| 0074 <sub>H</sub> | FSR3                  | Flash memory status register 3                                    | R   | 00000000 <sub>B</sub> |
| 0075 <sub>H</sub> | —                     | (Disabled)  | —   | —                     |
| 0076 <sub>H</sub> | WREN                  | Wild register address compare enable register                     | R/W | 00000000 <sub>B</sub> |
| 0077 <sub>H</sub> | WROR                  | Wild register data test setting register                          | R/W | 00000000 <sub>B</sub> |
| 0078 <sub>H</sub> | —                     | Mirror of register bank pointer (RP) and direct bank pointer (DP) | —   | —                     |

*(Continued)*

| Address                                   | Register abbreviation | Register name  | R/W | Initial value         |
|---|-----------------------|--|-----|-----------------------|
| 0079 <sub>H</sub>                         | ILR0                  | Interrupt level setting register 0                         | R/W | 11111111 <sub>B</sub> |
| 007A <sub>H</sub>                         | ILR1                  | Interrupt level setting register 1                         | R/W | 11111111 <sub>B</sub> |
| 007B <sub>H</sub>                         | ILR2                  | Interrupt level setting register 2                         | R/W | 11111111 <sub>B</sub> |
| 007C <sub>H</sub>                         | ILR3                  | Interrupt level setting register 3                         | R/W | 11111111 <sub>B</sub> |
| 007D <sub>H</sub>                         | ILR4                  | Interrupt level setting register 4                         | R/W | 11111111 <sub>B</sub> |
| 007E <sub>H</sub>                         | ILR5                  | Interrupt level setting register 5                         | R/W | 11111111 <sub>B</sub> |
| 007F <sub>H</sub>                         | —                     | (Disabled)   | —   | —                     |
| 0F80 <sub>H</sub>                         | WRARH0                | Wild register address setting register (upper) ch. 0       | R/W | 00000000 <sub>B</sub> |
| 0F81 <sub>H</sub>                         | WRARL0                | Wild register address setting register (lower) ch. 0       | R/W | 00000000 <sub>B</sub> |
| 0F82 <sub>H</sub>                         | WRDR0                 | Wild register data setting register ch. 0                  | R/W | 00000000 <sub>B</sub> |
| 0F83 <sub>H</sub>                         | WRARH1                | Wild register address setting register (upper) ch. 1       | R/W | 00000000 <sub>B</sub> |
| 0F84 <sub>H</sub>                         | WRARL1                | Wild register address setting register (lower) ch. 1       | R/W | 00000000 <sub>B</sub> |
| 0F85 <sub>H</sub>                         | WRDR1                 | Wild register data setting register ch. 1                  | R/W | 00000000 <sub>B</sub> |
| 0F86 <sub>H</sub>                         | WRARH2                | Wild register address setting register (upper) ch. 2       | R/W | 00000000 <sub>B</sub> |
| 0F87 <sub>H</sub>                         | WRARL2                | Wild register address setting register (lower) ch. 2       | R/W | 00000000 <sub>B</sub> |
| 0F88 <sub>H</sub>                         | WRDR2                 | Wild register data setting register ch. 2                  | R/W | 00000000 <sub>B</sub> |
| 0F89 <sub>H</sub> to<br>0F91 <sub>H</sub> | —                     | (Disabled)   | —   | —                     |
| 0F92 <sub>H</sub>                         | T01CR0                | 8/16-bit composite timer 01 status control register 0      | R/W | 00000000 <sub>B</sub> |
| 0F93 <sub>H</sub>                         | T00CR0                | 8/16-bit composite timer 00 status control register 0      | R/W | 00000000 <sub>B</sub> |
| 0F94 <sub>H</sub>                         | T01DR                 | 8/16-bit composite timer 01 data register                  | R/W | 00000000 <sub>B</sub> |
| 0F95 <sub>H</sub>                         | T00DR                 | 8/16-bit composite timer 00 data register                  | R/W | 00000000 <sub>B</sub> |
| 0F96 <sub>H</sub>                         | TMCR0                 | 8/16-bit composite timer 00/01 timer mode control register | R/W | 00000000 <sub>B</sub> |
| 0F97 <sub>H</sub>                         | T11CR0                | 8/16-bit composite timer 11 status control register 0      | R/W | 00000000 <sub>B</sub> |
| 0F98 <sub>H</sub>                         | T10CR0                | 8/16-bit composite timer 10 status control register 0      | R/W | 00000000 <sub>B</sub> |
| 0F99 <sub>H</sub>                         | T11DR                 | 8/16-bit composite timer 11 data register                  | R/W | 00000000 <sub>B</sub> |
| 0F9A <sub>H</sub>                         | T10DR                 | 8/16-bit composite timer 10 data register                  | R/W | 00000000 <sub>B</sub> |
| 0F9B <sub>H</sub>                         | TMCR1                 | 8/16-bit composite timer 10/11 timer mode control register | R/W | 00000000 <sub>B</sub> |
| 0F9C <sub>H</sub>                         | PPS01                 | 8/16-bit PPG01 cycle setting buffer register               | R/W | 11111111 <sub>B</sub> |
| 0F9D <sub>H</sub>                         | PPS00                 | 8/16-bit PPG00 cycle setting buffer register               | R/W | 11111111 <sub>B</sub> |
| 0F9E <sub>H</sub>                         | PDS01                 | 8/16-bit PPG01 duty setting buffer register                | R/W | 11111111 <sub>B</sub> |
| 0F9F <sub>H</sub>                         | PDS00                 | 8/16-bit PPG00 duty setting buffer register                | R/W | 11111111 <sub>B</sub> |
| 0FA0 <sub>H</sub>                         | PPS11                 | 8/16-bit PPG11 cycle setting buffer register               | R/W | 11111111 <sub>B</sub> |
| 0FA1 <sub>H</sub>                         | PPS10                 | 8/16-bit PPG10 cycle setting buffer register               | R/W | 11111111 <sub>B</sub> |
| 0FA2 <sub>H</sub>                         | PDS11                 | 8/16-bit PPG11 duty setting buffer register                | R/W | 11111111 <sub>B</sub> |
| 0FA3 <sub>H</sub>                         | PDS10                 | 8/16-bit PPG10 duty setting buffer register                | R/W | 11111111 <sub>B</sub> |

(Continued)

| Address                                   | Register abbreviation | Register name   | R/W | Initial value         |
|---|-----------------------|---|-----|-----------------------|
| 0FA4 <sub>H</sub>                         | PPGS                  | 8/16-bit PPG start register   | R/W | 00000000 <sub>B</sub> |
| 0FA5 <sub>H</sub>                         | REVC                  | 8/16-bit PPG output inversion register                                  | R/W | 00000000 <sub>B</sub> |
| 0FA6 <sub>H</sub>                         | TMRH0                 | 16-bit reload timer timer register upper                                | R/W | 00000000 <sub>B</sub> |
|   | TMRLRH0               | 16-bit reload timer reload register upper                               | R/W | 00000000 <sub>B</sub> |
| 0FA7 <sub>H</sub>                         | TMRL0                 | 16-bit reload timer timer register lower                                | R/W | 00000000 <sub>B</sub> |
|   | TMRLRL0               | 16-bit reload timer reload register lower                               | R/W | 00000000 <sub>B</sub> |
| 0FA8 <sub>H</sub>                         | PSSR0                 | UART/SIO dedicated baud rate generator prescaler select register ch. 0  | R/W | 00000000 <sub>B</sub> |
| 0FA9 <sub>H</sub>                         | BRSR0                 | UART/SIO dedicated baud rate generator baud rate setting register ch. 0 | R/W | 00000000 <sub>B</sub> |
| 0FAA <sub>H</sub>                         | PSSR1                 | UART/SIO dedicated baud rate generator prescaler select register ch. 1  | R/W | 00000000 <sub>B</sub> |
| 0FAB <sub>H</sub>                         | BRSR1                 | UART/SIO dedicated baud rate generator baud rate setting register ch. 1 | R/W | 00000000 <sub>B</sub> |
| 0FAC <sub>H</sub>                         | PSSR2                 | UART/SIO dedicated baud rate generator prescaler select register ch. 2  | R/W | 00000000 <sub>B</sub> |
| 0FAD <sub>H</sub>                         | BRSR2                 | UART/SIO dedicated baud rate generator baud rate setting register ch. 2 | R/W | 00000000 <sub>B</sub> |
| 0FAE <sub>H</sub>                         | —                     | (Disabled)  | —   | —                     |
| 0FAF <sub>H</sub>                         | AIDRL                 | A/D input disable register (lower)                                      | R/W | 00000000 <sub>B</sub> |
| 0FB0 <sub>H</sub>                         | LCDCC1                | LCDC control register 1   | R/W | 00000000 <sub>B</sub> |
| 0FB1 <sub>H</sub>                         | —                     | (Disabled)  | —   | —                     |
| 0FB2 <sub>H</sub>                         | LCDCE1                | LCDC enable register 1  | R/W | 00111110 <sub>B</sub> |
| 0FB3 <sub>H</sub>                         | LCDCE2                | LCDC enable register 2  | R/W | 00000000 <sub>B</sub> |
| 0FB4 <sub>H</sub>                         | LCDCE3                | LCDC enable register 3  | R/W | 00000000 <sub>B</sub> |
| 0FB5 <sub>H</sub>                         | LCDCE4                | LCDC enable register 4  | R/W | 00000000 <sub>B</sub> |
| 0FB6 <sub>H</sub>                         | LCDCE5                | LCDC enable register 5  | R/W | 00000000 <sub>B</sub> |
| 0FB7 <sub>H</sub>                         | LCDCE6                | LCDC enable register 6  | R/W | 00000000 <sub>B</sub> |
| 0FB8 <sub>H</sub>                         | LCDCE7                | LCDC enable register 7  | R/W | 00000000 <sub>B</sub> |
| 0FB9 <sub>H</sub>                         | LCDCB1                | LCDC blinking setting register 1  | R/W | 00000000 <sub>B</sub> |
| 0FBA <sub>H</sub>                         | LCDCB2                | LCDC blinking setting register 2  | R/W | 00000000 <sub>B</sub> |
| 0FBB <sub>H</sub> ,<br>0FBC <sub>H</sub>  | —                     | (Disabled)  | —   | —                     |
| 0FBD <sub>H</sub> to<br>0FE0 <sub>H</sub> | LCDRAM                | LCDC display RAM (36 bytes)   | R/W | 00000000 <sub>B</sub> |
| 0FE1 <sub>H</sub>                         | —                     | (Disabled)  | —   | —                     |
| 0FE2 <sub>H</sub>                         | EVCR                  | Event counter control register  | R/W | 00000000 <sub>B</sub> |
| 0FE3 <sub>H</sub>                         | WCDR                  | Watch counter data register   | R/W | 00111111 <sub>B</sub> |

*(Continued)*

(Continued)

| Address                                   | Register abbreviation | Register name                                | R/W | Initial value           |
|---|-----------------------|--|-----|-------------------------|
| 0FE4 <sub>H</sub>                         | CRTH                  | Main CR clock trimming register (upper)      | R/W | 0XXXXXXXX <sub>B</sub>  |
| 0FE5 <sub>H</sub>                         | CRTL                  | Main CR clock trimming register (lower)      | R/W | 00XXXXXXXX <sub>B</sub> |
| 0FE6 <sub>H</sub> ,<br>0FE7 <sub>H</sub>  | —                     | (Disabled)                                   | —   | —                       |
| 0FE8 <sub>H</sub>                         | SYSC                  | System configuration register                | R/W | 11000011 <sub>B</sub>   |
| 0FE9 <sub>H</sub>                         | CMCR                  | Clock monitoring control register            | R/W | XX000000 <sub>B</sub>   |
| 0FEA <sub>H</sub>                         | CMDR                  | Clock monitoring data register               | R   | 00000000 <sub>B</sub>   |
| 0FEB <sub>H</sub>                         | WDTH                  | Watchdog timer selection ID register (upper) | R   | XXXXXXXX <sub>B</sub>   |
| 0FEC <sub>H</sub>                         | WDTL                  | Watchdog timer selection ID register (lower) | R   | XXXXXXXX <sub>B</sub>   |
| 0FED <sub>H</sub>                         | —                     | (Disabled)                                   | —   | —                       |
| 0FEE <sub>H</sub>                         | ILSR                  | Input level select register                  | R/W | 00000000 <sub>B</sub>   |
| 0FEF <sub>H</sub>                         | WICR                  | Interrupt pin control register               | R/W | 01000000 <sub>B</sub>   |
| 0FF0 <sub>H</sub> to<br>0FFF <sub>H</sub> | —                     | (Disabled)                                   | —   | —                       |

**R/W access symbols**

R/W : Readable / Writable

R : Read only

**Initial value symbols**

0 : The initial value of this bit is “0”.

1 : The initial value of this bit is “1”.

X : The initial value of this bit is indeterminate.

Note: Do not write to an address that is “(Disabled)”. If a “(Disabled)” address is read, an indeterminate value is returned.

**15. I/O Map (MB95470H Series)**

| Address                                   | Register abbreviation | Register name  | R/W | Initial value         |
|---|-----------------------|--|-----|-----------------------|
| 0000 <sub>H</sub>                         | PDR0                  | Port 0 data register                                 | R/W | 00000000 <sub>B</sub> |
| 0001 <sub>H</sub>                         | DDR0                  | Port 0 direction register                            | R/W | 00000000 <sub>B</sub> |
| 0002 <sub>H</sub>                         | PDR1                  | Port 1 data register                                 | R/W | 00000000 <sub>B</sub> |
| 0003 <sub>H</sub>                         | DDR1                  | Port 1 direction register                            | R/W | 00000000 <sub>B</sub> |
| 0004 <sub>H</sub>                         | —                     | (Disabled)   | —   | —                     |
| 0005 <sub>H</sub>                         | WATR                  | Oscillation stabilization wait time setting register | R/W | 11111111 <sub>B</sub> |
| 0006 <sub>H</sub>                         | PLLC                  | PLL control register                                 | R/W | 00000000 <sub>B</sub> |
| 0007 <sub>H</sub>                         | SYCC                  | System clock control register                        | R/W | XXXXXX11 <sub>B</sub> |
| 0008 <sub>H</sub>                         | STBC                  | Standby control register                             | R/W | 0000XXXX <sub>B</sub> |
| 0009 <sub>H</sub>                         | RSRR                  | Reset source register                                | R/W | 000XXXXX <sub>B</sub> |
| 000A <sub>H</sub>                         | TBTC                  | Time-base timer control register                     | R/W | 00000000 <sub>B</sub> |
| 000B <sub>H</sub>                         | WPCR                  | Watch prescaler control register                     | R/W | 00000000 <sub>B</sub> |
| 000C <sub>H</sub>                         | WDTC                  | Watchdog timer control register                      | R/W | 00000000 <sub>B</sub> |
| 000D <sub>H</sub>                         | SYCC2                 | System clock control register 2                      | R/W | XX100011 <sub>B</sub> |
| 000E <sub>H</sub>                         | PDR2                  | Port 2 data register                                 | R/W | 00000000 <sub>B</sub> |
| 000F <sub>H</sub>                         | DDR2                  | Port 2 direction register                            | R/W | 00000000 <sub>B</sub> |
| 0010 <sub>H</sub> to<br>0015 <sub>H</sub> | —                     | (Disabled)   | —   | —                     |
| 0016 <sub>H</sub>                         | PDR6                  | Port 6 data register                                 | R/W | 00000000 <sub>B</sub> |
| 0017 <sub>H</sub>                         | DDR6                  | Port 6 direction register                            | R/W | 00000000 <sub>B</sub> |
| 0018 <sub>H</sub> to<br>001B <sub>H</sub> | —                     | (Disabled)   | —   | —                     |
| 001C <sub>H</sub>                         | PDR9                  | Port 9 data register                                 | R/W | 00000000 <sub>B</sub> |
| 001D <sub>H</sub>                         | DDR9                  | Port 9 direction register                            | R/W | 00000000 <sub>B</sub> |
| 001E <sub>H</sub>                         | PDRA                  | Port A data register                                 | R/W | 00000000 <sub>B</sub> |
| 001F <sub>H</sub>                         | DDRA                  | Port A direction register                            | R/W | 00000000 <sub>B</sub> |
| 0020 <sub>H</sub>                         | PDRB                  | Port B data register                                 | R/W | 00000000 <sub>B</sub> |
| 0021 <sub>H</sub>                         | DDRB                  | Port B direction register                            | R/W | 00000000 <sub>B</sub> |
| 0022 <sub>H</sub>                         | PDRC                  | Port C data register                                 | R/W | 00000000 <sub>B</sub> |
| 0023 <sub>H</sub>                         | DDRC                  | Port C direction register                            | R/W | 00000000 <sub>B</sub> |
| 0024 <sub>H</sub> ,<br>0025 <sub>H</sub>  | —                     | (Disabled)   | —   | —                     |
| 0026 <sub>H</sub>                         | PDRE                  | Port E data register                                 | R/W | 00000000 <sub>B</sub> |
| 0027 <sub>H</sub>                         | DDRE                  | Port E direction register                            | R/W | 00000000 <sub>B</sub> |
| 0028 <sub>H</sub>                         | PDRF                  | Port F data register                                 | R/W | 00000000 <sub>B</sub> |
| 0029 <sub>H</sub>                         | DDRF                  | Port F direction register                            | R/W | 00000000 <sub>B</sub> |
| 002A <sub>H</sub>                         | PDRG                  | Port G data register                                 | R/W | 00000000 <sub>B</sub> |
| 002B <sub>H</sub>                         | DDRG                  | Port G direction register                            | R/W | 00000000 <sub>B</sub> |
| 002C <sub>H</sub>                         | —                     | (Disabled)   | —   | —                     |

*(Continued)*

| Address                                | Register abbreviation | Register name   | R/W | Initial value         |
|--|-----------------------|---|-----|-----------------------|
| 002D <sub>H</sub>                      | PUL1                  | Port 1 pull-up register                                 | R/W | 00000000 <sub>B</sub> |
| 002E <sub>H</sub>                      | PUL2                  | Port 2 pull-up register                                 | R/W | 00000000 <sub>B</sub> |
| 002F <sub>H</sub> to 0034 <sub>H</sub> | —                     | (Disabled)  | —   | —                     |
| 0035 <sub>H</sub>                      | PULG                  | Port G pull-up register                                 | R/W | 00000000 <sub>B</sub> |
| 0036 <sub>H</sub>                      | T01CR1                | 8/16-bit composite timer 01 status control register 1   | R/W | 00000000 <sub>B</sub> |
| 0037 <sub>H</sub>                      | T00CR1                | 8/16-bit composite timer 00 status control register 1   | R/W | 00000000 <sub>B</sub> |
| 0038 <sub>H</sub>                      | T11CR1                | 8/16-bit composite timer 11 status control register 1   | R/W | 00000000 <sub>B</sub> |
| 0039 <sub>H</sub>                      | T10CR1                | 8/16-bit composite timer 10 status control register 1   | R/W | 00000000 <sub>B</sub> |
| 003A <sub>H</sub>                      | PC01                  | 8/16-bit PPG01 control register                         | R/W | 00000000 <sub>B</sub> |
| 003B <sub>H</sub>                      | PC00                  | 8/16-bit PPG00 control register                         | R/W | 00000000 <sub>B</sub> |
| 003C <sub>H</sub>                      | PC11                  | 8/16-bit PPG11 control register                         | R/W | 00000000 <sub>B</sub> |
| 003D <sub>H</sub>                      | PC10                  | 8/16-bit PPG10 control register                         | R/W | 00000000 <sub>B</sub> |
| 003E <sub>H</sub>                      | TMCSRH0               | 16-bit reload timer control status register upper       | R/W | 00000000 <sub>B</sub> |
| 003F <sub>H</sub>                      | TMCSRL0               | 16-bit reload timer control status register lower       | R/W | 00000000 <sub>B</sub> |
| 0040 <sub>H</sub> to 0047 <sub>H</sub> | —                     | (Disabled)  | —   | —                     |
| 0048 <sub>H</sub>                      | EIC00                 | External interrupt circuit control register ch. 0/ch. 1 | R/W | 00000000 <sub>B</sub> |
| 0049 <sub>H</sub>                      | EIC10                 | External interrupt circuit control register ch. 2/ch. 3 | R/W | 00000000 <sub>B</sub> |
| 004A <sub>H</sub>                      | EIC20                 | External interrupt circuit control register ch. 4/ch. 5 | R/W | 00000000 <sub>B</sub> |
| 004B <sub>H</sub>                      | EIC30                 | External interrupt circuit control register ch. 6/ch. 7 | R/W | 00000000 <sub>B</sub> |
| 004C <sub>H</sub> to 004E <sub>H</sub> | —                     | (Disabled)  | —   | —                     |
| 004F <sub>H</sub>                      | LCDCC2                | LCDC control register 2                                 | R/W | 00010100 <sub>B</sub> |
| 0050 <sub>H</sub>                      | CMR0                  | Voltage comparator control register                     | R/W | 000X0001 <sub>B</sub> |
| 0051 <sub>H</sub> to 0055 <sub>H</sub> | —                     | (Disabled)  | —   | —                     |
| 0056 <sub>H</sub>                      | SMC10                 | UART/SIO serial mode control register 1 ch. 0           | R/W | 00000000 <sub>B</sub> |
| 0057 <sub>H</sub>                      | SMC20                 | UART/SIO serial mode control register 2 ch. 0           | R/W | 00100000 <sub>B</sub> |
| 0058 <sub>H</sub>                      | SSR0                  | UART/SIO serial status register ch. 0                   | R/W | 00000001 <sub>B</sub> |
| 0059 <sub>H</sub>                      | TDR0                  | UART/SIO serial output data register ch. 0              | R/W | 00000000 <sub>B</sub> |
| 005A <sub>H</sub>                      | RDR0                  | UART/SIO serial input data register ch. 0               | R   | 00000000 <sub>B</sub> |
| 005B <sub>H</sub>                      | SMC11                 | UART/SIO serial mode control register 1 ch. 1           | R/W | 00000000 <sub>B</sub> |
| 005C <sub>H</sub>                      | SMC21                 | UART/SIO serial mode control register 2 ch. 1           | R/W | 00100000 <sub>B</sub> |
| 005D <sub>H</sub>                      | SSR1                  | UART/SIO serial status register ch. 1                   | R/W | 00000001 <sub>B</sub> |
| 005E <sub>H</sub>                      | TDR1                  | UART/SIO serial output data register ch. 1              | R/W | 00000000 <sub>B</sub> |

*(Continued)*



| Address           | Register abbreviation | Register name   | R/W | Initial value         |
|-------------------|-----------------------|---|-----|-----------------------|
| 005F <sub>H</sub> | RDR1                  | UART/SIO serial input data register ch. 1                         | R   | 00000000 <sub>B</sub> |
| 0060 <sub>H</sub> | IBCR00                | I <sup>2</sup> C bus control register 0                           | R/W | 00000001 <sub>B</sub> |
| 0061 <sub>H</sub> | IBCR10                | I <sup>2</sup> C bus control register 1                           | R/W | 00000000 <sub>B</sub> |
| 0062 <sub>H</sub> | IBCR0                 | I <sup>2</sup> C bus status register                              | R   | 00000000 <sub>B</sub> |
| 0063 <sub>H</sub> | IDDR0                 | I <sup>2</sup> C data register                                    | R/W | 00000000 <sub>B</sub> |
| 0064 <sub>H</sub> | IAAR0                 | I <sup>2</sup> C address register                                 | R/W | 00000000 <sub>B</sub> |
| 0065 <sub>H</sub> | ICCR0                 | I <sup>2</sup> C clock control register                           | R/W | 00000000 <sub>B</sub> |
| 0066 <sub>H</sub> | SMC12                 | UART/SIO serial mode control register 1 ch. 2                     | R/W | 00000000 <sub>B</sub> |
| 0067 <sub>H</sub> | SMC22                 | UART/SIO serial mode control register 2 ch. 2                     | R/W | 00100000 <sub>B</sub> |
| 0068 <sub>H</sub> | SSR2                  | UART/SIO serial status register ch. 2                             | R/W | 00000001 <sub>B</sub> |
| 0069 <sub>H</sub> | TDR2                  | UART/SIO serial output data register ch. 2                        | R/W | 00000000 <sub>B</sub> |
| 006A <sub>H</sub> | RDR2                  | UART/SIO serial input data register ch. 2                         | R   | 00000000 <sub>B</sub> |
| 006B <sub>H</sub> | —                     | (Disabled)  | —   | —                     |
| 006C <sub>H</sub> | ADC1                  | 8/10-bit A/D converter control register 1                         | R/W | 00000000 <sub>B</sub> |
| 006D <sub>H</sub> | ADC2                  | 8/10-bit A/D converter control register 2                         | R/W | 00000000 <sub>B</sub> |
| 006E <sub>H</sub> | ADDH                  | 8/10-bit A/D converter data register upper                        | R/W | 00000000 <sub>B</sub> |
| 006F <sub>H</sub> | ADDL                  | 8/10-bit A/D converter data register lower                        | R/W | 00000000 <sub>B</sub> |
| 0070 <sub>H</sub> | WCSR                  | Watch counter status register                                     | R/W | 00000000 <sub>B</sub> |
| 0071 <sub>H</sub> | FSR2                  | Flash memory status register 2                                    | R/W | 00000000 <sub>B</sub> |
| 0072 <sub>H</sub> | FSR                   | Flash memory status register                                      | R/W | 000X0000 <sub>B</sub> |
| 0073 <sub>H</sub> | SWRE0                 | Flash memory sector write control register 0                      | R/W | 00000000 <sub>B</sub> |
| 0074 <sub>H</sub> | FSR3                  | Flash memory status register 3                                    | R   | 00000000 <sub>B</sub> |
| 0075 <sub>H</sub> | —                     | (Disabled)  | —   | —                     |
| 0076 <sub>H</sub> | WREN                  | Wild register address compare enable register                     | R/W | 00000000 <sub>B</sub> |
| 0077 <sub>H</sub> | WROR                  | Wild register data test setting register                          | R/W | 00000000 <sub>B</sub> |
| 0078 <sub>H</sub> | —                     | Mirror of register bank pointer (RP) and direct bank pointer (DP) | —   | —                     |
| 0079 <sub>H</sub> | ILR0                  | Interrupt level setting register 0                                | R/W | 11111111 <sub>B</sub> |
| 007A <sub>H</sub> | ILR1                  | Interrupt level setting register 1                                | R/W | 11111111 <sub>B</sub> |
| 007B <sub>H</sub> | ILR2                  | Interrupt level setting register 2                                | R/W | 11111111 <sub>B</sub> |
| 007C <sub>H</sub> | ILR3                  | Interrupt level setting register 3                                | R/W | 11111111 <sub>B</sub> |
| 007D <sub>H</sub> | ILR4                  | Interrupt level setting register 4                                | R/W | 11111111 <sub>B</sub> |
| 007E <sub>H</sub> | ILR5                  | Interrupt level setting register 5                                | R/W | 11111111 <sub>B</sub> |
| 007F <sub>H</sub> | —                     | (Disabled)  | —   | —                     |
| 0F80 <sub>H</sub> | WRARH0                | Wild register address setting register (upper) ch. 0              | R/W | 00000000 <sub>B</sub> |
| 0F81 <sub>H</sub> | WRARL0                | Wild register address setting register (lower) ch. 0              | R/W | 00000000 <sub>B</sub> |
| 0F82 <sub>H</sub> | WRDR0                 | Wild register data setting register ch. 0                         | R/W | 00000000 <sub>B</sub> |

*(Continued)*

| Address                                   | Register abbreviation | Register name   | R/W | Initial value         |
|---|-----------------------|---|-----|-----------------------|
| 0F83 <sub>H</sub>                         | WRARH1                | Wild register address setting register (upper) ch. 1                    | R/W | 00000000 <sub>B</sub> |
| 0F84 <sub>H</sub>                         | WRARL1                | Wild register address setting register (lower) ch. 1                    | R/W | 00000000 <sub>B</sub> |
| 0F85 <sub>H</sub>                         | WRDR1                 | Wild register data setting register ch. 1                               | R/W | 00000000 <sub>B</sub> |
| 0F86 <sub>H</sub>                         | WRARH2                | Wild register address setting register (upper) ch. 2                    | R/W | 00000000 <sub>B</sub> |
| 0F87 <sub>H</sub>                         | WRARL2                | Wild register address setting register (lower) ch. 2                    | R/W | 00000000 <sub>B</sub> |
| 0F88 <sub>H</sub>                         | WRDR2                 | Wild register data setting register ch. 2                               | R/W | 00000000 <sub>B</sub> |
| 0F89 <sub>H</sub> to<br>0F91 <sub>H</sub> | —                     | (Disabled)  | —   | —                     |
| 0F92 <sub>H</sub>                         | T01CR0                | 8/16-bit composite timer 01 status control register 0                   | R/W | 00000000 <sub>B</sub> |
| 0F93 <sub>H</sub>                         | T00CR0                | 8/16-bit composite timer 00 status control register 0                   | R/W | 00000000 <sub>B</sub> |
| 0F94 <sub>H</sub>                         | T01DR                 | 8/16-bit composite timer 01 data register                               | R/W | 00000000 <sub>B</sub> |
| 0F95 <sub>H</sub>                         | T00DR                 | 8/16-bit composite timer 00 data register                               | R/W | 00000000 <sub>B</sub> |
| 0F96 <sub>H</sub>                         | TMCR0                 | 8/16-bit composite timer 00/01 timer mode control register              | R/W | 00000000 <sub>B</sub> |
| 0F97 <sub>H</sub>                         | T11CR0                | 8/16-bit composite timer 11 status control register 0                   | R/W | 00000000 <sub>B</sub> |
| 0F98 <sub>H</sub>                         | T10CR0                | 8/16-bit composite timer 10 status control register 0                   | R/W | 00000000 <sub>B</sub> |
| 0F99 <sub>H</sub>                         | T11DR                 | 8/16-bit composite timer 11 data register                               | R/W | 00000000 <sub>B</sub> |
| 0F9A <sub>H</sub>                         | T10DR                 | 8/16-bit composite timer 10 data register                               | R/W | 00000000 <sub>B</sub> |
| 0F9B <sub>H</sub>                         | TMCR1                 | 8/16-bit composite timer 10/11 timer mode control register              | R/W | 00000000 <sub>B</sub> |
| 0F9C <sub>H</sub>                         | PPS01                 | 8/16-bit PPG01 cycle setting buffer register                            | R/W | 11111111 <sub>B</sub> |
| 0F9D <sub>H</sub>                         | PPS00                 | 8/16-bit PPG00 cycle setting buffer register                            | R/W | 11111111 <sub>B</sub> |
| 0F9E <sub>H</sub>                         | PDS01                 | 8/16-bit PPG01 duty setting buffer register                             | R/W | 11111111 <sub>B</sub> |
| 0F9F <sub>H</sub>                         | PDS00                 | 8/16-bit PPG00 duty setting buffer register                             | R/W | 11111111 <sub>B</sub> |
| 0FA0 <sub>H</sub>                         | PPS11                 | 8/16-bit PPG11 cycle setting buffer register                            | R/W | 11111111 <sub>B</sub> |
| 0FA1 <sub>H</sub>                         | PPS10                 | 8/16-bit PPG10 cycle setting buffer register                            | R/W | 11111111 <sub>B</sub> |
| 0FA2 <sub>H</sub>                         | PDS11                 | 8/16-bit PPG11 duty setting buffer register                             | R/W | 11111111 <sub>B</sub> |
| 0FA3 <sub>H</sub>                         | PDS10                 | 8/16-bit PPG10 duty setting buffer register                             | R/W | 11111111 <sub>B</sub> |
| 0FA4 <sub>H</sub>                         | PPGS                  | 8/16-bit PPG start register   | R/W | 00000000 <sub>B</sub> |
| 0FA5 <sub>H</sub>                         | REVC                  | 8/16-bit PPG output inversion register                                  | R/W | 00000000 <sub>B</sub> |
| 0FA6 <sub>H</sub>                         | TMRH0                 | 16-bit reload timer timer register upper                                | R/W | 00000000 <sub>B</sub> |
|   | TMRLRH0               | 16-bit reload timer reload register upper                               | R/W | 00000000 <sub>B</sub> |
| 0FA7 <sub>H</sub>                         | TMRL0                 | 16-bit reload timer timer register lower                                | R/W | 00000000 <sub>B</sub> |
|   | TMRLRL0               | 16-bit reload timer reload register lower                               | R/W | 00000000 <sub>B</sub> |
| 0FA8 <sub>H</sub>                         | PSSR0                 | UART/SIO dedicated baud rate generator prescaler select register ch. 0  | R/W | 00000000 <sub>B</sub> |
| 0FA9 <sub>H</sub>                         | BRSR0                 | UART/SIO dedicated baud rate generator baud rate setting register ch. 0 | R/W | 00000000 <sub>B</sub> |
| 0FAA <sub>H</sub>                         | PSSR1                 | UART/SIO dedicated baud rate generator prescaler select register ch. 1  | R/W | 00000000 <sub>B</sub> |
| 0FAB <sub>H</sub>                         | BRSR1                 | UART/SIO dedicated baud rate generator baud rate setting register ch. 1 | R/W | 00000000 <sub>B</sub> |

(Continued)

| Address                                   | Register abbreviation | Register name   | R/W | Initial value           |
|---|-----------------------|---|-----|-------------------------|
| 0FAC <sub>H</sub>                         | PSSR2                 | UART/SIO dedicated baud rate generator prescaler select register ch. 2  | R/W | 00000000 <sub>B</sub>   |
| 0FAD <sub>H</sub>                         | BRSR2                 | UART/SIO dedicated baud rate generator baud rate setting register ch. 2 | R/W | 00000000 <sub>B</sub>   |
| 0FAE <sub>H</sub>                         | —                     | (Disabled)  | —   | —                       |
| 0FAF <sub>H</sub>                         | AIDRL                 | A/D input disable register (lower)                                      | R/W | 00000000 <sub>B</sub>   |
| 0FB0 <sub>H</sub>                         | LCDCC1                | LCDC control register 1   | R/W | 00000000 <sub>B</sub>   |
| 0FB1 <sub>H</sub>                         | —                     | (Disabled)  | —   | —                       |
| 0FB2 <sub>H</sub>                         | LCDCE1                | LCDC enable register 1  | R/W | 00111100 <sub>B</sub>   |
| 0FB3 <sub>H</sub>                         | LCDCE2                | LCDC enable register 2  | R/W | 00000000 <sub>B</sub>   |
| 0FB4 <sub>H</sub>                         | LCDCE3                | LCDC enable register 3  | R/W | 00000000 <sub>B</sub>   |
| 0FB5 <sub>H</sub>                         | LCDCE4                | LCDC enable register 4  | R/W | 00000000 <sub>B</sub>   |
| 0FB6 <sub>H</sub>                         | LCDCE5                | LCDC enable register 5  | R/W | 00000000 <sub>B</sub>   |
| 0FB7 <sub>H</sub>                         | LCDCE6                | LCDC enable register 6  | R/W | 00000000 <sub>B</sub>   |
| 0FB8 <sub>H</sub>                         | —                     | (Disabled)  | —   | —                       |
| 0FB9 <sub>H</sub>                         | LCDCB1                | LCDC blinking setting register 1  | R/W | 00000000 <sub>B</sub>   |
| 0FBA <sub>H</sub>                         | LCDCB2                | LCDC blinking setting register 2  | R/W | 00000000 <sub>B</sub>   |
| 0FBB <sub>H</sub> ,<br>0FBC <sub>H</sub>  | —                     | (Disabled)  | —   | —                       |
| 0FBD <sub>H</sub> to<br>0FD8 <sub>H</sub> | LCDRAM                | LCDC display RAM (28 bytes)   | R/W | 00000000 <sub>B</sub>   |
| 0FD9 <sub>H</sub> to<br>0FE1 <sub>H</sub> | —                     | (Disabled)  | —   | —                       |
| 0FE2 <sub>H</sub>                         | EVCR                  | Event counter control register  | R/W | 00000000 <sub>B</sub>   |
| 0FE3 <sub>H</sub>                         | WCDR                  | Watch counter data register   | R/W | 00111111 <sub>B</sub>   |
| 0FE4 <sub>H</sub>                         | CRT <sub>H</sub>      | Main CR clock trimming register (upper)                                 | R/W | 0XXXXXXXX <sub>B</sub>  |
| 0FE5 <sub>H</sub>                         | CRT <sub>L</sub>      | Main CR clock trimming register (lower)                                 | R/W | 00XXXXXXXX <sub>B</sub> |
| 0FE6 <sub>H</sub> ,<br>0FE7 <sub>H</sub>  | —                     | (Disabled)  | —   | —                       |
| 0FE8 <sub>H</sub>                         | SYSC                  | System configuration register   | R/W | 11000011 <sub>B</sub>   |
| 0FE9 <sub>H</sub>                         | CMCR                  | Clock monitoring control register                                       | R/W | XX000000 <sub>B</sub>   |
| 0FEA <sub>H</sub>                         | CMDR                  | Clock monitoring data register  | R   | 00000000 <sub>B</sub>   |
| 0FEB <sub>H</sub>                         | WDTH                  | Watchdog timer selection ID register (upper)                            | R   | XXXXXXXX <sub>B</sub>   |
| 0FEC <sub>H</sub>                         | WDTL                  | Watchdog timer selection ID register (lower)                            | R   | XXXXXXXX <sub>B</sub>   |

*(Continued)*

(Continued)

| Address                                   | Register abbreviation | Register name                  | R/W | Initial value        |
|---|-----------------------|--------------------------------|-----|----------------------|
| 0FED <sub>H</sub>                         | —                     | (Disabled)                     | —   | —                    |
| 0FEE <sub>H</sub>                         | ILSR                  | Input level select register    | R/W | 0000000 <sub>B</sub> |
| 0FEF <sub>H</sub>                         | WICR                  | Interrupt pin control register | R/W | 0100000 <sub>B</sub> |
| 0FF0 <sub>H</sub> to<br>0FFF <sub>H</sub> | —                     | (Disabled)                     | —   | —                    |

**R/W access symbols**

R/W : Readable / Writable

R : Read only

**Initial value symbols**


0 : The initial value of this bit is “0”.

1 : The initial value of this bit is “1”.

X : The initial value of this bit is indeterminate.

Note: Do not write to an address that is “(Disabled)”. If a “(Disabled)” address is read, an indeterminate value is returned.

**16. Interrupt Source Table**

| Interrupt source                       | Interrupt request number | Vector table address |                   | Bit name of interrupt level setting register | Priority order of interrupt sources of the same level (occurring simultaneously)                        |
|--|--------------------------|----------------------|-------------------|--|---|
|  |                          | Upper                | Lower             |  |   |
| External interrupt ch. 0               | IRQ00                    | FFFA <sub>H</sub>    | FFFB <sub>H</sub> | L00 [1:0]                                    | High<br><br>↓<br>Low |
| External interrupt ch. 4               |                          |                      |                   |  |   |
| External interrupt ch. 1               | IRQ01                    | FFF8 <sub>H</sub>    | FFF9 <sub>H</sub> | L01 [1:0]                                    |   |
| External interrupt ch. 5               |                          |                      |                   |  |   |
| External interrupt ch. 2               | IRQ02                    | FFF6 <sub>H</sub>    | FFF7 <sub>H</sub> | L02 [1:0]                                    |   |
| External interrupt ch. 6               |                          |                      |                   |  |   |
| External interrupt ch. 3               | IRQ03                    | FFF4 <sub>H</sub>    | FFF5 <sub>H</sub> | L03 [1:0]                                    |   |
| External interrupt ch. 7               |                          |                      |                   |  |   |
| UART/SIO ch. 0                         | IRQ04                    | FFF2 <sub>H</sub>    | FFF3 <sub>H</sub> | L04 [1:0]                                    |   |
| 8/16-bit composite timer ch. 0 (lower) | IRQ05                    | FFF0 <sub>H</sub>    | FFF1 <sub>H</sub> | L05 [1:0]                                    |   |
| 8/16-bit composite timer ch. 0 (upper) | IRQ06                    | FFEE <sub>H</sub>    | FFEF <sub>H</sub> | L06 [1:0]                                    |   |
| UART/SIO ch. 2                         | IRQ07                    | FFEC <sub>H</sub>    | FFED <sub>H</sub> | L07 [1:0]                                    |   |
| LCD controller                         | IRQ08                    | FFEA <sub>H</sub>    | FFEB <sub>H</sub> | L08 [1:0]                                    |   |
| 8/16-bit PPG ch. 1 (lower)             | IRQ09                    | FFE8 <sub>H</sub>    | FFE9 <sub>H</sub> | L09 [1:0]                                    |   |
| UART/SIO ch. 1                         |                          |                      |                   |  |   |
| 8/16-bit PPG ch. 1 (upper)             | IRQ10                    | FFE6 <sub>H</sub>    | FFE7 <sub>H</sub> | L10 [1:0]                                    |   |
| 16-bit reload timer ch. 0              | IRQ11                    | FFE4 <sub>H</sub>    | FFE5 <sub>H</sub> | L11 [1:0]                                    |   |
| 8/16-bit PPG ch. 0 (upper)             | IRQ12                    | FFE2 <sub>H</sub>    | FFE3 <sub>H</sub> | L12 [1:0]                                    |   |
| 8/16-bit PPG ch. 0 (lower)             | IRQ13                    | FFE0 <sub>H</sub>    | FFE1 <sub>H</sub> | L13 [1:0]                                    |   |
| 8/16-bit composite timer ch. 1 (upper) | IRQ14                    | FFDE <sub>H</sub>    | FFDF <sub>H</sub> | L14 [1:0]                                    |   |
| Voltage comparator                     | IRQ15                    | FFDC <sub>H</sub>    | FFDD <sub>H</sub> | L15 [1:0]                                    |   |
| I <sup>2</sup> C                       | IRQ16                    | FFDA <sub>H</sub>    | FFDB <sub>H</sub> | L16 [1:0]                                    |   |
| —                                      | IRQ17                    | FFD8 <sub>H</sub>    | FFD9 <sub>H</sub> | L17 [1:0]                                    |   |
| 8/10-bit A/D converter                 | IRQ18                    | FFD6 <sub>H</sub>    | FFD7 <sub>H</sub> | L18 [1:0]                                    |   |
| Time-base timer                        | IRQ19                    | FFD4 <sub>H</sub>    | FFD5 <sub>H</sub> | L19 [1:0]                                    |   |
| Watch prescaler                        | IRQ20                    | FFD2 <sub>H</sub>    | FFD3 <sub>H</sub> | L20 [1:0]                                    |   |
| Watch counter                          |                          |                      |                   |  |   |
| —                                      | IRQ21                    | FFD0 <sub>H</sub>    | FFD1 <sub>H</sub> | L21 [1:0]                                    |   |
| 8/16-bit composite timer ch. 1 (lower) | IRQ22                    | FFCE <sub>H</sub>    | FFCF <sub>H</sub> | L22 [1:0]                                    |   |
| Flash memory                           | IRQ23                    | FFCC <sub>H</sub>    | FFCD <sub>H</sub> | L23 [1:0]                                    |   |

## 17. Electrical Characteristics

### 17.1 Absolute Maximum Ratings

| Parameter                              | Symbol              | Rating         |              | Unit | Remarks   |
|--|---------------------|----------------|--------------|------|---|
|  |                     | Min            | Max          |      |   |
| Power supply voltage* <sup>1</sup>     | $V_{CC}$            | $V_{SS} - 0.3$ | $V_{SS} + 6$ | V    |   |
| Input voltage* <sup>1</sup>            | $V_I$               | $V_{SS} - 0.3$ | $V_{SS} + 6$ | V    | * <sup>2</sup>  |
| Output voltage* <sup>1</sup>           | $V_O$               | $V_{SS} - 0.3$ | $V_{SS} + 6$ | V    | * <sup>2</sup>  |
| Maximum clamp current                  | $I_{CLAMP}$         | -2             | +2           | mA   | Applicable to specific pins* <sup>3</sup>   |
| Total maximum clamp current            | $\Sigma I_{CLAMP} $ | —              | 20           | mA   | Applicable to specific pins* <sup>3</sup>   |
| “L” level maximum output current       | $I_{CL}$            | —              | 15           | mA   |   |
| “L” level average current              | $I_{CLAV}$          | —              | 4            | mA   | Average output current = operating current × operating ratio (1 pin)                      |
| “L” level total maximum output current | $\Sigma I_{OL}$     | —              | 100          | mA   |   |
| “L” level total average output current | $\Sigma I_{OLAV}$   | —              | 50           | mA   | Total average output current = operating current × operating ratio (Total number of pins) |
| “H” level maximum output current       | $I_{CH}$            | —              | -15          | mA   |   |
| “H” level average current              | $I_{CHAV}$          | —              | -4           | mA   | Average output current = operating current × operating ratio (1 pin)                      |
| “H” level total maximum output current | $\Sigma I_{OH}$     | —              | -100         | mA   |   |
| “H” level total average output current | $\Sigma I_{OHAV}$   | —              | -50          | mA   | Total average output current = operating current × operating ratio (Total number of pins) |
| Power consumption                      | $P_d$               | —              | 320          | mW   |   |
| Operating temperature                  | $T_A$               | -40            | +85          | °C   |   |
| Storage temperature                    | $T_{stg}$           | -55            | +150         | °C   |   |

\*1: These parameters are based on the condition that  $V_{SS} = 0.0$  V.

\*2:  $V_I$  and  $V_O$  must not exceed  $V_{CC} + 0.3$  V.  $V_I$  must not exceed the rated voltage. However, if the maximum current to/from an input is limited by means of an external component, the  $I_{CLAMP}$  rating is used instead of the  $V_I$  rating.


(Continued)

(Continued)

\*3: Applicable to the following pins: P00 to P07, P10, P11, P13 to P16, P20 to P22, P40 to P43, P50 to P53, P60 to P67, P90 to P94, PA0 to PA7, PB0 to PB4, PC0 to PC7, PE0 to PE7, PF0, PF1, PG1 and PG2 (P40 to P43, P50 to P53, P94, PB2 to PB4 and PC4 to PC7 are only available on the MB95410H Series.)

- Use under recommended operating conditions.
- Use with DC voltage (current).
- The HV (High Voltage) signal is an input signal exceeding the  $V_{CC}$  voltage. Always connect a limiting resistor between the HV (High Voltage) signal and the microcontroller before applying the HV (High Voltage) signal.
- The value of the limiting resistance should be set so that when the HV (High Voltage) signal is applied the input current to the microcontroller pin does not exceed rated values, either instantaneously or for prolonged periods.
- When the microcontroller drive current is low, such as in low power consumption modes, the HV (High Voltage) input potential may pass through the protective diode to increase the potential of the  $V_{CC}$  pin, and thus affects other devices.
- If the HV (High Voltage) signal is input when the microcontroller power supply is off (not fixed at 0 V), since power is supplied from the pins, incomplete operations may be executed.
- If the HV (High Voltage) input is input after power-on, since power is supplied from the pins, the voltage of power supply may not be sufficient to enable a power-on reset.
- Do not leave the HV (High Voltage) input pin unconnected.
- Example of a recommended circuit

#### Input/Output equivalent circuit

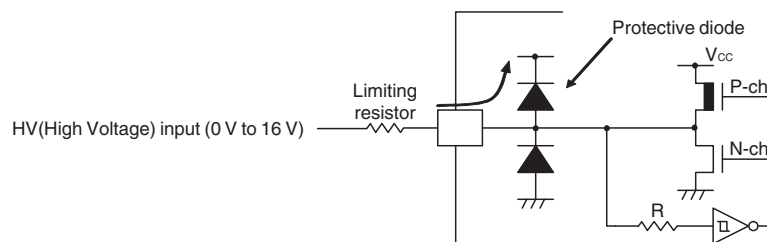

**WARNING:** Semiconductor devices can be permanently damaged by application of stress (voltage, current, temperature, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

**17.2 Recommended Operating Conditions**


 (V<sub>SS</sub> = 0.0 V)

| Parameter             | Symbol                                | Value   |       | Unit | Remarks                       |                               |
|-----------------------|---------------------------------------|---------|-------|------|-------------------------------|-------------------------------|
|                       |                                       | Min     | Max   |      |                               |                               |
| Power supply voltage  | V <sub>CC</sub> ,<br>AV <sub>CC</sub> | 2.4*1*2 | 5.5*1 | V    | In normal operation           | Other than on-chip debug mode |
|                       |                                       | 2.3     | 5.5   |      | Hold condition in stop mode   |                               |
|                       |                                       | 2.9     | 5.5   |      | In normal operation           | On-chip debug mode            |
|                       |                                       | 2.3     | 5.5   |      | Hold condition in stop mode   |                               |
| Smoothing capacitor   | C <sub>S</sub>                        | 0.022   | 1     | μF   | *3                            |                               |
| Operating temperature | T <sub>A</sub>                        | -40     | +85   | °C   | Other than on-chip debug mode |                               |
|                       |                                       | +5      | +35   |      | On-chip debug mode            |                               |

\*1: The value varies depending on the operating frequency, the machine clock and the analog guaranteed range.

\*2: The value is initially 2.88 V when the low-voltage detection reset is used.

\*3: Use a ceramic capacitor or a capacitor with equivalent frequency characteristics. The bypass capacitor for the V<sub>CC</sub> pin must have a capacitance larger than C<sub>S</sub>. For the connection to a smoothing capacitor C<sub>S</sub>, see the diagram below. To prevent the device from unintentionally entering an unknown mode due to noise, minimize the distance between the C pin and C<sub>S</sub> and the distance between C<sub>S</sub> and the V<sub>SS</sub> pin when designing the layout of a printed circuit board.

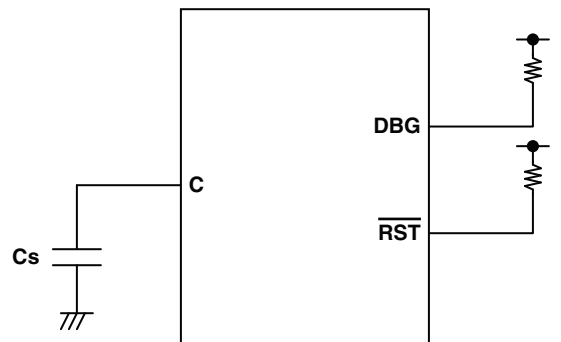**DBG /  $\overline{\text{RST}}$  / C pins connection diagram**


\*: Since the DBG pin becomes a communication pin in on-chip debug mode, set a pull-up resistor value suiting the input/output specifications of P12/DBG.

**WARNING:** The recommended operating conditions are required in order to ensure the normal operation of the semiconductor device. All of the device's electrical characteristics are warranted when the device is operated within these ranges.

Always use semiconductor devices within their recommended operating condition ranges.

Operation outside these ranges may adversely affect reliability and could result in device failure.

No warranty is made with respect to uses, operating conditions, or combinations not represented on the data sheet. Users considering application outside the listed conditions are advised to contact their representatives beforehand.



**17.3 DC Characteristics**
 $(V_{CC} = 5.0\text{ V} \pm 10\%, V_{SS} = 0.0\text{ V}, T_A = -40^\circ\text{C to } +85^\circ\text{C})$ 

| Parameter                             | Symbol    | Pin name   | Condition               | Value          |     |                | Unit | Remarks  |
|---------------------------------------|-----------|--|-------------------------|----------------|-----|----------------|------|--|
|                                       |           |  |                         | Min            | Typ | Max            |      |  |
| "H" level input voltage               | $V_{IHI}$ | P01, P04, P10, P22, P23  | *1                      | $0.7 V_{CC}$   | —   | $V_{CC} + 0.3$ | V    | When CMOS input level (hysteresis input) is selected |
|                                       | $V_{IHS}$ | P00 to P07, P10 to P17, P20 to P23, P40 to P43 <sup>*2</sup> , P50 to P53 <sup>*2</sup> , P60 to P67, P90 to P93, P94 <sup>*2</sup> , PA0 to PA7, PB0, PB1, PB2 to PB4 <sup>*2</sup> , PC0 to PC3, PC4 to PC7 <sup>*2</sup> , PE0 to PE7, PF0, PF1, PG1, PG2 | *1                      | $0.8 V_{CC}$   | —   | $V_{CC} + 0.3$ | V    | Hysteresis input                                     |
|                                       | $V_{IHM}$ | PF2  | —                       | $0.7 V_{CC}$   | —   | $V_{CC} + 0.3$ | V    | Hysteresis input                                     |
| "L" level input voltage               | $V_{IL}$  | P01, P04, P10, P22, P23  | *1                      | $V_{SS} - 0.3$ | —   | $0.3 V_{CC}$   | V    | When CMOS input level (hysteresis input) is selected |
|                                       | $V_{ILS}$ | P00 to P07, P10 to P17, P20 to P23, P40 to P43 <sup>*2</sup> , P50 to P53 <sup>*2</sup> , P60 to P67, P90 to P93, P94 <sup>*2</sup> , PA0 to PA7, PB0, PB1, PB2 to PB4 <sup>*2</sup> , PC0 to PC3, PC4 to PC7 <sup>*2</sup> , PE0 to PE7, PF0, PF1, PG1, PG2 | *1                      | $V_{SS} - 0.3$ | —   | $0.2 V_{CC}$   | V    | Hysteresis input                                     |
|                                       | $V_{ILM}$ | PF2  | —                       | $V_{SS} - 0.3$ | —   | $0.3 V_{CC}$   | V    | Hysteresis input                                     |
| Open-drain output application voltage | $V_D$     | P12, P22, P23, PF2   | —                       | $V_{SS} - 0.3$ | —   | $V_{SS} + 5.5$ | V    |  |
| "H" level output voltage              | $V_{OH1}$ | Output pins other than P12, P22, P23, PF2  | $I_{OH} = -4\text{ mA}$ | $V_{CC} - 0.5$ | —   | —              | V    |  |

*(Continued)*

$(V_{CC} = 5.0\text{ V} \pm 10\%, V_{SS} = 0.0\text{ V}, T_A = -40^\circ\text{C to } +85^\circ\text{C})$ 

| Parameter                                     | Symbol   | Pin name   | Condition   | Value |                   |      | Unit             | Remarks  |
|---|--|--|---|-------|-------------------|------|------------------|--|
|   |  |  |   | Min   | Typ <sup>*4</sup> | Max  |                  |  |
| "L" level output voltage                      | $V_{OL1}$  | All output pins  | $I_{OL} = 4\text{ mA}$  | —     | —                 | 0.4  | V                |  |
| Input leak current (Hi-Z output leak current) | $I_{LI}$   | All input pins   | $0.0\text{ V} < V_I < V_{CC}$   | -5    | —                 | +5   | $\mu\text{A}$    | When pull-up resistance is disabled                |
| Pull-up resistance                            | $R_{PULL}$   | P10, P11, P13, P14, P17, P20, P21, P50 to P53 <sup>*2</sup> , PG1, PG2 | $V_I = 0\text{ V}$  | 25    | 50                | 100  | $\text{k}\Omega$ | When pull-up resistance is enabled                 |
| Input capacitance                             | $C_{IN}$   | Other than $V_{CC}$ and $V_{SS}$                                       | $f = 1\text{ MHz}$  | —     | 5                 | 15   | $\text{pF}$      |  |
| Power supply current <sup>*3</sup>            | $I_{CC}$   | $V_{CC}$ (External clock operation)                                    | $V_{CC} = 5.5\text{ V}$<br>$F_{CH} = 32\text{ MHz}$<br>$F_{MP} = 16\text{ MHz}$<br>Main clock mode (divided by 2)                             | —     | 14.1              | 17   | $\text{mA}$      | Except during Flash memory programming and erasing |
|   |  |  |   | —     | 20                | 39.5 | $\text{mA}$      | During Flash memory programming and erasing        |
|   | $I_{CCS}$  |  | $V_{CC} = 5.5\text{ V}$<br>$F_{CH} = 32\text{ MHz}$<br>$F_{MP} = 16\text{ MHz}$<br>Main sleep mode (divided by 2)                             | —     | 6.6               | 9    | $\text{mA}$      |  |
|   | $I_{CCL}$  |  | $V_{CC} = 5.5\text{ V}$<br>$F_{CL} = 32\text{ kHz}$<br>$F_{MPL} = 16\text{ kHz}$<br>Subclock mode (divided by 2)<br>$T_A = +25^\circ\text{C}$ | —     | 60                | 153  | $\mu\text{A}$    |  |
|   | $I_{CCLS}$   |  | $V_{CC} = 5.5\text{ V}$<br>$F_{CL} = 32\text{ kHz}$<br>$F_{MPL} = 16\text{ kHz}$<br>Subsleep mode (divided by 2)<br>$T_A = +25^\circ\text{C}$ | —     | 9                 | 84   | $\mu\text{A}$    |  |
| $I_{CCT}$                                     | $V_{CC} = 5.5\text{ V}$<br>$F_{CL} = 32\text{ kHz}$<br>Watch mode<br>Main stop mode<br>$T_A = +25^\circ\text{C}$ | —  | 4.3   | 30    | $\mu\text{A}$     |      |                  |  |

*(Continued)*

$(V_{CC} = 5.0 \text{ V} \pm 10\%, V_{SS} = 0.0 \text{ V}, T_A = -40^\circ\text{C to } +85^\circ\text{C})$ 

| Parameter                          | Symbol              | Pin name                                      | Condition   | Value |                   |      | Unit | Remarks                                |
|------------------------------------|---------------------|---|---|-------|-------------------|------|------|--|
|                                    |                     |   |   | Min   | Typ* <sup>4</sup> | Max  |      |  |
| Power supply current* <sup>3</sup> | I <sub>CCMPLL</sub> | V <sub>CC</sub><br>(External clock operation) | V <sub>CC</sub> = 5.5 V<br>F <sub>CH</sub> = 4 MHz<br>F <sub>MP</sub> = 10 MHz<br>Main PLL mode<br>(multiplied by 2.5)<br>T <sub>A</sub> = +25°C    | —     | 9.7               | 12.5 | mA   |  |
|                                    |                     |   | V <sub>CC</sub> = 5.5 V<br>F <sub>CH</sub> = 6.44 MHz<br>F <sub>MP</sub> = 16 MHz<br>Main PLL mode<br>(multiplied by 2.5)<br>T <sub>A</sub> = +25°C | —     | 13.9              | 20   | mA   |  |
|                                    | I <sub>CCMCR</sub>  | V <sub>CC</sub>                               | V <sub>CC</sub> = 5.5 V<br>F <sub>CRH</sub> = 12.5 MHz<br>F <sub>MP</sub> = 12.5 MHz<br>Main CR clock mode  | —     | 11                | 13.2 | mA   |  |
|                                    | I <sub>CCSCR</sub>  |   | V <sub>CC</sub> = 5.5 V<br>Sub-CR clock mode<br>(multiplied by 2.5)<br>T <sub>A</sub> = +25°C   | —     | 112               | 410  | μA   |  |
|                                    | I <sub>CCTS</sub>   | V <sub>CC</sub><br>(External clock operation) | V <sub>CC</sub> = 5.5 V<br>F <sub>CH</sub> = 32 MHz<br>Time-base timer mode<br>T <sub>A</sub> = +25°C   | —     | 1                 | 3    | mA   |  |
|                                    | I <sub>CCH</sub>    |   | V <sub>CC</sub> = 5.5 V<br>Substop mode<br>T <sub>A</sub> = +25°C   | —     | 3.1               | 22.5 | μA   | Main stop mode with one clock selected |
|                                    | I <sub>A</sub>      | AV <sub>CC</sub>                              | Current consumption for A/D conversion at 16 MHz  | —     | 1.5               | 4.7  | mA   |  |
|                                    | I <sub>AH</sub>     |   | Current consumption for stopping A/D conversion at 16 MHz   | —     | 1                 | 5    | μA   |  |
|                                    | I <sub>V</sub>      |   | Current consumption of voltage comparator at 16 MHz   | —     | 113               | 350  | μA   |  |

*(Continued)*

(Continued)

( $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $V_{SS} = 0.0\text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ )

| Parameter                          | Symbol     | Pin name                                      | Condition   | Value |                   |     | Unit             | Remarks |
|------------------------------------|------------|---|---|-------|-------------------|-----|------------------|---------|
|                                    |            |   |   | Min   | Typ* <sup>4</sup> | Max |                  |         |
| Power supply current* <sup>3</sup> | $I_{LVD}$  | $V_{CC}$                                      | Current consumption of the low-voltage detection circuit            | —     | 31                | 54  | $\mu\text{A}$    |         |
|                                    | $I_{CRH}$  |   | Current consumption of the main CR oscillator                       | —     | 0.5               | 0.6 | $\text{mA}$      |         |
|                                    | $I_{CRL}$  |   | Current consumption of the sub-CR oscillator oscillating at 100 kHz | —     | 20                | 72  | $\mu\text{A}$    |         |
| LCD internal division resistance   | $R_{LCD}$  | —   | Between $V_4$ and $V_{SS}$  | —     | 400               | —   | $\text{k}\Omega$ |         |
|                                    |            |   |   | —     | 40                | —   | $\text{k}\Omega$ |         |
| COM0 to COM7 output impedance      | $R_{VCOM}$ | COM0 to COM7                                  | $V_1$ to $V_4 = 4.1\text{ V}$                                       | —     | —                 | 5   | $\text{k}\Omega$ |         |
| SEG00 to SEG39 output impedance    | $R_{VSEG}$ | SEG00 to SEG39                                |   | —     | —                 | 7   | $\text{k}\Omega$ |         |
| LCD leakage current                | $I_{LCDL}$ | $V_0$ to $V_4$ , COM0 to COM7, SEG00 to SEG39 | —   | -1    | —                 | +1  | $\mu\text{A}$    |         |

\*1: The input levels of P01, P04, P10, P22 and P23 can be switched between “CMOS input level” and “hysteresis input level”. The input level selection register (ILSR) is used to switch between the two input levels.

\*2: P40 to P43, P50 to P53, P94, PB2 to PB4 and PC4 to PC7 are only available on the MB95410H Series.

\*3: • The power supply current is determined by the external clock. When the low-voltage detection option is selected, the power-supply current will be the sum of adding the current consumption of the low-voltage detection circuit ( $I_{LVD}$ ) to one of the value from  $I_{CC}$  to  $I_{CCH}$ . In addition, when both the low-voltage detection option and the CR oscillator are selected, the power supply current will be the sum of adding up the current consumption of the low-voltage detection circuit, the current consumption of the CR oscillators ( $I_{CRH}$ ,  $I_{CRL}$ ) and a specified value. In on-chip debug mode, the CR oscillator ( $I_{CRH}$ ) and the low-voltage detection circuit are always enabled, and current consumption therefore increases accordingly.

• See “17.4. AC Characteristics: 17.4.1. Clock Timing” for  $F_{CH}$  and  $F_{CL}$ .

• See “17.4. AC Characteristics: 17.4.2. Source Clock/Machine Clock” for  $F_{MP}$  and  $F_{MPL}$ .


\*4:  $V_{CC} = 5.0\text{ V}$ ,  $T_A = +25^\circ\text{C}$

**17.4 AC Characteristics**
**17.4.1 Clock Timing**
 $(V_{CC} = 2.4\text{ V to } 5.5\text{ V}, V_{SS} = 0.0\text{ V}, T_A = -40^\circ\text{C to } +85^\circ\text{C})$ 

| Parameter                           | Symbol                 | Pin name | Condition | Value   |      |         | Unit                                     | Remarks  |
|-------------------------------------|------------------------|----------|-----------|---------|------|---------|--|--|
|                                     |                        |          |           | Min     | Typ  | Max     |  |  |
| Clock frequency                     | $F_{CH}$               | X0, X1   | —         | 1       | —    | 16.25   | MHz                                      | When the main oscillation circuit is used  |
|                                     |                        | X0       | X1: open  | 1       | —    | 12      | MHz                                      | When the main external clock is used   |
|                                     |                        | X0, X1   | *         | 1       | —    | 32.5    | MHz                                      | Main PLL multiplied by 2   |
|                                     |                        |          | —         | 3       | —    | 8.13    | MHz                                      | Main PLL multiplied by 2.5   |
|                                     |                        |          | —         | 3       | —    | 6.5     | MHz                                      | Main PLL multiplied by 2.5   |
|                                     |                        |          | —         | 3       | —    | 4.06    | MHz                                      | Main PLL multiplied by 4   |
|                                     | $F_{CRH}$              | —        | —         | 12.25   | 12.5 | 12.75   | MHz                                      | Operating conditions:<br>• The main CR clock is used.<br>• $T_A = -10^\circ\text{C to } +85^\circ\text{C}$ |
|                                     |                        |          |           | 9.8     | 10   | 10.2    | MHz                                      |  |
|                                     |                        |          |           | 7.84    | 8    | 8.16    | MHz                                      |  |
|                                     |                        |          |           | 0.98    | 1    | 1.02    | MHz                                      |  |
|                                     |                        | —        | —         | 12.1875 | 12.5 | 12.8125 | MHz                                      | Operating conditions:<br>• The main CR clock is used.<br>• $T_A = -40^\circ\text{C to } -10^\circ\text{C}$ |
|                                     |                        |          |           | 9.75    | 10   | 10.25   | MHz                                      |  |
|                                     |                        |          |           | 7.8     | 8    | 8.2     | MHz                                      |  |
|                                     |                        |          |           | 0.975   | 1    | 1.025   | MHz                                      |  |
| $F_{CL}$                            | X0A, X1A               | —        | —         | 32.768  | —    | kHz     | When the sub-oscillation circuit is used |  |
|                                     |                        |          | —         | 32.768  | —    | kHz     | When the sub-external clock is used      |  |
| $F_{CRL}$                           | —                      | —        | —         | 50      | 100  | 200     | kHz                                      | When the sub-CR clock is used  |
| Clock cycle time                    | $t_{HCYL}$             | X0, X1   | —         | 61.5    | —    | 1000    | ns                                       | When the main oscillation circuit is used  |
|                                     |                        | X0       | X1: open  | 83.4    | —    | 1000    | ns                                       | When the external clock is used  |
|                                     |                        | X0, X1   | *         | 30.8    | —    | 1000    | ns                                       |  |
|                                     | $t_{LCYL}$             | X0A, X1A | —         | —       | 30.5 | —       | $\mu\text{s}$                            | When the subclock is used  |
| Input clock pulse width             | $t_{WH1}$              | X0       | X1: open  | 33.4    | —    | —       | ns                                       | When the external clock is used, the duty ratio should range between 40% and 60%.                          |
|                                     | $t_{WL1}$              | X0, X1   | *         | 12.4    | —    | —       | ns                                       |  |
|                                     | $t_{WH2}$<br>$t_{WL2}$ | X0A      | —         | —       | 15.2 | —       | $\mu\text{s}$                            |  |
| Input clock rise time and fall time | $t_{CR}$               | X0       | X1: open  | —       | —    | 5       | ns                                       | When the external clock is used  |
|                                     | $t_{CF}$               | X0, X1   | *         | —       | —    | 5       | ns                                       |  |
| CR oscillation start time           | $t_{CRHWK}$            | —        | —         | —       | —    | 80      | $\mu\text{s}$                            | When the main CR clock is used   |
|                                     | $t_{CRLWK}$            | —        | —         | —       | —    | 10      | $\mu\text{s}$                            | When the sub-CR clock is used  |


\*: The external clock signal is input to X0 and the inverted external clock signal to X1.

**Input waveform generated when an external clock (main clock) is used**

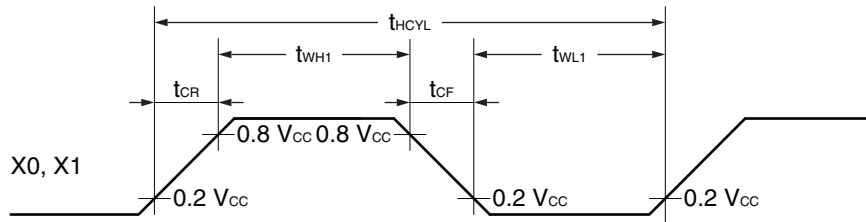


**Figure of main clock input port external connection**


When a crystal oscillator or a ceramic oscillator is used




When the external clock is used (X1 is open)



When the external clock is used




**Input waveform generated when an external clock (subclock) is used**

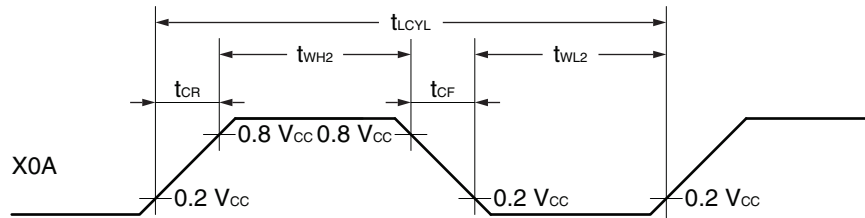


**Figure of subclock input port external connection**

When a crystal oscillator or a ceramic oscillator is used



When the external clock is used



**17.4.2 Source Clock/Machine Clock**
 $(V_{CC} = 5.0\text{ V} \pm 10\%, V_{SS} = 0.0\text{ V}, T_A = -40^\circ\text{C to } +85^\circ\text{C})$ 

| Parameter  | Symbol     | Pin name | Value  |     |        | Unit                                   | Remarks  |
|--|------------|----------|--------|-----|--------|--|--|
|  |            |          | Min    | Typ | Max    |  |  |
| Source clock cycle time* <sup>1</sup>  | $t_{SCLK}$ | —        | 61.5   | —   | 2000   | ns                                     | When the main oscillation clock is used<br>Min: $F_{CH} = 32.5\text{ MHz}$ , divided by 2<br>Max: $F_{CH} = 1\text{ MHz}$ , divided by 2                           |
|  |            |          | 61.5   | —   | 2000   | ns                                     | When the main oscillation clock is used<br>Min: $F_{CH} = 8.125\text{ MHz}$ , multiplied by the PLL multiplier of 2<br>Max: $F_{CH} = 1\text{ MHz}$ , divided by 2 |
|  |            |          | 80     | —   | 1000   | ns                                     | When the main CR clock is used<br>Min: $F_{CRH} = 12.5\text{ MHz}$<br>Max: $F_{CRH} = 1\text{ MHz}$  |
|  |            |          | —      | 61  | —      | $\mu\text{s}$                          | When the sub-oscillation clock is used<br>$F_{CL} = 32.768\text{ kHz}$ , divided by 2  |
|  |            |          | —      | 20  | —      | $\mu\text{s}$                          | When the sub-CR clock is used<br>$F_{CRL} = 100\text{ kHz}$ , divided by 2   |
| Source clock frequency   | $F_{SP}$   | —        | 0.50   | —   | 16.25  | MHz                                    | When the main oscillation clock is used  |
|  |            |          | 1      | —   | 12.5   | MHz                                    | When the main CR clock is used   |
|  | —          |          | 16.384 | —   | kHz    | When the sub-oscillation clock is used |  |
|  | $F_{SPL}$  |          | —      | 50  | —      | kHz                                    | When the sub-CR clock is used<br>$F_{CRL} = 100\text{ kHz}$ , divided by 2   |
| Machine clock cycle time* <sup>2</sup><br>(minimum instruction execution time) | $t_{MCLK}$ | —        | 61.5   | —   | 32000  | ns                                     | When the main oscillation clock is used<br>Min: $F_{SP} = 16.25\text{ MHz}$ , no division<br>Max: $F_{SP} = 0.5\text{ MHz}$ , divided by 16                        |
|  |            |          | 80     | —   | 16000  | ns                                     | When the main CR clock is used<br>Min: $F_{SP} = 12.5\text{ MHz}$<br>Max: $F_{SP} = 1\text{ MHz}$ , divided by 16  |
|  |            |          | 61     | —   | 976.5  | $\mu\text{s}$                          | When the sub-oscillation clock is used<br>Min: $F_{SPL} = 16.384\text{ kHz}$ , no division<br>Max: $F_{SPL} = 16.384\text{ kHz}$ , divided by 16                   |
|  |            |          | 20     | —   | 320    | $\mu\text{s}$                          | When the sub-CR clock is used<br>Min: $F_{SPL} = 50\text{ kHz}$ , no division<br>Max: $F_{SPL} = 50\text{ kHz}$ , divided by 16                                    |
| Machine clock frequency  | $F_{MP}$   | —        | 0.031  | —   | 16.25  | MHz                                    | When the main oscillation clock is used  |
|  |            |          | 0.0625 | —   | 12.5   | MHz                                    | When the main CR clock is used   |
|  | $F_{MPL}$  |          | 1.024  | —   | 16.384 | kHz                                    | When the sub-oscillation clock is used   |
|  | $F_{MPL}$  |          | 3.125  | —   | 50     | kHz                                    | When the sub-CR clock is used<br>$F_{CRL} = 100\text{ kHz}$  |

\*1: This is the clock before it is divided according to the division ratio set by the machine clock divide ratio select bits (SYCC:DIV1, DIV0). This source clock is divided to become a machine clock according to the division ratio set by the machine clock divide ratio select bits (SYCC:DIV1, DIV0). In addition, a source clock can be selected from the following.


- Main clock divided by 2
- PLL multiplication of main clock (select from 2, 2.5, 4 multiplication)
- Main CR clock divided by 2
- Subclock divided by 2
- Sub-CR clock divided by 2

(Continued)

(Continued)

\*2: This is the operating clock of the microcontroller. A machine clock can be selected from the following.


- Source clock (no division)
- Source clock divided by 4
- Source clock divided by 8
- Source clock divided by 16

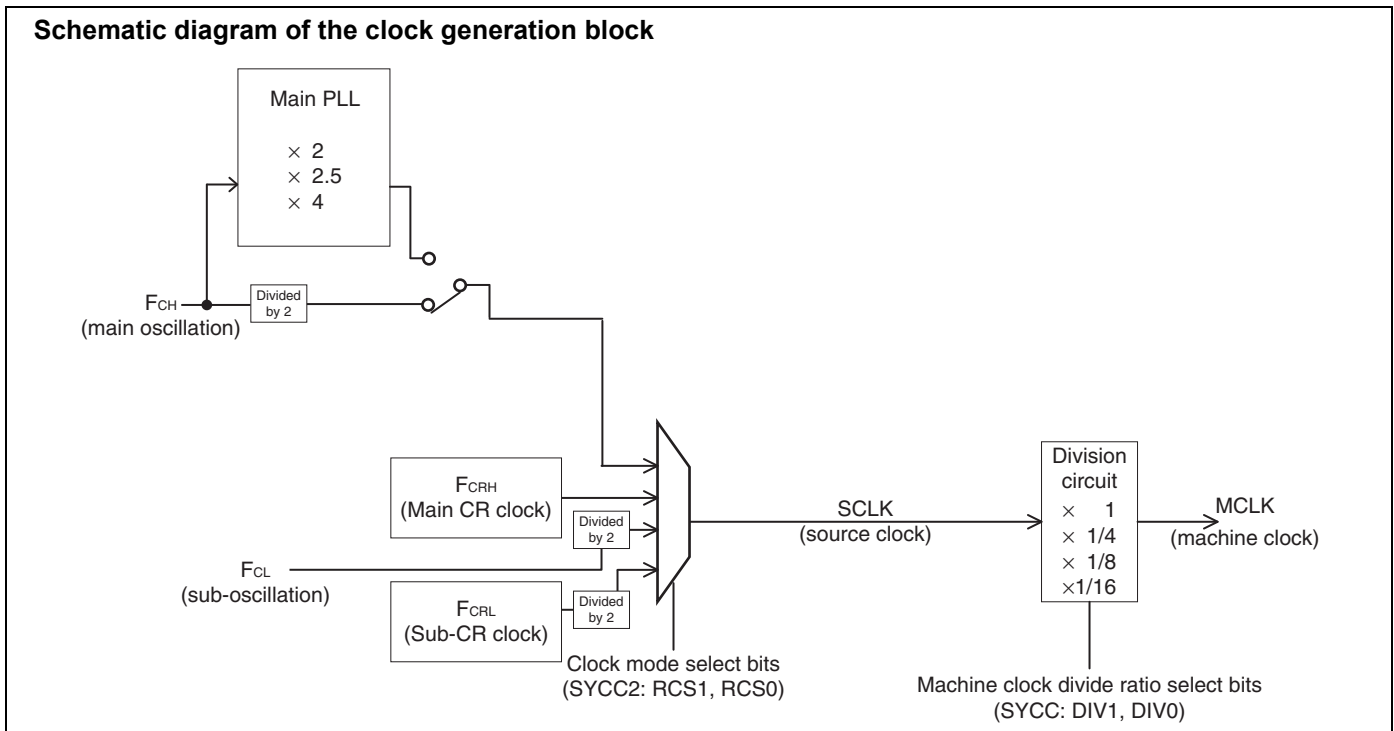




**Operating voltage - Operating frequency (When  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ )**

**Without the on-chip debug function**

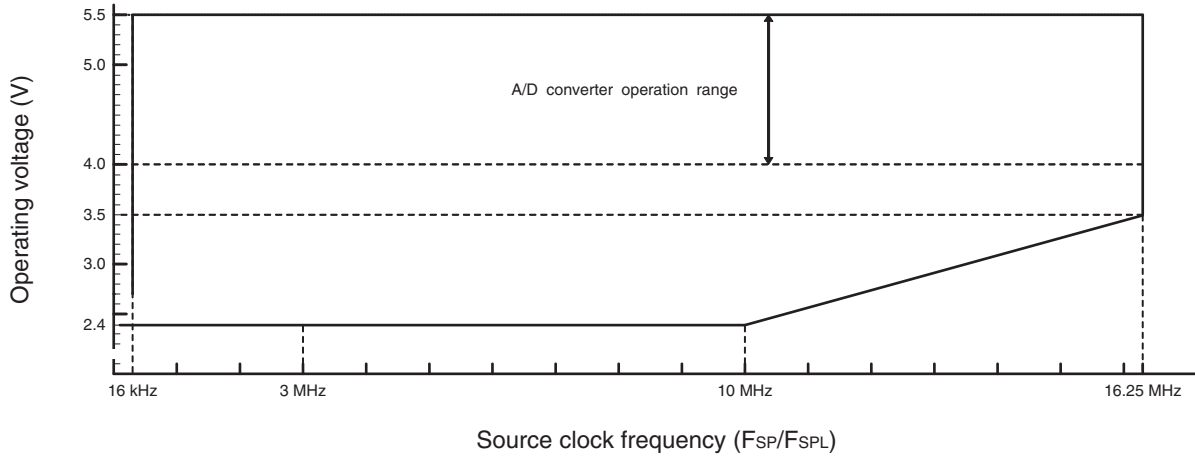

**Operating voltage - Operating frequency (When  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ )**

**With the on-chip debug function**

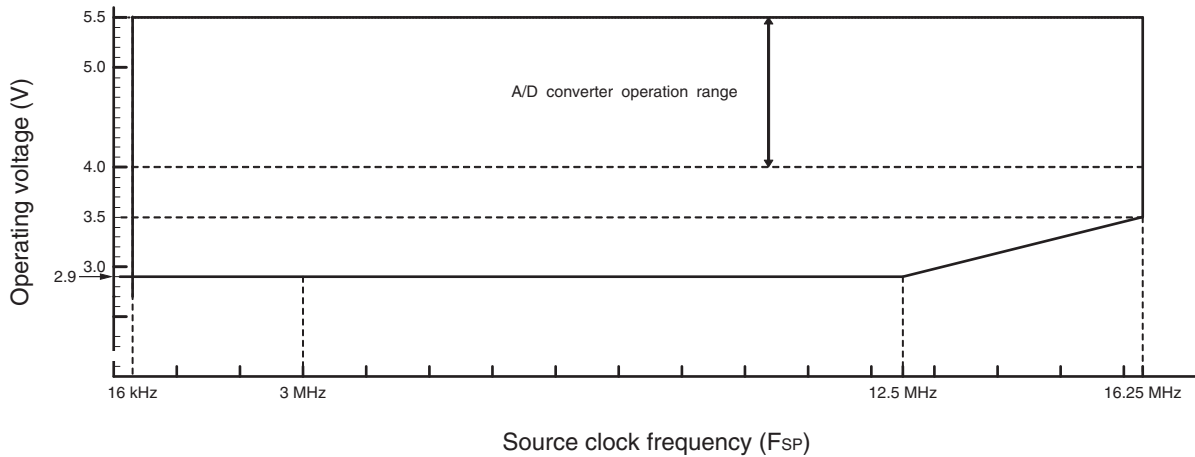


17.4.3 External Reset

( $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $V_{SS} = 0.0\text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ )

| Parameter                                     | Symbol            | Value  |     | Unit          | Remarks  |
|---|-------------------|--|-----|---------------|--|
|   |                   | Min  | Max |               |  |
| $\overline{\text{RST}}$ "L" level pulse width | $t_{\text{RSTL}}$ | $2 t_{\text{MCLK}}^{*1}$                               | —   | ns            | In normal operation  |
|   |                   | Oscillation time of the oscillator <sup>*2</sup> + 100 | —   | $\mu\text{s}$ | In stop mode, subclock mode, subsleep mode, watch mode, and power-on |
|   |                   | 100  | —   | $\mu\text{s}$ | In time-base timer mode  |


\*1: See "17.4.2. Source Clock/Machine Clock" for  $t_{\text{MCLK}}$ .

\*2: The oscillation time of an oscillator is the time for it to reach 90% of its amplitude. The crystal oscillator has an oscillation time of between several ms and tens of ms. The ceramic oscillator has an oscillation time of between hundreds of  $\mu\text{s}$  and several ms. The external clock has an oscillation time of 0 ms. The CR oscillator clock has an oscillation time of between several  $\mu\text{s}$  and several ms.

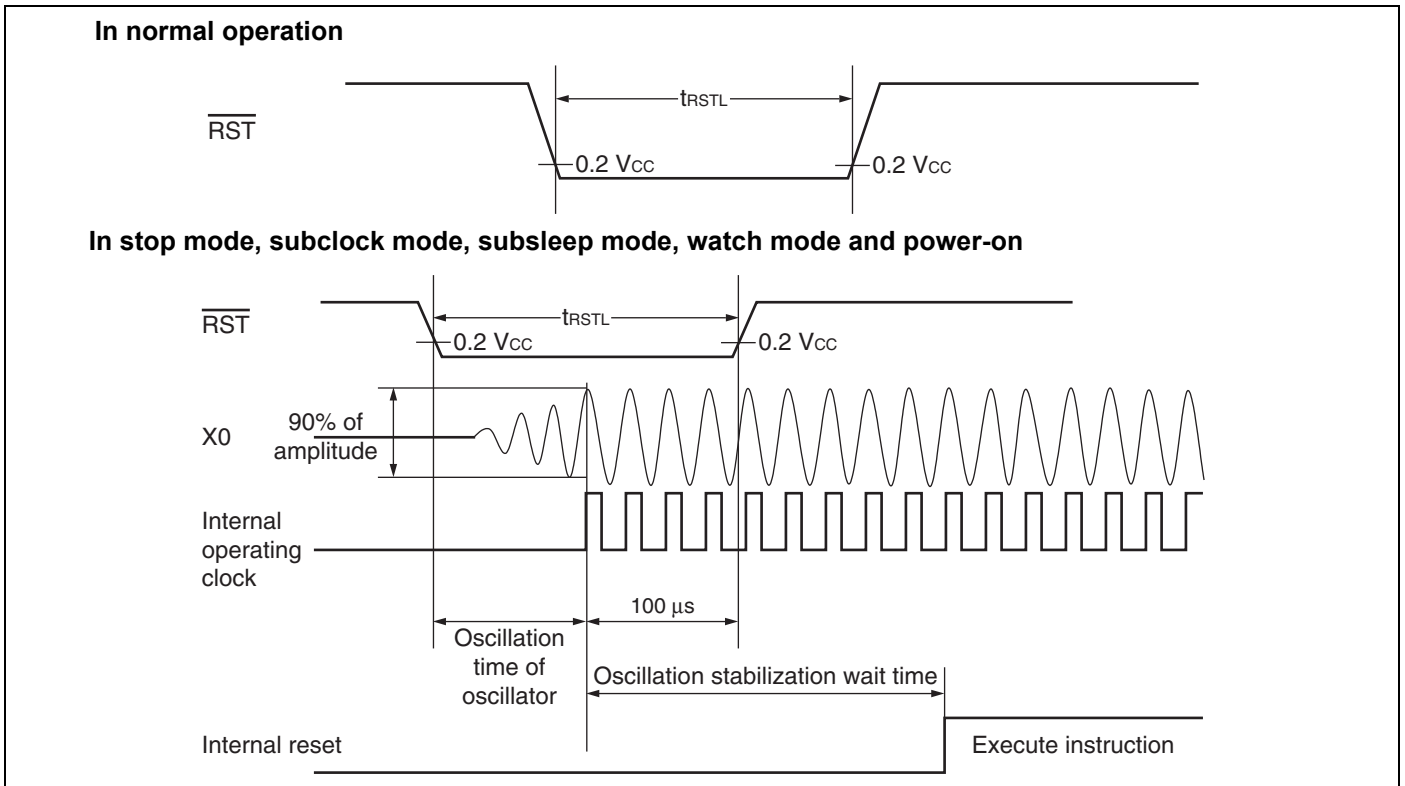


**17.4.4 Power-on Reset**
 $(V_{SS} = 0.0\text{ V}, T_A = -40^\circ\text{C to } +85^\circ\text{C})$ 

| Parameter                | Symbol    | Condition | Value |     | Unit | Remarks                  |
|--------------------------|-----------|-----------|-------|-----|------|--------------------------|
|                          |           |           | Min   | Max |      |                          |
| Power supply rising time | $t_R$     | —         | —     | 50  | ms   |                          |
| Power supply cutoff time | $t_{OFF}$ | —         | 1     | —   | ms   | Wait time until power-on |

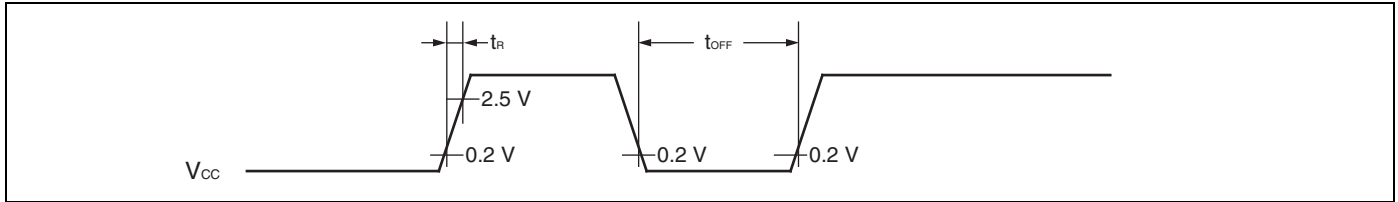


Note: A sudden change of power supply voltage may activate the power-on reset function. When changing the power supply voltage during the operation, set the slope of rising to a value below within 30 mV/ms as shown below.

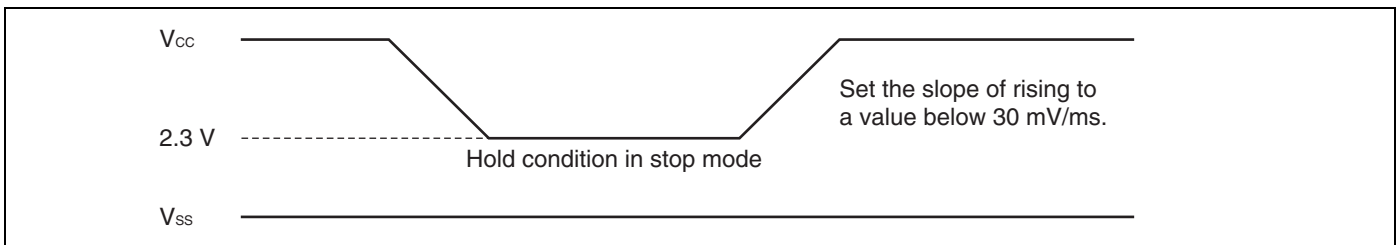
**17.4.5 Peripheral Input Timing**
 $(V_{CC} = 5.0\text{ V} \pm 10\%, V_{SS} = 0.0\text{ V}, T_A = -40^\circ\text{C to } +85^\circ\text{C})$ 

| Parameter                        | Symbol   | Pin name                       | Value          |     | Unit |
|----------------------------------|----------|--------------------------------|----------------|-----|------|
|                                  |          |                                | Min            | Max |      |
| Peripheral input "H" pulse width | $t_{LH}$ | INT00 to INT07, EC0, EC1, ADTG | $2 t_{MCLK}^*$ | —   | ns   |
| Peripheral input "L" pulse width | $t_{HL}$ |                                | $2 t_{MCLK}^*$ | —   | ns   |

\*: See "17.4.2. Source Clock/Machine Clock" for  $t_{MCLK}$ .

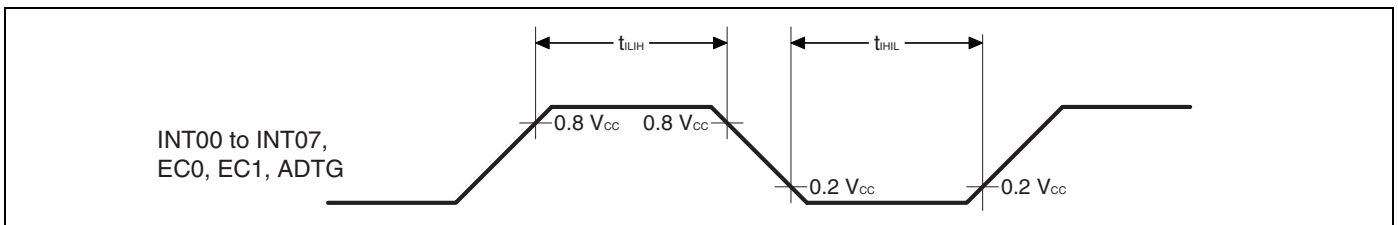


**17.4.6 UART/SIO, Serial I/O Timing**
 $(V_{CC} = 5.0\text{ V} \pm 10\%, AV_{SS} = V_{SS} = 0.0\text{ V}, T_A = -40^\circ\text{C to } +85^\circ\text{C})$ 


| Parameter                    | Symbol      | Pin name                        | Condition   | Value          |      | Unit |
|------------------------------|-------------|---------------------------------|---|----------------|------|------|
|                              |             |                                 |   | Min            | Max  |      |
| Serial clock cycle time      | $t_{SCYC}$  | UCK0, UCK1, UCK2                | Internal clock operation output pin:<br>$C_L = 80\text{ pF} + 1\text{ TTL}$ | $4 t_{MCLK}^*$ | —    | ns   |
| UCK ↓→ UO time               | $t_{SLOVI}$ | UCK0, UCK1, UCK2, UO0, UO1, UO2 |   | -190           | +190 | ns   |
| Valid UI → UCK ↑             | $t_{IVSHI}$ | UCK0, UCK1, UCK2, UI0, UI1, UI2 |   | $2 t_{MCLK}^*$ | —    | ns   |
| UCK ↑→ valid UI hold time    | $t_{SHIXI}$ | UCK0, UCK1, UCK2, UI0, UI1, UI2 |   | $2 t_{MCLK}^*$ | —    | ns   |
| Serial clock "H" pulse width | $t_{SHSL}$  | UCK0, UCK1, UCK2                | External clock operation output pin:<br>$C_L = 80\text{ pF} + 1\text{ TTL}$ | $4 t_{MCLK}^*$ | —    | ns   |
| Serial clock "L" pulse width | $t_{SLSH}$  | UCK0, UCK1, UCK2                |   | $4 t_{MCLK}^*$ | —    | ns   |
| UCK ↓→ UO time               | $t_{SLOVE}$ | UCK0, UCK1, UCK2, UO0, UO1, UO2 |   | —              | 190  | ns   |
| Valid UI → UCK ↑             | $t_{IVSHE}$ | UCK0, UCK1, UCK2, UI0, UI1, UI2 |   | $2 t_{MCLK}^*$ | —    | ns   |
| UCK ↑→ valid UI hold time    | $t_{SHIXE}$ | UCK0, UCK1, UCK2, UI0, UI1, UI2 |   | $2 t_{MCLK}^*$ | —    | ns   |

\*: See "17.4.2. Source Clock/Machine Clock" for  $t_{MCLK}$ .

**Internal shift clock mode**

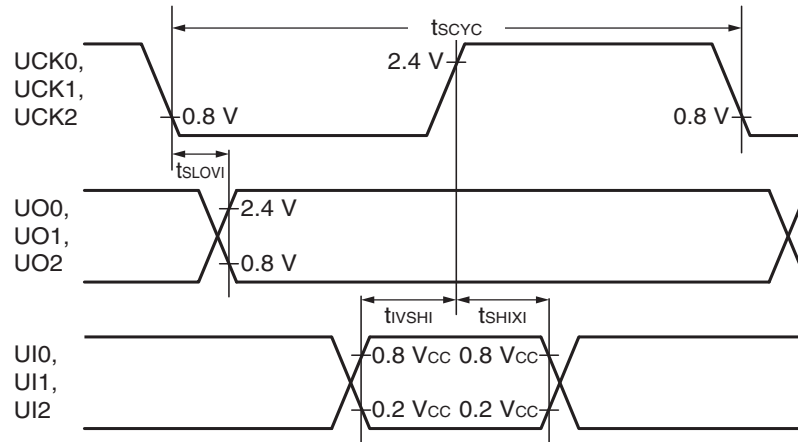


**External shift clock mode**

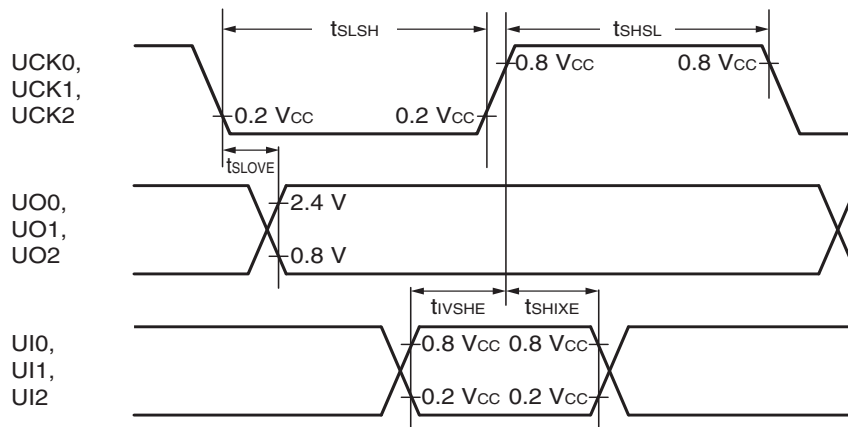

**17.4.7 Low-voltage Detection**

 ( $V_{SS} = 0.0\text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ )

| Parameter  | Symbol    | Value |     |      | Unit          | Remarks   |
|--|-----------|-------|-----|------|---------------|---|
|  |           | Min   | Typ | Max  |               |   |
| Release voltage  | $V_{DL+}$ | 2.52  | 2.7 | 2.88 | V             | At power supply rise  |
| Detection voltage  | $V_{DL-}$ | 2.42  | 2.6 | 2.78 | V             | At power supply fall  |
| Hysteresis width   | $V_{HYS}$ | 70    | 100 | —    | mV            |   |
| Power supply start voltage                                 | $V_{off}$ | —     | —   | 2.3  | V             |   |
| Power supply end voltage                                   | $V_{on}$  | 4.9   | —   | —    | V             |   |
| Power supply voltage change time<br>(at power supply rise) | $t_r$     | 3000  | —   | —    | $\mu\text{s}$ | Slope of power supply that the reset release signal generates within the rating ( $V_{DL+}$ )   |
| Power supply voltage change time<br>(at power supply fall) | $t_f$     | 300   | —   | —    | $\mu\text{s}$ | Slope of power supply that the reset detection signal generates within the rating ( $V_{DL-}$ ) |
| Reset release delay time                                   | $t_{d1}$  | —     | —   | 300  | $\mu\text{s}$ |   |
| Reset detection delay time                                 | $t_{d2}$  | —     | —   | 20   | $\mu\text{s}$ |   |

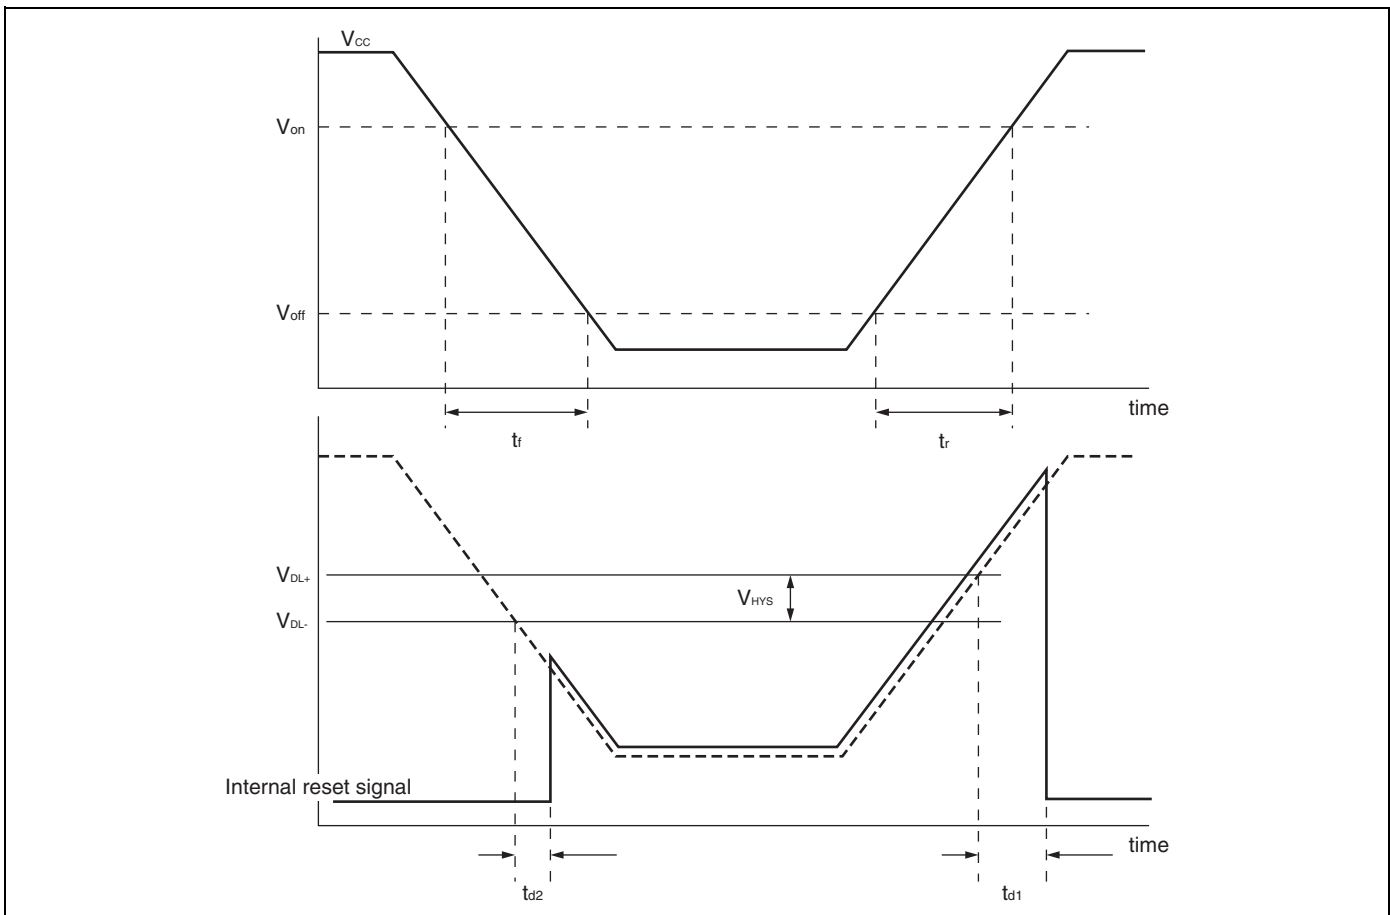

**17.4.8 I<sup>2</sup>C Timing**


 (V<sub>CC</sub> = 5.0 V ±10%, AV<sub>SS</sub> = V<sub>SS</sub> = 0.0 V, T<sub>A</sub> = -40°C to +85°C)

| Parameter  | Symbol              | Pin name | Conditions                 | Value         |        |           |       | Unit |
|--|---------------------|----------|----------------------------|---------------|--------|-----------|-------|------|
|  |                     |          |                            | Standard-mode |        | Fast-mode |       |      |
|  |                     |          |                            | Min           | Max    | Min       | Max   |      |
| SCL clock frequency                                      | f <sub>SCL</sub>    | SCL      | R = 1.7 kΩ,<br>C = 50 pF*1 | 0             | 100    | 0         | 400   | kHz  |
| (Repeat) Start condition hold time SDA ↓ → SCL ↓         | t <sub>HD;STA</sub> | SCL, SDA |                            | 4.0           | —      | 0.6       | —     | μs   |
| SCL clock "L" width                                      | t <sub>LOW</sub>    | SCL      |                            | 4.7           | —      | 1.3       | —     | μs   |
| SCL clock "H" width                                      | t <sub>HIGH</sub>   | SCL      |                            | 4.0           | —      | 0.6       | —     | μs   |
| (Repeat) Start condition setup time SCL ↑ → SDA ↓        | t <sub>SU;STA</sub> | SCL, SDA |                            | 4.7           | —      | 0.6       | —     | μs   |
| Data hold time SCL ↓ → SDA ↓ ↑                           | t <sub>HD;DAT</sub> | SCL, SDA |                            | 0             | 3.45*2 | 0         | 0.9*3 | μs   |
| Data setup time SDA ↓ ↑ → SCL ↑                          | t <sub>SU;DAT</sub> | SCL, SDA |                            | 0.25          | —      | 0.1       | —     | μs   |
| Stop condition setup time SCL ↑ → SDA ↑                  | t <sub>SU;STO</sub> | SCL, SDA |                            | 4.0           | —      | 0.6       | —     | μs   |
| Bus free time between stop condition and start condition | t <sub>BUF</sub>    | SCL, SDA |                            | 4.7           | —      | 1.3       | —     | μs   |

\*1: R represents the pull-up resistor of the SCL and SDA lines, and C the load capacitor of the SCL and SDA lines.

\*2: The maximum t<sub>HD;DAT</sub> in the Standard-mode is applicable only when the time during which the device is holding the SCL signal at "L" (t<sub>LOW</sub>) does not extend.

\*3: A Fast-mode I<sup>2</sup>C-bus device can be used in a Standard-mode I<sup>2</sup>C-bus system, provided that the condition of t<sub>SU;DAT</sub> ≥ 250 ns is fulfilled.

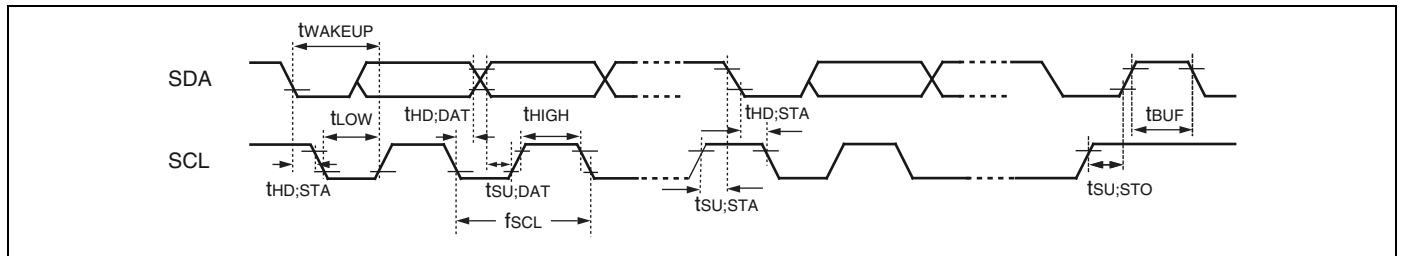

(Continued)

$(V_{CC} = 5.0\text{ V} \pm 10\%, AV_{SS} = V_{SS} = 0.0\text{ V}, T_A = -40^\circ\text{C to } +85^\circ\text{C})$ 

| Parameter  | Symbol       | Pin name    | Conditions                          | Value*2                      |                              | Unit | Remarks  |
|--|--------------|-------------|-------------------------------------|------------------------------|------------------------------|------|--|
|  |              |             |                                     | Min                          | Max                          |      |  |
| SCL clock "L" width                                      | $t_{LOW}$    | SCL         | R = 1.7 k $\Omega$ ,<br>C = 50 pF*1 | $(2 + nm / 2)t_{MCLK} - 20$  | —                            | ns   | Master mode  |
| SCL clock "H" width                                      | $t_{HIGH}$   | SCL         |                                     | $(nm / 2)t_{MCLK} - 20$      | $(nm / 2)t_{MCLK} + 20$      | ns   | Master mode  |
| Start condition hold time                                | $t_{HD;STA}$ | SCL,<br>SDA |                                     | $(-1 + nm / 2)t_{MCLK} - 20$ | $(-1 + nm)t_{MCLK} + 20$     | ns   | Master mode<br>Maximum value is applied when m, n = 1, 8. Otherwise, the minimum value is applied.   |
| Stop condition setup time                                | $t_{SU;STO}$ | SCL,<br>SDA |                                     | $(1 + nm / 2)t_{MCLK} - 20$  | $(1 + nm / 2)t_{MCLK} + 20$  | ns   | Master mode  |
| Start condition setup time                               | $t_{SU;STA}$ | SCL,<br>SDA |                                     | $(1 + nm / 2)t_{MCLK} - 20$  | $(1 + nm / 2)t_{MCLK} + 20$  | ns   | Master mode  |
| Bus free time between stop condition and start condition | $t_{BUF}$    | SCL,<br>SDA |                                     | $(2nm + 4)t_{MCLK} - 20$     | —                            | ns   |  |
| Data hold time   | $t_{HD;DAT}$ | SCL,<br>SDA |                                     | $3 t_{MCLK} - 20$            | —                            | ns   | Master mode  |
| Data setup time  | $t_{SU;DAT}$ | SCL,<br>SDA |                                     | $(-2 + nm / 2)t_{MCLK} - 20$ | $(-1 + nm / 2)t_{MCLK} + 20$ | ns   | Master mode<br>When assuming that "L" of SCL is not extended, the minimum value is applied to first bit of continuous data. Otherwise, the maximum value is applied. |
| Setup time between clearing interrupt and SCL rising     | $t_{SU;INT}$ | SCL         |                                     | $(nm / 2)t_{MCLK} - 20$      | $(1 + nm / 2)t_{MCLK} + 20$  | ns   | Minimum value is applied to interrupt at 9th SCL $\downarrow$ . Maximum value is applied to interrupt at 8th SCL $\downarrow$ .                                      |
| SCL clock "L" width                                      | $t_{LOW}$    | SCL         |                                     | $4 t_{MCLK} - 20$            | —                            | ns   | At reception   |
| SCL clock "H" width                                      | $t_{HIGH}$   | SCL         |                                     | $4 t_{MCLK} - 20$            | —                            | ns   | At reception   |

*(Continued)*



(Continued)

 $(V_{CC} = 5.0\text{ V} \pm 10\%, AV_{SS} = V_{SS} = 0.0\text{ V}, T_A = -40^\circ\text{C to } +85^\circ\text{C})$ 

| Parameter  | Symbol       | Pin name | Conditions                          | Value*2  |     | Unit | Remarks   |
|--|--------------|----------|-------------------------------------|--|-----|------|---|
|  |              |          |                                     | Min  | Max |      |   |
| Start condition detection                                | $t_{HD;STA}$ | SCL, SDA | R = 1.7 k $\Omega$ ,<br>C = 50 pF*1 | $2 t_{MCLK} - 20$  | —   | ns   | Not detected when 1 $t_{MCLK}$ is used at reception |
| Stop condition detection                                 | $t_{SU;STO}$ | SCL, SDA |                                     | $2 t_{MCLK} - 20$  | —   | ns   | Not detected when 1 $t_{MCLK}$ is used at reception |
| Restart condition detection condition                    | $t_{SU;STA}$ | SCL, SDA |                                     | $2 t_{MCLK} - 20$  | —   | ns   | Not detected when 1 $t_{MCLK}$ is used at reception |
| Bus free time  | $t_{BUF}$    | SCL, SDA |                                     | $2 t_{MCLK} - 20$  | —   | ns   | At reception  |
| Data hold time   | $t_{HD;DAT}$ | SCL, SDA |                                     | $2 t_{MCLK} - 20$  | —   | ns   | At slave transmission mode                          |
| Data setup time  | $t_{SU;DAT}$ | SCL, SDA |                                     | $t_{LOW} - 3 t_{MCLK} - 20$                                | —   | ns   | At slave transmission mode                          |
| Data hold time   | $t_{HD;DAT}$ | SCL, SDA |                                     | 0  | —   | ns   | At reception  |
| Data setup time  | $t_{SU;DAT}$ | SCL, SDA |                                     | $t_{MCLK} - 20$  | —   | ns   | At reception  |
| SDA $\downarrow$ →SCL $\uparrow$<br>(at wakeup function) | $t_{WAKEUP}$ | SCL, SDA |                                     | Oscillation stabilization wait time<br>$+ 2 t_{MCLK} - 20$ | —   | ns   |   |

\*1: R represents the pull-up resistor of the SCL and SDA lines, and C the load capacitor of the SCL and SDA lines.

\*2: • See “17.4.2. Source Clock/Machine Clock” for  $t_{MCLK}$ .

- m represents the CS4 bit and CS3 bit (bit4 and bit3) in the I<sup>2</sup>C clock control register (ICCR0).
- n represents the CS2 bit to CS0 bit (bit2 to bit0) in the I<sup>2</sup>C clock control register (ICCR0).
- The actual timing of I<sup>2</sup>C is determined by the values of m and n set by the machine clock ( $t_{MCLK}$ ) and the CS4 to CS0 bits in the ICCR0 register.
- Standard-mode:
  - m and n can be set to values in the following range: 0.9 MHz <  $t_{MCLK}$  (machine clock) < 16.25 MHz.
  - The usable frequencies of the machine clock are determined by the settings of m and n as shown below.
  - (m, n) = (1, 8) : 0.9 MHz <  $t_{MCLK}$  ≤ 1 MHz
  - (m, n) = (1, 22), (5, 4), (6, 4), (7, 4), (8, 4) : 0.9 MHz <  $t_{MCLK}$  ≤ 2 MHz
  - (m, n) = (1, 38), (5, 8), (6, 8), (7, 8), (8, 8) : 0.9 MHz <  $t_{MCLK}$  ≤ 4 MHz
  - (m, n) = (1, 98), (5, 22), (6, 22), (7, 22) : 0.9 MHz <  $t_{MCLK}$  ≤ 10 MHz
  - (m, n) = (8, 22) : 0.9 MHz <  $t_{MCLK}$  ≤ 16.25 MHz
- Fast-mode:
  - m and n can be set to values in the following range: 3.3 MHz <  $t_{MCLK}$  (machine clock) < 16.25 MHz.
  - The usable frequencies of the machine clock are determined by the settings of m and n as shown below.
  - (m, n) = (1, 8) : 3.3 MHz <  $t_{MCLK}$  ≤ 4 MHz
  - (m, n) = (1, 22), (5, 4) : 3.3 MHz <  $t_{MCLK}$  ≤ 8 MHz
  - (m, n) = (1, 38), (6, 4), (7, 4), (8, 4) : 3.3 MHz <  $t_{MCLK}$  ≤ 10 MHz
  - (m, n) = (5, 8) : 3.3 MHz <  $t_{MCLK}$  ≤ 16.25 MHz

**17.4.9 Voltage Comparator Timing**

 (AV<sub>CC</sub> = 4.0 V to 5.5 V, AV<sub>SS</sub> = 0.0 V, T<sub>A</sub> = -40°C to +85°C)

| Parameter                   | Pin name   | Value |      |                        | Unit | Remarks  |
|-----------------------------|------------|-------|------|------------------------|------|--|
|                             |            | Min   | Typ  | Max                    |      |  |
| Voltage range               | CMPP, CMPN | 0     | —    | AV <sub>CC</sub> - 1.3 | V    |  |
| Offset voltage              | CMPP, CMPN | -10   | —    | +10                    | mV   |  |
| Delay time                  | CMPO       | —     | 650  | 1210                   | ns   | 5 mV overdrive   |
|                             |            | —     | 140  | 420                    | ns   | 50 mV overdrive  |
| Power down delay            | CMPO       | —     | —    | 1210                   | ns   | Power down recovery<br>PD: 1 → 0                       |
|                             |            | 0     | —    | —                      | ns   | Power down effective<br>PD: 0 → 1<br>Output: "H" level |
| Power up stabilization time | CMPO       | —     | —    | 1210                   | ns   | Output stabilization time at power up                  |
| Bandgap reference voltage   | —          | 1.17  | 1.22 | 1.27                   | V    |  |

**17.5 A/D Converter**
*17.5.1 A/D Converter Electrical Characteristics*
 $(AV_{CC} = V_{CC} = 4.0\text{ V to }5.5\text{ V}, AV_{SS} = V_{SS} = 0.0\text{ V}, T_A = -40^\circ\text{C to }+85^\circ\text{C})$ 


| Parameter                     | Symbol    | Value                      |                            |                            | Unit          | Remarks   |
|-------------------------------|-----------|----------------------------|----------------------------|----------------------------|---------------|---|
|                               |           | Min                        | Typ                        | Max                        |               |   |
| Resolution                    | —         | —                          | —                          | 10                         | bit           |   |
| Total error                   |           | -3                         | —                          | +3                         | LSB           |   |
| Linearity error               |           | -2.5                       | —                          | +2.5                       | LSB           |   |
| Differential linear error     |           | -1.9                       | —                          | +1.9                       | LSB           |   |
| Zero transition voltage       | $V_{OT}$  | $AV_{SS} - 1.5\text{ LSB}$ | $AV_{SS} + 0.5\text{ LSB}$ | $AV_{SS} + 2.5\text{ LSB}$ | V             |   |
| Full-scale transition voltage | $V_{FST}$ | $AV_{CC} - 4.5\text{ LSB}$ | $AV_{CC} - 2\text{ LSB}$   | $AV_{CC} + 0.5\text{ LSB}$ | V             |   |
| Compare time                  | —         | 0.9                        | —                          | 16500                      | $\mu\text{s}$ | $4.5\text{ V} \leq V_{CC} \leq 5.5\text{ V}$  |
|                               |           | 1.8                        | —                          | 16500                      | $\mu\text{s}$ | $4.0\text{ V} \leq V_{CC} < 4.5\text{ V}$   |
| Sampling time                 | —         | 0.6                        | —                          | $\infty$                   | $\mu\text{s}$ | $4.5\text{ V} \leq V_{CC} \leq 5.5\text{ V}$ , with external impedance < 5.4 k $\Omega$ |
|                               |           | 1.2                        | —                          | $\infty$                   | $\mu\text{s}$ | $4.0\text{ V} \leq V_{CC} < 4.5\text{ V}$ , with external impedance < 2.4 k $\Omega$    |
| Analog input current          | $I_{AIN}$ | -0.3                       | —                          | +0.3                       | $\mu\text{A}$ |   |
| Analog input voltage          | $V_{AIN}$ | $AV_{SS}$                  | —                          | $AV_{CC}$                  | V             |   |

17.5.2 Notes on Using the A/D Converter

**External impedance of analog input and its sampling time**

The A/D converter has a sample and hold circuit. If the external impedance is too high to keep sufficient sampling time, the analog voltage charged to the capacitor of the internal sample and hold circuit is insufficient, adversely affecting A/D conversion precision. Therefore, to satisfy the A/D conversion precision standard, considering the relationship between the external impedance and minimum sampling time, either adjust the register value and operating frequency or decrease the external impedance so that the sampling time is longer than the minimum value. In addition, if sufficient sampling time cannot be secured, connect a capacitor of about 0.1  $\mu\text{F}$  to the analog input pin.



**Analog input equivalent circuit**

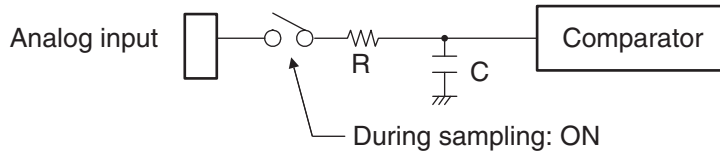

| V <sub>CC</sub>                 | R             | C           |
|---------------------------------|---------------|-------------|
| 4.5 V ≤ V <sub>CC</sub> ≤ 5.5 V | 1.95 kΩ (Max) | 17 pF (Max) |
| 4.0 V ≤ V <sub>CC</sub> < 4.5 V | 8.98 kΩ (Max) | 17 pF (Max) |

Note: The values are reference values.

**Relationship between external impedance and minimum sampling time**

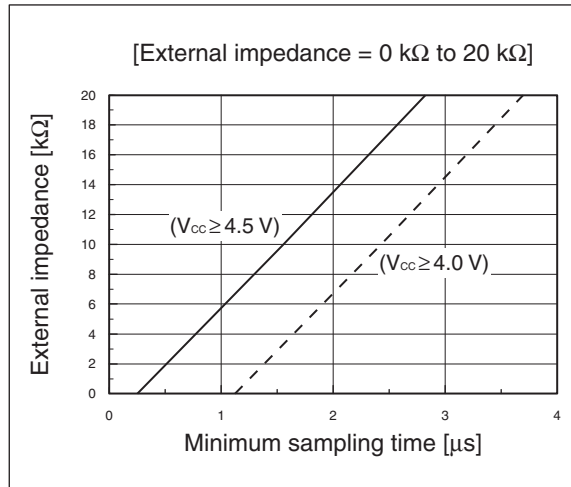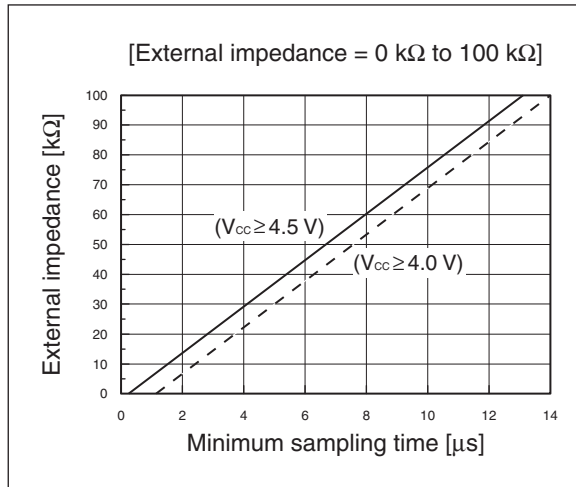

**A/D conversion error**

As  $|V_{CC} - V_{SS}|$  decreases, the A/D conversion error increases proportionately.

17.5.3 Definitions of A/D Converter Terms

**Resolution**

It indicates the level of analog variation that can be distinguished by the A/D converter. When the number of bits is 10, analog voltage can be divided into  $2^{10} = 1024$ .

**Linearity error (unit: LSB)**


It indicates how much an actual conversion value deviates from the straight line connecting the zero transition point ("00 0000 0000" ← → "00 0000 0001") of a device to the full-scale transition point ("11 1111 1111" ← → "11 1111 1110") of the same device.

**Differential linear error (unit: LSB)**

It indicates how much the input voltage required to change the output code by 1 LSB deviates from an ideal value.





**Total error (unit: LSB)**

It indicates the difference between an actual value and a theoretical value. The error can be caused by a zero transition error, a full-scale transition errors, a linearity error, a quantum error, or noise.

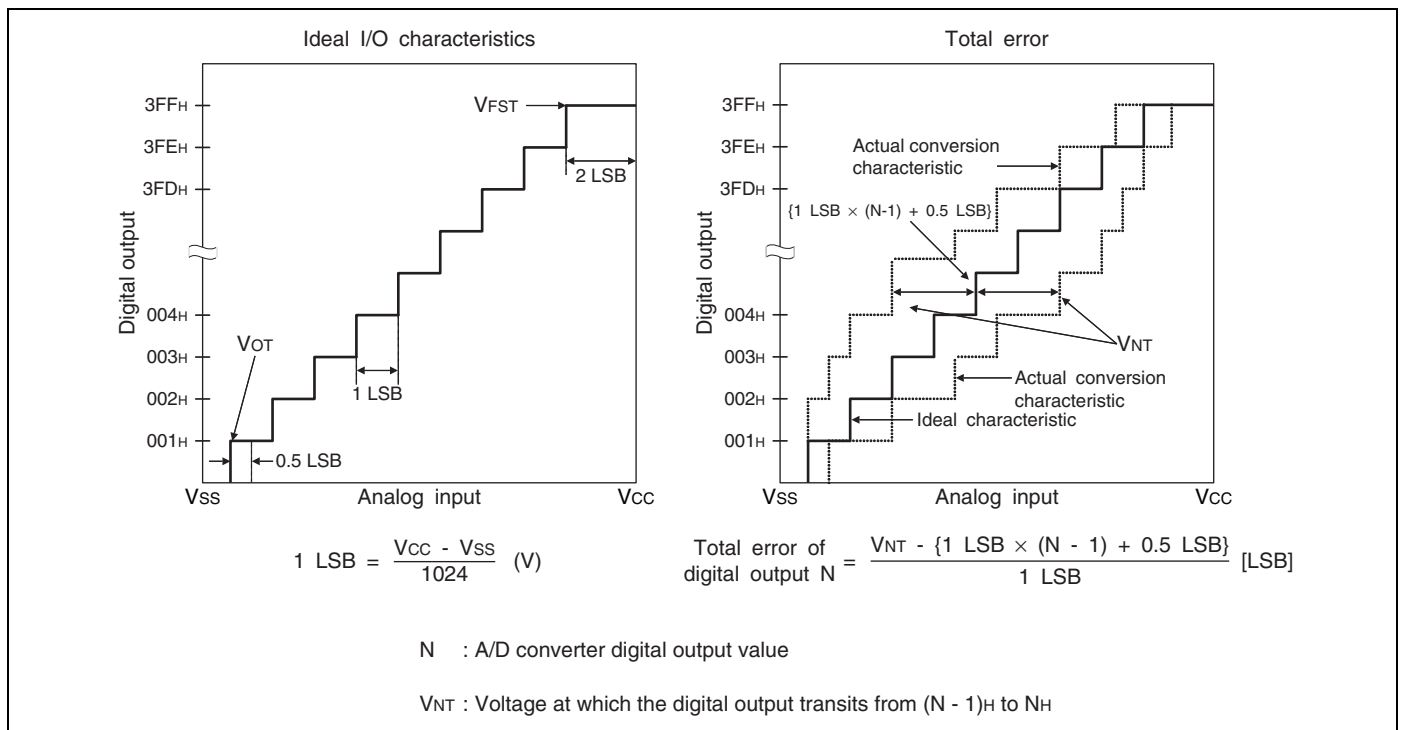

(Continued)

(Continued)

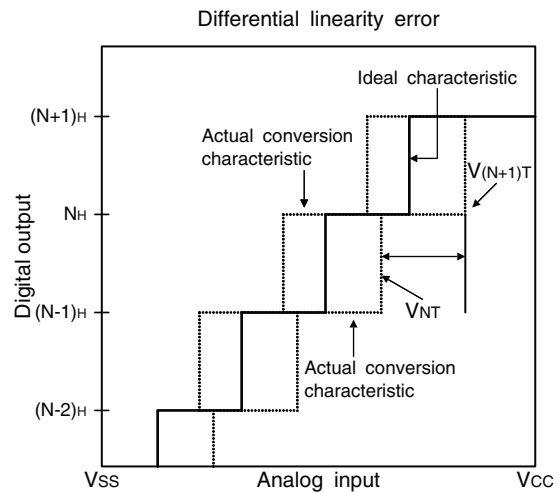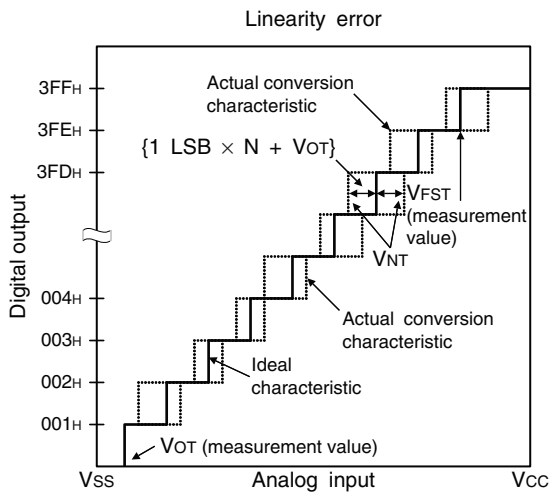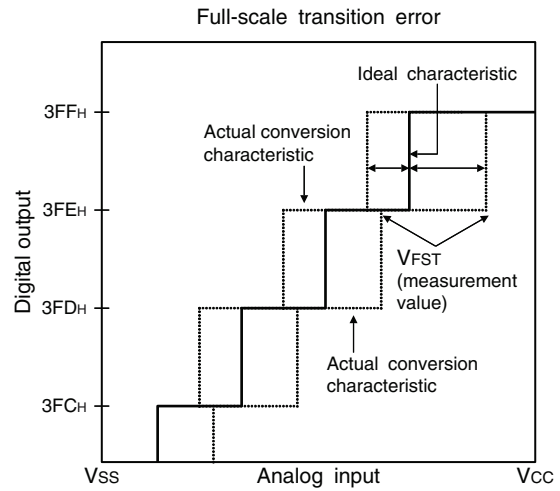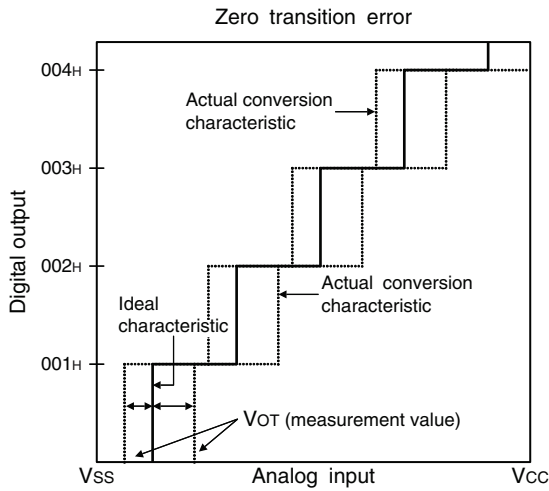

$$\text{Linearity error of digital output } N = \frac{V_{NT} - \{1 \text{ LSB} \times N + V_{OT}\}}{1 \text{ LSB}}$$

$$\text{Differential linear error of digital output } N = \frac{V_{(N+1)T} - V_{NT}}{1 \text{ LSB}} - 1$$

N : A/D converter digital output value

V<sub>NT</sub> : Voltage at which the digital output transits from (N - 1)<sub>H</sub> to N<sub>H</sub>

V<sub>OT</sub> (ideal value) = V<sub>ss</sub> + 0.5 LSB [V]

V<sub>FST</sub> (ideal value) = V<sub>cc</sub> - 2 LSB [V]

**17.6 Flash Memory Program/Erase Characteristics**

| Parameter                                | Value            |                   |                    | Unit  | Remarks   |
|--|------------------|-------------------|--------------------|-------|---|
|  | Min              | Typ               | Max                |       |   |
| Sector erase time<br>(2 Kbyte sector)    | —                | 0.2* <sup>1</sup> | 0.5* <sup>2</sup>  | s     | The time of writing 00 <sub>H</sub> prior to erasure is excluded. |
| Sector erase time<br>(16 Kbyte sector)   | —                | 0.5* <sup>1</sup> | 7.5* <sup>2</sup>  | s     | The time of writing 00 <sub>H</sub> prior to erasure is excluded. |
| Byte writing time                        | —                | 21                | 6100* <sup>2</sup> | μs    | System-level overhead is excluded.                                |
| Program/erase cycle                      | 100000           | —                 | —                  | cycle |   |
| Power supply voltage at<br>program/erase | 3.0              | —                 | 5.5                | V     |   |
| Flash memory data retention time         | 20* <sup>3</sup> | —                 | —                  | year  | Average T <sub>A</sub> = +85°C                                    |


\*1: T<sub>A</sub> = +25°C, V<sub>CC</sub> = 5.0 V, 100000 cycles

\*2: T<sub>A</sub> = +85°C, V<sub>CC</sub> = 3.0 V, 100000 cycles

\*3: This value is converted from the result of a technology reliability assessment. (The value is converted from the result of a high temperature accelerated test using the Arrhenius equation with the average temperature being +85°C).


### 18. Sample Characteristics

#### Power supply current temperature characteristics

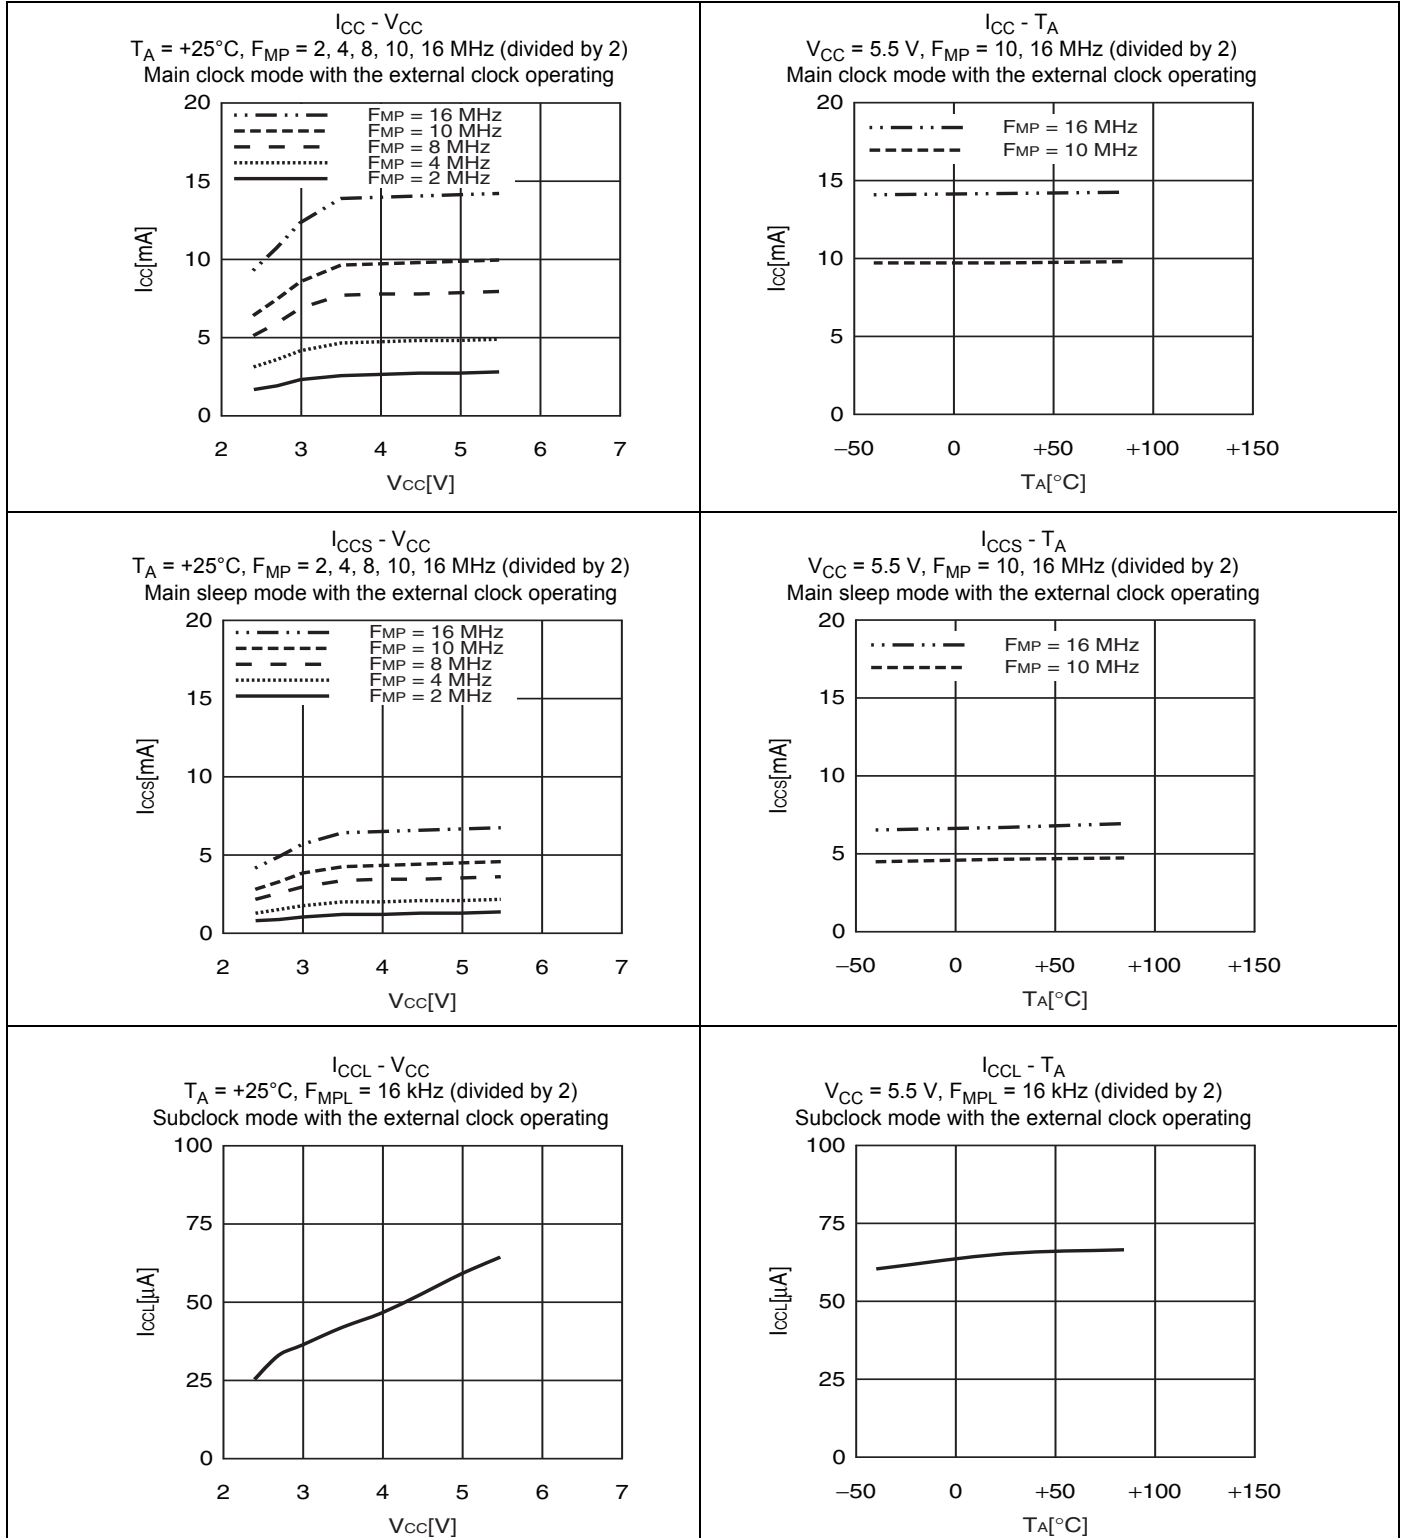







(Continued)



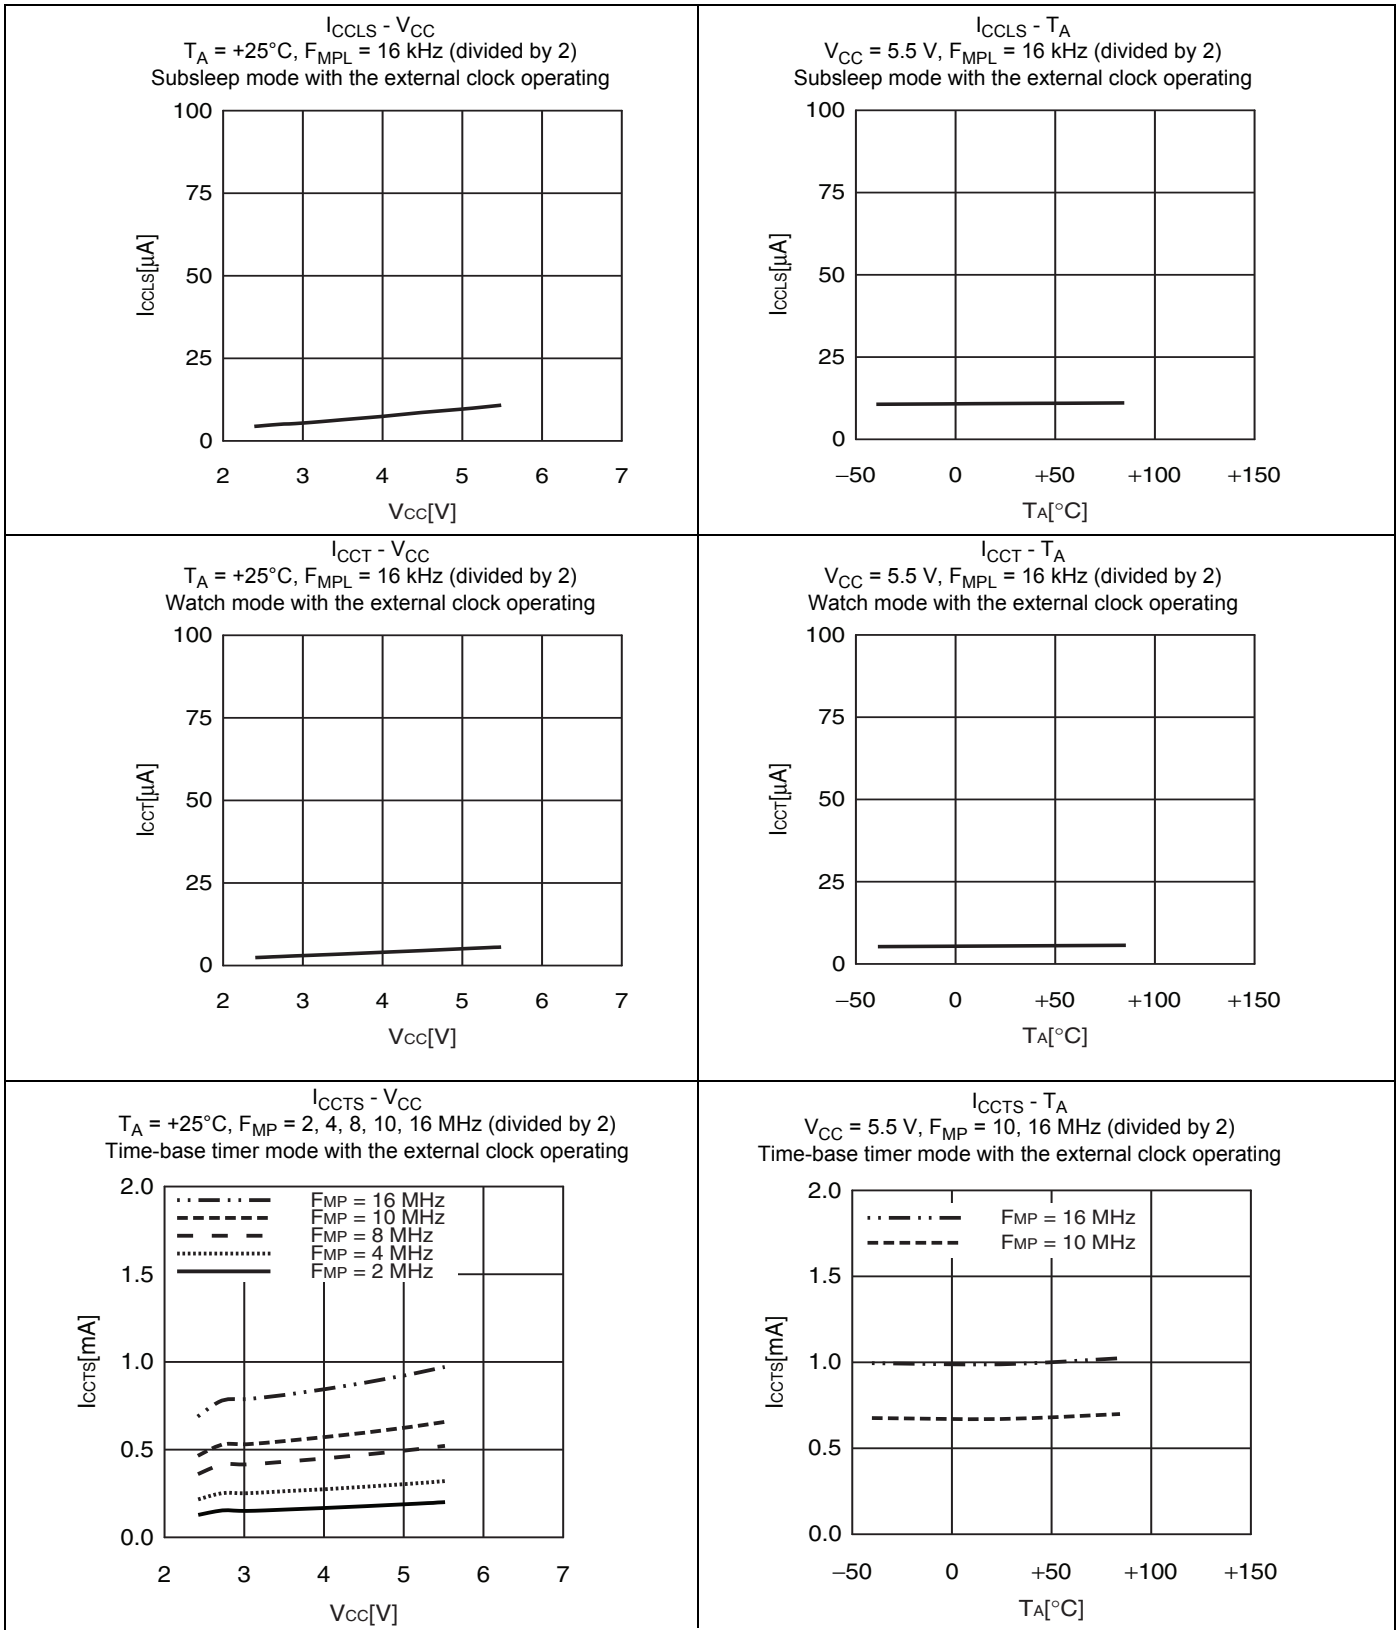


(Continued)


(Continued)

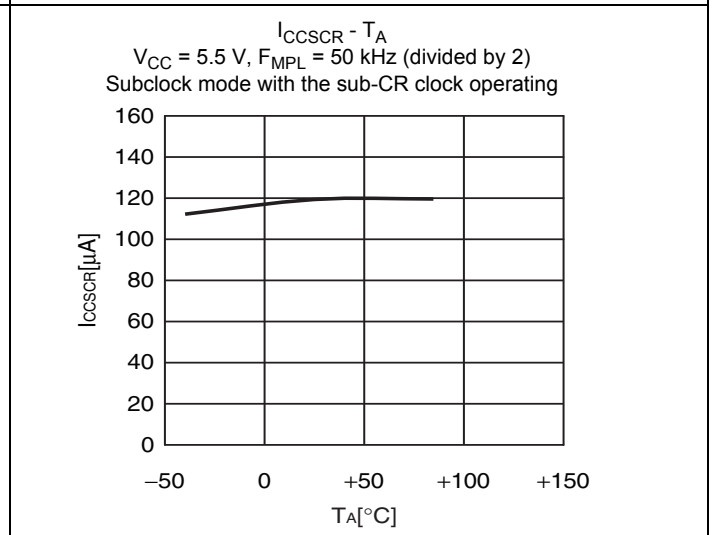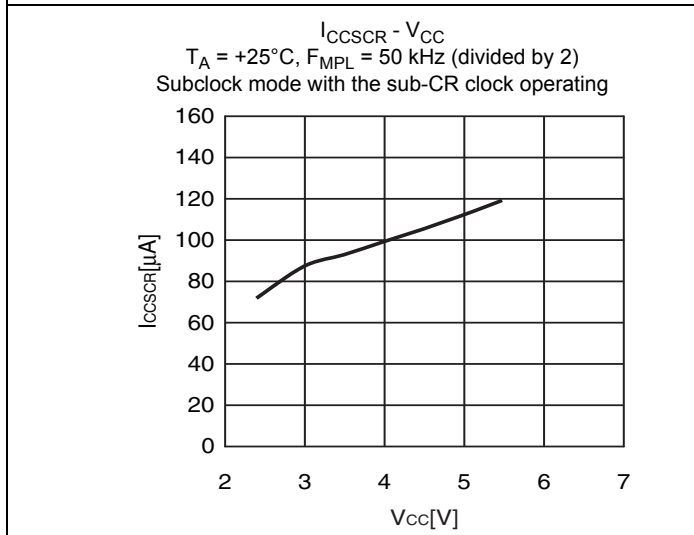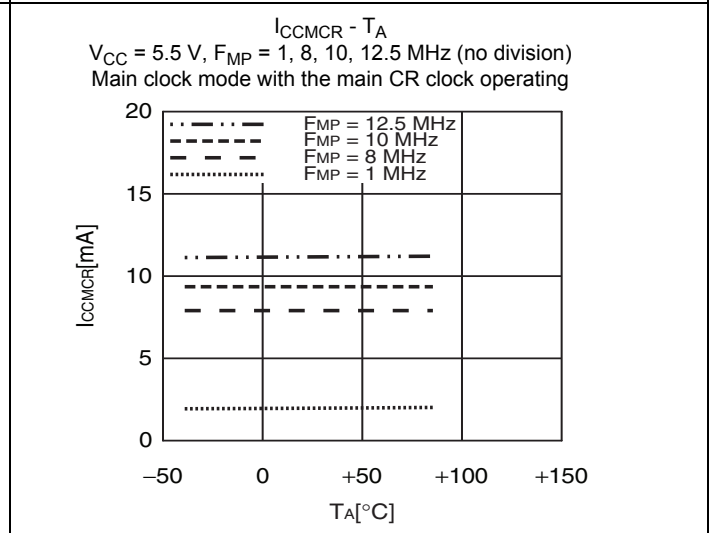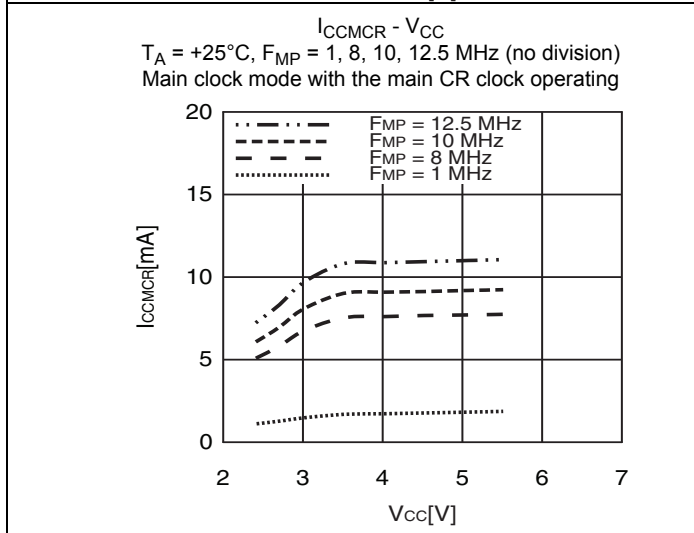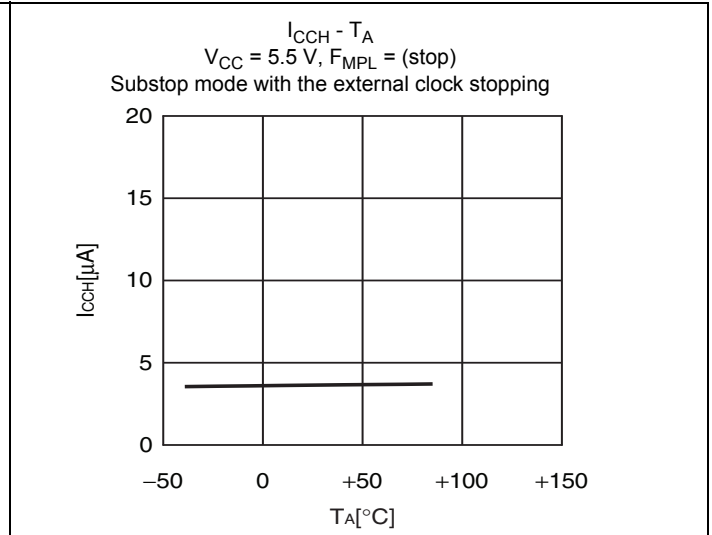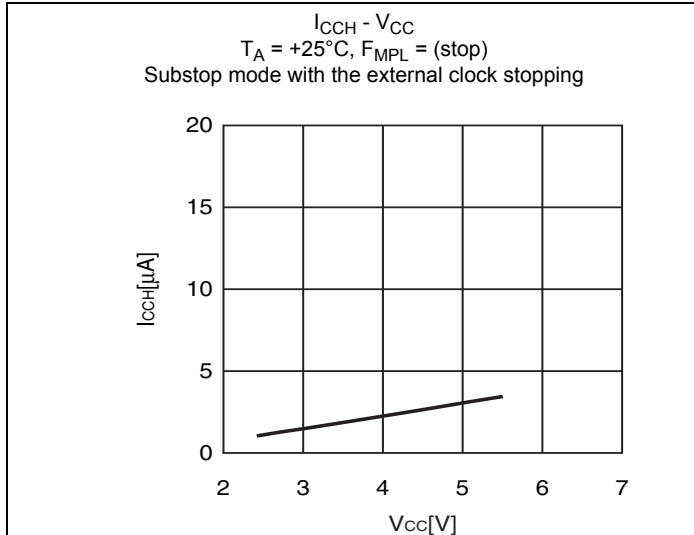


Input voltage characteristics

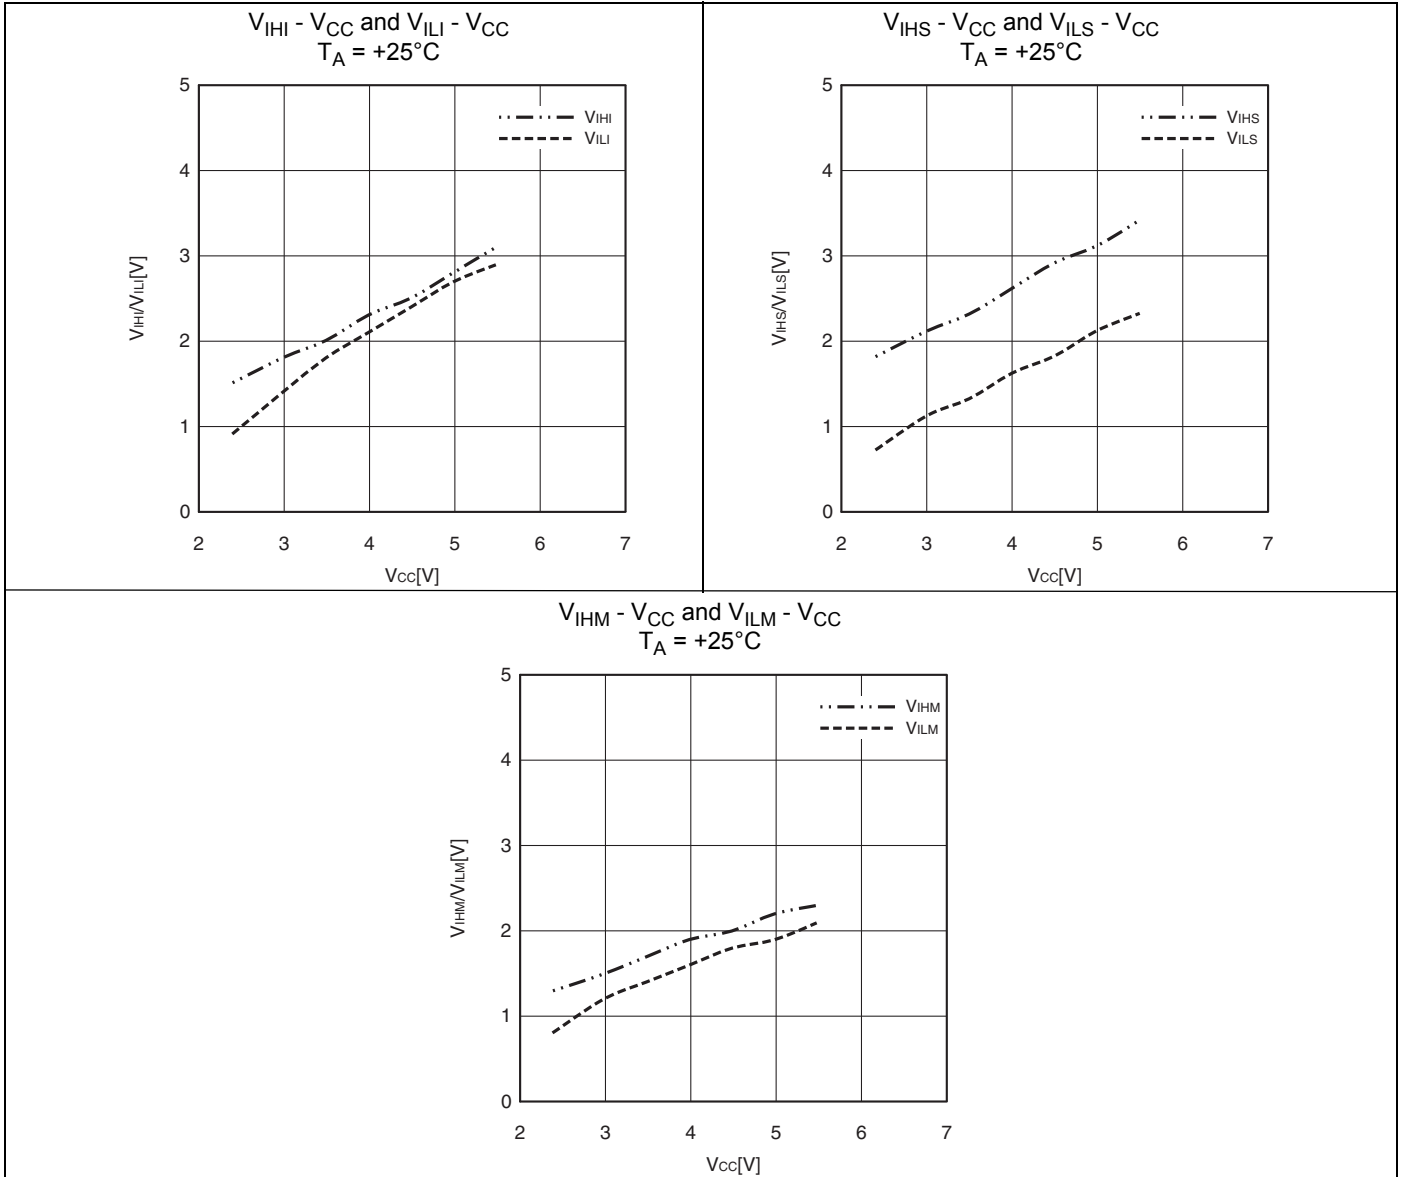

Output voltage characteristics

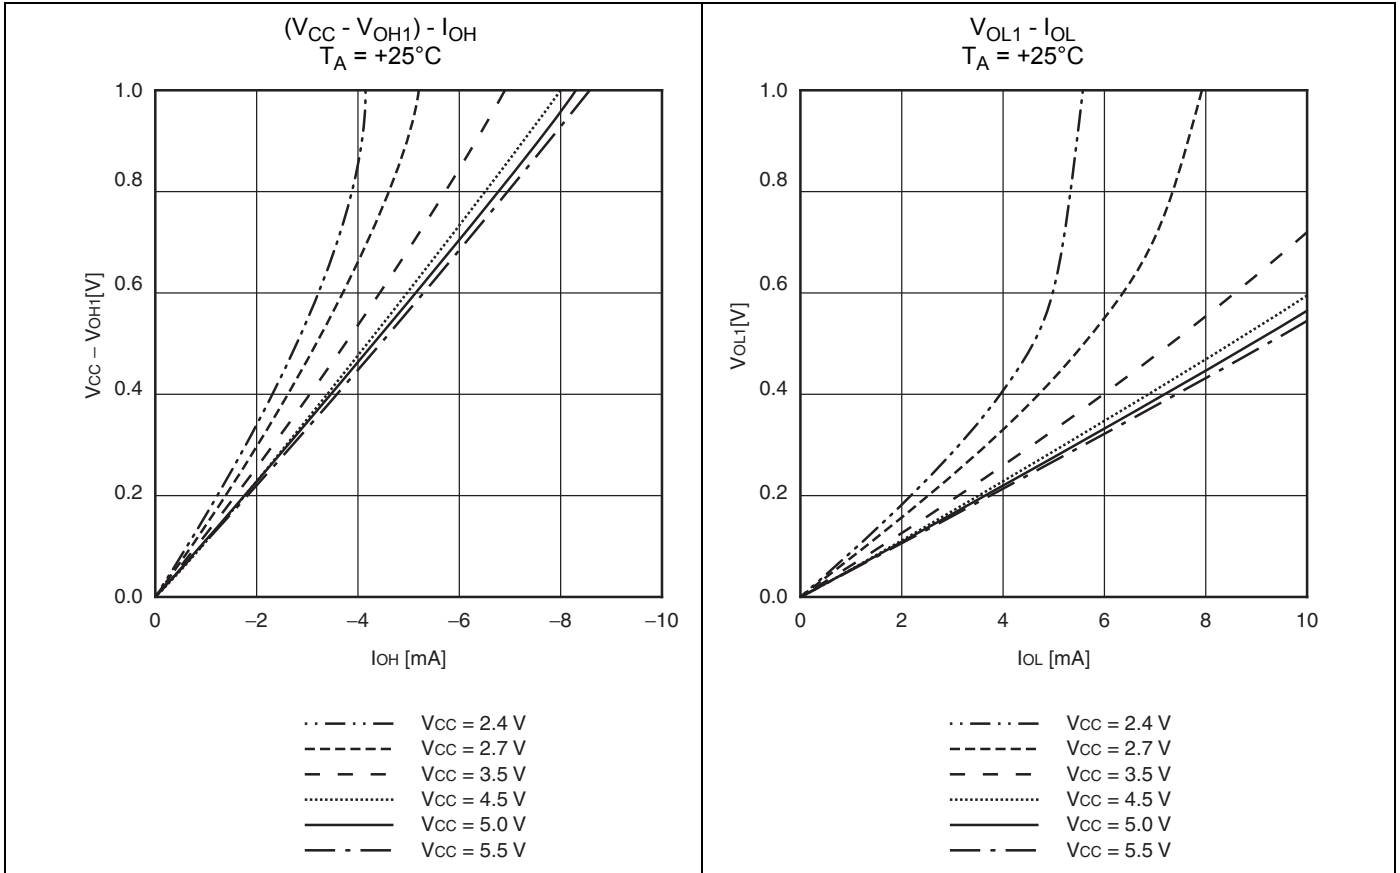

**Pull-up characteristics**

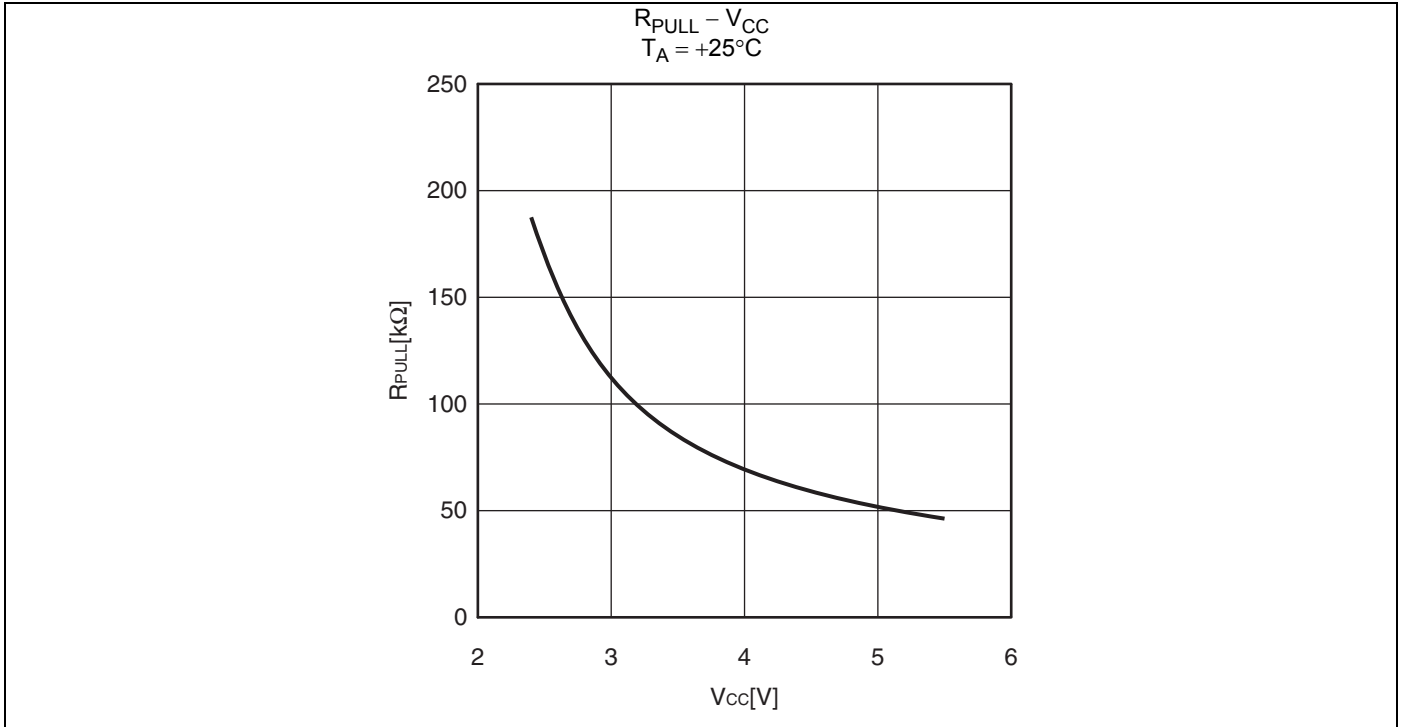

**19. Mask Options**


| No. | Part Number                 | MB95F414H<br>MB95F416H<br>MB95F418H<br>MB95F474H<br>MB95F476H<br>MB95F478H | MB95F414K<br>MB95F416K<br>MB95F418K<br>MB95F474K<br>MB95F476K<br>MB95F478K |
|-----|-----------------------------|--|--|
|     | Selectable/Fixed            | Fixed  |  |
| 1   | Low-voltage detection reset | Without low-voltage detection reset  | With low-voltage detection reset   |
| 2   | Reset                       | With dedicated reset input   | Without dedicated reset input  |

**20. Ordering Information**

| Part Number  | Package                              |
|--|--------------------------------------|
| MB95F414HPMC-G-SNE2<br>MB95F414KPMC-G-SNE2<br>MB95F416HPMC-G-SNE2<br>MB95F416KPMC-G-SNE2<br>MB95F418HPMC-G-SNE2<br>MB95F418KPMC-G-SNE2       | 80-pin plastic LQFP<br>(FPT-80P-M37) |
| MB95F474HPMC1-G-SNE2<br>MB95F474KPMC1-G-SNE2<br>MB95F476HPMC1-G-SNE2<br>MB95F476KPMC1-G-SNE2<br>MB95F478HPMC1-G-SNE2<br>MB95F478KPMC1-G-SNE2 | 64-pin plastic LQFP<br>(FPT-64P-M38) |
| MB95F474HPMC2-G-SNE2<br>MB95F474KPMC2-G-SNE2<br>MB95F476HPMC2-G-SNE2<br>MB95F476KPMC2-G-SNE2<br>MB95F478HPMC2-G-SNE2<br>MB95F478KPMC2-G-SNE2 | 64-pin plastic LQFP<br>(FPT-64P-M39) |

**21. Package Dimension**

|   |                                |                     |
|---|--------------------------------|---------------------|
| <p>80-pin plastic LQFP</p> <p>(FPT-80P-M37)</p> | Lead pitch                     | 0.50 mm             |
|   | Package width × package length | 12.00 mm × 12.00 mm |
|   | Lead shape                     | Gullwing            |
|   | Lead bend direction            | Normal bend         |
|   | Sealing method                 | Plastic mold        |
|   | Mounting height                | 1.70 mm MAX         |
|   | Weight                         | 0.47 g              |

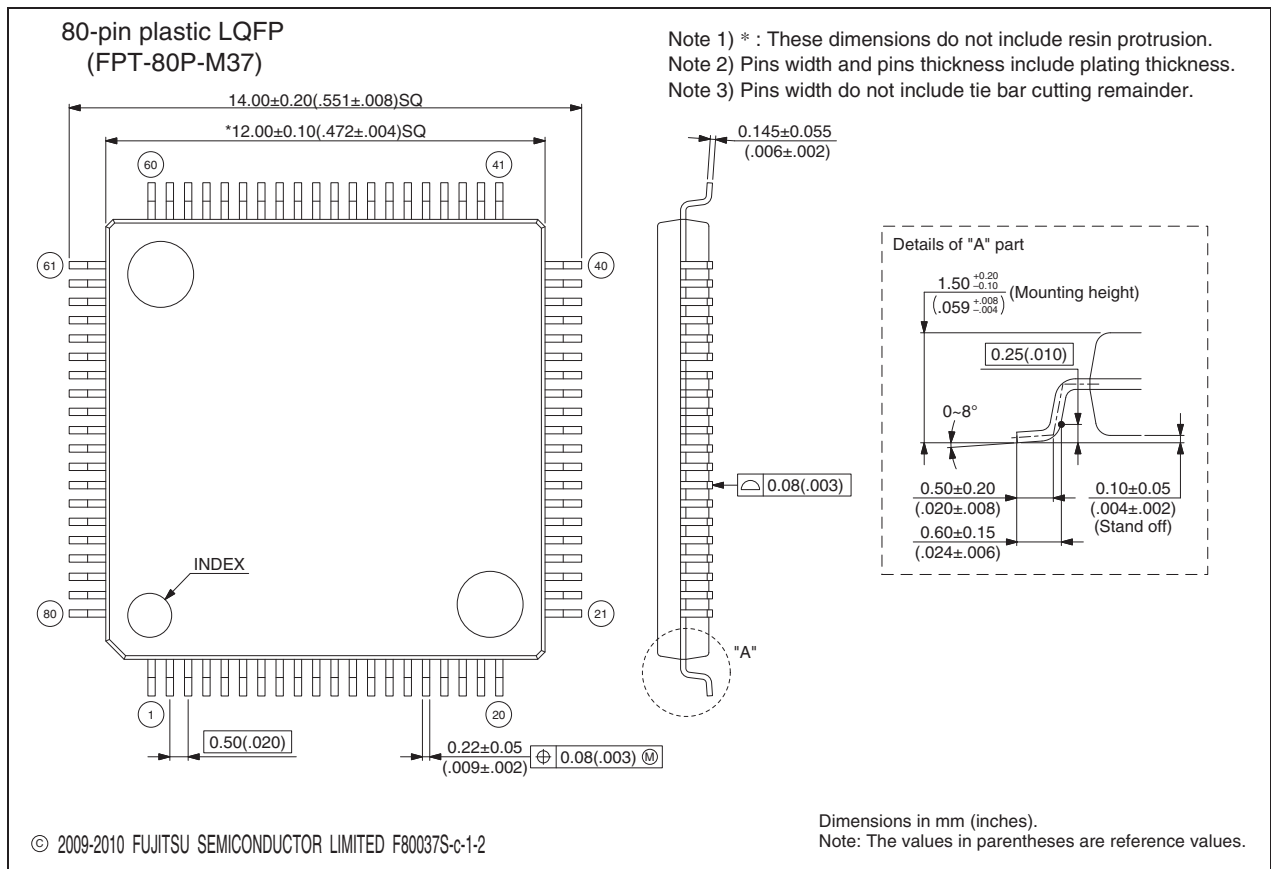

(Continued)



|   |                                |                     |
|---|--------------------------------|---------------------|
| <p>64-pin plastic LQFP</p> <p>(FPT-64P-M38)</p> | Lead pitch                     | 0.50 mm             |
|   | Package width × package length | 10.00 mm × 10.00 mm |
|   | Lead shape                     | Gullwing            |
|   | Lead bend direction            | Normal bend         |
|   | Sealing method                 | Plastic mold        |
|   | Mounting height                | 1.70 mm MAX         |
|   | Weight                         | 0.32 g              |

64-pin plastic LQFP (FPT-64P-M38)

Note 1) \* : These dimensions do not include resin protrusion.  
 Note 2) Pins width and pins thickness include plating thickness.  
 Note 3) Pins width do not include tie bar cutting remainder.

Top view dimensions:  
 Overall width:  $12.00 \pm 0.20$  (.472 ± .008) SQ  
 Pin pitch:  $10.00 \pm 0.10$  (.394 ± .004) SQ  
 Pin pitch:  $0.50$  (.020)  
 Pin thickness:  $0.22 \pm 0.05$  (.009 ± .002)  
 Pin width:  $0.08$  (.003)

Side view dimensions:  
 Lead thickness:  $0.145 \pm 0.055$  (.006 ± .002)  
 Lead width:  $0.08$  (.003)

Details of "A" part:  
 Mounting height:  $1.50^{+0.20}_{-0.10}$  (.059  $^{+0.008}_{-.004}$ )  
 Lead width:  $0.25$  (.010)  
 Lead angle: 0-8°  
 Stand off:  $0.10 \pm 0.10$  (.004 ± .004)  
 Lead thickness:  $0.50 \pm 0.20$  (.020 ± .008)  
 Lead width:  $0.60 \pm 0.15$  (.024 ± .006)


© 2010 FUJITSU SEMICONDUCTOR LIMITED F64038S-c-1-2

Dimensions in mm (inches).  
 Note: The values in parentheses are reference values.

(Continued)

(Continued)

|   |                                |                     |
|---|--------------------------------|---------------------|
| <p>64-pin plastic LQFP</p> <p>(FPT-64P-M39)</p> | Lead pitch                     | 0.65 mm             |
|   | Package width × package length | 12.00 mm × 12.00 mm |
|   | Lead shape                     | Gullwing            |
|   | Sealing method                 | Plastic mold        |
|   | Mounting height                | 1.70 mm MAX         |
|   | Weight                         | 0.47 g              |
|   |                                |                     |

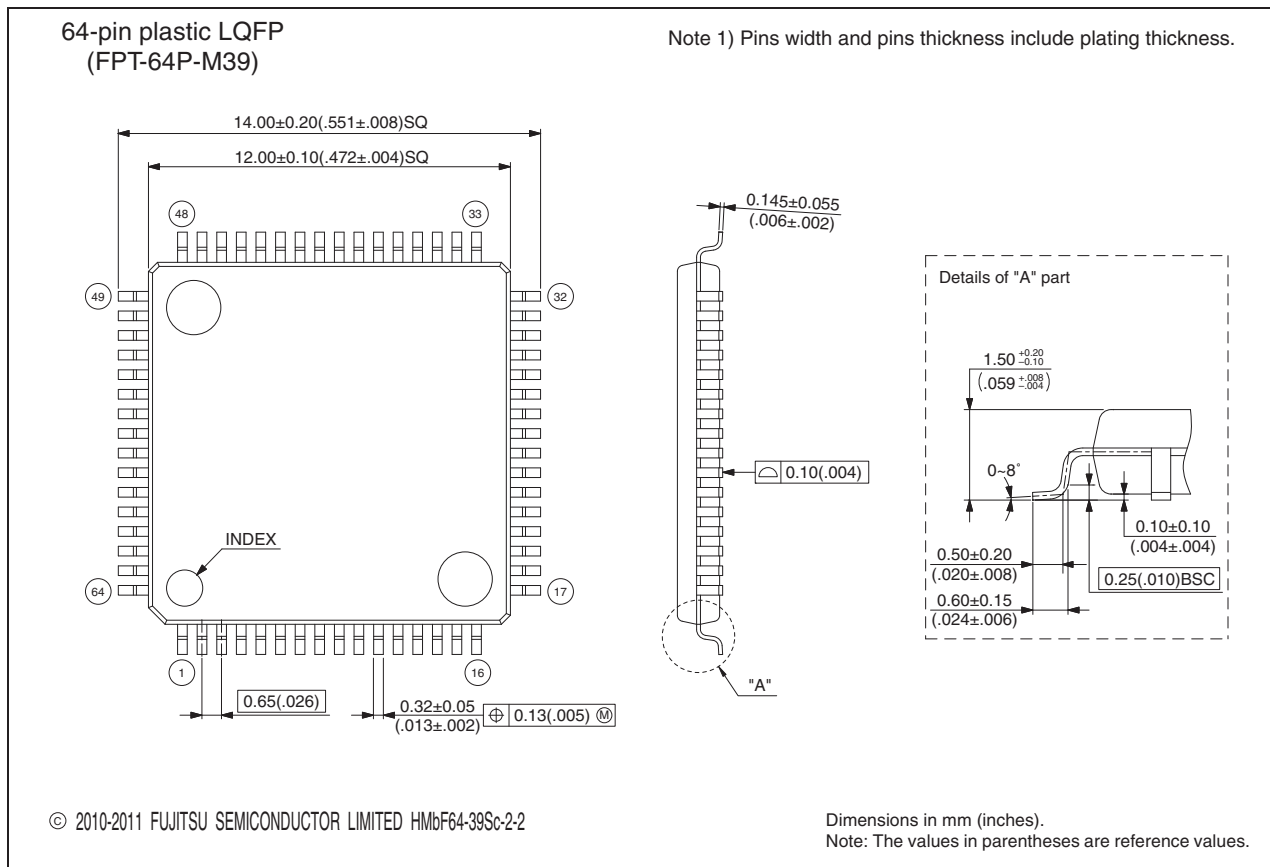

## 22. Major Changes

Spansion Publication Number: DS702-00004-1v0-E

| Page     | Section  | Details  |
|----------|--|--|
| 1        | —  | Changed the family name.<br>F <sup>2</sup> MC-8FX → New 8FX  |
| 49 to 51 | Electrical Characteristics<br>3. DC Characteristics                                | Changed the values of the following power supply current parameters:<br>I <sub>CC</sub> , I <sub>CCS</sub> , I <sub>CCL</sub> , I <sub>CCLS</sub> , I <sub>CCT</sub> , I <sub>CCMPLL</sub> , I <sub>CCMCR</sub> , I <sub>CCSCR</sub> , I <sub>CCTS</sub> , I <sub>CCH</sub> , I <sub>A</sub> , I <sub>V</sub> , I <sub>LVD</sub> . |
| 52       | Electrical Characteristics<br>4. AC Characteristics<br>(1) Clock Timing            | Changed the values of the clock frequency (F <sub>CRH</sub> ).   |
| 64       | Electrical Characteristics<br>4. AC Characteristics<br>(8) I <sup>2</sup> c Timing | Changed the settings related to the machine clock shown in *2.   |
| 71 to 76 | Sample Characteristics   | Added "Sample Characteristics".  |

**NOTE:** Please see "Document History" about later revised information.

**Document History**

| <b>Document Title: MB95410H/470H Series New 8FX 8-bit Microcontrollers</b> |            |                        |                        |   |
|--|------------|------------------------|------------------------|---|
| <b>Document Number: 002-07475</b>  |            |                        |                        |   |
| <b>Revision</b>  | <b>ECN</b> | <b>Orig. of Change</b> | <b>Submission Date</b> | <b>Description of Change</b>  |
| **   | –          | AKIH                   | 05/17/2011             | Migrated to Cypress and assigned document number 002-07475.<br>No change to document contents or format |
| *A   | 5198834    | AKIH                   | 04/04/2016             | Updated to Cypress format.  |
| *B   | 5861647    | YSAT                   | 08/24/2017             | Adapted new Cypress logo  |

## Sales, Solutions, and Legal Information

### Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

#### Products

|                               |  |
|-------------------------------|--|
| ARM® Cortex® Microcontrollers | <a href="http://cypress.com/arm">cypress.com/arm</a>               |
| Automotive                    | <a href="http://cypress.com/automotive">cypress.com/automotive</a> |
| Clocks & Buffers              | <a href="http://cypress.com/clocks">cypress.com/clocks</a>         |
| Interface                     | <a href="http://cypress.com/interface">cypress.com/interface</a>   |
| Internet of Things            | <a href="http://cypress.com/iot">cypress.com/iot</a>               |
| Memory                        | <a href="http://cypress.com/memory">cypress.com/memory</a>         |
| Microcontrollers              | <a href="http://cypress.com/mcu">cypress.com/mcu</a>               |
| PSoC                          | <a href="http://cypress.com/psoc">cypress.com/psoc</a>             |
| Power Management ICs          | <a href="http://cypress.com/pmic">cypress.com/pmic</a>             |
| Touch Sensing                 | <a href="http://cypress.com/touch">cypress.com/touch</a>           |
| USB Controllers               | <a href="http://cypress.com/usb">cypress.com/usb</a>               |
| Wireless/RF                   | <a href="http://cypress.com/wireless">cypress.com/wireless</a>     |

#### PSoC® Solutions

[PSoC 1](#) | [PSoC 3](#) | [PSoC 4](#) | [PSoC 5LP](#) | [PSoC 6](#)

#### Cypress Developer Community

[Forums](#) | [WICED IOT Forums](#) | [Projects](#) | [Video](#) | [Blogs](#) | [Training](#) | [Components](#)

#### Technical Support

[cypress.com/support](http://cypress.com/support)

© Cypress Semiconductor Corporation 2010-2017. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spansion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you under its copyright rights in the Software, a personal, non-exclusive, nontransferable license (without the right to sublicense) (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units. Cypress also grants you a personal, non-exclusive, nontransferable, license (without the right to sublicense) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely to the minimum extent that is necessary for you to exercise your rights under the copyright license granted in the previous sentence. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spansion, the Spansion logo, and combinations thereof, WICED, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit [cypress.com](http://cypress.com). Other names and brands may be claimed as property of their respective owners.