

RFM products are now Murata products.

SF1146B

- 499.25 MHz **SAW Filter**
- **SMP-03**

Low Insertion Loss

- 5.0 X 7.0 mm Surface-Mount Case
- Complies with Directive 2002/95/EC (RoHS)

Absolute Maximum Ratings

Rating	Value	Units
Maximum Incident Power in Passband	+10	dBm
Max. DC voltage between any 2 terminals	30	VDC
Storage Temperature Range	-40 to +85	°C
Suitable for lead-free soldering - Max Soldering Profile	260°C for 30 s	

Electrical Characteristics

Characteristic		Notes	Min	Тур	Max	Units
Nominal Center Frequency		1	499.25			MHz
Passband Insertion Loss at fc	IL	'			3.5	dB
1.5 dB Passband	BW ₁	1, 2	±15			kHz
Rejection fc±1.5 MHz		1, 2, 3	5			
fc±6.0 MHz		1, 2, 3	20			dB
fc±50 MHz			50			
Operating Temperature Range	T _A	1	-40		+85	°C
Differential Input and Output Impedance after matching			5	0 ohms		•
Case Style		6	SMI	P-03 7 x 5 mm	Nominal Foot	orint
Lid Symbolization (YY=year, WW=week, S=shift) See note 4				RFM SF1146	B YYWWS	

Electrical Connections


Connection	Terminals
Port 1 Hot	10
Port 1 Ground Return	1
Port 2 Hot	5
Port 2 Ground Return	6
Case Ground	All Others




CAUTION: Electrostatic Sensitive Device. Observe precautions for handling. NOTES:

Unless noted otherwise, all specifications apply over the operating temperature range with filter soldered to the specified demonstration board with impedance matching to $50~\Omega$ and measured with $50~\Omega$ network analyzer. Unless noted otherwise, all frequency specifications are referenced to the nominal center frequency, fc. Rejection is measured as attenuation below the minimum IL point in the passband. Rejection in final user application is dependent on PCB layout and external impedance matching design. See Application Note No. 42 for details. "LRIP" or "L" after the part number indicates "low rate initial production" and "ENG" or "E" indicates "engineering prototypes." The design, manufacturing process, and specifications of this filter are subject to change. Tape and Reel Standard ANSI / EIA 481. Either Port 1 or Port 2 may be used for either input or output in the design. However, impedances and impedance matching may vary between Port 1 and Port 2, so that the filter must always be installed in one direction per the circuit design. US and international patents may apply. Murata, stylized Murata logo, and Murata N.A., Inc. are registered trademarks of Murata Manufacturing Co., Ltd.


Tape and Reel Specifications

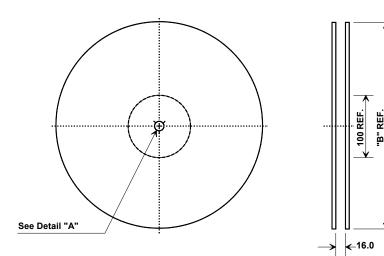


"B " Nominal Size		Quantity Per Reel
Inches	millimeters	
7	178	500
13	330	2000



COMPONENT ORIENTATION and DIMENSIONS




Carrier Tape Dimensions				
Ao	5.5 mm			
Во	7.5 mm			
Ко	2.0 mm			
Pitch	8.0 mm			
W	16.0 mm			

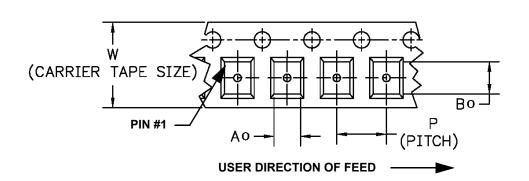


SMP-03 Case

10-Terminal Ceramic Surface-Mount Case 7 x 5 mm Nominal Footprint



Recommended PCB Footprint

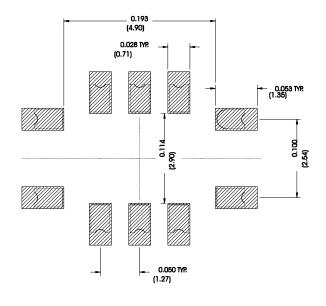

Case Dimensions						
Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
Α	6.80	7.00	7.20	0.268	0.276	0.283
В	4.80	5.00	5.20	0.189	0.197	0.205
С		1.65	2.00		0.065	0.079
D		0.60			0.024	
E		2.54			0.100	
Н		1.0			0.039	
J		5.00			0.197	
K		3.00			0.118	
Р		1.27			0.050	

Electrical Connections				
	Connection	Terminals		
Port 1	Input or Return	10		
. 010 1	Return or Input	1		
Port 2	Output or Return	5		
	Return or Output	6		
	Ground	All others		
Single Ended Operation Return is gr		Return is ground		
Differer	ntial Operation	Return is hot		

	Materials				
Solder Pad Termination	Au plating 30 - 60 ulnches (76.2-152 uM) over 80-200 ulnches (203-508 uM) Ni.				
Lid	Fe-Ni-Co Alloy Electroless Nickel Plate (8-11% Phosphorus) 100-200 ulnches Thick				
Body	Al ₂ O ₃ Ceramic				
Pb Free					

