


Specifications

- * Due to ongoing technological advances, consult factory for certification specifics.

Figure 1: Dimensions of the 100-pin connector. The figure contains four views: a top view, a side view, a front view, and a rear view. Each view shows the connector's profile with various dimensions in inches and millimeters. The top view shows a width of .825 [20.95] and a height of .080 [2.03]. The side view shows a width of .590 [14.98] and a height of .877 [22.27]. The front view shows a width of .825 [20.95] and a height of 1.040 [26.42]. The rear view shows a width of .590 [14.98] and a height of .920 [23.36]. Labels include 'HIGH BARRIER OPTION', 'P.C. (option 2)', and 'TAB'.

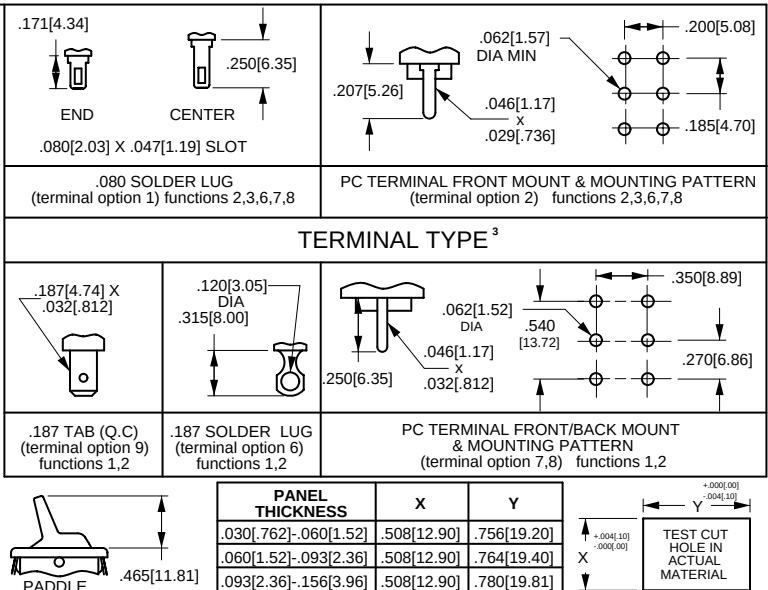

The diagram shows a 6-pin rocker switch with the following labels and specifications:

- SERIES:** 6
- ACTUATOR STYLE:**
 - 11 PADDLE
 - 21 CURVED ROCKER
- BASE/ACTUATOR COLOR:**
 - BASE: 1 BLACK, 2 BLACK, 4 WHITE, 5 WHITE
 - ACTUATOR: 1 BLACK, 2 WHITE, 4 BLACK, 5 WHITE
- POLES:**
 - 1 SINGLE POLE
 - 2 DOUBLE POLE
 - 5 DOUBLE POLE W/ HIGH BARRIERS
 - 6 SINGLE POLE W/ HIGH BARRIERS
- RATING:**
 - 1 .4VA MAX @20V MAX (AC/DC)
 - 2 2A 250VAC, 5A 125VAC RESISTIVE
 - 3 11A 125VAC H³
 - 4 4A 250 VAC, 8A 125VAC
 - 9 4A 250VAC, 8A 125VAC INDUCTIVE, 6(4)A 250VAC T85⁸
- FUNCTION:** 1 ON-NONE-OFF
- TERMINATION:**
 - 1 .080 SOLDER LUG
 - 2 PC TERM
 - 3 WIRE LEAD⁷
 - 4 WIRE LEAD
 - 6 .187 SOLDER LUG
 - 7 PC BACK MOUNT
 - 8 PC FRONT MOUNT
 - 9 .187TAB (QC)
- EPOXY SEALED TERMINALS:**
 - E EPOXY
 - 0 NONE REQUIRED
- ROCKER FACE LEGEND:**
 - MOLDED-IN:** 0 NO LEGEND ON-OFF (VERTICAL), 8 I-O (HORIZONTAL), 9 I-O (VERTICAL)
 - TRANSFER STAMP:** 0 A, B, D, E, F
 - (indicates ON) (ON ROCKER RADIUS)

8 Rating 9 using Termination 1 or 2 is rated T55 only.

al. **N** NOT APPLICABLE
B BLACK
V VISI-RED
W WHITE