


FEATURES

- **LOW POWER DISSIPATION**
 $V_{CC} = 3\text{ V}$, $I_{CC} = 7\text{ mA}$
- **HIGH CONVERSION GAIN**
80 dB
- **ON CHIP OSCILLATOR OR LO BUFFER:**
DC - 450 MHz
- **OUTPUT LIMITING**
450 mVp-p
- **BROADBAND OPERATION**
DC - 450 MHz
- **POWER SAVE FUNCTION**
 $I_{CC}(\text{ps}) = <100\text{ }\mu\text{A}$

DESCRIPTION

The UPC2768GR is a frequency converter manufactured with the NESAT III process. This product consists of an RF input amplifier, Gilbert cell mixer, Local Oscillator or LO buffer, IF amplifier, external filter port, and IF output limiting amplifier. The on-chip local oscillator only requires an external tank circuit. The power save feature enables users to minimize overall current consumption when dormant. This device was specifically designed for low-cost second IF receivers, key-less entry applications, security systems, GPS, and other low power Part 15 mobile radios.

INTERNAL BLOCK DIAGRAM

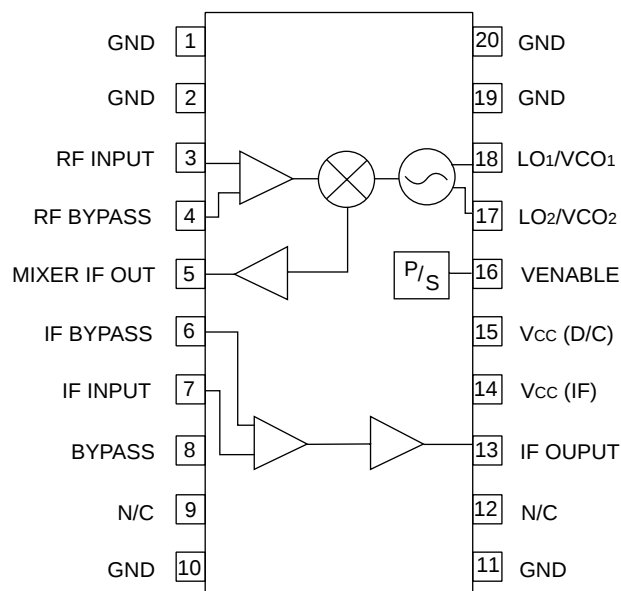

ELECTRICAL CHARACTERISTICS ($V_{CC} = 3.0\text{ V}$, $T_A = 25^\circ\text{C}$, $Z_L = Z_S = 50\text{ }\Omega$, $V_{ENABLE} \oplus 2.5\text{ V}$ unless otherwise specified)

PART NUMBER PACKAGE OUTLINE			UPC2768GR S20 (SSOP 20)			
SYMBOLS	PARAMETERS AND CONDITIONS	UNITS	MIN	TYP	MAX	
I_{CC}	Circuit Current ($V_{ENABLE} \geq 2.5\text{ V}$) ⁴ ($V_{ENABLE} \leq 0.5\text{ V}$)	mA μA		7	100	
f_{RF}, f_{LO}	RF and LO Input Frequency Range (3 dB BW) ¹ , $f_{IF} = 10\text{ MHz}$	MHz	DC		450	
CG	Conversion Gain ² , $f_{RF} = 433\text{ MHz}$, $f_{IF} = 25\text{ MHz}$	dB	33	36	40	
NF	Noise Figure ² , $f_{RF} = 450\text{ MHz}$, $f_{IF} = 10\text{ MHz}$	dB		12		
Leak LO-RF	LO to RF Leakage ³ , $f_{LO} = 1\text{ to }450\text{ MHz}$	dBm		-62		
Leak LO-IF	LO to IF Leakage ³ , $f_{LO} = 1\text{ to }450\text{ MHz}$	dBm		-25		
G_s	IF Amplifier Small Signal Gain $f_{IF} = 10.7\text{ MHz}$ $f_{IF} = 25.0\text{ MHz}$	dB dB	40 38	44 42	47 45	
V_{OUT}	Limiting Output Voltage, $Z_L = 2K\Omega$, $f_{IF} = 10\text{ MHz}$	mVp-p		450		
P_{SAT}	Saturated Output Power	dBm		-20		

Notes:

1. Max freq. range is -3 dB from conversion gain for $R_F = 50\text{ MHz}$
2. Down converter only (R_{FIN} to mixer I_{FOUR}).
3. $P_{LO} = -10\text{ dBm}$ external, or using internal LO.

4. Down converter and IF amp may be operated separately.
Typical I_{CC} for down converter is 5.5 mA (pin 15). Typical I_{CC} for IF amp is 1.4 mA (pin 14).

ABSOLUTE MAXIMUM RATINGS¹ (T_A = 25°C)





SYMBOLS	PARAMETERS	UNITS	RATINGS
V _{CC}	Supply Voltage	V	5
P _T	Power Dissipation ²	mW	433
T _{OP}	Operating Temperature	°C	-40 to +85
T _{STG}	Storage Temperature	°C	-55 to +150

- Note:
1. Operation in excess of any one of these parameters may result in permanent damage.
 2. Mounted on a 50x50x1.6 mm epoxy glass PWB (T_A = 85°C).

RECOMMENDED
OPERATING CONDITIONS


SYMBOLS	PARAMETERS	UNITS	MIN	TYP	MAX
V _{CC}	Supply Voltage	V	2.7	3.0	3.3
T _{OP}	Operating Temperature	°C	-40	25	85
f _{IF}	IF Frequency Range	MHz	DC		25

TYPICAL PERFORMANCE CURVES (T_A = 25°C, V_{CC} = 3.0 V, V_{ENABLE} ≥ 2.5 V unless otherwise specified)

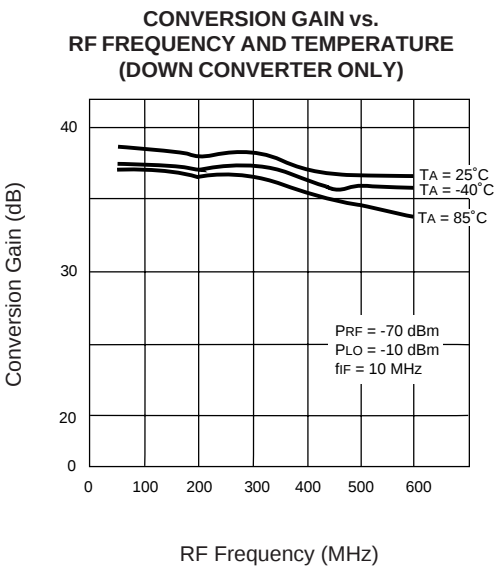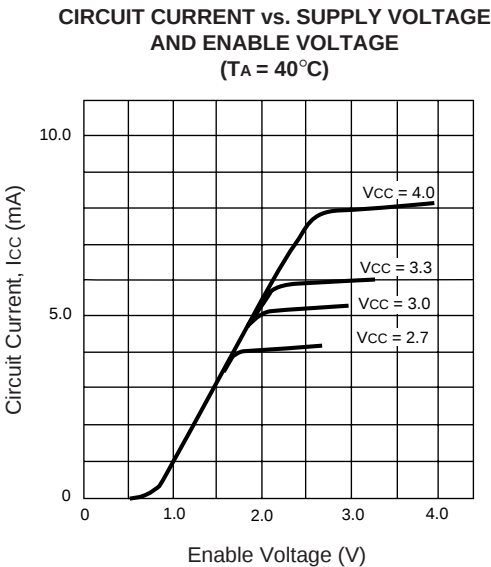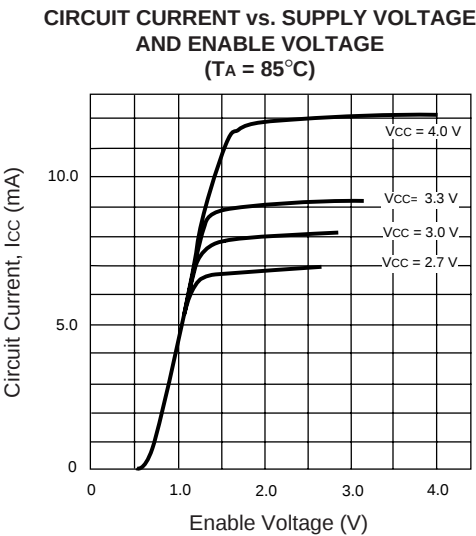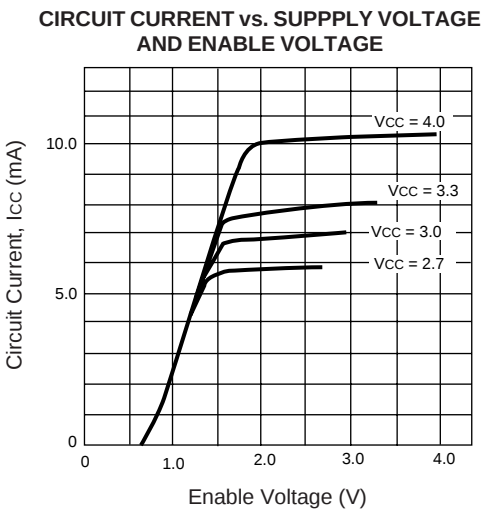


TYPICAL PERFORMANCE CURVES ($T_A = 25^\circ\text{C}$, $V_{CC} = 3.0\text{ V}$, $V_{ENABLE} \geq 2.5\text{ V}$ unless otherwise specified)


**CONVERSION GAIN VS.
IF FREQUENCY
(DOWNCONVERTER ONLY)**

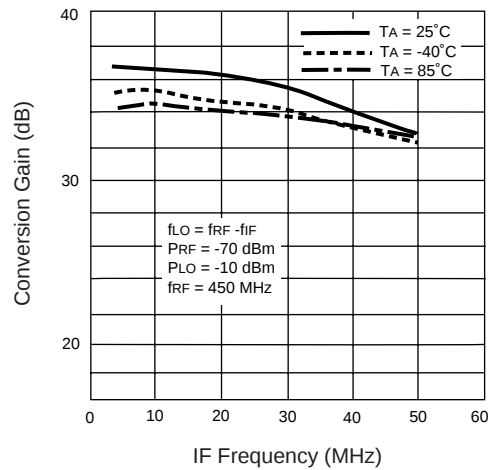


**OUTPUT VOLTAGE vs.
INPUT POWER**

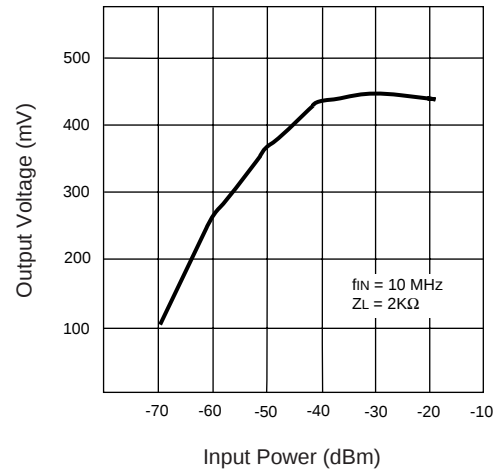


LO LEAKAGE vs. FREQUENCY

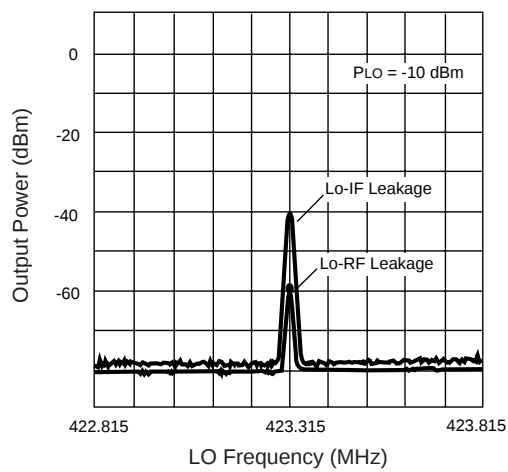


RF INPUT MATCH (S_{11})

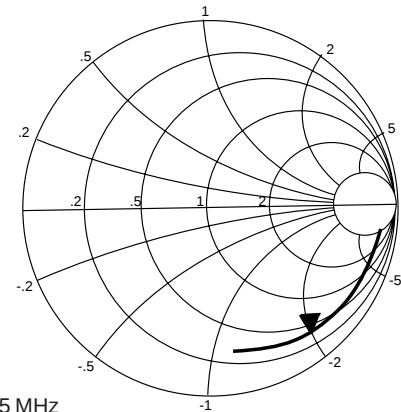

TYPICAL DETECTOR CIRCUIT

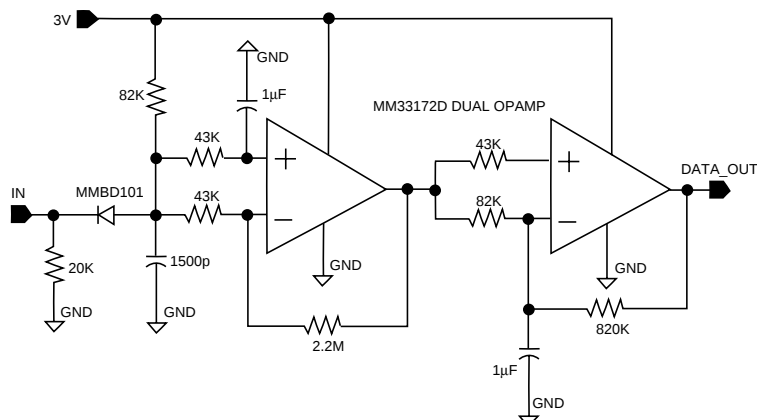


APPLICATION CIRCUIT

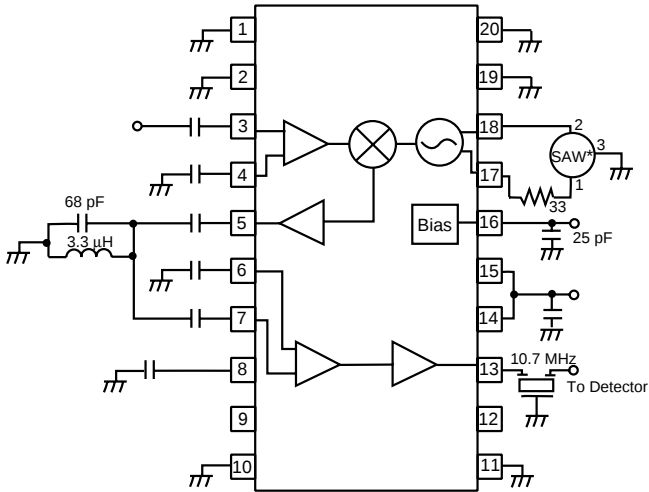

All unmarked caps are 1000 pF

OUTLINE DIMENSIONS (Units in mm)

PACKAGE OUTLINE SSOP 20

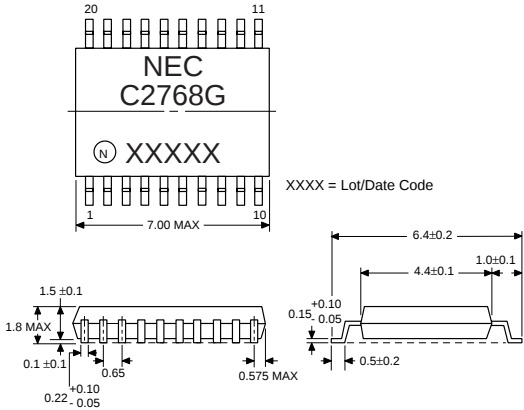

Lead Material: Alloy 42
Lead Plating: Lead Tin Alloy

LEAD CONNECTIONS:


- | | |
|--------------|---------------|
| 1. GND | 11. GND |
| 2. GND | 12. N/C |
| 3. RF INPUT | 13. IF OUTPUT |
| 4. RF BYPASS | 14. Vcc (IF) |
| 5. MIXER IF | 15. Vcc (D/C) |
| 6. IF BYPASS | 16. V ENABLE |
| 7. IF INPUT | 17. Lo2/VCO2 |
| 8. BYPASS | 18. Lo1/VCO1 |
| 9. N/C | 19. GND |
| 10. GND | 20. GND |

- | | |
|--------------|---------------|
| 1. GND | 20. GND |
| 2. GND | 19. GND |
| 3. RF Input | 18. Lo1/VCO1 |
| 4. RF Bypass | 17. Lo2/VCO2 |
| 5. Mixer IF | 16. VENABLE |
| 6. IF Bypass | 15. Vcc (D/C) |
| 7. IF Input | 14. Vcc (IF) |
| 8. Bypass | 13. IF OUTPUT |
| 9. N/C | 12. N/C |
| 10. GND | 11. GND |

* Recommended devices:
RF Monolithics RO2125A for 304 MHz
RF Monolithics RO2102A for 423 MHz
or equivalent

TYPICAL INPUT MATCHING CIRCUIT

3 pole high-pass network provides greater than 20 dB rejection in the FM band (<100 MHz) and a VSWR of 1.5:1 at 315 MHz.

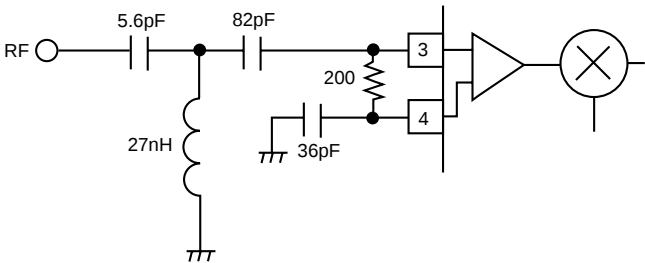

ORDERING INFORMATION

PART NUMBER	QUANTITY
UPC2768GR-E1	2500/Reel

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CEL:

[UPC2746TB-E3-A](#)