

TOSHIBA SOLID STATE I/O INTERFACE MODULE

TF1108

AC OUTPUT MODULE

TOSHIBA TF1108 is AC 100V Line Controlled I/O Interface Module and it includes the optical isolator.
Using this Module, you can design high reliability and compact system.

- R.M.S. On-State Current : $I_{T(RMS)}=1A$ (Max.)
- Nominal AC Line Voltage : $V_{AC}=70\sim140V$ AC
- Recommended Input Supply Voltage : $V_{CC}=5V$
- 1500V AC Optical Isolation
- Including Snubber Network
- Input is Compatible with TTL Logic
- Small Size and Light Weight


MAXIMUM RATINGS ($T_a = 25^{\circ}C$)
INPUT (CONTROL)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Control Input Voltage	$V_{F(IN)}$	6	V
Control Input Supply Voltage	V_{CC}	4.5~6	V


OUTPUT (AC LOAD)

Non-Repetitive Peak off-State Voltage	V_{DSM}	400	V
R.M.S. On-State Current	$I_{T(RMS)}$	1	A
Peak One Cycle Surge On-State Current (Non-Repetitive)	I_{TSM}	12 (50Hz) 13 (60Hz)	A
Operating Frequency Range	f	45~65	Hz
Isolation Voltage (Input-Output) (AC)	BV_S / AC	1500 (1min)	V
Operating Temperature Range	T_{opr}	-20~80	°C
Storage Temperature Range	T_{stg}	-20~80	°C
Lead Soldering Temperature (10s)	T_{sol}	260	°C

MARK

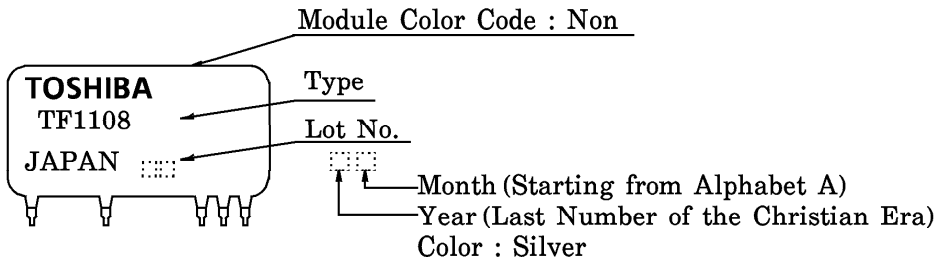


Unit in mm

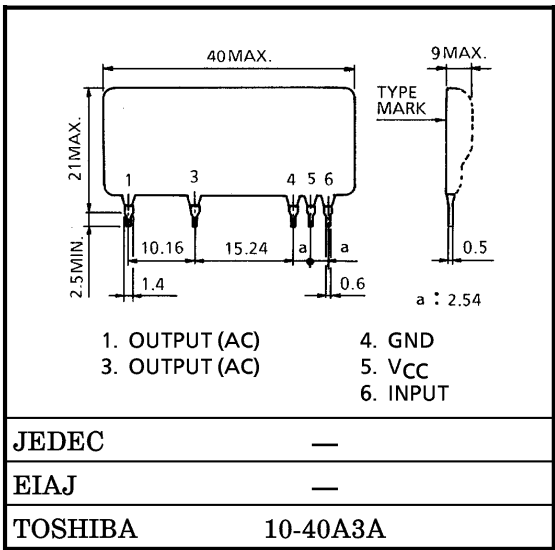

Weight : 8g

BLOCK DIAGRAM

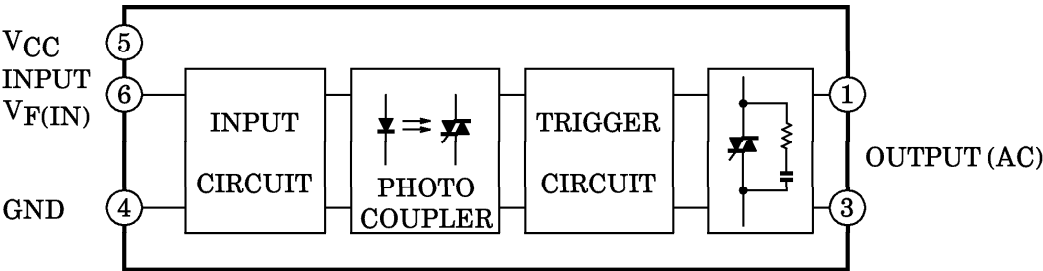

ELECTRICAL CHARACTERISTICS (Ta = 25°C, VCC = 5V)
INPUT (CONTROL)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Pick Up Current	I_{FT}	$V_{AC} = 100V$ Resistive Load ($R_L = 100\Omega$)	-0.6	-0.4	—	mA
Drop Out Current	I_{FD}		—	0.37	0.1	
Input Resistance	R_{IN}	—	—	4.1	—	k Ω

OUTPUT (AC LOAD)

Off-State Leakage Current	I_{OL}	$V_{AC} = 100V, f = 50Hz$	—	—	1	mA
Peak On-State Voltage	V_{TM}	$T_T(RMS) = 1A$	—	—	1.5	V
dv / dt (Off-State)	dv / dt	$V_{DSM} = 0.7 \times \text{Rated}$	30	—	—	V / μs
dv / dt (Commutating)	(dv / dt) c	$V_{DSM} = 0.7 \times \text{Rated}$ $T_T(RMS) = 1A$	2	—	—	V / μs
Turn-On Time	t_{on}	$V_{AC} = 100V$	—	—	1	ms
Turn-Off Time	t_{off}	Resistive Load ($R_L = 100\Omega$)	—	—	1 / 2	Cycle
Isolation Resistance	R_S	$V = 1kV, R.H = 40 \sim 60\%$	—	10^{10}	—	Ω




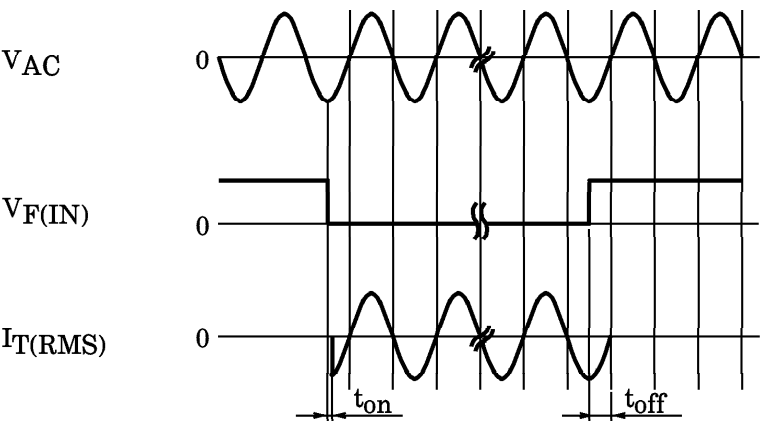


Fig.1 SWITCHING TIME TEST CONDITION

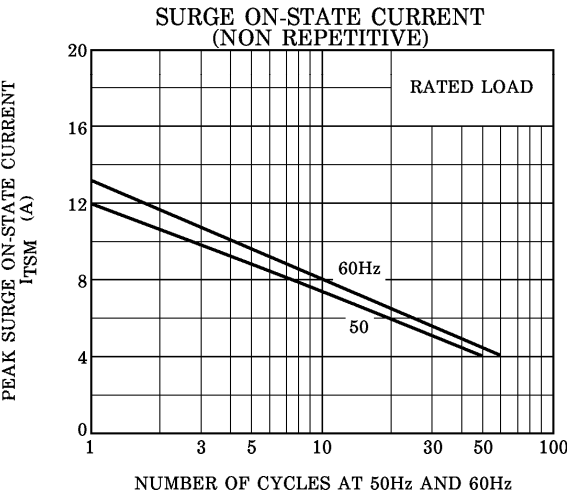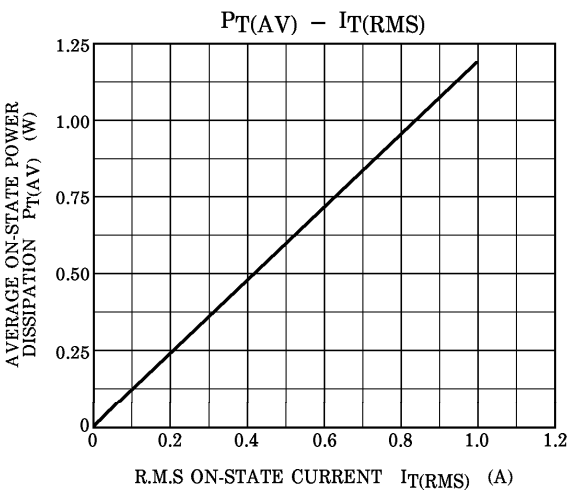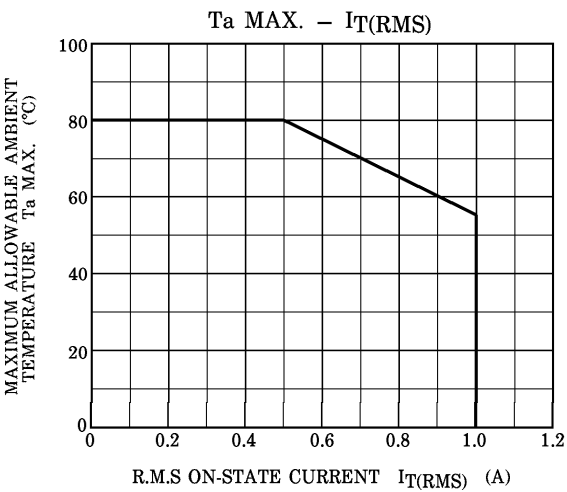

RESTRICTIONS ON PRODUCT USE

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.