


2009

RELEASED FOR PUBLICATION

THIS DRAWING IS UNPUBLISHED.


ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION		DATE	DWN	APVD
E	B	A1	REVISED PER ECO-11-005150		28APR11	RK HMR

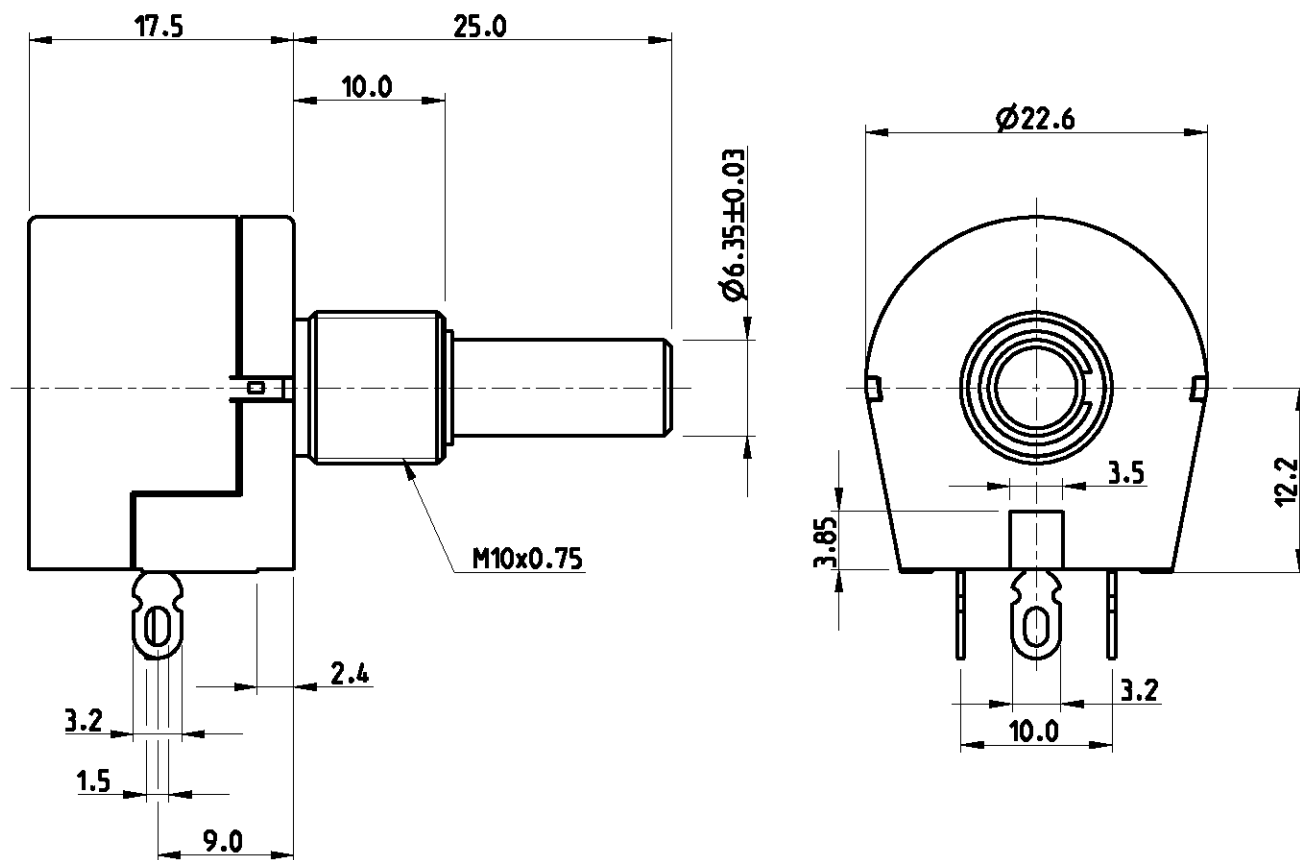



RoHS Compliant

FOR FURTHER INFORMATION SEE DATA SHEET FOR
SERIES TW - WIRE WOUND SPINDLE OPERATED POTENTIOMETER



SCALE 1:1

DIMENSIONS:		DWN SUBHASH.M	08-JAN-09	MATERIAL		FINISH		
mm		CHK ALLAN.P	08-JAN-09	TE Connectivity				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD STEPHEN.P	08-JAN-09					
0 PLC	±0.2	PRODUCT SPEC		NAME WIRE WOUND SPINDLE OPERATED POTENTIOMETER SERIES TW				
1 PLC	±0.1	-						
2 PLC	±	APPLICATION SPEC		SIZECAGE CODEDRAWING NORESTRICTED TO				
3 PLC	±	-						
4 PLC	±	WEIGHT		A 400779C-1676979-				
ANGLES	±5°	-						
		CUSTOMER DRAWING		SCALE		SHEET 1 OF 1		REV A1
				2:1				



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[TW1100KA](#)