

# "High Frequency Ceramic Solutions"

## 910 MHz Directional Coupler/ Low Pass Filter Combination

Detail Specification: 10/13/08

P/N 0910CF15A0100

Page 1 of 4

### General Specifications

Part Number	0910CF15A0100
Frequency (MHz)	860 - 960
Attenuation (min.)	30 dB @ 2 x Fo
Attenuation (min.)	30 dB @ 3 x Fo
Attenuation (min.)	30 dB @ 4 x Fo
Attenuation (min.)	30 dB @ 5 x Fo
Insertion Loss	1 dB max.

Return Loss	20 dB min.
Coupling	13 ± 1 dB
Isolation	30 dB min.
Impedance	50 Ω
Operating and Storage Temp	-40 to +85°C
Reel Quantity	4000

P/N Suffix	Packaging Style	Bulk	Suffix = S	Eg. 0910CF15A0100
	T & R	Suffix = E		Eg. 0910CF15A0100
Termination Style	100% Tin	Suffix = None		Eg. 0910CF15A0100(E or S)
	Tin / Lead	Suffix = /Pb		Eg. 0910CF15A0100(E or S)/Pb

Terminal Configuration	
No.	Function
1	Termination
2	GND
3	GND
4	Input
5	Coupled Out
6	GND
7	GND
8	Output

### Mechanical Dimensions


L	In	mm	Case Size: 15-2B
	0.079 ± 0.004	2.00 ± 0.10	
W	0.049 ± 0.004	1.25 ± 0.10	
T	0.027 ± 0.004	0.70 ± 0.10	
a	0.012 ± 0.004	0.30 ± 0.10	
b	0.008 ± 0.004	0.20 ± 0.10	
c	0.012 +.004/-0.008	0.30 +0.1/-0.2	
g	0.014 ± 0.004	0.35 ± 0.10	
p	0.026 ± 0.002	0.65 ± 0.05	

### Mounting Considerations

Mount these devices with brown mark facing up.

Line width should be designed to provide 50 ohm impedance, depending on PCB material and thickness

Units: mils

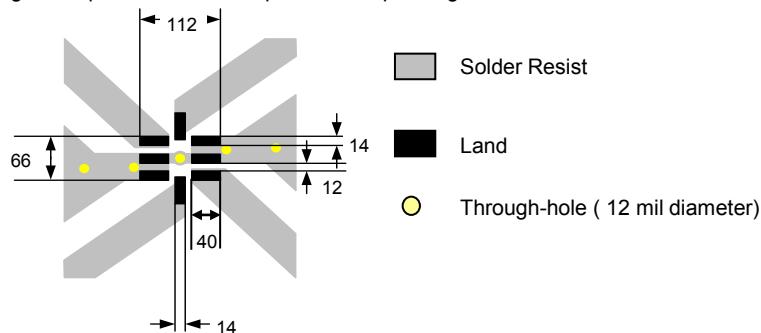

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

# "High Frequency Ceramic Solutions"


**910 MHz Directional Coupler/ Low Pass Filter Combination**

**P/N 0910CF15A0100**

Detail Specification: 10/13/08

Page 2 of 4

## Typical Electrical Performance (T=25°C)

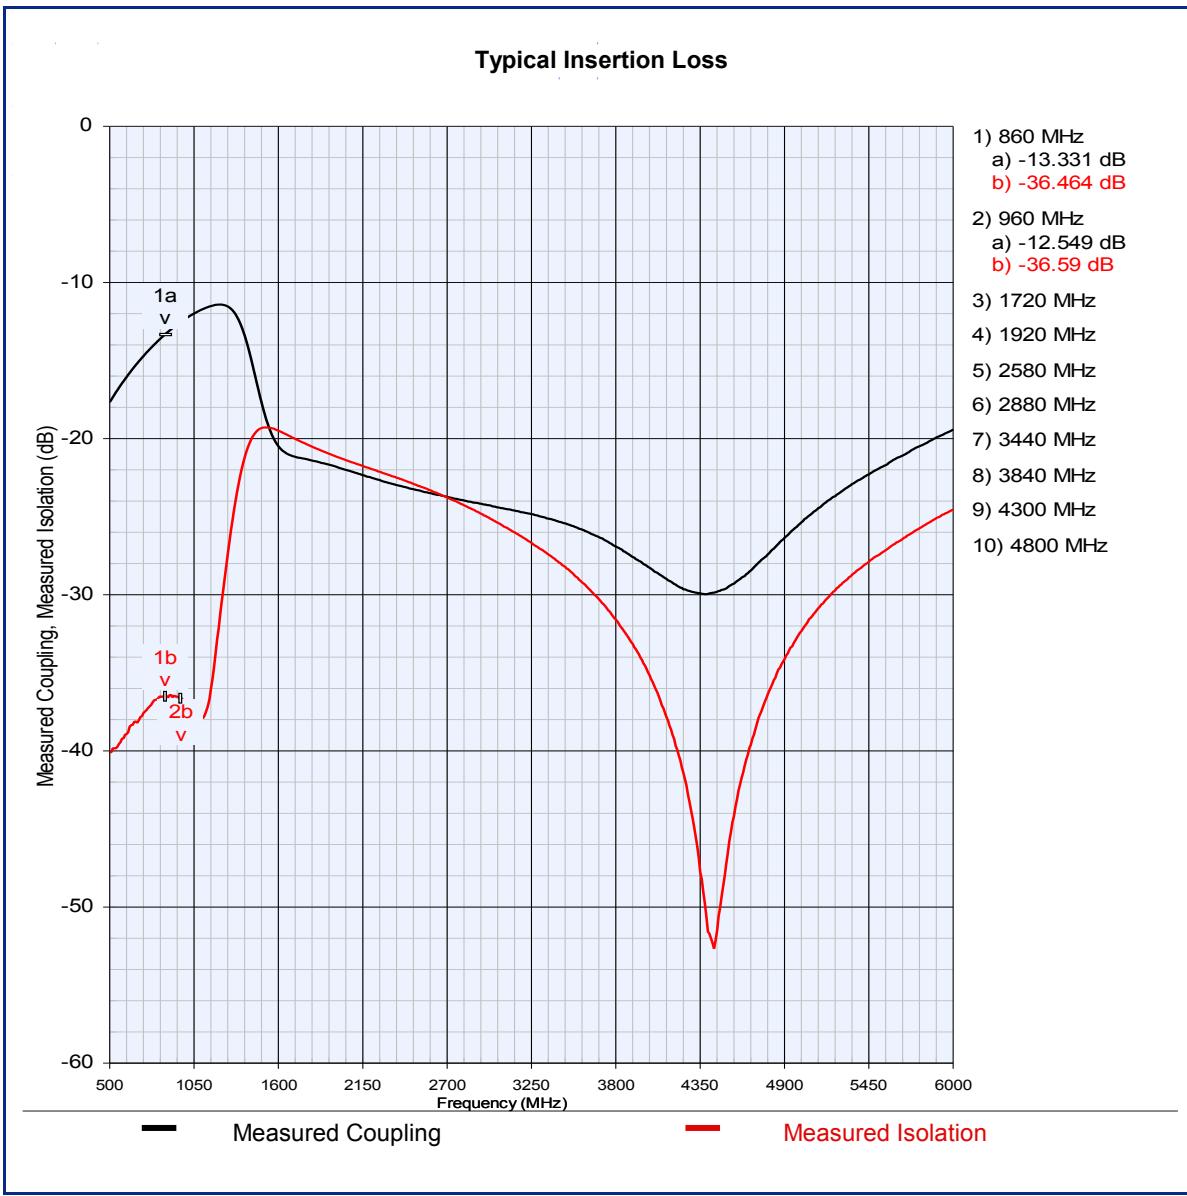

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

**JOHANSON  
TECHNOLOGY**

[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2008 Johanson Technology, Inc. All Rights Reserved

# "High Frequency Ceramic Solutions"


**910 MHz Directional Coupler/ Low Pass Filter Combination**

**P/N 0910CF15A0100**

Detail Specification: 10/13/08

Page 3 of 4

## Typical Electrical Performance (T=25°C)

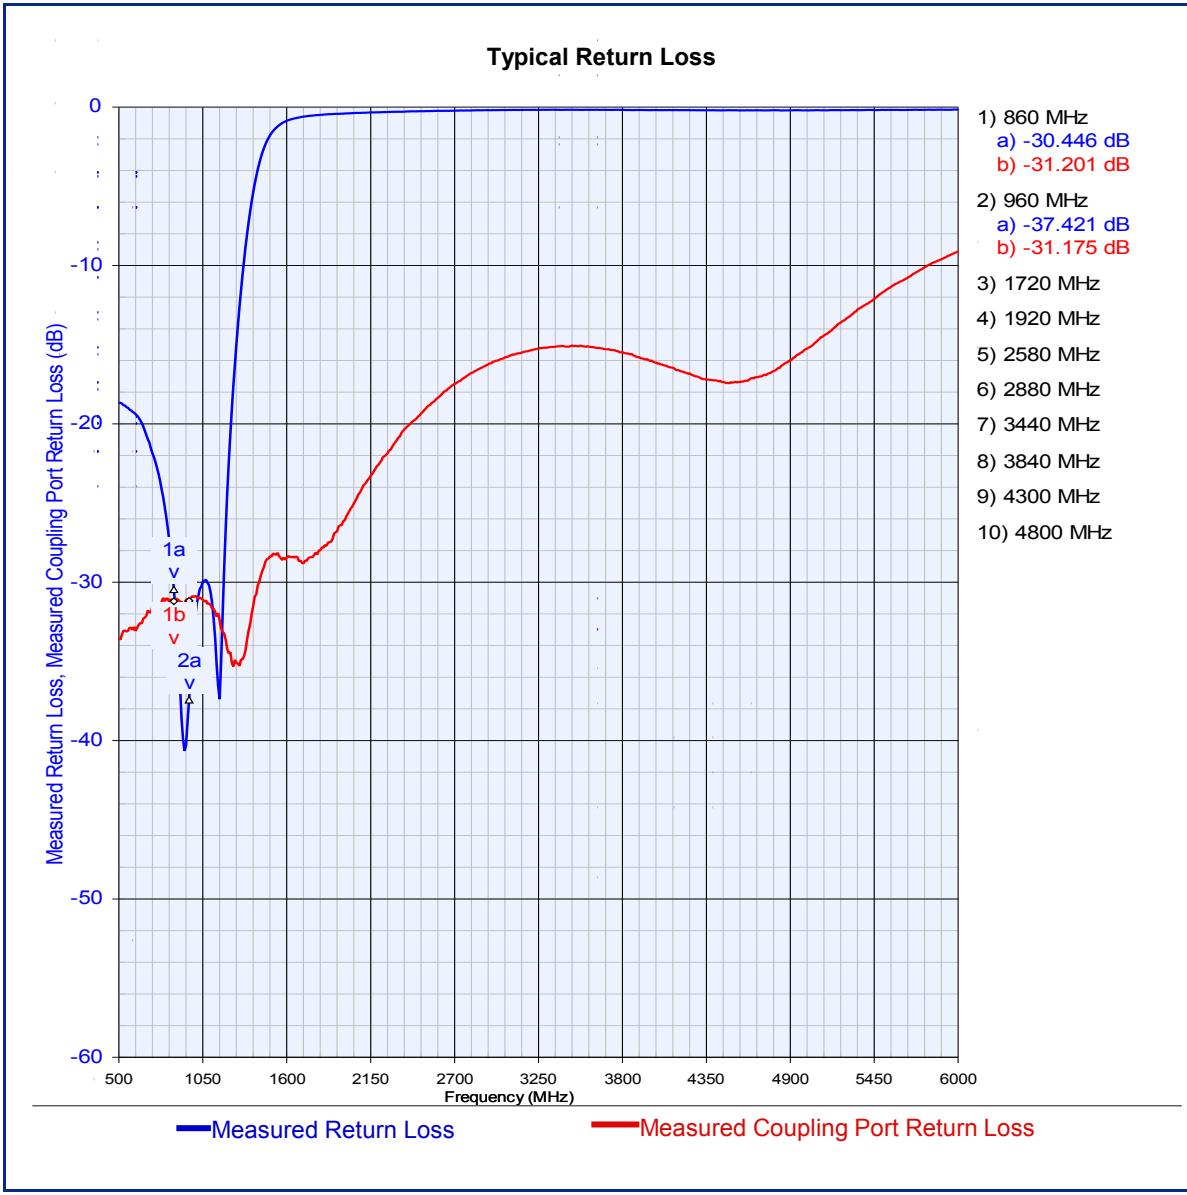

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

**JOHANSON**  
**TECHNOLOGY**

[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2008 Johanson Technology, Inc. All Rights Reserved

# "High Frequency Ceramic Solutions"


910 MHz Directional Coupler/ Low Pass Filter Combination

P/N 0910CF15A0100

Detail Specification: 10/13/08

Page 4 of 4

## Typical Electrical Performance (T=25°C)

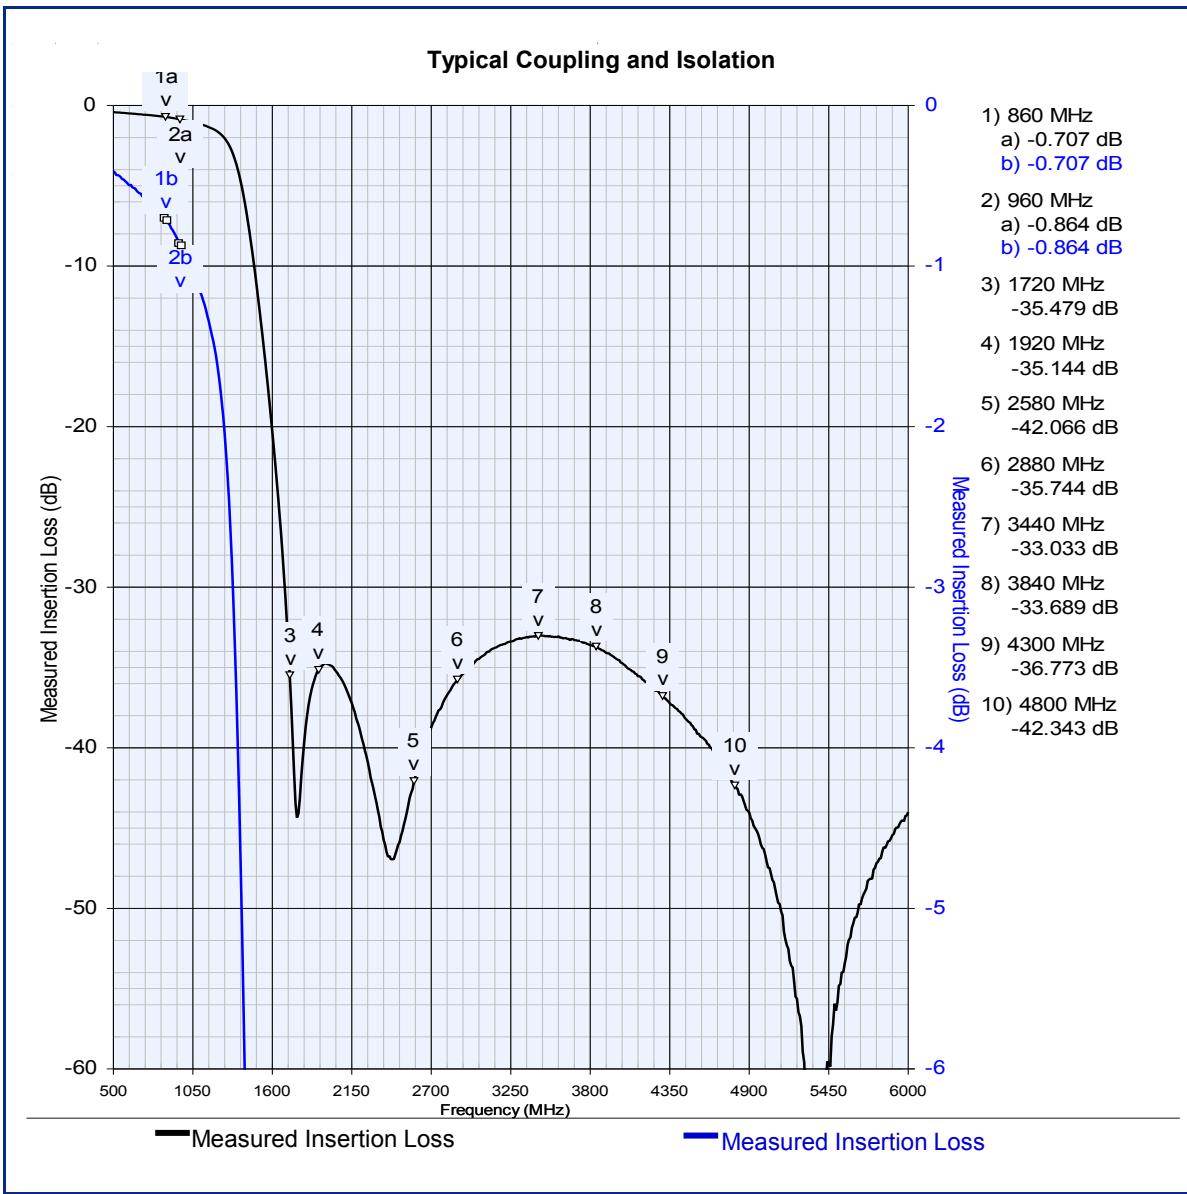

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

**JOHANSON**  
**TECHNOLOGY**

[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2008 Johanson Technology, Inc. All Rights Reserved