


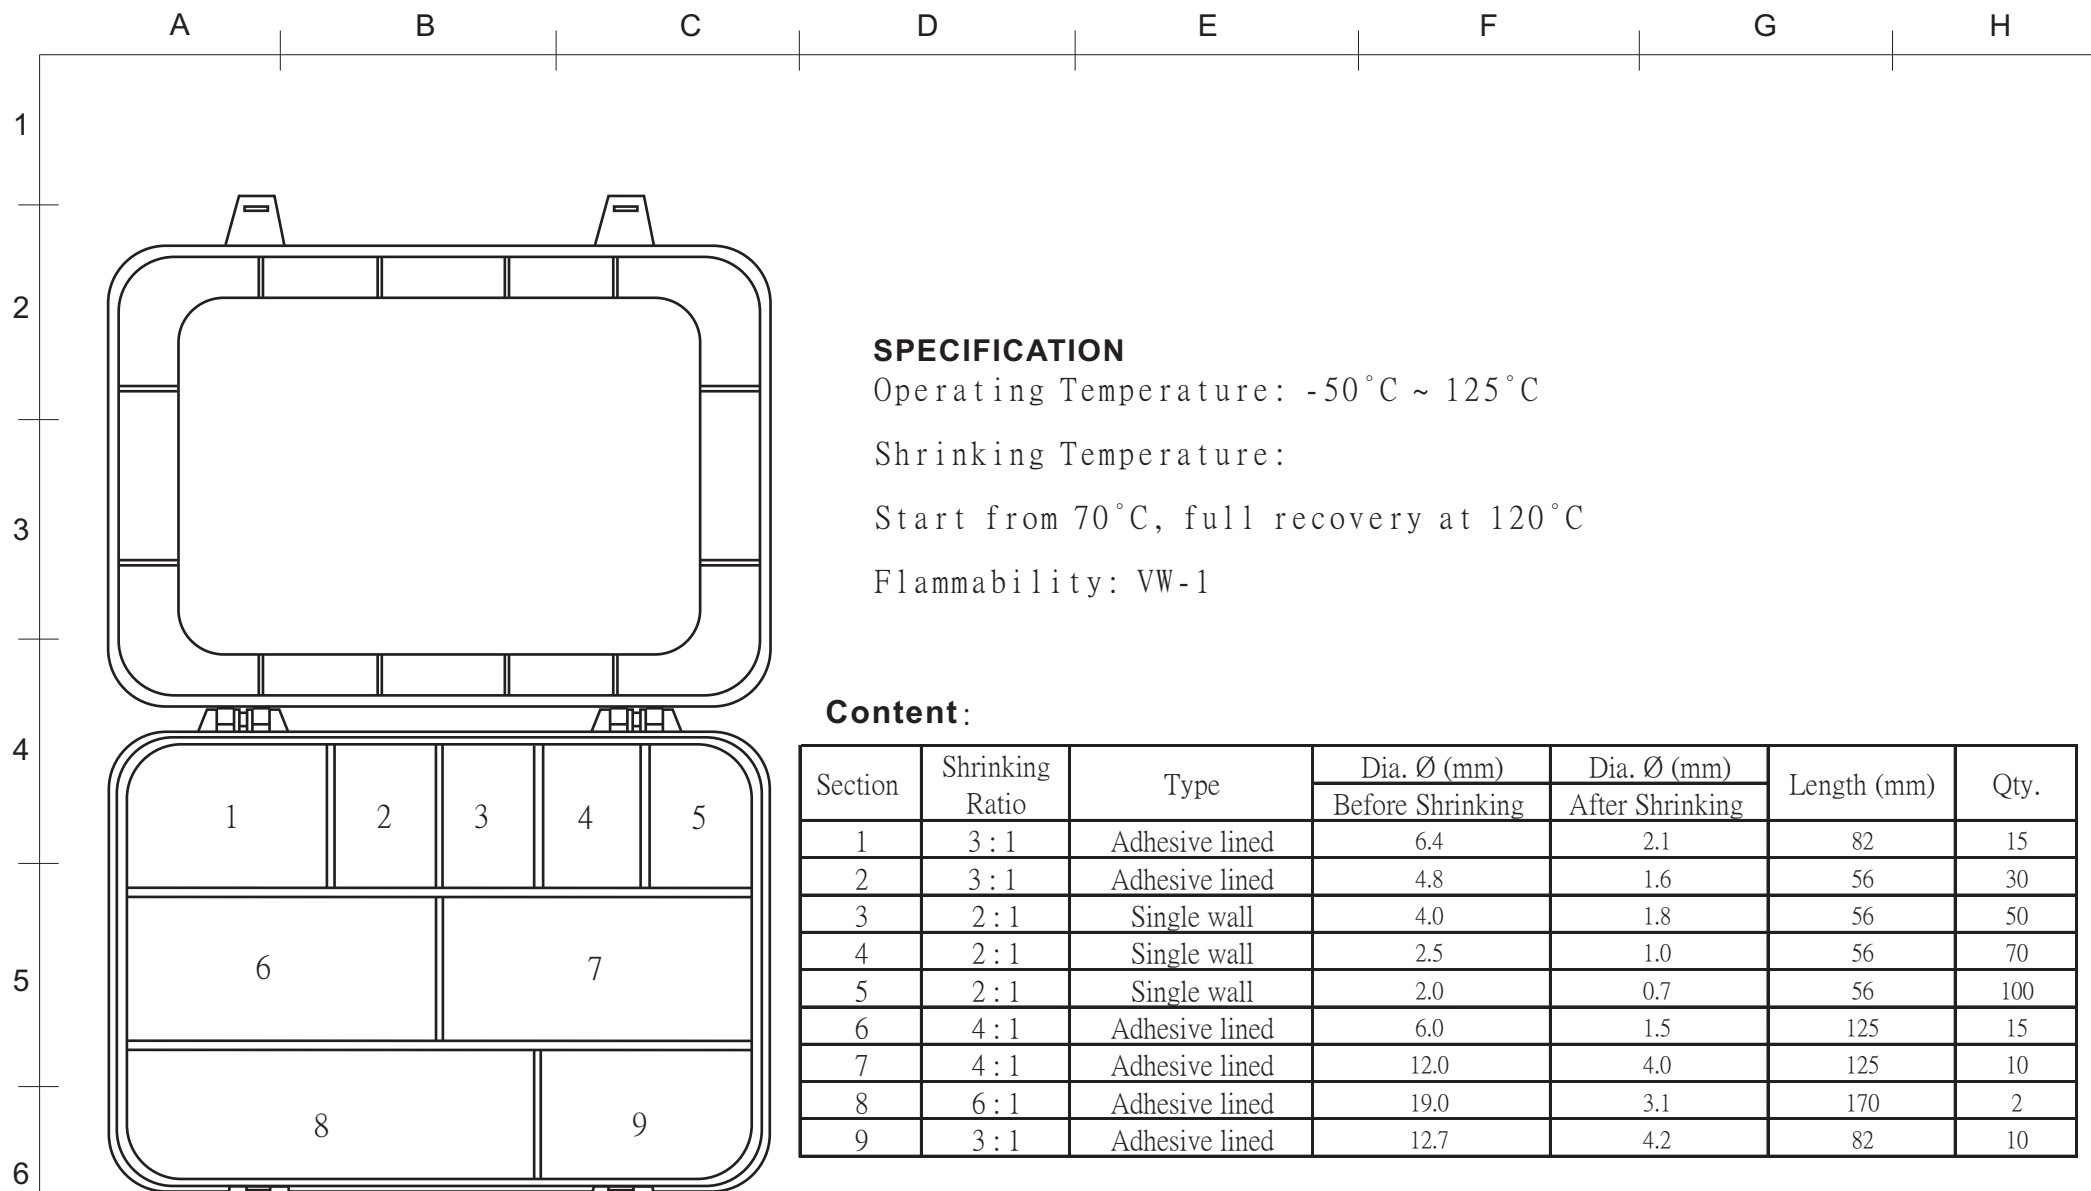

SPECIFICATION

Operating Temperature: -50°C ~ 125°C

Shrinking Temperature:

Start from 70°C, full recovery at 120°C

Flammability: VW-1

Content:

Section	Shrinking Ratio	Type	Dia. Ø (mm)		Length (mm)	Qty.
			Before Shrinking	After Shrinking		
1	3 : 1	Adhesive lined	6.4	2.1	82	15
2	3 : 1	Adhesive lined	4.8	1.6	56	30
3	2 : 1	Single wall	4.0	1.8	56	50
4	2 : 1	Single wall	2.5	1.0	56	70
5	2 : 1	Single wall	2.0	0.7	56	100
6	4 : 1	Adhesive lined	6.0	1.5	125	15
7	4 : 1	Adhesive lined	12.0	4.0	125	10
8	6 : 1	Adhesive lined	19.0	3.1	170	2
9	3 : 1	Adhesive lined	12.7	4.2	82	10

DATE	REVISION	APPROVAL BY	DIMENSION	mm	PART No	HST-302S
			DRAW BY	Andy	NAME	Sortiment Heat shrink tube Set
			APPROVAL BY	Rikki		
			DATE	02-11-11		