


# 1.27mm Pitch Multi-function Two Piece Connector

## FX2 Series

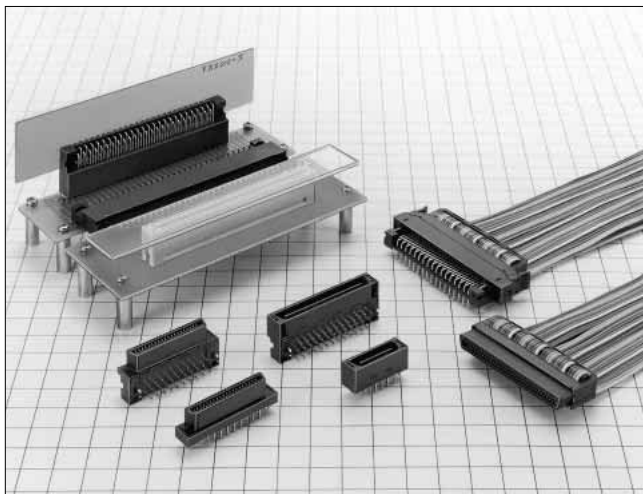


### ■ Features

#### 1. Various connection with various product line


| Stacking connection               |          | Vertical type                     |          | Cable connection |
|-----------------------------------|----------|-----------------------------------|----------|------------------|
| Through hole type                 | SMT type | Through hole type                 | SMT type |                  |
|                                   |          |                                   |          |                  |
| <br>Through hole type    SMT type |          | <br>Through hole type    SMT type |          | <br>Cable only   |
|                                   |          |                                   |          |                  |

|                                           |  |                                                    |
|-------------------------------------------|--|----------------------------------------------------|
| Through hole type<br><br><br>SMT type<br> |  | Horizontal type<br><br>                            |
|                                           |  | Vertical type<br>Through hole type    SMT type<br> |
| Cable only<br>                            |  | Cable connection<br>                               |


#### Stacking connection (Stack height: 12~16mm)



#### Horizontal Connection



#### Vertical Connection



#### 2. Easy One-Touch Operation


The ribbon cable connection type allows easy one-touch operation with either single hand.

#### Insertion and Extraction

(1) Pick internal locks with thumb and the index finger.



(2) With unique and preferable click feeling, the cable and connector can be inserted or withdrawn.

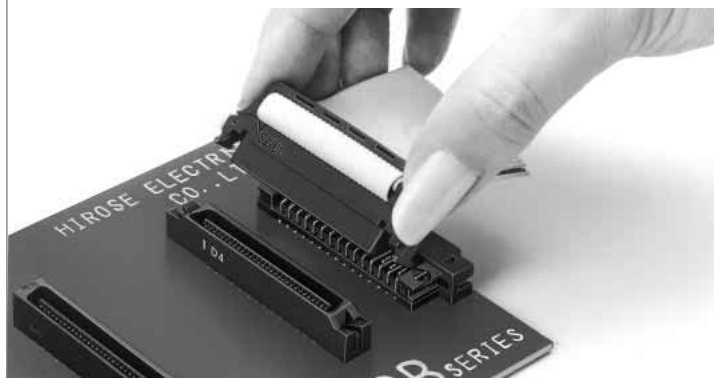

(For insertion, the operation proceeds from procedure (2) to (1).)

## FX2 Series 1.27mm Pitch Multi-function Two Piece Connector

### 3. Board to board type

#### ① Flux swell prevention

The straight through hole type takes the complete flux tight action from the board back side at solder dipping. The type is prepared, corresponding to whether or not cleaning is required.

#### ② Stack height 12mm to 16mm

The board stack height can be set to every 1 mm unit up to 12 to 16mm.

#### ③ Mis-insertion preventive mechanism

The mating area is designed in a mechanism so as to prevent mis-insertion, and complete countermeasures have been taken against wrenching.

## Applications

Computers, peripheral equipments, various machines etc.

## Product Specifications

|        |                        |                                                     |                                                   |
|--------|------------------------|-----------------------------------------------------|---------------------------------------------------|
| Rating | Current rating 0.5A    | Operating Temperature Range -55°C to +85°C (Note 1) | Storage Temperature Range -10°C to +60°C (Note 2) |
|        | Voltage rating 125V AC | Operating Humidity Range 40 to 80%                  | Storage Humidity Range 40 to 70% (Note 2)         |

| Item                             | Specification                                                                                                        | Condition                                                                                                |
|----------------------------------|----------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
| 1. Insulation Resistance         | 1000M ohms min                                                                                                       | 250V DC                                                                                                  |
| 2. Withstanding Voltage          | No flashover or insulation breakdown.                                                                                | 300V AC/1 minute                                                                                         |
| 3. Contact Resistance            | 45m ohms max.                                                                                                        | 100mA                                                                                                    |
| 4. Vibration                     | No electrical discontinuity of 1μs or more                                                                           | Frequency: 10 to 55 Hz, single amplitude of 0.75 mm, 2 hours in each of the 3 directions.                |
| 5. Humidity (Steady state)       | Contact resistance: 55m ohms max. Insulation resistance: 100M ohms min.                                              | 96 hours at temperature of 40°C and humidity of 90% to 95%                                               |
| 6. Temperature Cycle             | Contact resistance: 55m ohms max.<br>Insulation resistance: 100M ohms min.<br>No damage, cracks, or parts looseness. | (-55°C: 30 minutes→15 to 35°C: 2 to 3 minutes →<br>85°C: 30 minutes→15 to 35°C: 2 to 3 minutes) 5 cycles |
| 7. Durability (Mating/un-mating) | Contact resistance: 55 m ohms max.                                                                                   | 500 cycles                                                                                               |
| 8. Resistance to soldering heat  | No deformation of components affecting performance.                                                                  | SMT Type<br>Reflow: At the recommended temperature profile<br>Manual soldering: 360°C for 5 seconds      |
|                                  |                                                                                                                      | DIP Type<br>Solder bath: 260°C for 10 seconds<br>Manual soldering: 360°C for 5 seconds                   |

Note 1: Includes temperature rise caused by current flow.


Note 2: The term "storage" refers to products stored for long period of time prior to mounting and use. Operating Temperature Range and Humidity range covers non conducting condition of installed connectors in storage, shipment or during transportation.

Note 3: Information contained in this catalog represents general requirements for this Series. Contact us for the drawings and specifications for a specific part number shown.

## Material

| Parts     |            | Material                 | Finish                | Remark  |
|-----------|------------|--------------------------|-----------------------|---------|
| Insulator | Dip type   | Polyamid                 | Black                 | UL94V-0 |
|           | Socket     | PBT/Polyamid             |                       |         |
|           | SMT type   | PPS                      | Light brown           |         |
| Contact   | Receptacle | Phosphor bronze          | Selective gold plated | _____   |
|           | Socket     |                          |                       |         |
|           | Header     | Phosphor bronze or brass |                       |         |

## Stacking Variation



| Header \ Receptacle |                      | Dip type           |                     | SMT type         |
|---------------------|----------------------|--------------------|---------------------|------------------|
|                     |                      | FX2C-*S-1.27DSA(L) | FX2C2-*S-1.27DSA(L) | FX2-*S-1.27SV(L) |
| Dip type            | FX2C-*P-1.27DSA(L)   | 12                 | 14.0                | 12.2             |
|                     | FX2CA-*P-1.27DSA(L)  |                    |                     |                  |
|                     | FX2CA1-*P-1.27DSA(L) |                    |                     |                  |
|                     | FX2CA2-*P-1.27DSA(L) |                    |                     |                  |
| SMT type            | FX2-*P-1.27SV(L)     | 12.1               | 14.1                | 12.3             |

Unit:mm

Ordering Information

Board to Board Receptacle

FX2 CA 2 - \* S - 1.27 DSA L

1 2 3 4 5 6 7 8

|                                       |                                                            |
|---------------------------------------|------------------------------------------------------------|
| 1 Series Name :FX2                    | 4 Number of contacts: 20, 32, 40, 52, 60, 68, 80, 100, 120 |
| 2 Blank: Right angle type             | 5 Connector type: S: Receptacle                            |
| C : Straight non-cleaning type        | 6 Contact pitch: 1.27mm                                    |
| CA : Straight cleaning type           | 7 Contact type                                             |
| 3 Product height variation (DSA only) | DS : Right angle type                                      |
| Blank : Standard product              | DSA : Straight type                                        |
| 2 : +2mm                              | 8 L: Board prefixed pin                                    |

Board to Board Header

FX2 CA 1 - \* P - 1.27 DSA L

1 2 3 4 5 6 7 8

|                                       |                                                            |
|---------------------------------------|------------------------------------------------------------|
| 1 Series Name :FX2                    | 4 Number of contacts: 20, 32, 40, 52, 60, 68, 80, 100, 120 |
| 2 None : Right angle type             | 5 Connector type: P: header                                |
| C : Straight non-cleaning type        | 6 Contact pitch: 1.27mm                                    |
| CA : Straight cleaning type           | 7 Contact type:                                            |
| 3 Product height variation (DSA only) | DS : Right angle type                                      |
| Blank : Standard product              | DSA : Straight type                                        |
| 1 : +1mm                              | 8 L: Board prefixed pin                                    |
| 2 : +2mm                              |                                                            |

Note 1. C and CA take complete countermeasures against flux.  
Note 2. Cleaning type: the liquid escape hole is added at dip cleaning.  
Note 3. No-cleaning type: no liquid escape hole is added at dip cleaning.

Board to Cable Socket

FX2 BA - \* S A - 1.27 R

1 2 3 4 5 6 7

|                                                       |                                        |
|-------------------------------------------------------|----------------------------------------|
| 1 Series Name : FX2                                   | 4 S: Socket                            |
| 2 B : Lock cable type                                 | 5 A: Contact material: phosphor bronze |
| BA : No lock cable type                               | 6 Contact pitch: 1.27mm                |
| 3 Number of contacts: 20, 32, 40, 52, 60, 68, 80, 100 | 7 R: Insulation displacement           |

## FX2 Series 1.27mm Pitch Multi-function Two Piece Connector

### ●Board to Cable Header

**FX2**   **BA** - **\*** **P** **A** - **1.27** **DSA** **L**  
           ①           ②           ③   ④   ⑤           ⑥           ⑦   ⑧

|                                                                                                     |                                                                           |
|-----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|
| ① Series Name : FX2                                                                                 | ⑤ None : Contact material: phosphor bronze<br>A : Contact material: brass |
| ② B : Lock straight no cleaning type<br>: Lock right angle type<br>BA : Lock straight cleaning type | ⑥ Contact pitch: 1.27mm                                                   |
| ③ Number of contacts: 20, 32, 40, 52, 60, 68, 80, 100                                               | ⑦ Contact type:<br>DS : Right angle type<br>DSA : Straight type           |
| ④ Connector type: P: header                                                                         | ⑧ L: Board prefixed pin                                                   |

Note 1. Cleaning type: The liquid escape hole is added at dip cleaning.

Note 2. No cleaning type: No liquid escape hole is added at dip cleaning.

Note 3. Straight 20 and 32 contact types use phosphor bronze for contact material.

### ●Straight SMT Type

**FX2** - **\*** **P** - **1.27** **SV** **L**  
           ①           ②   ③           ④   ⑤   ⑥

|                                                            |                                          |
|------------------------------------------------------------|------------------------------------------|
| ① Series Name :FX2                                         | ④ Contact pitch: 1.27mm                  |
| ② Number of contacts: 20, 32, 40, 52, 60, 68, 80, 100, 120 | ⑤ Contact type:<br>SV: Straight SMT type |
| ③ Connector type: P: Header<br>S: Receptacle               | ⑥ L: Board prefixed pin                  |











### ●Header Right Angle SMT Type

**FX2**   **A** - **\*** **P** - **0.635** **SH**  
           ①           ②           ③   ④           ⑤   ⑥

|                                          |                                            |
|------------------------------------------|--------------------------------------------|
| ① Series Name :FX2                       | ④ Connector type: P: Header                |
| ② Blank: With boss<br>A : Without boss   | ⑤ Mounting area pitch: 0.635mm             |
| ③ Number of contacts: 20, 40, 52, 60, 80 | ⑥ Contact type<br>SH: Right angle SMT type |

◆FX2 Functional Flow Chart


Board to Board Cable Type

| Header Side                                                                                                                                                              | Receptacle and Socket Side                                                                                                                                              |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>FX2-*P-1.27DS (L)</b><br/>Right angle type</p>                                    | <p><b>FX2-*S-1.27DS (L)</b><br/>Right angle type</p>                                 |
| <p><b>FX2(A)-*P-0.635SH</b><br/>Right angle type<br/>SMT type</p>                       | <p><b>FX2C-*S-1.27DS (L)</b><br/>Straight type<br/>No cleaning type, flux tight</p>  |
| <p><b>FX2C-*P-1.27DSA (L)</b><br/>Straight type<br/>No cleaning type, flux tight</p>  | <p><b>FX2C-*S-1.27DS (L)</b><br/>Straight type<br/>Cleaning type, flux tight</p>   |
| <p><b>FX2CA-*P-1.27DSA (L)</b><br/>Straight type<br/>Cleaning type, flux tight</p>    | <p><b>FX2CA-*S-1.27DSV (L)</b><br/>Straight type<br/>SMT type</p>                  |
| <p><b>FX2-*P-1.27DSA (L)</b><br/>Straight type<br/>SMT type</p>                       | <p><b>FX2BA-*SA-1.27R</b><br/>No lock cable type</p>                               |







FX2 Series 1.27mm Pitch Multi-function Two Piece Connector

◆FX2 Functional Flow Chart

Board to Board Cable Type

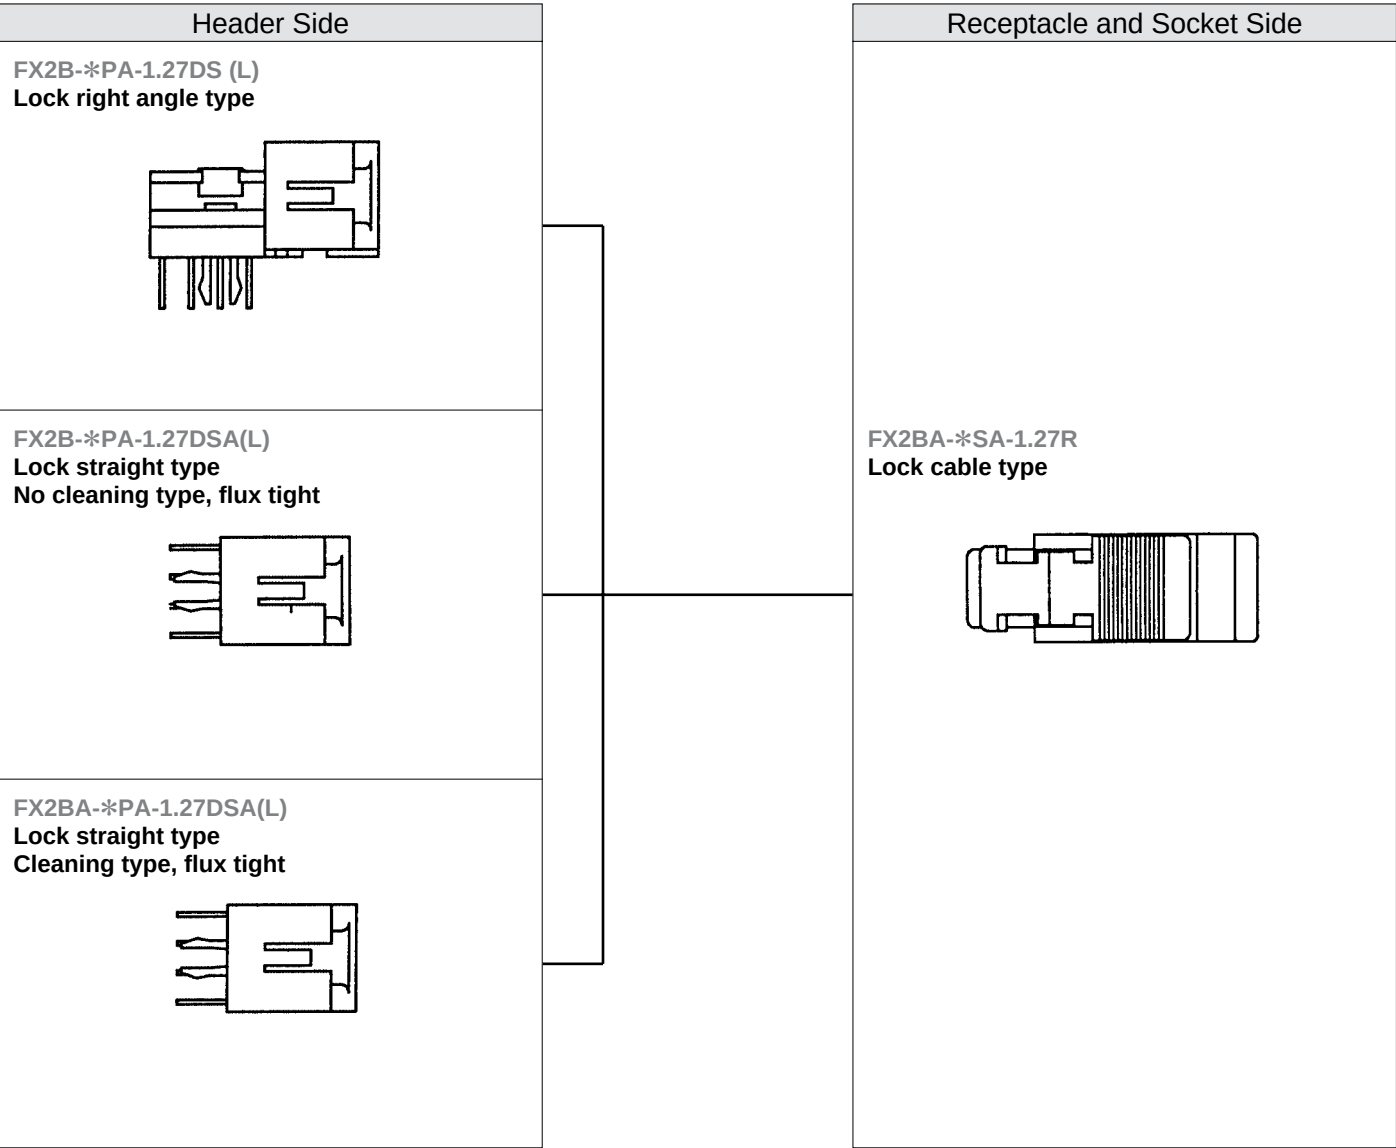


## ◆ Through hole Type Application Pattern

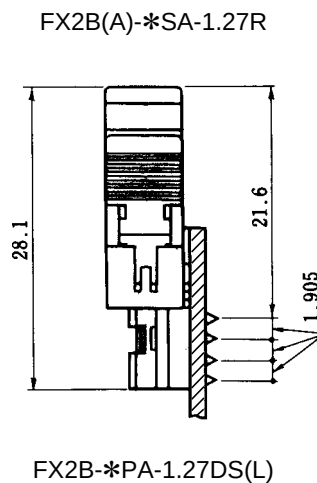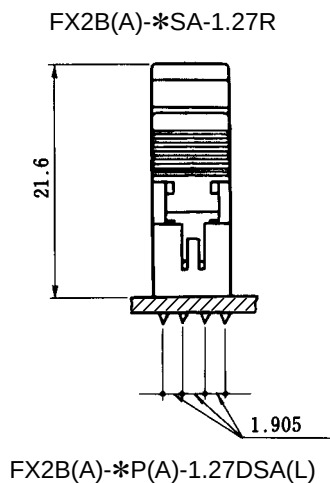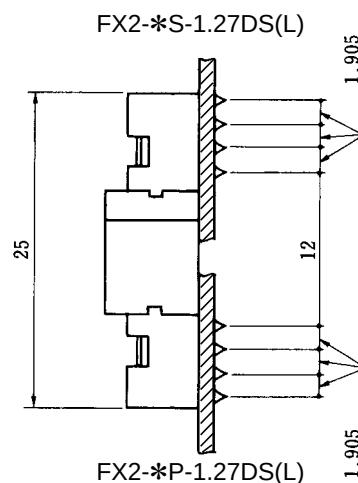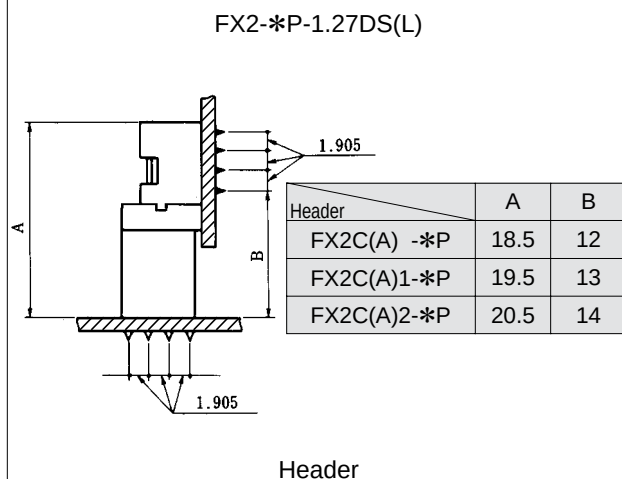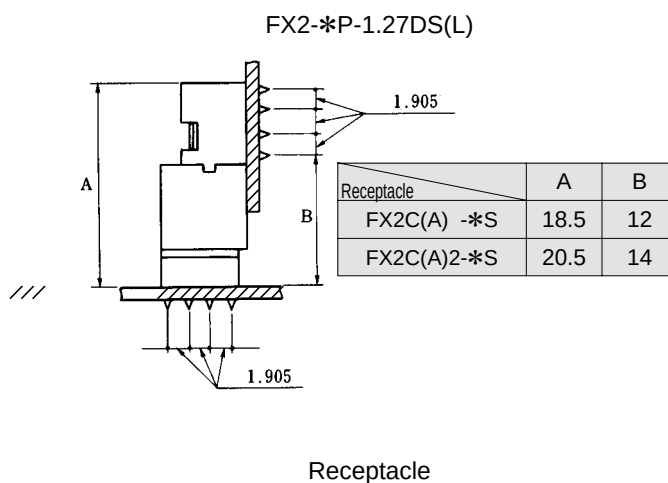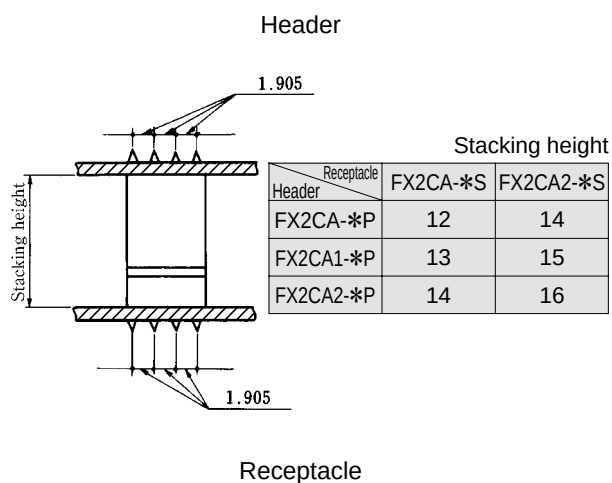

## FX2 Series 1.27mm Pitch Multi-Function Two Piece Connector


### ◆ SMT Type Application Pattern

FX2-\*P-1.27SV(L)




FX2-\*S-1.27SV(L)

FX2-\*S-1.27SV(L)

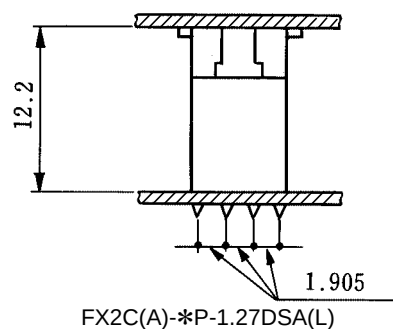


FX2-\*P-1.27SV(L)




FX2C(A)-\*S-1.27-DSA(L)

FX2-\*S-1.27SV(L)

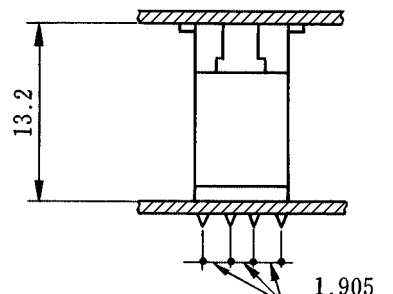


FX2C(A)1-\*P-1.27DSA(L)

FX2-\*P-1.27SV(L)

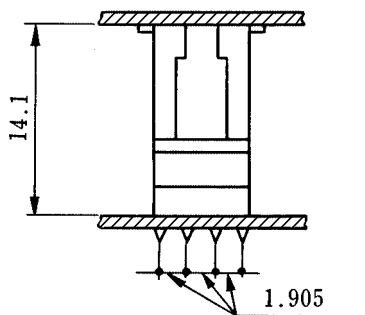


FX2C(A)2-\*S-1.27DSA(L)

FX2-\*S-1.27SV(L)

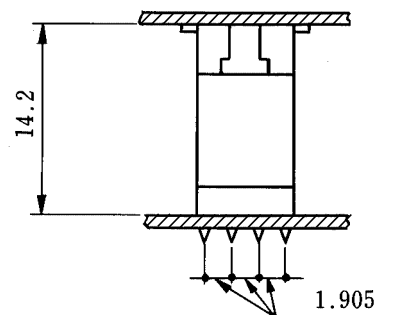


FX2C(A)2-\*P-1.27DSA(L)

FX2-\*P-1.27SV(L)

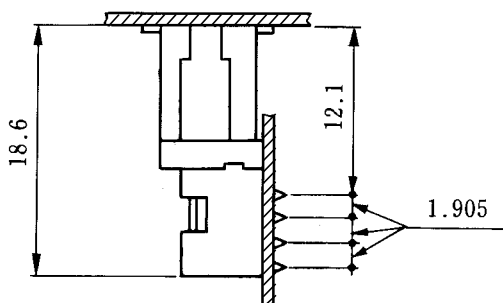

FX2-\*S-1.27DS(L)

FX2-\*S-1.27SV(L)

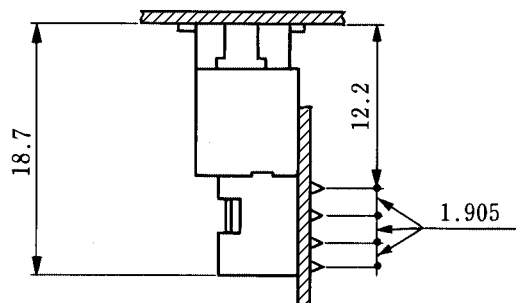


FX2-\*P-1.27DS(L)




## ◆ SMT Type Application Pattern

FX2(A)-\*P-0.635SH

| Receptacle | A    |
|------------|------|
| FX2C(A)    | 14.7 |
| FX2C(A)2   | 16.7 |

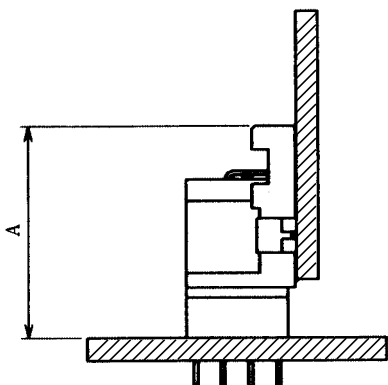

FX2(A)-\*P-0.635SH

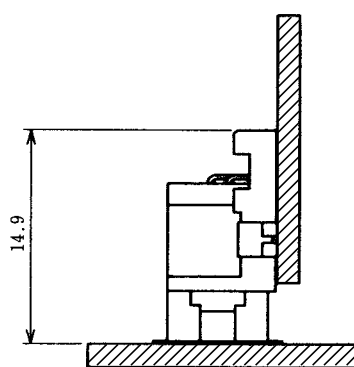


FX2C(A\*2)-\*S-1.27DSA(L)


FX2-\*S-1.27SV(L)

FX2(A)-\*P-0.635SH

FX2(A)-\*P-0.635SH

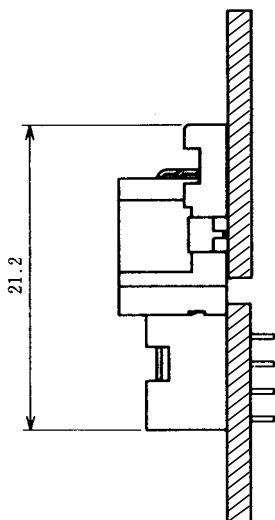

FX2-\*S-1.27DS(L)


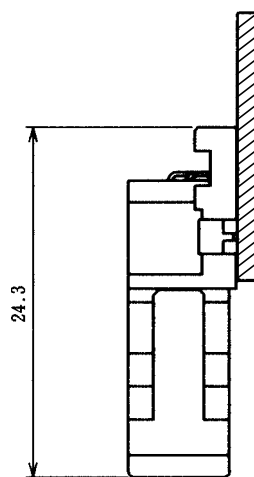


FX2BA-\*SA-1.27R


## FX2 Series 1.27mm Pitch Multi-function Two Piece Connector

### ■Receptacle No Cleaning Type

#### ●Straight Type

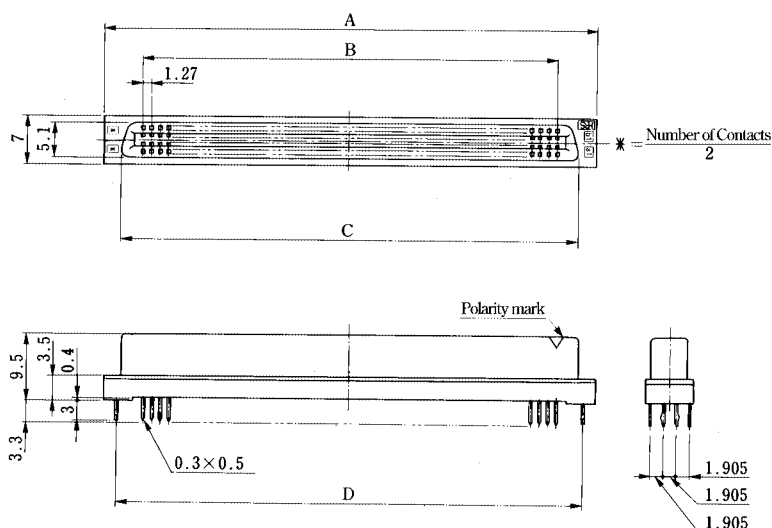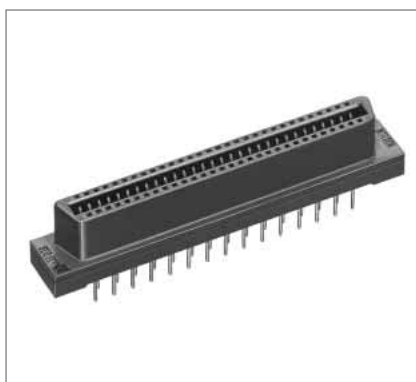

### ◆PCB mounting pattern

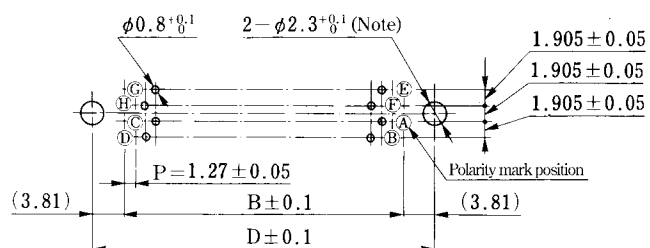

n = Number of Contacts

- |                       |                       |
|-----------------------|-----------------------|
| Ⓐ a1                  | Ⓔ b1                  |
| Ⓑ a2                  | Ⓕ b2                  |
| Ⓒ $a \frac{n}{2} - 1$ | Ⓖ $b \frac{n}{2} - 1$ |
| Ⓓ $a \frac{n}{2}$     | Ⓗ $b \frac{n}{2}$     |


Note: Not required, if no prefixed pin is attached.

Unit:mm


| Part Number            | CL No.        | Number of Contacts | A     | B     | C     | D     | RoHS |
|------------------------|---------------|--------------------|-------|-------|-------|-------|------|
| FX2C- 20S-1.27DSA(71)  | 572-2401-7-71 | 20                 | 22.75 | 11.43 | 17.63 | _____ | YES  |
| FX2C- 20S-1.27DSAL(71) | 572-2451-5-71 |                    |       |       |       | 19.05 |      |
| FX2C- 32S-1.27DSA(71)  | 572-2402-0-71 | 32                 | 30.37 | 19.05 | 25.25 | _____ |      |
| FX2C- 32S-1.27DSAL(71) | 572-2452-8-71 |                    |       |       |       | 26.67 |      |
| FX2C- 40S-1.27DSA(71)  | 572-2403-2-71 | 40                 | 35.45 | 24.13 | 30.33 | _____ |      |
| FX2C- 40S-1.27DSAL(71) | 572-2453-0-71 |                    |       |       |       | 31.75 |      |
| FX2C- 52S-1.27DSA(71)  | 572-2404-5-71 | 52                 | 43.07 | 31.75 | 37.95 | _____ |      |
| FX2C- 52S-1.27DSAL(71) | 572-2454-3-71 |                    |       |       |       | 39.37 |      |
| FX2C- 60S-1.27DSA(71)  | 572-2405-8-71 | 60                 | 48.15 | 36.83 | 43.03 | _____ |      |
| FX2C- 60S-1.27DSAL(71) | 572-2455-6-71 |                    |       |       |       | 44.45 |      |
| FX2C- 68S-1.27DSA(71)  | 572-2406-0-71 | 68                 | 53.23 | 41.91 | 48.11 | _____ |      |
| FX2C- 68S-1.27DSAL(71) | 572-2456-9-71 |                    |       |       |       | 49.53 |      |
| FX2C- 80S-1.27DSA(71)  | 572-2407-3-71 | 80                 | 60.85 | 49.53 | 55.73 | _____ |      |
| FX2C- 80S-1.27DSAL(71) | 572-2457-1-71 |                    |       |       |       | 57.15 |      |
| FX2C-100S-1.27DSA(71)  | 572-2408-6-71 | 100                | 73.55 | 62.23 | 68.43 | _____ |      |
| FX2C-100S-1.27DSAL(71) | 572-2458-4-71 |                    |       |       |       | 69.85 |      |
| FX2C-120S-1.27DSA(71)  | 572-2409-9-71 | 120                | 86.25 | 74.93 | 81.13 | _____ |      |
| FX2C-120S-1.27DSAL(71) | 572-2459-7-71 |                    |       |       |       | 82.55 |      |

## ■Receptacle Cleaning Type

### ●Straight Type

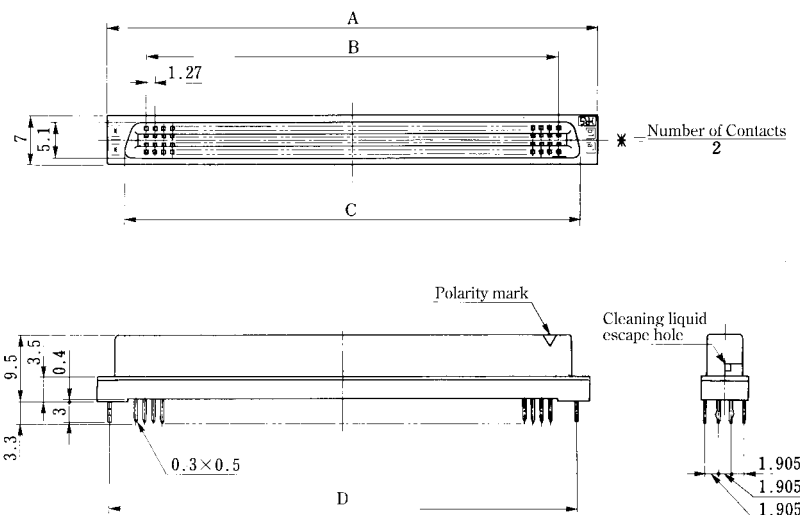

## ◆PCB mounting pattern

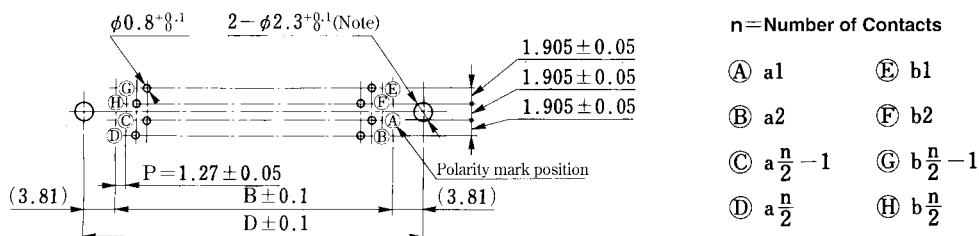

Note: Not required, if no prefixed pin is attached.



Unit:mm

| Part Number             | CL No.        | Number of Contacts | A     | B     | C     | D     | RoHS |
|-------------------------|---------------|--------------------|-------|-------|-------|-------|------|
| FX2CA- 20S-1.27DSA(71)  | 572-2501-1-71 | 20                 | 22.75 | 11.43 | 17.63 | _____ | YES  |
| FX2CA- 20S-1.27DSAL(71) | 572-2551-0-71 |                    |       |       |       | 19.05 |      |
| FX2CA- 32S-1.27DSA(71)  | 572-2502-4-71 | 32                 | 30.37 | 19.05 | 25.25 | _____ |      |
| FX2CA- 32S-1.27DSAL(71) | 572-2552-2-71 |                    |       |       |       | 26.67 |      |
| FX2CA- 40S-1.27DSA(71)  | 572-2503-7-71 | 40                 | 35.45 | 24.13 | 30.33 | _____ |      |
| FX2CA- 40S-1.27DSAL(71) | 572-2553-5-71 |                    |       |       |       | 31.75 |      |
| FX2CA- 52S-1.27DSA(71)  | 572-2504-0-71 | 52                 | 43.07 | 31.75 | 37.95 | _____ |      |
| FX2CA- 52S-1.27DSAL(71) | 572-2554-8-71 |                    |       |       |       | 39.37 |      |
| FX2CA- 60S-1.27DSA(71)  | 572-2505-2-71 | 60                 | 48.15 | 36.83 | 43.03 | _____ |      |
| FX2CA- 60S-1.27DSAL(71) | 572-2555-0-71 |                    |       |       |       | 44.45 |      |
| FX2CA- 68S-1.27DSA(71)  | 572-2506-5-71 | 68                 | 53.23 | 41.91 | 48.11 | _____ |      |
| FX2CA- 68S-1.27DSAL(71) | 572-2556-3-71 |                    |       |       |       | 49.53 |      |
| FX2CA- 80S-1.27DSA(71)  | 572-2507-8-71 | 80                 | 60.85 | 49.53 | 55.73 | _____ |      |
| FX2CA- 80S-1.27DSAL(71) | 572-2557-6-71 |                    |       |       |       | 57.15 |      |
| FX2CA-100S-1.27DSA(71)  | 572-2508-0-71 | 100                | 73.55 | 62.23 | 68.43 | _____ |      |
| FX2CA-100S-1.27DSAL(71) | 572-2558-9-71 |                    |       |       |       | 69.85 |      |
| FX2CA-120S-1.27DSA(71)  | 572-2509-3-71 | 120                | 86.25 | 74.93 | 81.13 | _____ |      |
| FX2CA-120S-1.27DSAL(71) | 572-2559-1-71 |                    |       |       |       | 82.55 |      |


## FX2 Series 1.27mm Pitch Multi-function Two Piece Connector

### ■Receptacle No Cleaning Type

#### ●Straight Type

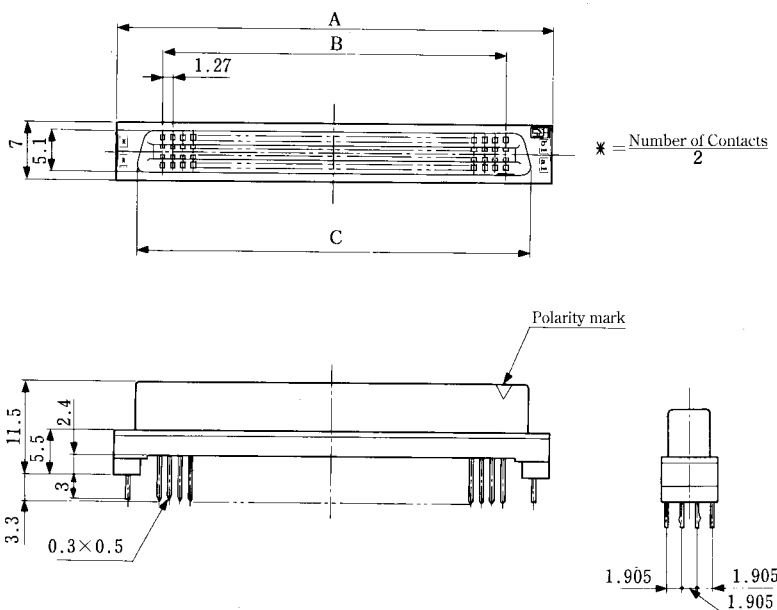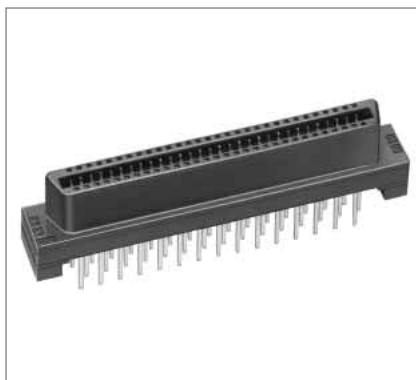

### ◆PCB mounting pattern

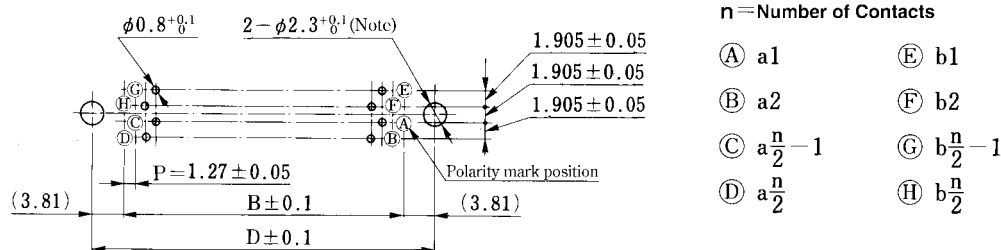



Note: Not required, if no prefixed pin is attached.

Unit:mm


| Part Number             | CL No.        | Number of Contacts | A     | B     | C     | D     | RoHS |
|-------------------------|---------------|--------------------|-------|-------|-------|-------|------|
| FX2C2- 20S-1.27DSA(71)  | 572-2421-4-71 | 20                 | 22.75 | 11.43 | 17.63 | _____ | YES  |
| FX2C2- 20S-1.27DSAL(71) | 572-2471-2-71 |                    |       |       |       | 19.05 |      |
| FX2C2- 32S-1.27DSA(71)  | 572-2422-7-71 | 32                 | 30.37 | 19.05 | 25.25 | _____ |      |
| FX2C2- 32S-1.27DSAL(71) | 572-2472-5-71 |                    |       |       |       | 26.67 |      |
| FX2C2- 40S-1.27DSA(71)  | 572-2423-0-71 | 40                 | 35.45 | 24.13 | 30.33 | _____ |      |
| FX2C2- 40S-1.27DSAL(71) | 572-2473-8-71 |                    |       |       |       | 31.75 |      |
| FX2C2- 52S-1.27DSA(71)  | 572-2424-2-71 | 52                 | 43.07 | 31.75 | 37.95 | _____ |      |
| FX2C2- 52S-1.27DSAL(71) | 572-2474-0-71 |                    |       |       |       | 39.37 |      |
| FX2C2- 60S-1.27DSA(71)  | 572-2425-5-71 | 60                 | 48.15 | 36.83 | 43.03 | _____ |      |
| FX2C2- 60S-1.27DSAL(71) | 572-2475-3-71 |                    |       |       |       | 44.45 |      |
| FX2C2- 68S-1.27DSA(71)  | 572-2426-8-71 | 68                 | 53.23 | 41.91 | 48.11 | _____ |      |
| FX2C2- 68S-1.27DSAL(71) | 572-2476-6-71 |                    |       |       |       | 49.53 |      |
| FX2C2- 80S-1.27DSA(71)  | 572-2427-0-71 | 80                 | 60.85 | 49.53 | 55.73 | _____ |      |
| FX2C2- 80S-1.27DSAL(71) | 572-2477-9-71 |                    |       |       |       | 57.15 |      |
| FX2C2-100S-1.27DSA(71)  | 572-2428-3-71 | 100                | 73.55 | 62.23 | 68.43 | _____ |      |
| FX2C2-100S-1.27DSAL(71) | 572-2478-1-71 |                    |       |       |       | 69.85 |      |
| FX2C2-120S-1.27DSA(71)  | 572-2429-6-71 | 120                | 86.25 | 74.93 | 81.13 | _____ |      |
| FX2C2-120S-1.27DSAL(71) | 572-2479-4-71 |                    |       |       |       | 82.55 |      |

## ■Receptacle Cleaning Type

### ●Straight Type

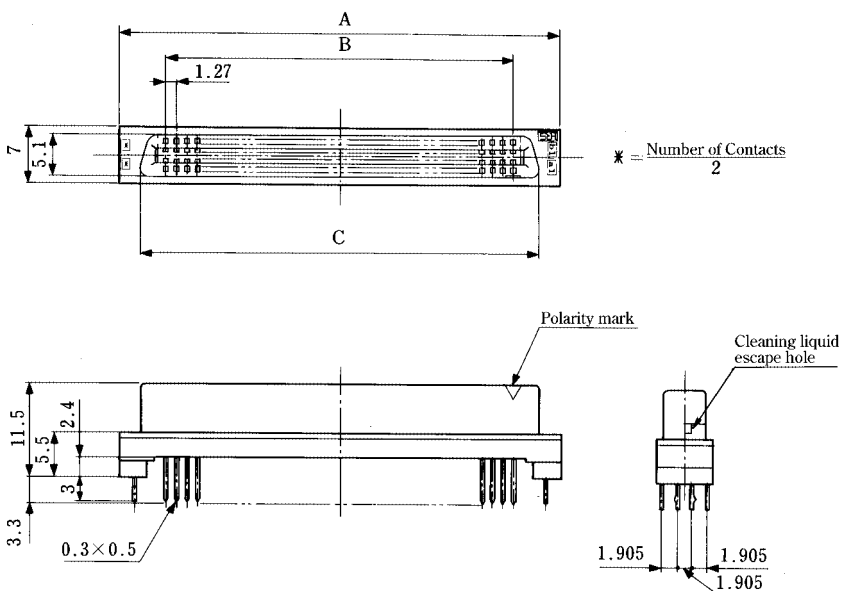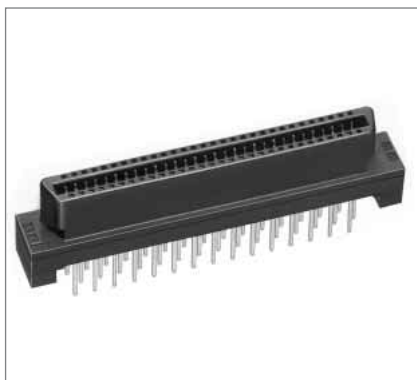

### ◆PCB mounting pattern

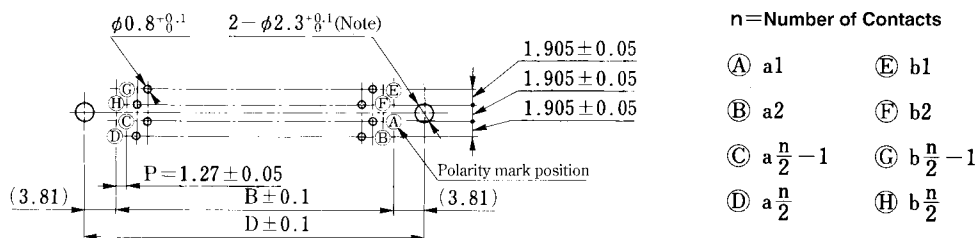

Note: Not required, if no prefixed pin is attached.


Unit:mm

| Part Number              | CL No.        | Number of Contacts | A     | B     | C     | D     | RoHS |
|--------------------------|---------------|--------------------|-------|-------|-------|-------|------|
| FX2CA2- 20S-1.27DSA(71)  | 572-2521-9-71 | 20                 | 22.75 | 11.43 | 17.63 | _____ | YES  |
| FX2CA2- 20S-1.27DSAL(71) | 572-2571-7-71 |                    |       |       |       | 19.05 |      |
| FX2CA2- 32S-1.27DSA(71)  | 572-2522-1-71 | 32                 | 30.37 | 19.05 | 25.25 | _____ |      |
| FX2CA2- 32S-1.27DSAL(71) | 572-2572-0-71 |                    |       |       |       | 26.67 |      |
| FX2CA2- 40S-1.27DSA(71)  | 572-2523-4-71 | 40                 | 35.45 | 24.13 | 30.33 | _____ |      |
| FX2CA2- 40S-1.27DSAL(71) | 572-2573-2-71 |                    |       |       |       | 31.75 |      |
| FX2CA2- 52S-1.27DSA(71)  | 572-2524-7-71 | 52                 | 43.07 | 31.75 | 37.95 | _____ |      |
| FX2CA2- 52S-1.27DSAL(71) | 572-2574-5-71 |                    |       |       |       | 39.37 |      |
| FX2CA2- 60S-1.27DSA(71)  | 572-2525-0-71 | 60                 | 48.15 | 36.83 | 43.03 | _____ |      |
| FX2CA2- 60S-1.27DSAL(71) | 572-2575-8-71 |                    |       |       |       | 44.45 |      |
| FX2CA2- 68S-1.27DSA(71)  | 572-2526-2-71 | 68                 | 53.23 | 41.91 | 48.11 | _____ |      |
| FX2CA2- 68S-1.27DSAL(71) | 572-2576-0-71 |                    |       |       |       | 49.53 |      |
| FX2CA2- 80S-1.27DSA(71)  | 572-2527-5-71 | 80                 | 60.85 | 49.53 | 55.73 | _____ |      |
| FX2CA2- 80S-1.27DSAL(71) | 572-2577-3-71 |                    |       |       |       | 57.15 |      |
| FX2CA2-100S-1.27DSA(71)  | 572-2528-8-71 | 100                | 73.55 | 62.23 | 68.43 | _____ |      |
| FX2CA2-100S-1.27DSAL(71) | 572-2578-6-71 |                    |       |       |       | 69.85 |      |
| FX2CA2-120S-1.27DSA(71)  | 572-2529-0-71 | 120                | 86.25 | 74.93 | 81.13 | _____ |      |
| FX2CA2-120S-1.27DSAL(71) | 572-2579-9-71 |                    |       |       |       | 82.55 |      |


## FX2 Series 1.27mm Pitch Multi-function Two Piece Connector

### ■Receptacle

#### ●Right Angle Type

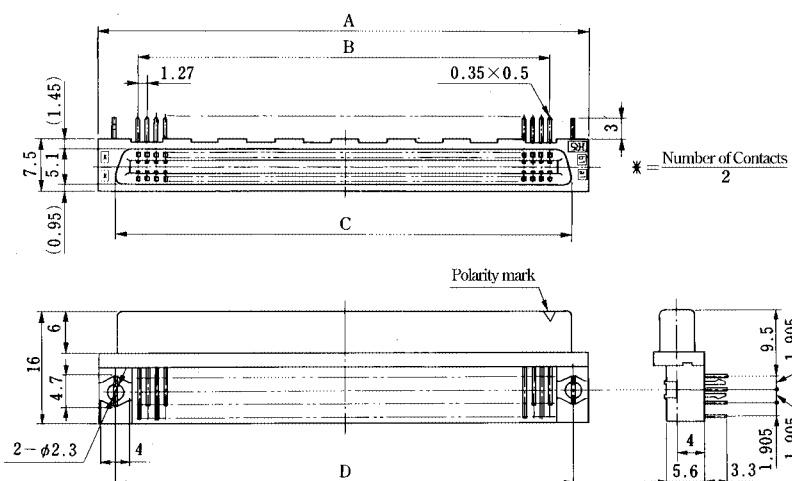

### ◆PCB mounting pattern

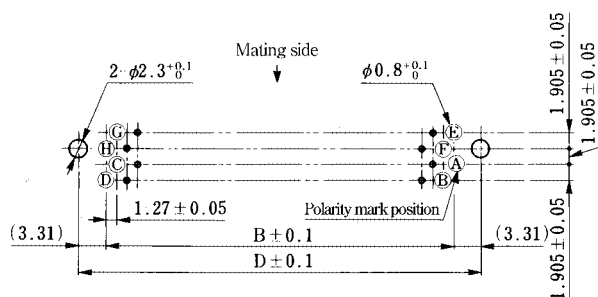

n = Number of Contacts



- |                    |                    |
|--------------------|--------------------|
| Ⓐ a1               | Ⓔ b1               |
| Ⓑ a2               | Ⓕ b2               |
| Ⓒ $a\frac{n}{2}-1$ | Ⓖ $b\frac{n}{2}-1$ |
| Ⓓ $a\frac{n}{2}$   | Ⓗ $b\frac{n}{2}$   |

Unit:mm


| Part Number          | CL No.        | Number of Contacts | A     | B     | C     | D     | D   |
|----------------------|---------------|--------------------|-------|-------|-------|-------|-----|
| FX2- 20S-1.27DS(71)  | 572-2701-0-71 | 20                 | 22.75 | 11.43 | 17.63 | 18.05 | YES |
| FX2- 20S-1.27DSL(71) | 572-2751-9-71 |                    |       |       |       |       |     |
| FX2- 32S-1.27DS(71)  | 572-2702-3-71 | 32                 | 30.37 | 19.05 | 25.25 | 25.67 |     |
| FX2- 32S-1.27DSL(71) | 572-2752-1-71 |                    |       |       |       |       |     |
| FX2- 40S-1.27DS(71)  | 572-2703-6-71 | 40                 | 35.45 | 24.13 | 30.33 | 30.75 |     |
| FX2- 40S-1.27DSL(71) | 572-2753-4-71 |                    |       |       |       |       |     |
| FX2- 52S-1.27DS(71)  | 572-2704-9-71 | 52                 | 43.07 | 31.75 | 37.95 | 38.37 |     |
| FX2- 52S-1.27DSL(71) | 572-2754-7-71 |                    |       |       |       |       |     |
| FX2- 60S-1.27DS(71)  | 572-2705-1-71 | 60                 | 48.15 | 36.83 | 43.03 | 43.45 |     |
| FX2- 60S-1.27DSL(71) | 572-2755-0-71 |                    |       |       |       |       |     |
| FX2- 68S-1.27DS(71)  | 572-2706-4-71 | 68                 | 53.23 | 41.91 | 48.11 | 48.53 |     |
| FX2- 68S-1.27DSL(71) | 572-2756-2-71 |                    |       |       |       |       |     |
| FX2- 80S-1.27DS(71)  | 572-2707-7-71 | 80                 | 60.85 | 49.53 | 55.73 | 56.15 |     |
| FX2- 80S-1.27DSL(71) | 572-2757-5-71 |                    |       |       |       |       |     |
| FX2-100S-1.27DS(71)  | 572-2708-0-71 | 100                | 73.55 | 62.23 | 68.43 | 68.85 |     |
| FX2-100S-1.27DSL(71) | 572-2758-8-71 |                    |       |       |       |       |     |
| FX2-120S-1.27DS(71)  | 572-2709-2-71 | 120                | 86.25 | 74.93 | 81.13 | 81.55 |     |
| FX2-120S-1.27DSL(71) | 572-2759-0-71 |                    |       |       |       |       |     |

## Header

### Right Angle Type

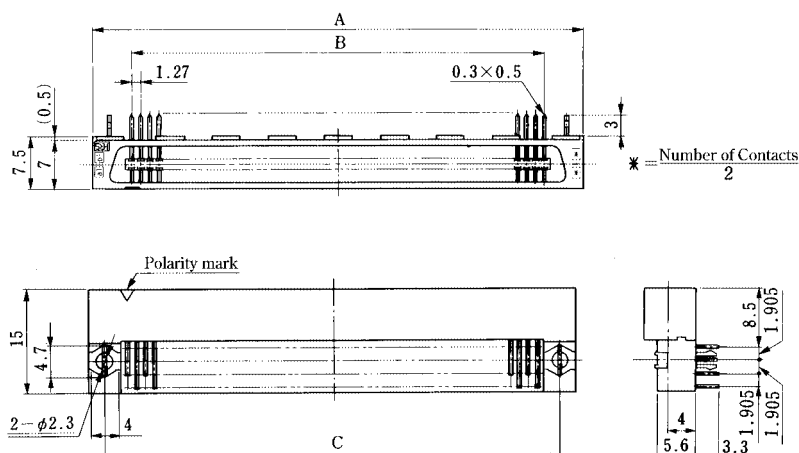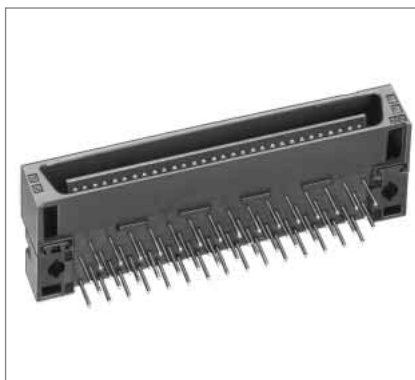

### PCB mounting pattern

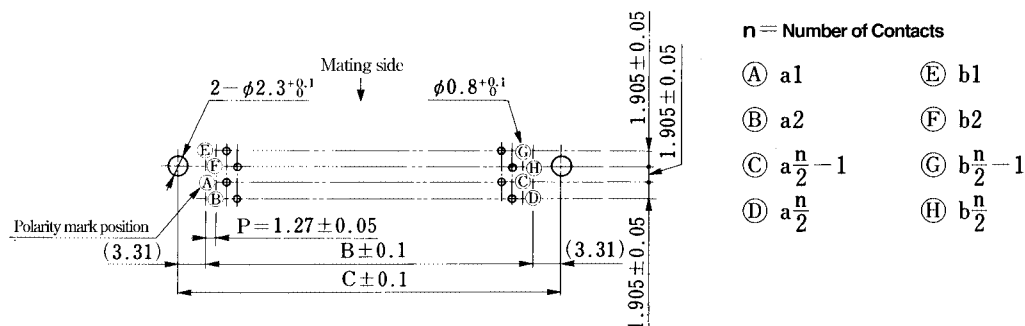



Unit:mm

| Part Number          | CL No.        | Number of Contacts | A     | B     | C     | RoHS |
|----------------------|---------------|--------------------|-------|-------|-------|------|
| FX2- 20P-1.27DS(71)  | 572-2601-6-71 | 20                 | 22.75 | 11.43 | 18.05 | YES  |
| FX2- 20P-1.27DSL(71) | 572-2651-4-71 |                    |       |       |       |      |
| FX2- 32P-1.27DS(71)  | 572-2602-9-71 | 32                 | 30.37 | 19.05 | 25.67 |      |
| FX2- 32P-1.27DSL(71) | 572-2652-7-71 |                    |       |       |       |      |
| FX2- 40P-1.27DS(71)  | 572-2603-1-71 | 40                 | 35.45 | 24.13 | 30.75 |      |
| FX2- 40P-1.27DSL(71) | 572-2653-0-71 |                    |       |       |       |      |
| FX2- 52P-1.27DS(71)  | 572-2604-4-71 | 52                 | 43.07 | 31.75 | 38.37 |      |
| FX2- 52P-1.27DSL(71) | 572-2654-2-71 |                    |       |       |       |      |
| FX2- 60P-1.27DS(71)  | 572-2605-7-71 | 60                 | 48.15 | 36.83 | 43.45 |      |
| FX2- 60P-1.27DSL(71) | 572-2655-5-71 |                    |       |       |       |      |
| FX2- 68P-1.27DS(71)  | 572-2606-0-71 | 68                 | 53.23 | 41.91 | 48.53 |      |
| FX2- 68P-1.27DSL(71) | 572-2656-8-71 |                    |       |       |       |      |
| FX2- 80P-1.27DS(71)  | 572-2607-2-71 | 80                 | 60.85 | 49.53 | 56.15 |      |
| FX2- 80P-1.27DSL(71) | 572-2657-0-71 |                    |       |       |       |      |
| FX2-100P-1.27DS(71)  | 572-2608-5-71 | 100                | 73.55 | 62.23 | 68.85 |      |
| FX2-100P-1.27DSL(71) | 572-2658-3-71 |                    |       |       |       |      |
| FX2-120P-1.27DS(71)  | 572-2609-8-71 | 120                | 86.25 | 74.93 | 81.55 |      |
| FX2-120P-1.27DSL(71) | 572-2659-6-71 |                    |       |       |       |      |


## FX2 Series 1.27mm Pitch Multi-function Two Piece Connector

### Header No Cleaning Type

#### ●Straight Type

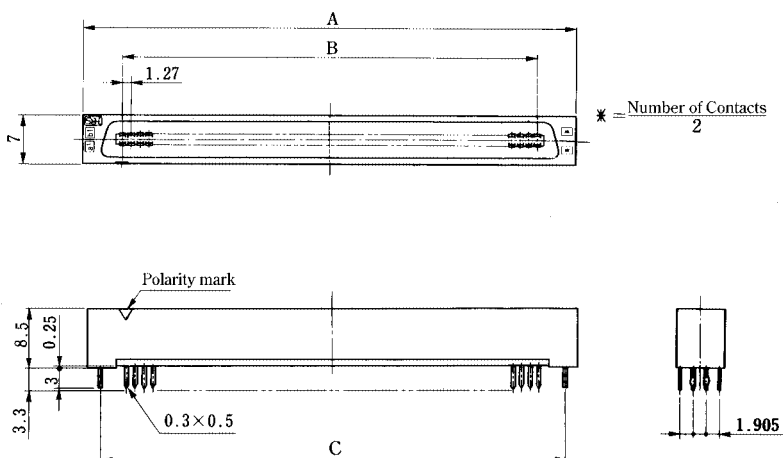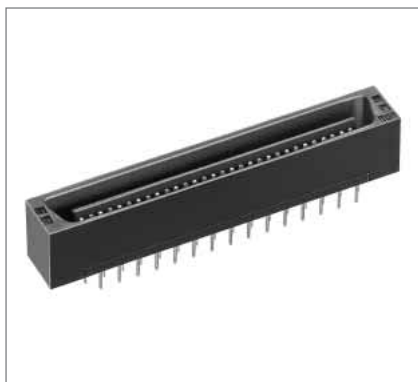

### PCB mounting pattern

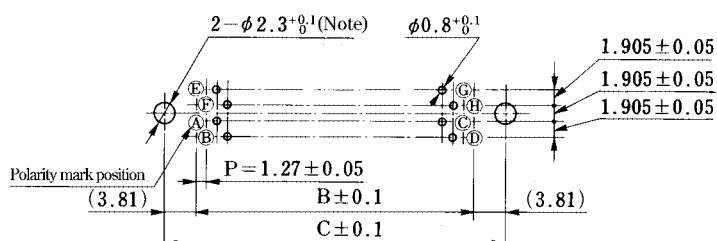

n = Number of Contacts

- |                    |                    |
|--------------------|--------------------|
| Ⓐ a1               | Ⓔ b1               |
| Ⓑ a2               | Ⓕ b2               |
| Ⓒ $a\frac{n}{2}-1$ | Ⓖ $b\frac{n}{2}-1$ |
| Ⓓ $a\frac{n}{2}$   | Ⓗ $b\frac{n}{2}$   |

Note: Not required, if no prefixed pin is attached.


Unit:mm

| Part Number            | CL No.        | Number of Contacts | A     | B     | C     | RoHS |
|------------------------|---------------|--------------------|-------|-------|-------|------|
| FX2C- 20P-1.27DSA(71)  | 572-2201-8-71 | 20                 | 22.75 | 11.43 | _____ | YES  |
| FX2C- 20P-1.27DSAL(71) | 572-2251-6-71 |                    |       |       | 19.05 |      |
| FX2C- 32P-1.27DSA(71)  | 572-2202-0-71 | 32                 | 30.37 | 19.05 | _____ |      |
| FX2C- 32P-1.27DSAL(71) | 572-2252-9-71 |                    |       |       | 26.67 |      |
| FX2C- 40P-1.27DSA(71)  | 572-2203-3-71 | 40                 | 35.45 | 24.13 | _____ |      |
| FX2C- 40P-1.27DSAL(71) | 572-2253-1-71 |                    |       |       | 31.75 |      |
| FX2C- 52P-1.27DSA(71)  | 572-2204-6-71 | 52                 | 43.07 | 31.75 | _____ |      |
| FX2C- 52P-1.27DSAL(71) | 572-2254-4-71 |                    |       |       | 39.37 |      |
| FX2C- 60P-1.27DSA(71)  | 572-2205-9-71 | 60                 | 48.15 | 36.83 | _____ |      |
| FX2C- 60P-1.27DSAL(71) | 572-2255-7-71 |                    |       |       | 44.45 |      |
| FX2C- 68P-1.27DSA(71)  | 572-2206-1-71 | 68                 | 53.23 | 41.91 | _____ |      |
| FX2C- 68P-1.27DSAL(71) | 572-2256-0-71 |                    |       |       | 49.53 |      |
| FX2C- 80P-1.27DSA(71)  | 572-2207-4-71 | 80                 | 60.85 | 49.53 | _____ |      |
| FX2C- 80P-1.27DSAL(71) | 572-2257-2-71 |                    |       |       | 57.15 |      |
| FX2C-100P-1.27DSA(71)  | 572-2208-7-71 | 100                | 73.55 | 62.23 | _____ |      |
| FX2C-100P-1.27DSAL(71) | 572-2258-5-71 |                    |       |       | 69.85 |      |
| FX2C-120P-1.27DSA(71)  | 572-2209-0-71 | 120                | 86.25 | 74.93 | _____ |      |
| FX2C-120P-1.27DSAL(71) | 572-2259-8-71 |                    |       |       | 82.55 |      |




## Header Cleaning Type

### ●Straight Type

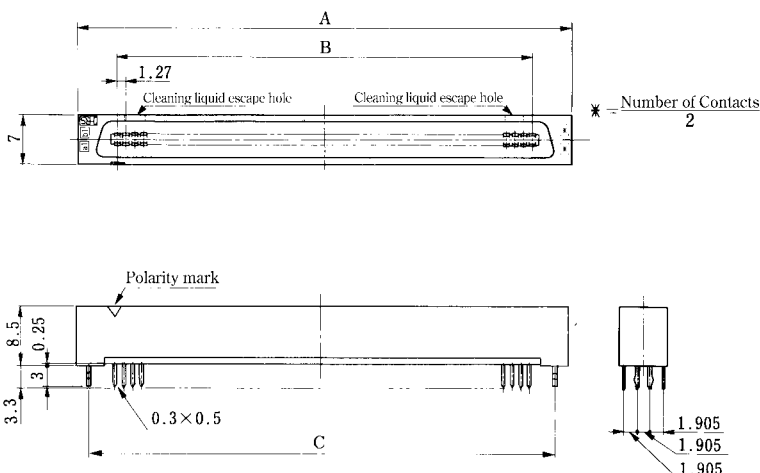

## PCB mounting pattern

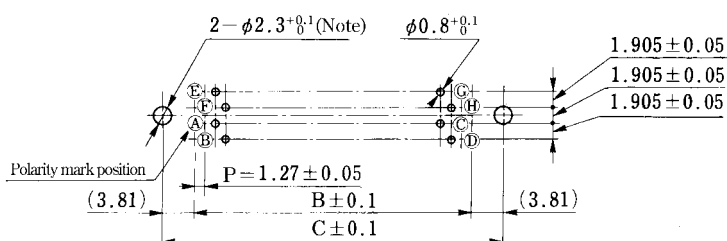

n = Number of Contacts

- |                    |                    |
|--------------------|--------------------|
| Ⓐ a1               | Ⓔ b1               |
| Ⓑ a2               | Ⓕ b2               |
| Ⓒ $a\frac{n}{2}-1$ | Ⓖ $b\frac{n}{2}-1$ |
| Ⓓ $a\frac{n}{2}$   | Ⓗ $b\frac{n}{2}$   |

Note: Not required, if no prefixed pin is attached.



Unit:mm

| Part Number             | CL No.        | Number of Contacts | A     | B     | C     | RoHS |
|-------------------------|---------------|--------------------|-------|-------|-------|------|
| FX2CA- 20P-1.27DSA(71)  | 572-2301-2-71 | 20                 | 22.75 | 11.43 | —     | YES  |
| FX2CA- 20P-1.27DSAL(71) | 572-2351-0-71 |                    |       |       | 19.05 |      |
| FX2CA- 32P-1.27DSA(71)  | 572-2302-5-71 | 32                 | 30.37 | 19.05 | —     |      |
| FX2CA- 32P-1.27DSAL(71) | 572-2352-3-71 |                    |       |       | 26.67 |      |
| FX2CA- 40P-1.27DSA(71)  | 572-2303-8-71 | 40                 | 35.45 | 24.13 | —     |      |
| FX2CA- 40P-1.27DSAL(71) | 572-2353-6-71 |                    |       |       | 31.75 |      |
| FX2CA- 52P-1.27DSA(71)  | 572-2304-0-71 | 52                 | 43.07 | 31.75 | —     |      |
| FX2CA- 52P-1.27DSAL(71) | 572-2354-9-71 |                    |       |       | 39.37 |      |
| FX2CA- 60P-1.27DSA(71)  | 572-2305-3-71 | 60                 | 48.15 | 36.83 | —     |      |
| FX2CA- 60P-1.27DSAL(71) | 572-2355-1-71 |                    |       |       | 44.45 |      |
| FX2CA- 68P-1.27DSA(71)  | 572-2306-6-71 | 68                 | 53.23 | 41.91 | —     |      |
| FX2CA- 68P-1.27DSAL(71) | 572-2356-4-71 |                    |       |       | 49.53 |      |
| FX2CA- 80P-1.27DSA(71)  | 572-2307-9-71 | 80                 | 60.85 | 49.53 | —     |      |
| FX2CA- 80P-1.27DSAL(71) | 572-2357-7-71 |                    |       |       | 57.15 |      |
| FX2CA-100P-1.27DSA(71)  | 572-2308-1-71 | 100                | 73.55 | 62.23 | —     |      |
| FX2CA-100P-1.27DSAL(71) | 572-2358-0-71 |                    |       |       | 69.85 |      |
| FX2CA-120P-1.27DSA(71)  | 572-2309-4-71 | 120                | 86.25 | 74.93 | —     |      |
| FX2CA-120P-1.27DSAL(71) | 572-2359-2-71 |                    |       |       | 82.55 |      |


## FX2 Series 1.27mm Pitch Multi-function Two Piece Connector

### Header No Cleaning Type

#### ●Straight Type

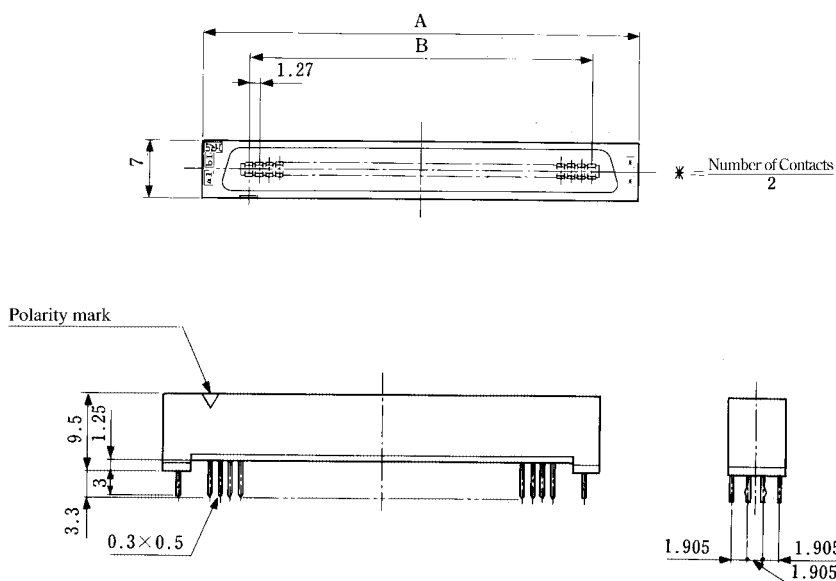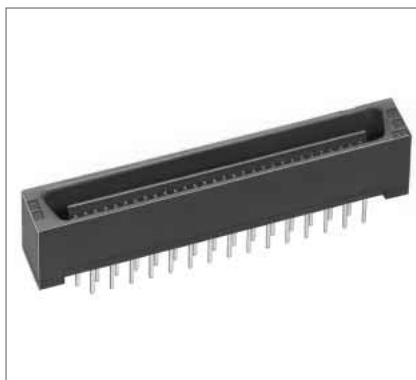

### PCB mounting pattern

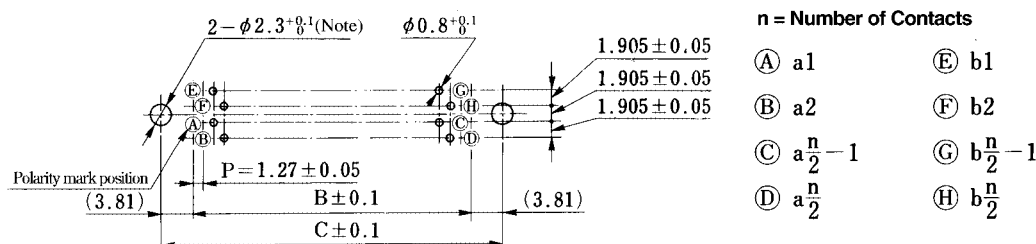


Note: Not required, if no prefixed pin is attached.

Unit: mm


| Part Number             | CL No.        | Number of Contacts | A     | B     | C     | RoHS |
|-------------------------|---------------|--------------------|-------|-------|-------|------|
| FX2C1- 20P-1.27DSA(71)  | 572-2211-1-71 | 20                 | 22.75 | 11.43 | —     | YES  |
| FX2C1- 20P-1.27DSAL(71) | 572-2261-0-71 |                    |       |       | 19.05 |      |
| FX2C1- 32P-1.27DSA(71)  | 572-2212-4-71 | 32                 | 30.37 | 19.05 | —     |      |
| FX2C1- 32P-1.27DSAL(71) | 572-2262-2-71 |                    |       |       | 26.67 |      |
| FX2C1- 40P-1.27DSA(71)  | 572-2213-7-71 | 40                 | 35.45 | 24.13 | —     |      |
| FX2C1- 40P-1.27DSAL(71) | 572-2263-5-71 |                    |       |       | 31.75 |      |
| FX2C1- 52P-1.27DSA(71)  | 572-2214-0-71 | 52                 | 43.07 | 31.75 | —     |      |
| FX2C1- 52P-1.27DSAL(71) | 572-2264-8-71 |                    |       |       | 39.37 |      |
| FX2C1- 60P-1.27DSA(71)  | 572-2215-2-71 | 60                 | 48.15 | 36.83 | —     |      |
| FX2C1- 60P-1.27DSAL(71) | 572-2265-0-71 |                    |       |       | 44.45 |      |
| FX2C1- 68P-1.27DSA(71)  | 572-2216-5-71 | 68                 | 53.23 | 41.91 | —     |      |
| FX2C1- 68P-1.27DSAL(71) | 572-2266-3-71 |                    |       |       | 49.53 |      |
| FX2C1- 80P-1.27DSA(71)  | 572-2217-8-71 | 80                 | 60.85 | 49.53 | —     |      |
| FX2C1- 80P-1.27DSAL(71) | 572-2267-6-71 |                    |       |       | 57.15 |      |
| FX2C1-100P-1.27DSA(71)  | 572-2218-0-71 | 100                | 73.55 | 62.23 | —     |      |
| FX2C1-100P-1.27DSAL(71) | 572-2268-9-71 |                    |       |       | 69.85 |      |
| FX2C1-120P-1.27DSA(71)  | 572-2219-3-71 | 120                | 86.25 | 74.93 | —     |      |
| FX2C1-120P-1.27DSAL(71) | 572-2269-1-71 |                    |       |       | 82.55 |      |

## Header Cleaning Type

### ●Straight Type

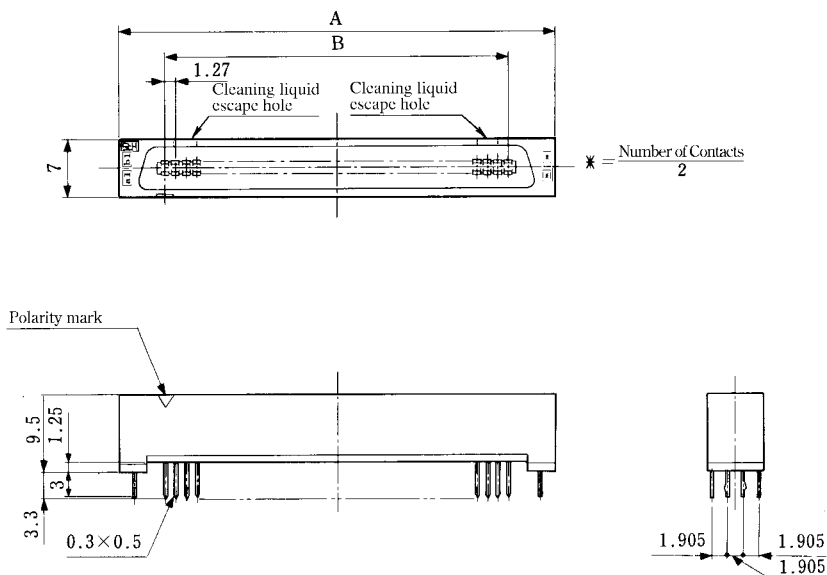

## PCB mounting pattern

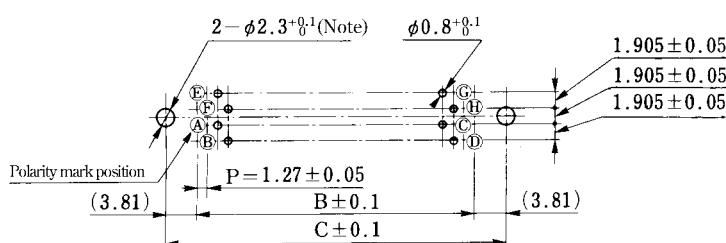

n = Number of Contacts

- |                     |                     |
|---------------------|---------------------|
| Ⓐ a1                | Ⓔ b1                |
| Ⓑ a2                | Ⓕ b2                |
| Ⓒ $\frac{n}{2} - 1$ | Ⓖ $\frac{n}{2} - 1$ |
| Ⓓ $\frac{n}{2}$     | Ⓗ $\frac{n}{2}$     |

Note: Not required, if no prefixed pin is attached.



Unit: mm

| Part Number              | CL No.        | Number of Contacts | A     | B     | C     | RoHS |
|--------------------------|---------------|--------------------|-------|-------|-------|------|
| FX2CA1- 20P-1.27DSA(71)  | 572-2311-6-71 | 20                 | 22.75 | 11.43 | —     | YES  |
| FX2CA1- 20P-1.27DSAL(71) | 572-2361-4-71 |                    |       |       | 19.05 |      |
| FX2CA1- 32P-1.27DSA(71)  | 572-2312-9-71 | 32                 | 30.37 | 19.05 | —     |      |
| FX2CA1- 32P-1.27DSAL(71) | 572-2362-7-71 |                    |       |       | 26.67 |      |
| FX2CA1- 40P-1.27DSA(71)  | 572-2313-1-71 | 40                 | 35.45 | 24.13 | —     |      |
| FX2CA1- 40P-1.27DSAL(71) | 572-2363-0-71 |                    |       |       | 31.75 |      |
| FX2CA1- 52P-1.27DSA(71)  | 572-2314-4-71 | 52                 | 43.07 | 31.75 | —     |      |
| FX2CA1- 52P-1.27DSAL(71) | 572-2364-2-71 |                    |       |       | 39.37 |      |
| FX2CA1- 60P-1.27DSA(71)  | 572-2315-7-71 | 60                 | 48.15 | 36.83 | —     |      |
| FX2CA1- 60P-1.27DSAL(71) | 572-2365-5-71 |                    |       |       | 44.45 |      |
| FX2CA1- 68P-1.27DSA(71)  | 572-2316-0-71 | 68                 | 53.23 | 41.91 | —     |      |
| FX2CA1- 68P-1.27DSAL(71) | 572-2366-8-71 |                    |       |       | 49.53 |      |
| FX2CA1- 80P-1.27DSA(71)  | 572-2317-2-71 | 80                 | 60.85 | 49.53 | —     |      |
| FX2CA1- 80P-1.27DSAL(71) | 572-2367-0-71 |                    |       |       | 57.15 |      |
| FX2CA1-100P-1.27DSA(71)  | 572-2318-5-71 | 100                | 73.55 | 62.23 | —     |      |
| FX2CA1-100P-1.27DSAL(71) | 572-2368-3-71 |                    |       |       | 69.85 |      |
| FX2CA1-120P-1.27DSA(71)  | 572-2319-8-71 | 120                | 86.25 | 74.93 | —     |      |
| FX2CA1-120P-1.27DSAL(71) | 572-2369-6-71 |                    |       |       | 82.55 |      |


## FX2 Series 1.27mm Pitch Multi-function Two Piece Connector

### Header No Cleaning Type

#### ●Straight Type

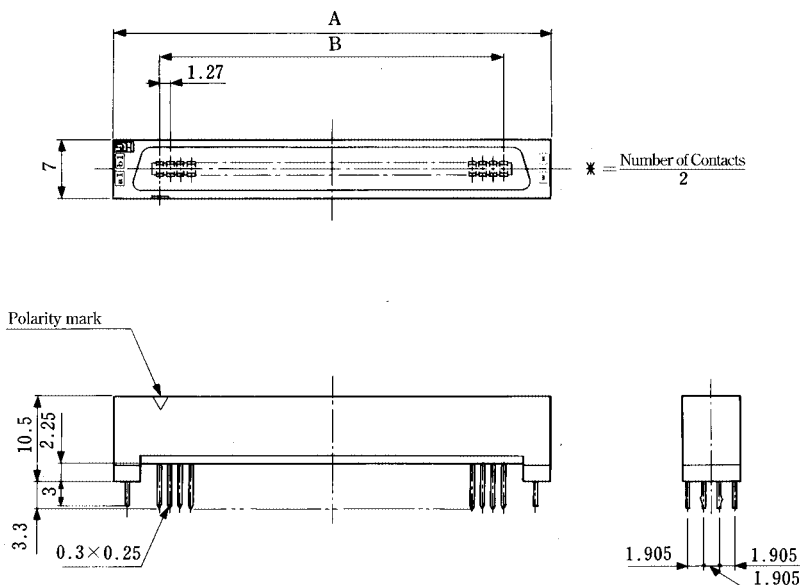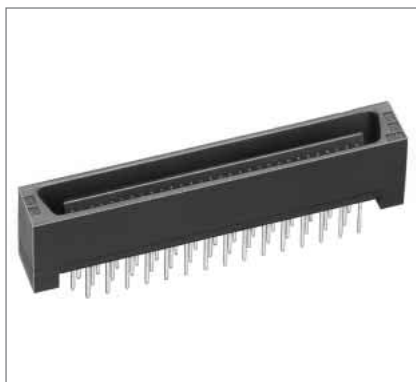

### PCB mounting pattern

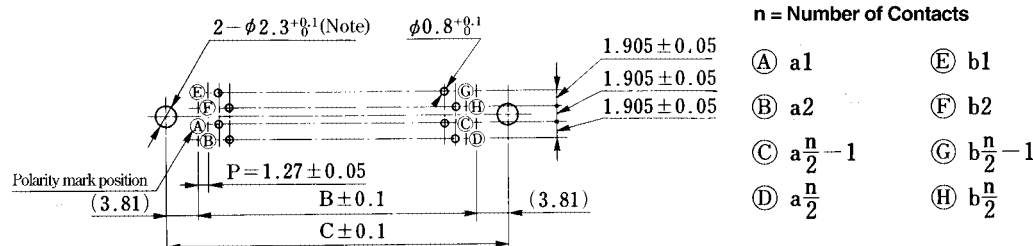


Note: Not required, if no prefixed pin is attached.

Unit: mm


| Part Number             | CL No.        | Number of Contacts | A     | B     | C     | RoHS |
|-------------------------|---------------|--------------------|-------|-------|-------|------|
| FX2C2- 20P-1.27DSA(71)  | 572-2221-5-71 | 20                 | 22.75 | 11.43 | —     | YES  |
| FX2C2- 20P-1.27DSAL(71) | 572-2271-3-71 |                    |       |       | 19.05 |      |
| FX2C2- 32P-1.27DSA(71)  | 572-2222-8-71 | 32                 | 30.37 | 19.05 | —     |      |
| FX2C2- 32P-1.27DSAL(71) | 572-2272-6-71 |                    |       |       | 26.67 |      |
| FX2C2- 40P-1.27DSA(71)  | 572-2223-0-71 | 40                 | 35.45 | 24.13 | —     |      |
| FX2C2- 40P-1.27DSAL(71) | 572-2273-9-71 |                    |       |       | 31.75 |      |
| FX2C2- 52P-1.27DSA(71)  | 572-2224-3-71 | 52                 | 43.07 | 31.75 | —     |      |
| FX2C2- 52P-1.27DSAL(71) | 572-2274-1-71 |                    |       |       | 39.37 |      |
| FX2C2- 60P-1.27DSA(71)  | 572-2225-6-71 | 60                 | 48.15 | 36.83 | —     |      |
| FX2C2- 60P-1.27DSAL(71) | 572-2275-4-71 |                    |       |       | 44.45 |      |
| FX2C2- 68P-1.27DSA(71)  | 572-2226-9-71 | 68                 | 53.23 | 41.91 | —     |      |
| FX2C2- 68P-1.27DSAL(71) | 572-2276-7-71 |                    |       |       | 49.53 |      |
| FX2C2- 80P-1.27DSA(71)  | 572-2227-1-71 | 80                 | 60.85 | 49.53 | —     |      |
| FX2C2- 80P-1.27DSAL(71) | 572-2277-0-71 |                    |       |       | 57.15 |      |
| FX2C2-100P-1.27DSA(71)  | 572-2228-4-71 | 100                | 73.55 | 62.23 | —     |      |
| FX2C2-100P-1.27DSAL(71) | 572-2278-2-71 |                    |       |       | 69.85 |      |
| FX2C2-120P-1.27DSA(71)  | 572-2229-7-71 | 120                | 86.25 | 74.93 | —     |      |
| FX2C2-120P-1.27DSAL(71) | 572-2279-5-71 |                    |       |       | 82.55 |      |

## Header Cleaning Type

### ●Straight Type

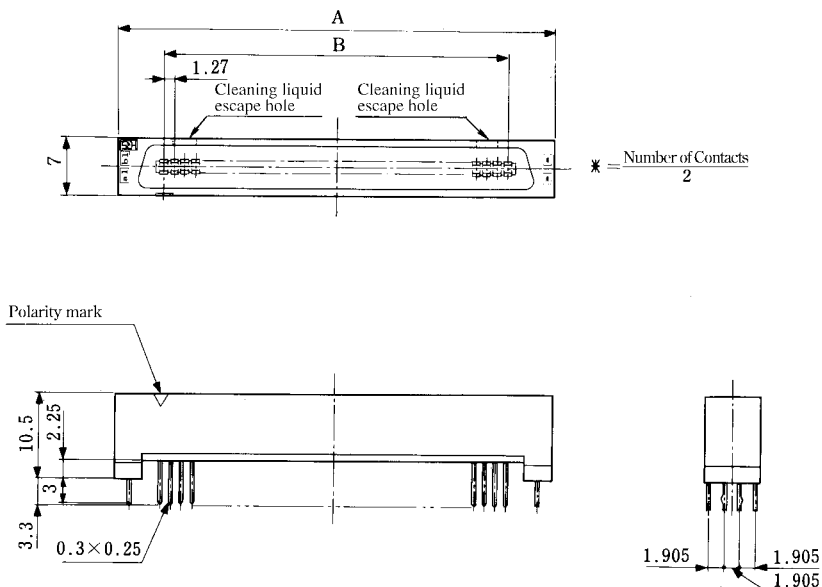

## PCB mounting pattern

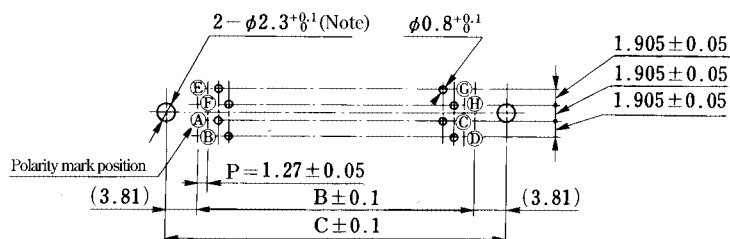

n = Number of Contacts

- |                       |                       |
|-----------------------|-----------------------|
| Ⓐ a1                  | Ⓔ b1                  |
| Ⓑ a2                  | Ⓕ b2                  |
| Ⓒ $a \frac{n}{2} - 1$ | Ⓖ $b \frac{n}{2} - 1$ |
| Ⓓ $a \frac{n}{2}$     | Ⓗ $b \frac{n}{2}$     |

Note: Not required, if no prefixed pin is attached.




Unit: mm

| Part Number              | CL No.        | Number of Contacts | A     | B     | C     | RoHS |
|--------------------------|---------------|--------------------|-------|-------|-------|------|
| FX2CA2- 20P-1.27DSA(71)  | 572-2321-0-71 | 20                 | 22.75 | 11.43 | —     | YES  |
| FX2CA2- 20P-1.27DSAL(71) | 572-2371-8-71 |                    |       |       | 19.05 |      |
| FX2CA2- 32P-1.27DSA(71)  | 572-2322-2-71 | 32                 | 30.37 | 19.05 | —     |      |
| FX2CA2- 32P-1.27DSAL(71) | 572-2372-0-71 |                    |       |       | 26.67 |      |
| FX2CA2- 40P-1.27DSA(71)  | 572-2323-5-71 | 40                 | 35.45 | 24.13 | —     |      |
| FX2CA2- 40P-1.27DSAL(71) | 572-2373-3-71 |                    |       |       | 31.75 |      |
| FX2CA2- 52P-1.27DSA(71)  | 572-2324-8-71 | 52                 | 43.07 | 31.75 | —     |      |
| FX2CA2- 52P-1.27DSAL(71) | 572-2374-6-71 |                    |       |       | 39.37 |      |
| FX2CA2- 60P-1.27DSA(71)  | 572-2325-0-71 | 60                 | 48.15 | 36.83 | —     |      |
| FX2CA2- 60P-1.27DSAL(71) | 572-2375-9-71 |                    |       |       | 44.45 |      |
| FX2CA2- 68P-1.27DSA(71)  | 572-2326-3-71 | 68                 | 53.23 | 41.91 | —     |      |
| FX2CA2- 68P-1.27DSAL(71) | 572-2376-1-71 |                    |       |       | 49.53 |      |
| FX2CA2- 80P-1.27DSA(71)  | 572-2327-6-71 | 80                 | 60.85 | 49.53 | —     |      |
| FX2CA2- 80P-1.27DSAL(71) | 572-2377-4-71 |                    |       |       | 57.15 |      |
| FX2CA2-100P-1.27DSA(71)  | 572-2328-9-71 | 100                | 73.55 | 62.23 | —     |      |
| FX2CA2-100P-1.27DSAL(71) | 572-2378-7-71 |                    |       |       | 69.85 |      |
| FX2CA2-120P-1.27DSA(71)  | 572-2329-1-71 | 120                | 86.25 | 74.93 | —     |      |
| FX2CA2-120P-1.27DSAL(71) | 572-2379-0-71 |                    |       |       | 82.55 |      |

## FX2 Series 1.27mm Pitch Multi-function Two Piece Connector

### ■Receptacle SMT Type


#### ●Straight Type

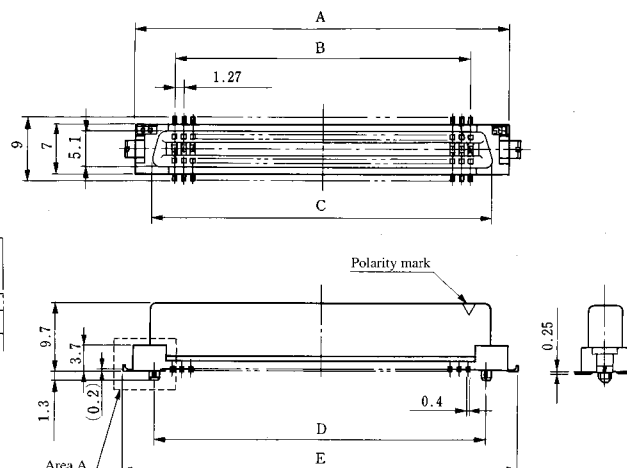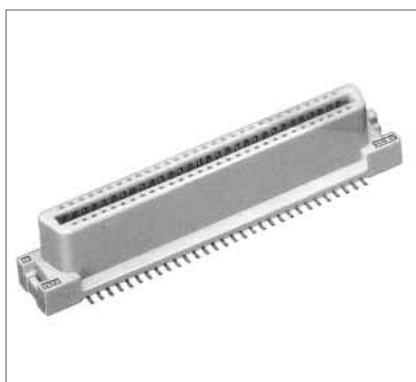

Note 1 : The 120 contacts type differs in the style.

Note 2 : The connector positioning bosses are constructed to press fit into the board with light force. When mounting on the board, press the connector lightly from the top and check that the positioning bosses are securely inserted in the board holes and that the connector leads are engaged in the board. The recommended boss hole for use with automatic mounting is illustrated in fig. 1.

### ◆PCB mounting pattern

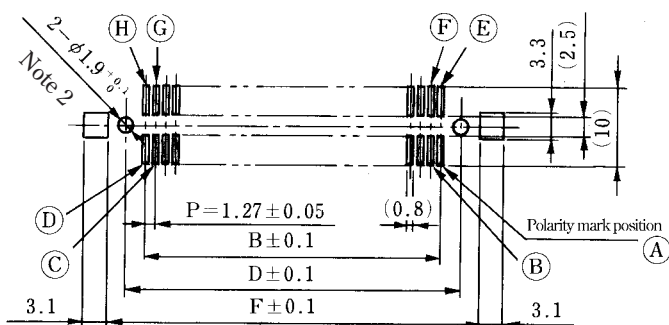

n = Number of Contacts

- |                    |                    |
|--------------------|--------------------|
| Ⓐ a1               | Ⓔ b1               |
| Ⓑ a2               | Ⓕ b2               |
| Ⓒ $a\frac{n}{2}-1$ | Ⓖ $b\frac{n}{2}-1$ |
| Ⓓ $a\frac{n}{2}$   | Ⓗ $b\frac{n}{2}$   |





FIG.1

Unit: mm

| Part Number          | CL No.        | Number of Contacts | A     | B     | C     | D     | E     | F     | RoHS |
|----------------------|---------------|--------------------|-------|-------|-------|-------|-------|-------|------|
| FX2- 20S-1.27SV(71)  | 572-2101-3-71 | 20                 | 22.75 | 11.43 | 17.63 | 16.51 | —     | —     | YES  |
| FX2- 20S-1.27SVL(71) | 572-2151-1-71 |                    |       |       |       |       | 25.75 | 21.15 |      |
| FX2- 32S-1.27SV(71)  | 572-2102-6-71 | 32                 | 30.37 | 19.05 | 25.25 | 24.13 | —     | —     |      |
| FX2- 32S-1.27SVL(71) | 572-2152-4-71 |                    |       |       |       |       | 33.37 | 28.77 |      |
| FX2- 40S-1.27SV(71)  | 572-2103-9-71 | 40                 | 35.45 | 24.13 | 30.33 | 29.21 | —     | —     |      |
| FX2- 40S-1.27SVL(71) | 572-2153-7-71 |                    |       |       |       |       | 38.45 | 33.85 |      |
| FX2- 52S-1.27SV(71)  | 572-2104-1-71 | 52                 | 43.07 | 31.75 | 37.95 | 36.83 | —     | —     |      |
| FX2- 52S-1.27SVL(71) | 572-2154-0-71 |                    |       |       |       |       | 46.07 | 41.47 |      |
| FX2- 60S-1.27SV(71)  | 572-2105-4-71 | 60                 | 48.15 | 36.83 | 43.03 | 41.91 | —     | —     |      |
| FX2- 60S-1.27SVL(71) | 572-2155-2-71 |                    |       |       |       |       | 51.15 | 46.55 |      |
| FX2- 68S-1.27SV(71)  | 572-2106-7-71 | 68                 | 53.23 | 41.91 | 48.11 | 46.99 | —     | —     |      |
| FX2- 68S-1.27SVL(71) | 572-2156-5-71 |                    |       |       |       |       | 56.23 | 51.63 |      |
| FX2- 80S-1.27SV(71)  | 572-2107-0-71 | 80                 | 60.85 | 49.53 | 55.73 | 54.61 | —     | —     |      |
| FX2- 80S-1.27SVL(71) | 572-2157-8-71 |                    |       |       |       |       | 63.85 | 59.25 |      |
| FX2-100S-1.27SV(71)  | 572-2108-2-71 | 100                | 73.55 | 62.23 | 68.43 | 67.31 | —     | —     |      |
| FX2-100S-1.27SVL(71) | 572-2158-0-71 |                    |       |       |       |       | 76.55 | 71.95 |      |
| FX2-120S-1.27SV(71)  | 572-2109-5-71 | 120                | 86.25 | 74.93 | 81.13 | 80.01 | —     | —     |      |
| FX2-120S-1.27SVL(71) | 572-2159-3-71 |                    |       |       |       |       | 89.25 | 84.65 |      |


## ●Straight Type

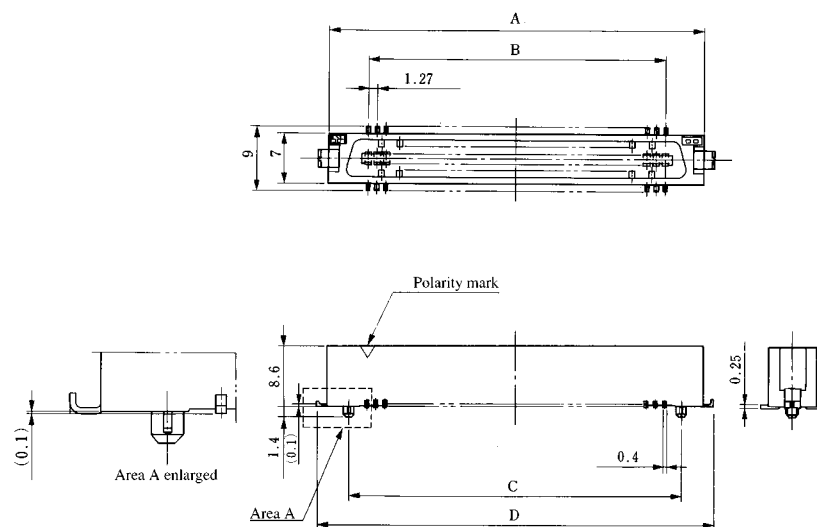

## PCB mounting pattern



- (A)  $a_1$                       (E)  $b_1$   
 (B)  $a_2$                       (F)  $b_2$   
 (C)  $a \frac{n}{2} - 1$                   (G)  $b \frac{n}{2} - 1$   
 (D)  $a \frac{n}{2}$                       (H)  $b \frac{n}{2}$



**FIG.1**


Unit: mm

HRS A107

## FX2 Series 1.27mm Pitch Multi-function Two Piece Connector


### Header SMT Type

#### Right Angle Type

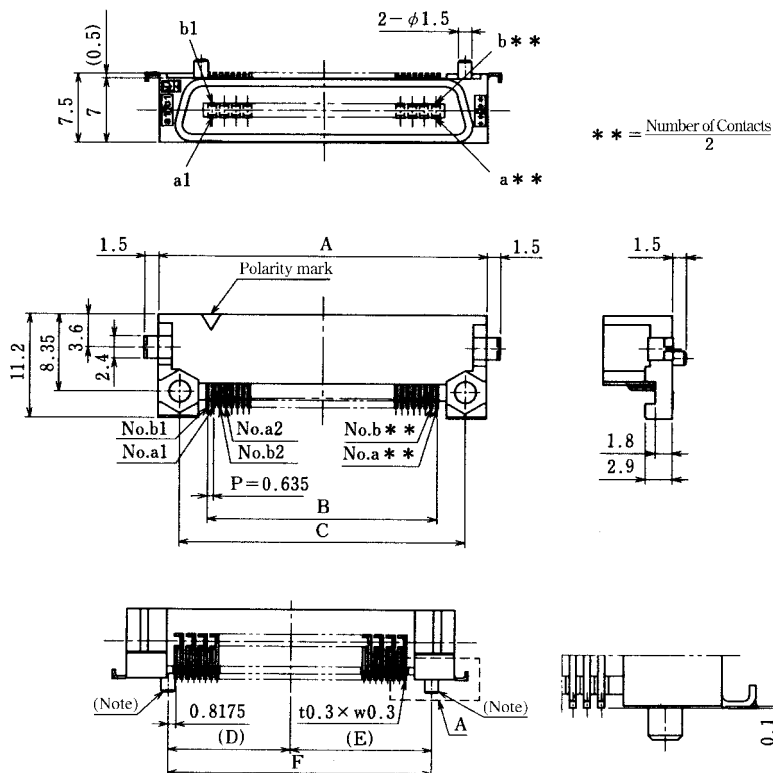


Note: The FX2A type does not have bosses as shown in the illustration.

### PCB mounting Pattern

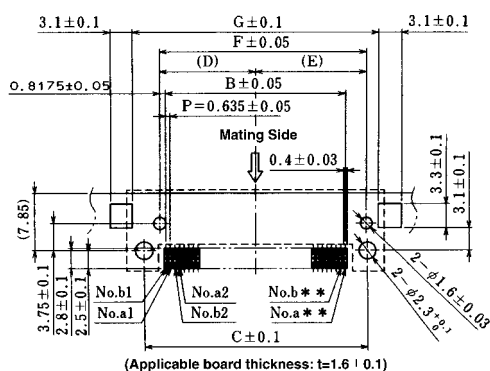

### Recommended Screw Clamp

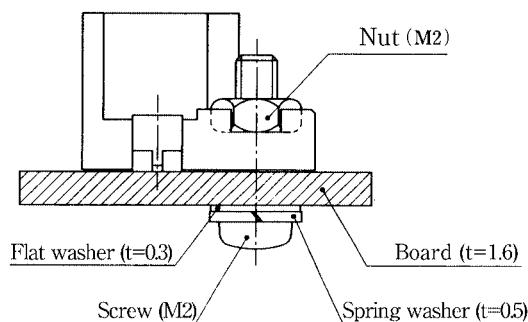

Use M2 screw for fixture.  
 Recommended torque is 0.15(N•m).



Unit: mm

| Part Number          | CL No.        | Number of Contacts | A     | B      | C     | D     | E     | F     | G     | RoHS |
|----------------------|---------------|--------------------|-------|--------|-------|-------|-------|-------|-------|------|
| FX2-20P-0.635SH(71)  | 572-2761-2-71 | 20                 | 22.75 | 12.065 | 18.05 | 6.85  | 8.85  | 15.7  | 21.15 | YES  |
| FX2A-20P-0.635SH(71) | 572-2771-6-71 |                    |       |        |       | —     | —     | —     |       |      |
| FX2-40P-0.635SH(71)  | 572-2763-8-71 | 40                 | 35.45 | 24.765 | 30.75 | 13.2  | 15.2  | 28.4  | 33.85 |      |
| FX2A-40P-0.635SH(71) | 572-2773-1-71 |                    |       |        |       | —     | —     | —     |       |      |
| FX2-52P-0.635SH(71)  | 572-2764-0-71 | 52                 | 43.07 | 32.385 | 38.37 | 17.01 | 19.01 | 36.02 | 41.47 |      |
| FX2A-52P-0.635SH(71) | 572-2774-4-71 |                    |       |        |       | —     | —     | —     |       |      |
| FX2-60P-0.635SH(71)  | 572-2765-3-71 | 60                 | 48.15 | 37.465 | 43.45 | 19.55 | 21.55 | 41.1  | 46.55 |      |
| FX2A-60P-0.635SH(71) | 572-2775-7-71 |                    |       |        |       | —     | —     | —     |       |      |
| FX2-80P-0.635SH(71)  | 572-2767-9-71 | 80                 | 60.85 | 50.165 | 56.15 | 25.9  | 27.9  | 53.8  | 59.25 |      |
| FX2A-80P-0.635SH(71) | 572-2777-2-71 |                    |       |        |       | —     | —     | —     |       |      |



## ■Socket Type

### ●Lock Cable Type

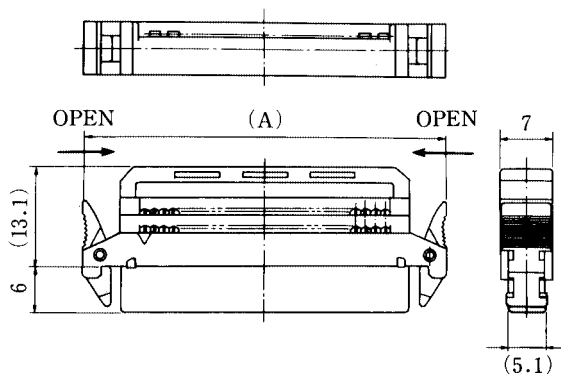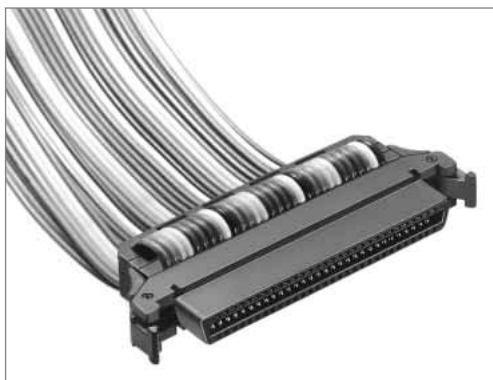


Combination View

Unit: mm

| Part Number      | CL No.     | Number of Contacts | A     | RoHS |
|------------------|------------|--------------------|-------|------|
| FX2B- 20SA-1.27R | 572-0621-2 | 20                 | 27.83 | YES  |
| FX2B- 32SA-1.27R | 572-0622-5 | 32                 | 35.45 |      |
| FX2B- 40SA-1.27R | 572-0623-8 | 40                 | 40.53 |      |
| FX2B- 52SA-1.27R | 572-0624-0 | 52                 | 48.15 |      |
| FX2B- 60SA-1.27R | 572-0625-3 | 60                 | 53.23 |      |
| FX2B- 68SA-1.27R | 572-0629-4 | 68                 | 58.31 |      |
| FX2B- 80SA-1.27R | 572-0630-3 | 80                 | 65.93 |      |
| FX2B-100SA-1.27R | 572-0628-1 | 100                | 78.63 |      |

### ●Unlock Cable Type

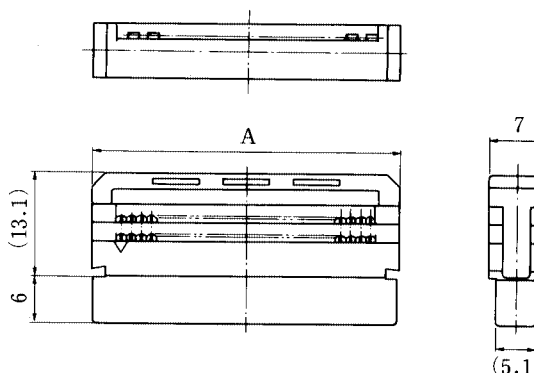

Combination View

Unit: mm

| Part Number       | CL No.     | Number of Contacts | A     | RoHS |
|-------------------|------------|--------------------|-------|------|
| FX2BA- 20SA-1.27R | 572-0671-0 | 20                 | 18.05 | YES  |
| FX2BA- 32SA-1.27R | 572-0672-3 | 32                 | 25.67 |      |
| FX2BA- 40SA-1.27R | 572-0673-6 | 40                 | 30.75 |      |
| FX2BA- 52SA-1.27R | 572-0674-9 | 52                 | 38.37 |      |
| FX2BA- 60SA-1.27R | 572-0675-1 | 60                 | 43.45 |      |
| FX2BA- 68SA-1.27R | 572-0676-4 | 68                 | 48.53 |      |
| FX2BA- 80SA-1.27R | 572-0677-7 | 80                 | 56.15 |      |
| FX2BA-100SA-1.27R | 572-0678-0 | 100                | 68.85 |      |

## ◆Connection Tool


| Type             | Part Number              | CL No.     |
|------------------|--------------------------|------------|
| Guide plate      | FX2B(A)-GPA              | 550-0212-6 |
| Connection press | Hi-Flex connection press | 550-0082-2 |

Note:HRS6 cable cutter FC601 isn't required for FX2B(A) connection.  
 (Connected without convex-concave cutting.)




## Header No Cleaning Type

### ●Straight Type for Lock

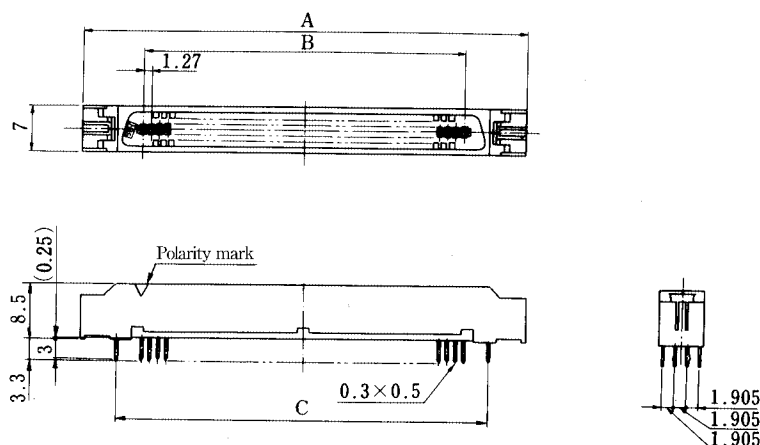

## PCB mounting pattern

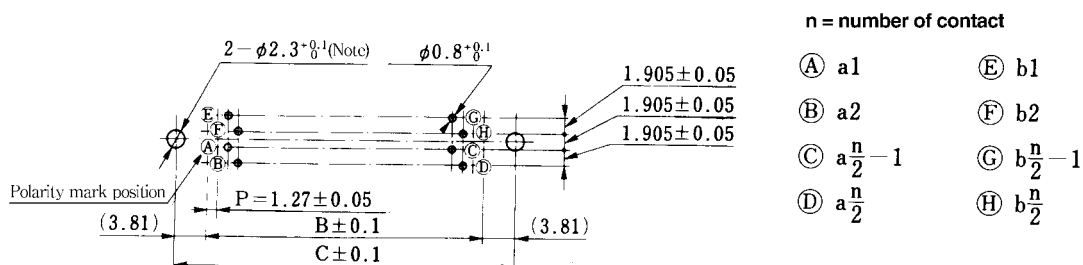

Note: Not required, unless the prefixed pin is attached.


Unit: mm

| Part Number             | CL No.        | Number of Contacts | A     | B     | C     | RoHS |
|-------------------------|---------------|--------------------|-------|-------|-------|------|
| FX2B- 20P-1.27DSA(71)   | 572-0801-4-71 | 20                 | 30.33 | 11.43 | —     | YES  |
| FX2B- 20P-1.27DSAL(71)  | 572-0851-2-71 |                    |       |       | 19.05 |      |
| FX2B- 32P-1.27DSA(71)   | 572-0802-7-71 | 32                 | 37.95 | 19.05 | —     |      |
| FX2B- 32P-1.27DSAL(71)  | 572-0852-5-71 |                    |       |       | 26.67 |      |
| FX2B- 40PA-1.27DSA(71)  | 572-0823-7-71 | 40                 | 43.03 | 24.13 | —     |      |
| FX2B- 40PA-1.27DSAL(71) | 572-0873-5-71 |                    |       |       | 31.75 |      |
| FX2B- 52PA-1.27DSA(71)  | 572-0824-0-71 | 52                 | 50.65 | 31.75 | —     |      |
| FX2B- 52PA-1.27DSAL(71) | 572-0874-8-71 |                    |       |       | 39.37 |      |
| FX2B- 60PA-1.27DSA(71)  | 572-0825-2-71 | 60                 | 55.73 | 36.83 | —     |      |
| FX2B- 60PA-1.27DSAL(71) | 572-0875-0-71 |                    |       |       | 44.45 |      |
| FX2B- 68PA-1.27DSA(71)  | 572-0826-5-71 | 68                 | 60.81 | 41.91 | —     |      |
| FX2B- 68PA-1.27DSAL(71) | 572-0876-3-71 |                    |       |       | 49.53 |      |
| FX2B- 80PA-1.27DSA(71)  | 572-0827-8-71 | 80                 | 68.43 | 49.53 | —     |      |
| FX2B- 80PA-1.27DSAL(71) | 572-0877-6-71 |                    |       |       | 57.15 |      |
| FX2B-100PA-1.27DSA(71)  | 572-0828-0-71 | 100                | 81.13 | 62.23 | —     |      |
| FX2B-100PA-1.27DSAL(71) | 572-0878-9-71 |                    |       |       | 69.85 |      |


## FX2 Series 1.27mm Pitch Multi-function Two Piece Connector

### Header Cleaning Type

#### ●Straight Type for Lock

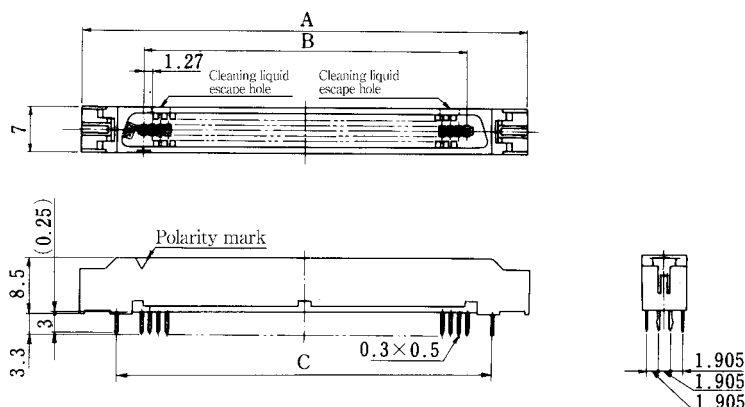

### PCB mounting pattern

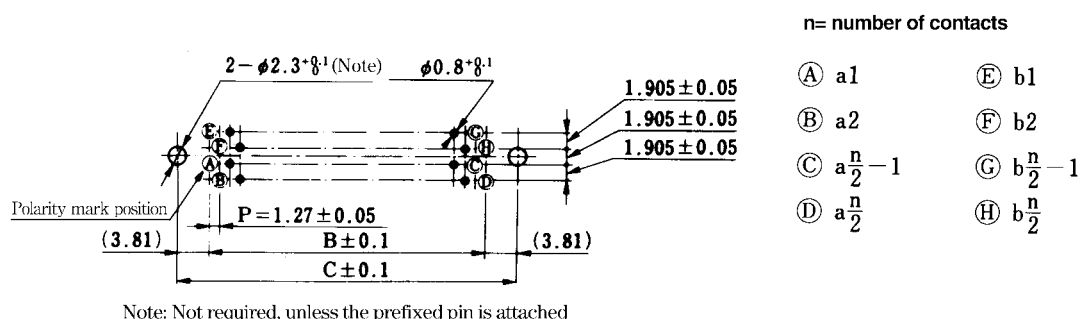

Unit: mm

| Part Number              | CL No.        | Number of Contacts | A     | B     | C     | RoHS |
|--------------------------|---------------|--------------------|-------|-------|-------|------|
| FX2BA- 20P-1.27DSA(71)   | 572-0901-9-71 | 20                 | 30.33 | 11.43 | —     | YES  |
| FX2BA- 20P-1.27DSAL(71)  | 572-0951-7-71 |                    |       |       | 19.05 |      |
| FX2BA- 32P-1.27DSA(71)   | 572-0902-1-71 | 32                 | 37.95 | 19.05 | —     |      |
| FX2BA- 32P-1.27DSAL(71)  | 572-0952-0-71 |                    |       |       | 26.67 |      |
| FX2BA- 40PA-1.27DSA(71)  | 572-0923-1-71 | 40                 | 43.03 | 24.13 | —     |      |
| FX2BA- 40PA-1.27DSAL(71) | 572-0973-0-71 |                    |       |       | 31.75 |      |
| FX2BA- 52PA-1.27DSA(71)  | 572-0924-4-71 | 52                 | 50.65 | 31.75 | —     |      |
| FX2BA- 52PA-1.27DSAL(71) | 572-0974-2-71 |                    |       |       | 39.37 |      |
| FX2BA- 60PA-1.27DSA(71)  | 572-0925-7-71 | 60                 | 55.73 | 36.83 | —     |      |
| FX2BA- 60PA-1.27DSAL(71) | 572-0975-5-71 |                    |       |       | 44.45 |      |
| FX2BA- 68PA-1.27DSA(71)  | 572-0926-0-71 | 68                 | 60.81 | 41.91 | —     |      |
| FX2BA- 68PA-1.27DSAL(71) | 572-0976-8-71 |                    |       |       | 49.53 |      |
| FX2BA- 80PA-1.27DSA(71)  | 572-0927-2-71 | 80                 | 68.43 | 49.53 | —     |      |
| FX2BA- 80PA-1.27DSAL(71) | 572-0977-0-71 |                    |       |       | 57.15 |      |
| FX2BA-100PA-1.27DSA(71)  | 572-0928-5-71 | 100                | 81.13 | 62.23 | —     |      |
| FX2BA-100PA-1.27DSAL(71) | 572-0978-3-71 |                    |       |       | 69.85 |      |