


HW Series — 22mm IEC Style Global Pushbuttons

A3

Switches & Pilot Devices

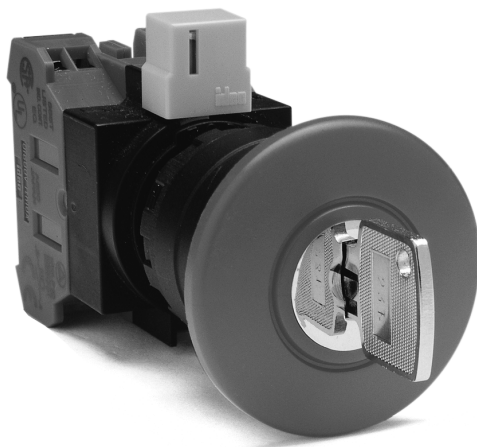

HW: The Best Engineered Switch in the World

Key features include:

- Locking lever removable contact blocks
- Finger-safe IP20 contacts as standard, other terminal styles available
- Tamperproof construction
- All E-stops meet EN418 and are compliant with SEMI S2 standards
- Worldwide approvals
- Easy to assemble
- Available assembled or as sub-components
- Choice of black plastic or metallic front bezels
- Incandescent or LED illumination
- Transformer or full voltage
- Slow make double break self cleaning contacts

IDEC's HW switches are "The best engineered switch in the world" for a reason. Carrying the CE mark, UL, CSA, CCC (Chinese), and TUV approvals, these switches are designed for use in almost any part of the world.

Complete with finger-safe contact blocks offering IP20 protection, these 7/8" (22mm) switches include illuminated and non-illuminated pushbuttons, pilot lights, selector switches, and emergency stop switches.

All switches also incorporate mechanically keyed safety locking levers, ensuring correct installation and maintaining safety in high-vibration applications.



File No. E68961



File No. LR92374



TÜV Rheinland



Certificate No.
2005010305145656

Registration No. J9650511 (Pilot Lights)

Specifications	Conforming to Standards		EN60947-1, EN60947-5-1, VDE0660-200, UL508, CSA C22-2 No.14							
	Approvals		 File No. E68961  File No. LR92374  Certificate No. 2005010305145656  TÜV Rheinland Registration No. R9551089 (E-stops) Registration No. J9551458 (all other switches) Registration No. J9650511 (Pilot Lights)  CSA: pushbuttons and selector switches: A600 pilot lights and illuminated pushbuttons, direct supply pilot lights and illuminated pushbuttons with integral transformer (100/110, 115, 120, 200/220, 230, 240, 380, 400/440, 480V) UL: pushbuttons and selector switches: A600 pilot lights and illuminated pushbuttons, direct supply pilot lights and illuminated pushbuttons with integral transformer (100/110, 115, 120, 200/220, 230, 240, 380, 400/440, 480V) TÜV: pushbuttons and selector switches: A600=P600 (NO, NC)/Q600 (NO-EM, NC-LB) pilot lights and illuminated pushbuttons, direct supply pilot lights and illuminated pushbuttons with integral transformer (100/110, 115, 120, 200/220, 230, 240, 380, 400/440, 480V)							
	Operating Temperature		Operation: -25 to +50°C (without freezing), Storage: -40 to +70°C (without freezing)							
	Vibration Resistance		10 to 55Hz, 98m/sec ² (10G) conforming to IEC6068-2-6							
	Shock Resistance		980m/sec ² (100G) conforming to IEC6068-2-7							
	Electric Shock Protection		Class 0 conforming to IEC60536							
	Degree of Protection (conforming to IEC60529) (conforming to NEMA ICS6-110)		IP65 (from front of the panel) IP20 (Type HW-F contact block) NEMA 1, 2, 3, 3R, 3S, 4, 4X, 5, 12, 13 (from front of panel)							
	Mechanical Life		Momentary pushbuttons: 5,000,000 (900 operations per hour), All other switches: 500,000							
	Pollution Degree (conforming to IEC60947-1)		3 for switches not using a transformer, 2 for switches using a transformer							
	Rated Operational Characteristics		AC-15: A600 or Ue = 250V, Ie = 3A (NO, NC, NO-EM, NC-LB) DC-13: P600 or Ue = 125V, Ie = 1.1A (NO, NC) DC-13: Q600 or Ue = 125V, Ie = 0.9A (NO-EM, NC-LB)							
	Rated Insulation Voltage		600V							
	Rated Switching Over-Voltage		Less than 4kV, conforming to IEC60947-1							
	Rated Impulse Withstanding Voltage		4kV for contact circuit, 2.5kV for lamp circuit							
	Rated Thermal Current		10 Amp							
	Minimum Switching Capacity		5 mA at 3V AC/DC							
	Contact Operation		Slow break NC or NO, self-cleaning							
	Positive Action Operation (Emergency Stops with NC contacts)		5.5mm to 10mm travel to latch 45N minimum force to latch 10mm maximum travel 1,800 operations per hour maximum for a Pushlock Turn Reset 900 operations per hour maximum for a Push-Pull							
	Operating Force		Flush and extended pushbuttons—with 1NO or 1NC contact: 6.2±2N (momentary), 7.0±2N (main- tained) Additional contacts—1NO or 1NC: +3.2N (momentary), + 3.3N (maintained)							
	Terminal Referencing		Conforming to CENELEC EN50005							
	Recommended Terminal Torque		0.8 N m (7.1 in lb.)							
	External Short-Circuit Protection		10A 250V fuse conforming to IEC60269-1							
	Applicable Wire Size		Minimum 1 x 22 AWG, max. 2 x 14 AWG or 1 x 12 AWG							
	Contact Resistance		Initial contact resistance of 50mΩ or less							
	Contact Gap		4mm (NO and NC), 2mm (NO-EM and NC-LB)							
	Horsepower Rating		Reference Value: 1/4 HP @ 120V (1ø non-reversing), 1HP @ 240V (3ø non-reversing)							
	Electrical Reliability		MTBF < 1 fault for 10 million operation cycles (3V DC, 5mA)							
	Lamp Ratings		Incandescent: 1 W LEDs: 6V/17mA max, 12V & 24V/11mA max, 120 & 240V/10mA max							
	Maximum Inrush Current		40 A (40 ms)							
	Contact Material		Silver (gold plated contacts available - contact IDEC)							
	Contact Ratings	Pushbuttons Illuminated Pushbuttons Selector Switches Illuminated Selector Switches Pushbutton Selectors		Contact Block			Type HW-C/HW-F /HW-G			
Rated Insulation Voltage				600V						
Rated Continuous Current				10A						
Contact Ratings by Utilization Category IEC 60947-5-1				AC-15 (A600) DC-13 (P600)						
Characteristics	Operational Voltage				24V	48V	50V	110V	220V	440V
	Operational Current	AC 50/60 Hz	AC-12 Control of resistive loads & solid state loads		10A	—	10A	10A	6A	2A
			AC-15 Control of electromagnetic loads (> 72VA)		10A	—	7A	5A	3A	1A
		DC	DC-12 Control of resistive loads & solid state loads		8A	5A	—	2.2A	1.1A	—
			DC-13 Control of electromagnets		5A	2A	—	1.1A	0.6A	—



- For dimensions, see page A3-100.
- For life expectancy derating curves, see page A3-105.

Part Numbers: Pilot Lights

Style			Plastic Bezel	Metal Bezel
Round Flush				
(Full Voltage type shown)	Full Voltage		HW1P-1FQ4-②-③	HW4P-1FQ4-②-③
	Transformer	120V AC 240V AC 480V AC	HW1P-1FH24-② HW1P-1FM44-② HW1P-1FT84-②	HW4P-1FH24-② HW4P-1FM44-② HW4P-1FT84-②
	DC-DC Converter*	110V DC	HW1P-1D24-②	—
Dome				
(Full Voltage type shown)	Full Voltage		HW1P-2FQ4-②-③	HW4P-2FQ4-②-③
	Transformer	120V AC 240V AC 480V AC	HW1P-2FH24-② HW1P-2FM44-② HW1P-2FT84-②	HW4P-2FH24-② HW4P-2FM44-② HW4P-2FT84-②
	DC-DC Converter*	110V DC	HW1P-2D24-②	—
Square Flush				
(Transformer type shown)	Full Voltage		HW2P-1FQ4-②-③	—
	Transformer	120V AC 240V AC 480V AC	HW2P-1FH24-② HW2P-1FM44-② HW2P-1FT84-②	—
	DC-DC Converter*	110V DC	HW2P-1D24-②	—
Jumbo Dome				
	Full Voltage**	LED	HW1P-5Q4-②	—
	24V AC/DC	Incandescent	HW1P-5Q7-②	—



1. In place of ②, specify the Lens/LED Color Code.
2. In place of ③ specify the Full Voltage Code from table below.
3. In place of ④ specify Lamp Type Code.
4. *DC-DC convertor voltage input from 90-140V DC, comes with spring up terminals only.
5. **Available with spring up terminals and 24V only.
6. For nameplates and accessories, see page A3-96.
- 7 For dimensions, see page A3-100.

③ Full Voltage Code

④ Lamp Type Code

Color	Code
Amber	A
Green	G
Red	R
Blue	S
White	W
Yellow	Y

Voltage	Code
6V AC/DC	6
12V AC/DC	12
24V AC/DC	24
120V AC (LED only)	120
240VAC (LED only)	240


Lamp	Code
Incandescent	Blank
LED	D

Dimensions — HW Series


Non-Illuminated Pushbuttons

A3

Switches & Pilot Devices

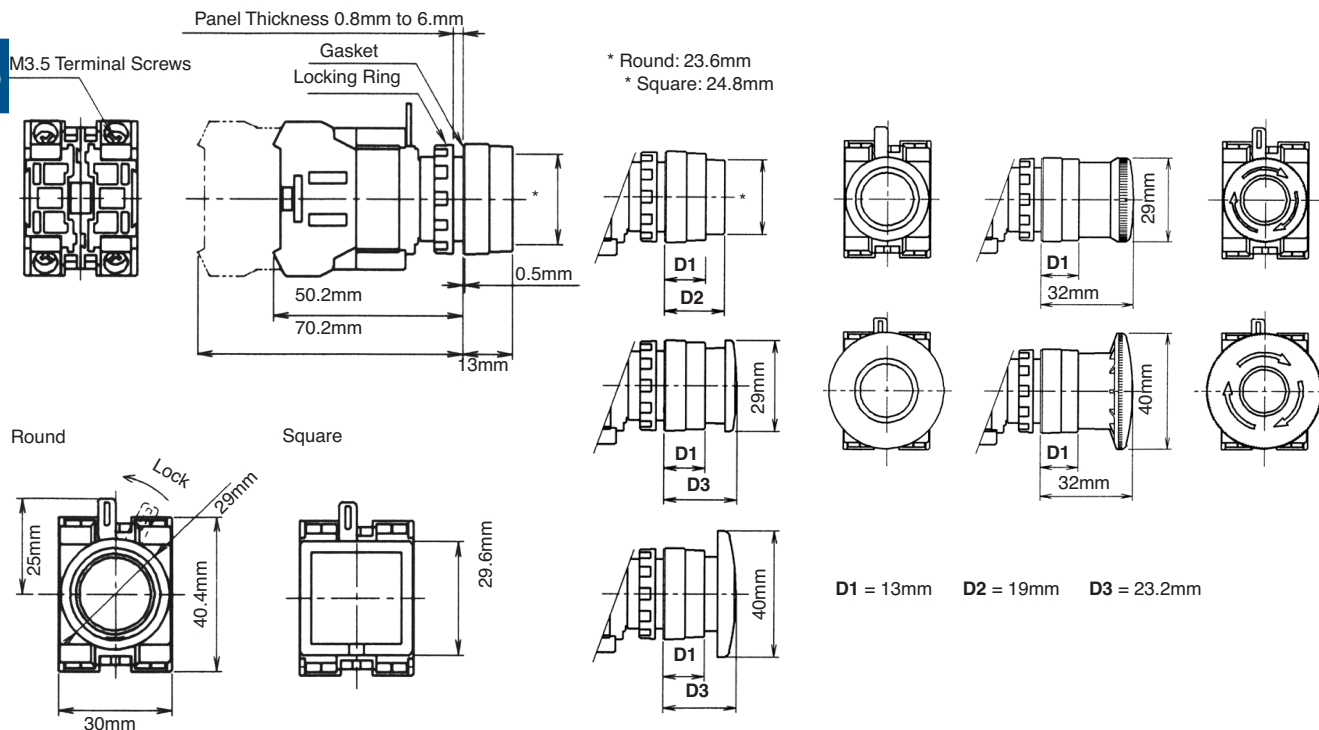

Monolever

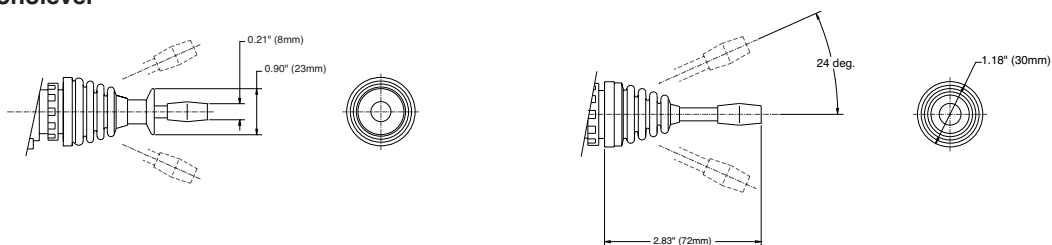

Pilot Lights

