

BGA751L7

Single-Band UMTS LNA
(800, 900 MHz)

RF & Protection Devices



Never stop thinking

Edition 2009-05-27

**Published by
Infineon Technologies AG
81726 München, Germany
© Infineon Technologies AG 2009.
All Rights Reserved.**

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

BGA751L7**Revision History: 2009-05-27, V3.2****Previous Version: 2008-11-24, V3.1**

Page	Subjects (major changes since last revision)
7	Updated DC Characteristics (added limits)
9, 10	Updated footnotes

Table of Contents

	Table of Contents	4
1	Description	5
2	Electrical Characteristics	6
2.1	Absolute Maximum Ratings	6
2.2	Thermal Resistance	6
2.3	ESD Integrity	6
2.4	DC Characteristics	7
2.5	Gain Mode Select Truth Table	7
2.6	Switching Times	7
2.7	Supply current and Power gain characteristics; $T_A = 25^\circ\text{C}$	8
2.8	Logic Signal Characteristics; $T_A = 25^\circ\text{C}$	8
2.9	Measured RF Characteristics UMTS Bands V / VI	9
2.10	Measured RF Characteristics UMTS Band VIII	10
2.11	Measured Performance Low Band (Band V) High Gain Mode vs. Frequency	11
2.12	Measured Performance Low Band (Band V) High Gain Mode vs. Temperature	12
2.13	Measured Performance Low Band (Band V) Low Gain Mode vs. Frequency	13
2.14	Measured Performance Low Band (Band V) Low Gain Mode vs. Temperature	15
3	Application Circuit and Block Diagram	16
3.1	UMTS bands V and VI Application Circuit Schematic	16
3.2	UMTS band VIII Application Circuit Schematic	17
3.3	Pin Definition	17
3.4	Application Board	18
4	Physical Characteristics	20
4.1	Package Dimensions	20

1 Description

The BGA751L7 is a low current single-band low noise amplifier MMIC for UMTS bands V, VI and VIII. The LNA is based upon Infineon's proprietary and cost-effective SiGe:C technology and comes in a low profile TSLP-7-1 leadless green package. Because the matching is off chip, the 800 MHz path can be easily converted into a 900 MHz path by optimizing the input and output matching network. This document specifies the electrical parameters, pinout, application circuit and packaging of the chip.

Features

- Gain: 16 / -8 dB in high / low gain mode
- Noise figure: 1.05 dB in high gain mode
- Supply current: 3.3 / 0.5 mA in high / low gain mode
- Standby mode (< 2 μ A typ.)
- Output internally matched to 50 Ω
- Inputs pre-matched to 50 Ω
- 2kV HBM ESD protection
- Low external component count
- Small leadless TSLP-7-1 package (2.0 x 1.3 x 0.39 mm)
- Pb-free (RoHS compliant) package



TSLP-7-1 package

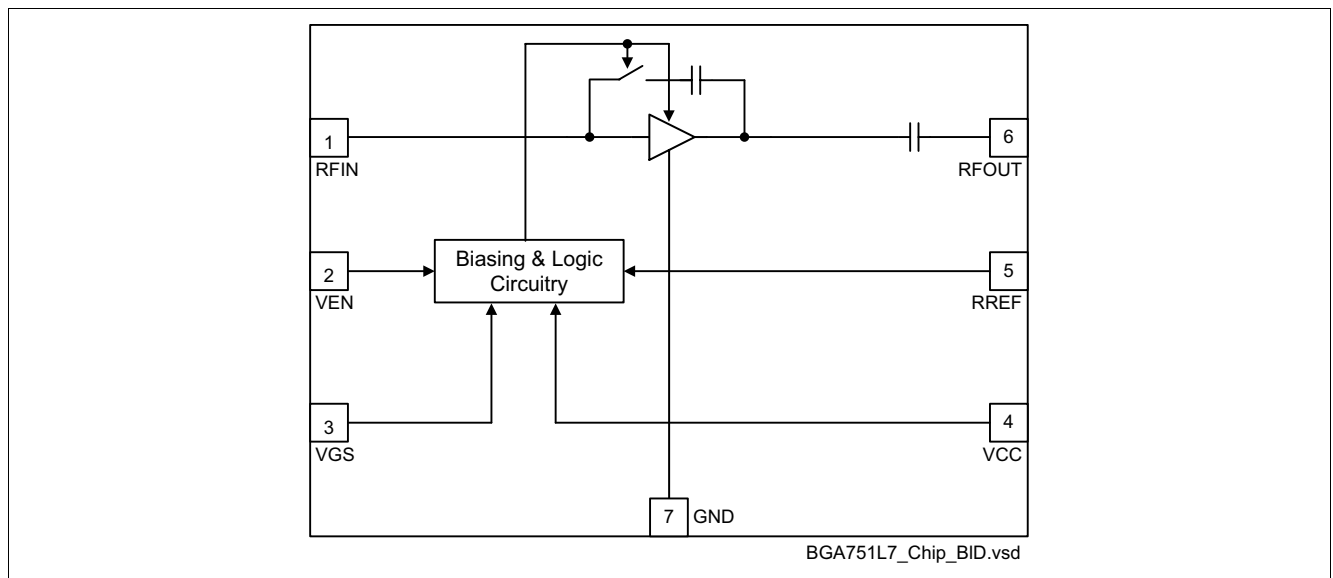


Figure 1 Block diagram of single-band LNA

Type	Package	Marking	Chip
BGA751L7	TSLP-7-1	B5	T1533

2 Electrical Characteristics

2.1 Absolute Maximum Ratings

Table 1 Absolute Maximum Ratings

Parameter	Symbol	Values		Unit	Note / Test Condition
		Min.	Max.		
Supply voltage	V_{CC}	-0.3	3.6	V	
Supply current	I_{CC}		10	mA	
Pin voltage	V_{PIN}	-0.3	$V_{CC}+0.3$	V	All pins except RF input pin
Pin voltage RF Input Pin	V_{RFIN}	-0.3	0.9	V	
RF input power	P_{RFIN}		4	dBm	
Junction temperature	T_j		150	°C	
Ambient temperature range	T_A	-30	85	°C	
Storage temperature range	T_{stg}	-65	150	°C	

2.2 Thermal Resistance

Table 2 Thermal Resistance

Parameter	Symbol	Value	Unit	Note / Test Conditions
Thermal resistance junction to soldering point	R_{thJS}	150	K/W	

2.3 ESD Integrity

Table 3 ESD Integrity

Parameter	Symbol	Value (typ.)	Unit	Note / Test Conditions
ESD hardness HBM ¹⁾	$V_{ESD-HBM}$	2000	V	All pins

1) According to JESD22-A114

2.4 DC Characteristics

Table 4 DC Characteristics, $T_A = 25\text{ }^{\circ}\text{C}$

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Supply voltage	V_{CC}	2.6	2.8	3.0	V	
Supply current high gain mode	I_{CCHG}		3.3		mA	
Supply current low gain mode	I_{CCLG}		500		μA	
Supply current standby mode	I_{CCOFF}		0.1	2.0	μA	
Logic level high	V_{HI}	1.5	2.8		V	VEN and VGS
Logic level low	V_{LO}	-0.2	0.0	0.5	V	
Logic currents VEN	I_{ENL}			0.1	μA	VEN
	I_{ENH}		5.0	6.0	μA	
Logic currents VGS	I_{GSL}			0.1	μA	VGS
	I_{GSH}		5.0	6.0	μA	

2.5 Gain Mode Select Truth Table

Table 5 Truth Table

Control Voltage		State	
		Bands V, VI and VIII	
VEN	VGS	HG	LG
H	L	OFF	ON
H	H	ON	OFF
L	L	STANDBY ¹⁾	
L	H		

1) In order to achieve minimum standby current it is encouraged to apply logic low-level at the VGS pin in standby mode although this is not mandatory. Details see section 2.4.

2.6 Switching Times

Table 6 Typical switching times; $T_A = -30 \dots 85\text{ }^{\circ}\text{C}$

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Settling time gainstep	t_{GS}		1		μs	Switching LG $\leftrightarrow$ HG


Supply current and Power gain characteristics; $T_A = 25\text{ }^{\circ}\text{C}$

2.7 Supply current and Power gain characteristics; $T_A = 25\text{ }^{\circ}\text{C}$


Supply current and Power gain high gain mode versus reference resistor R_{REF} (low gain mode supply current is independent of reference resistor).

Note: In order to achieve higher gain an external reference resistor can be soldered between RREF (Pin 5) and ground (see [Figure 2 on page 16](#)).

Supply Current $I_{CC} = f(R_{REF})$
 $V_{CC} = 2.8\text{ V}$

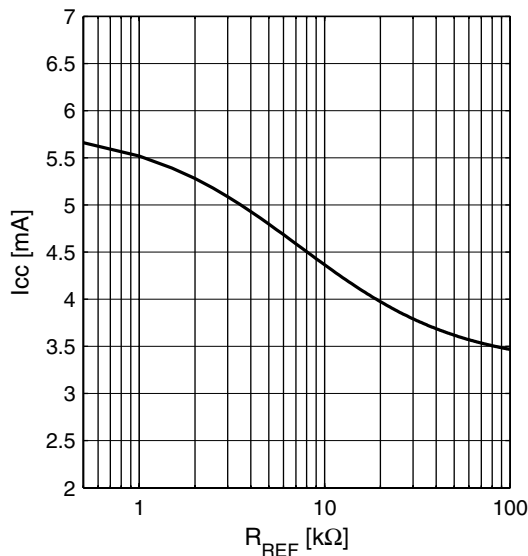


Power Gain $|S_{21}| = f(R_{REF})$
 $V_{CC} = 2.8\text{ V}$

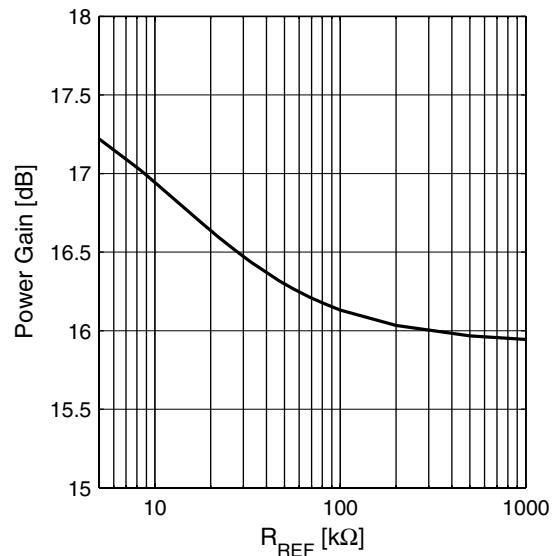


2.8 Logic Signal Characteristics; $T_A = 25\text{ }^{\circ}\text{C}$

Current consumption of logic inputs V_{EN} , V_{GS}

Logic currents $I_{EN} = f(V_{EN})$
 $V_{CC} = 2.8\text{ V}$

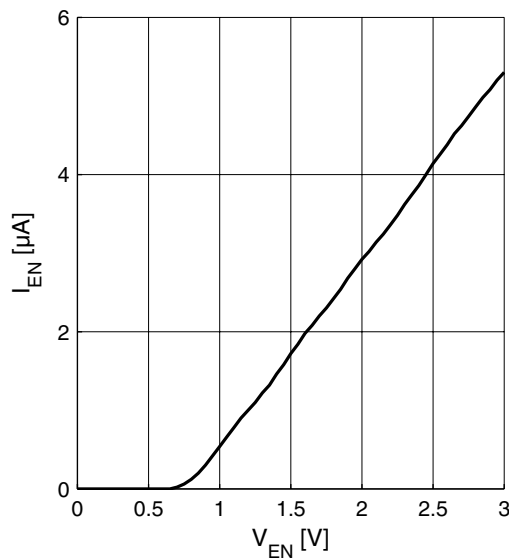

Logic currents $I_{GS} = f(V_{GS})$
 $V_{CC} = 2.8\text{ V}$

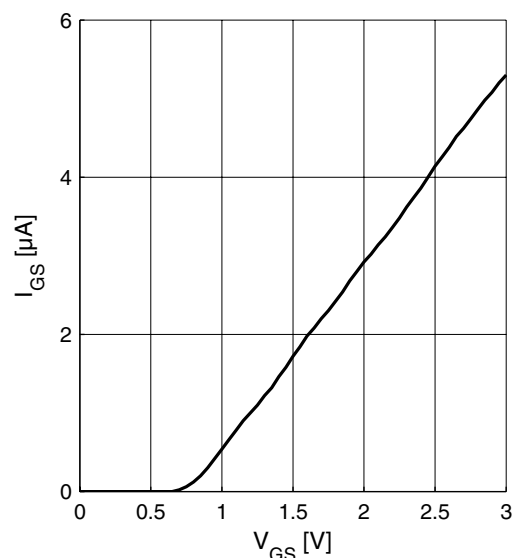

2.9 Measured RF Characteristics UMTS Bands V / VI

Table 7 Typical Characteristics 800 MHz Band, $T_A = 25\text{ °C}$, $V_{CC} = 2.8\text{ V}$, $R_{REF} = \text{n/c}$

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Pass band range band V		869		894	MHz	
Pass band range band VI		875		885	MHz	
Current consumption	I_{CCHG}		3.3		mA	High gain mode
	I_{CCLG}		0.5		mA	Low gain mode
Gain	S_{21HG}		15.8		dB	High gain mode
	S_{21LG}		-7.7		dB	Low gain mode
Reverse Isolation ¹⁾	S_{12HG}		-36		dB	High gain mode
	S_{12LG}		-8		dB	Low gain mode
Noise figure	NF_{HG}		1.05		dB	High gain mode
	NF_{LG}		7.9		dB	Low gain mode
Input return loss ¹⁾	S_{11HG}		-21		dB	50 Ω , high gain mode
	S_{11LG}		-13		dB	50 Ω , low gain mode
Output return loss ¹⁾	S_{22HG}		-21		dB	50 Ω , high gain mode
	S_{22LG}		-13		dB	50 Ω , low gain mode
Stability factor ²⁾	k		>2.3			DC to 10 GHz; all gain modes
Input compression point ¹⁾	IP_{1dBHG}		-5		dBm	High gain mode
	$IP_{1dB LG}$		-8		dBm	Low gain mode
Inband IIP3 ¹⁾ $f_1 - f_2 = 1\text{ MHz}$ $P_{f1} = P_{f2} = -37\text{ dBm}$	$IIP3_{HG}$		-7		dBm	High gain mode
	$IIP3_{LG}$		1			Low gain mode

1) Verification based on AQL; not 100% tested in production

2) Guaranteed by device design; not tested in production

2.10 Measured RF Characteristics UMTS Band VIII

Table 8 Typical Characteristics 900 MHz Band, $T_A = 25\text{ °C}$, $V_{CC} = 2.8\text{ V}$, $R_{REF} = \text{n/c}$

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Pass band range band VIII		925		960	MHz	
Current consumption	I_{CCHG}		3.3		mA	High gain mode
	I_{CCLG}		0.5		mA	Low gain mode
Gain	S_{21HG}		15.5		dB	High gain mode
	S_{21LG}		-7.2		dB	Low gain mode
Reverse Isolation ¹⁾	S_{12HG}		-36		dB	High gain mode
	S_{12LG}		-7		dB	Low gain mode
Noise figure	NF_{HG}		1.15		dB	High gain mode
	NF_{LG}		7.7		dB	Low gain mode
Input return loss ¹⁾	S_{11HG}		-12		dB	50 Ω , high gain mode
	S_{11LG}		-15		dB	50 Ω , low gain mode
Output return loss ¹⁾	S_{22HG}		-12		dB	50 Ω , high gain mode
	S_{22LG}		-12		dB	50 Ω , low gain mode
Stability factor ²⁾	k		>4.3			DC to 10 GHz; all gain modes
Input compression point ¹⁾	IP_{1dBHG}		-4		dBm	High gain mode
	$IP_{1dB LG}$		-5		dBm	Low gain mode
Inband IIP3 ¹⁾ $f_1 - f_2 = 1\text{ MHz}$ $P_{f1} = P_{f2} = -37\text{ dBm}$	$IIP3_{HG}$		-6		dBm	High gain mode
	$IIP3_{LG}$		1			Low gain mode

1) Verification based on AQL; not 100% tested in production


2) Guaranteed by device design; not tested in production

Measured Performance Low Band (Band V) High Gain Mode vs. Frequency


2.11 Measured Performance Low Band (Band V) High Gain Mode vs. Frequency

$T_A = 25^\circ\text{C}$, $V_{CC} = 2.8\text{ V}$, $V_{GS} = 2.8\text{ V}$, $V_{EN} = 2.8\text{ V}$, $R_{REF} = \text{n/c}$


Power Gain $|S_{21}| = f(f)$

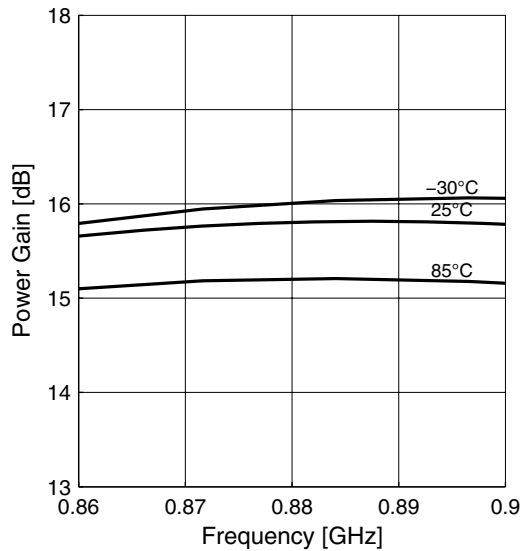


Power Gain wideband $|S_{21}| = f(f)$

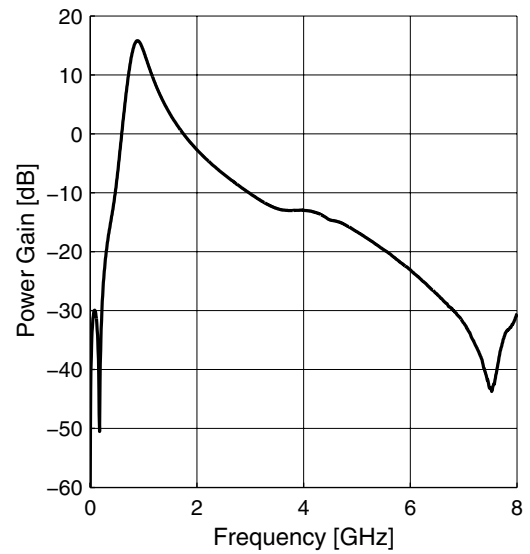

Matching $|S_{11}| = f(f)$, $|S_{22}| = f(f)$

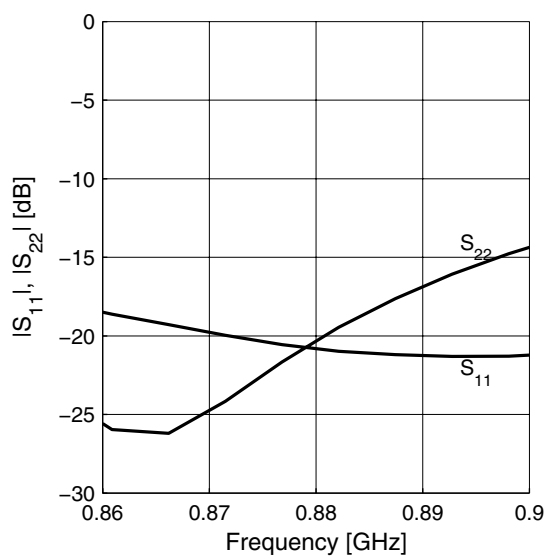


Gainstep HG-LG $|\Delta S_{21}| = f(f)$

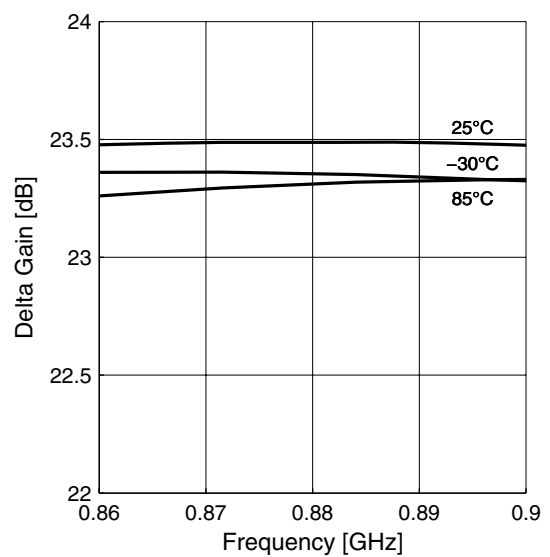


Measured Performance Low Band (Band V) High Gain Mode vs. Temperature

Noise Figure $NF = f(f)$

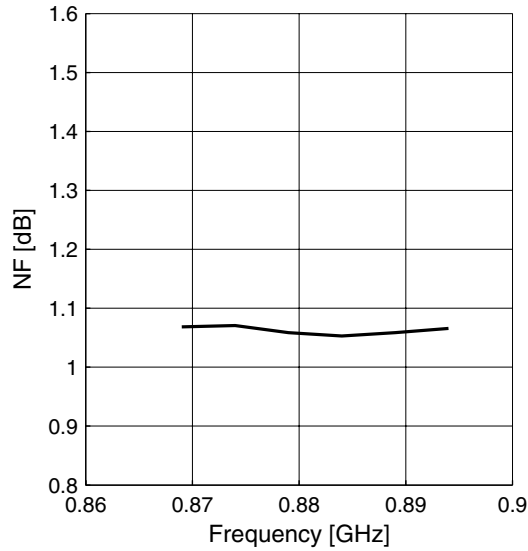


Input Compression $P1dB = f(f)$

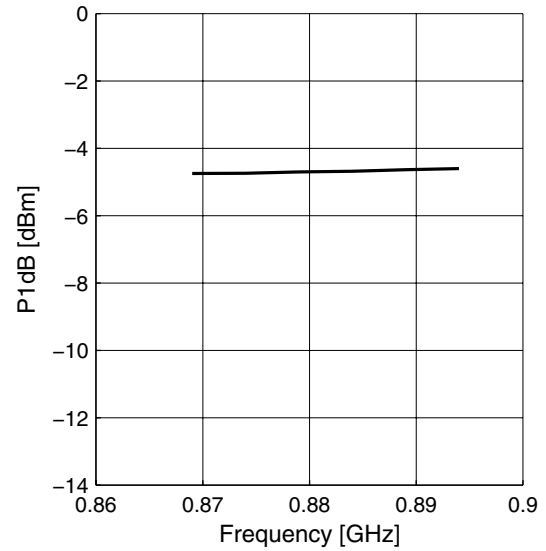


2.12 Measured Performance Low Band (Band V) High Gain Mode vs. Temperature

$V_{CC} = 2.8 \text{ V}$, $V_{GS} = 2.8 \text{ V}$, $V_{EN} = 2.8 \text{ V}$, $f = 880 \text{ MHz}$, $R_{REF} = n/c$

Power Gain $|S_{21}| = f(T_A)$

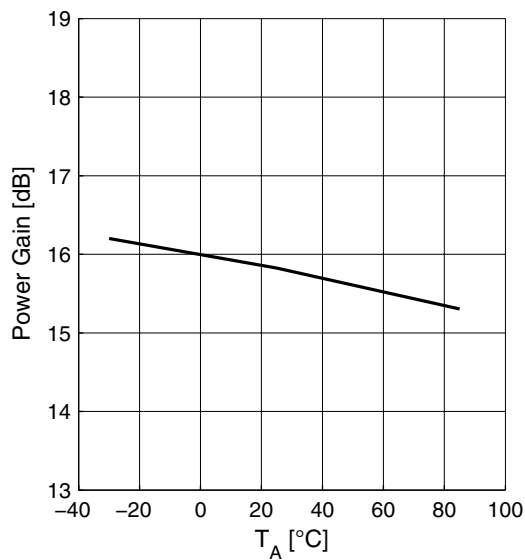


Supply Current $I_{CC} = f(T_A)$

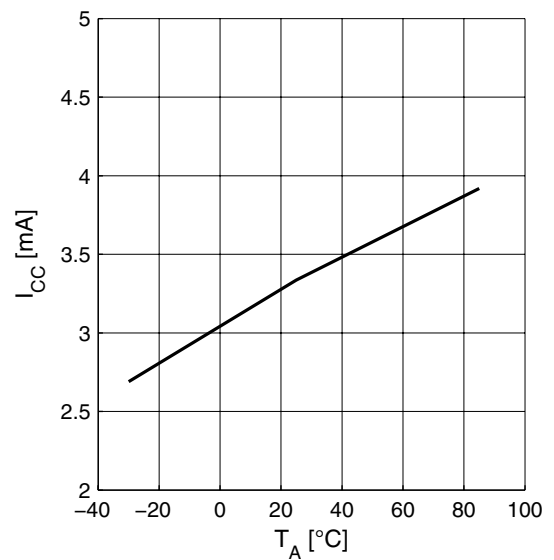


Measured Performance Low Band (Band V) Low Gain Mode vs. Frequency

Noise Figure $NF = f(T_A)$

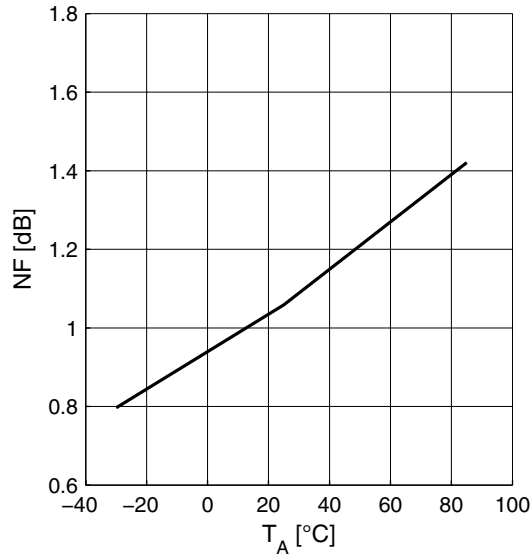


Input Compression $P1dB = f(T_A)$

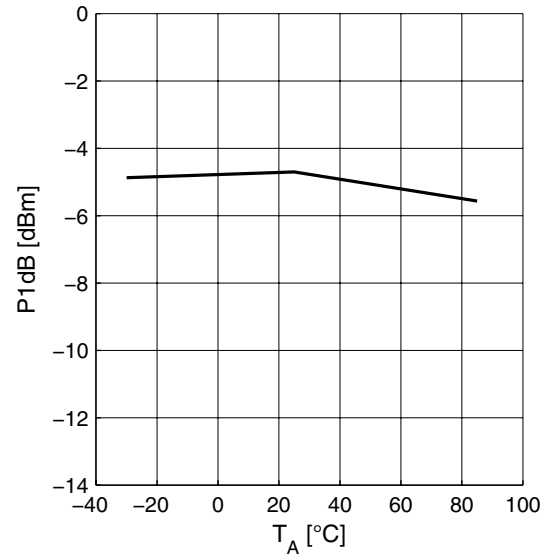


2.13 Measured Performance Low Band (Band V) Low Gain Mode vs. Frequency

$T_A = 25^\circ\text{C}$, $V_{CC} = 2.8\text{ V}$, $V_{GS} = 0\text{ V}$, $V_{EN} = 2.8\text{ V}$, $R_{REF} = n/c$

Power Gain $|S_{21}| = f(f)$

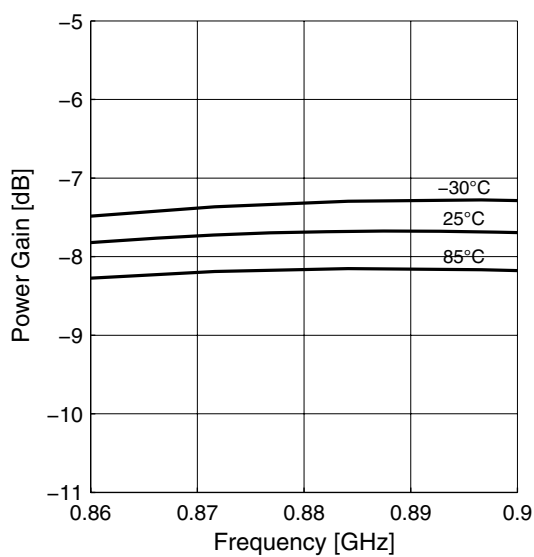


Power Gain wideband $|S_{21}| = f(f)$

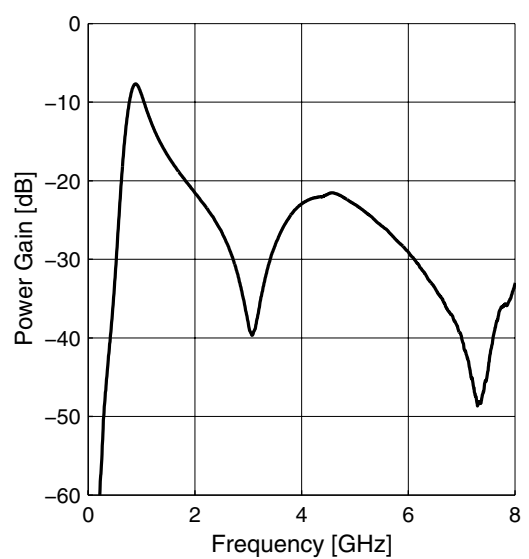


Measured Performance Low Band (Band V) Low Gain Mode vs. Frequency


Matching $|S_{11}| = f(f)$, $|S_{22}| = f(f)$

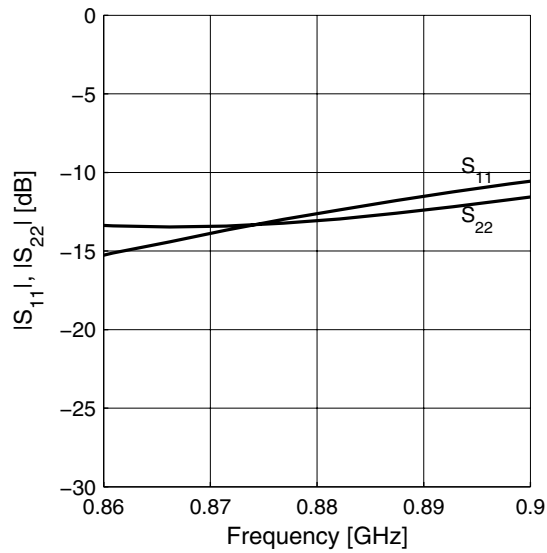

Noise Figure $NF = f(f)$

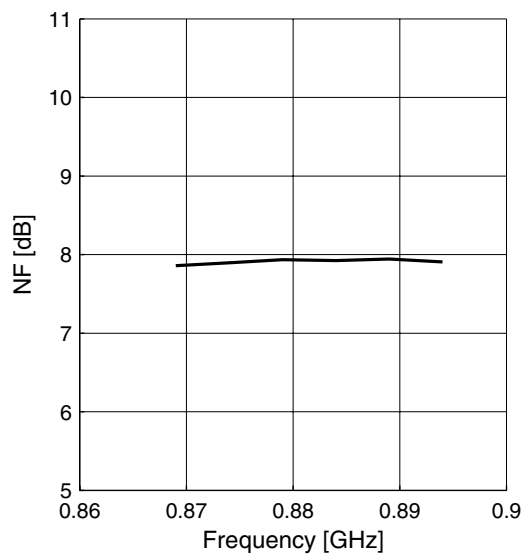

Input Compression $P1dB = f(f)$

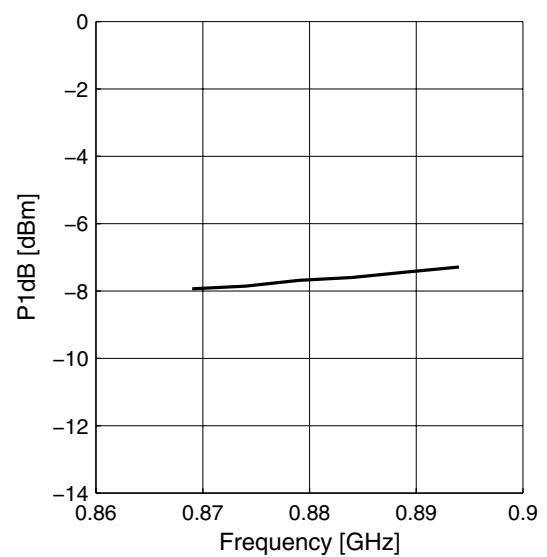


Measured Performance Low Band (Band V) Low Gain Mode vs. Temperature


2.14 Measured Performance Low Band (Band V) Low Gain Mode vs. Temperature

$V_{CC} = 2.8 \text{ V}$, $V_{GS} = 0 \text{ V}$, $V_{EN} = 2.8 \text{ V}$, $f = 880 \text{ MHz}$, $R_{REF} = n/c$


Power Gain $|S_{21}| = f(T_A)$

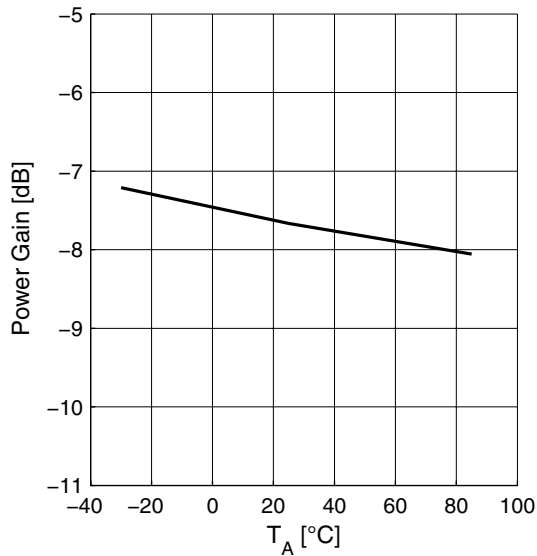


Supply Current $I_{CC} = f(T_A)$

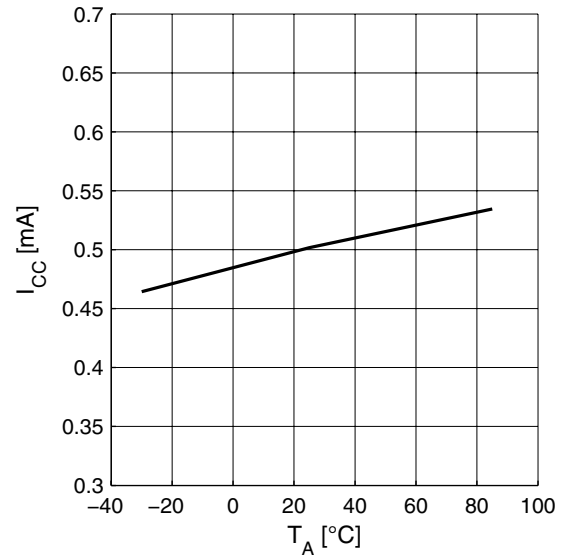

Noise Figure $NF = f(T_A)$

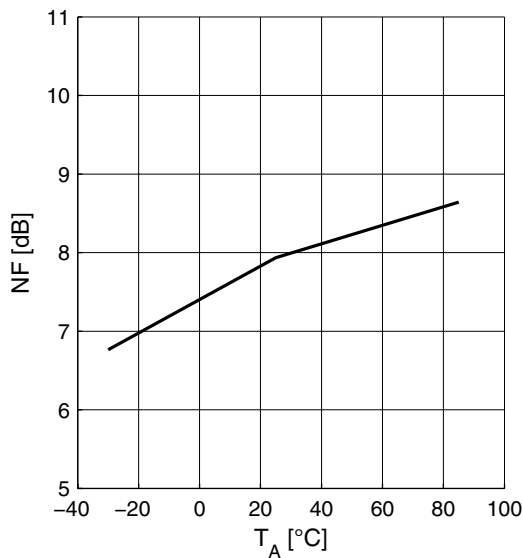

Input Compression $P1dB = f(T_A)$

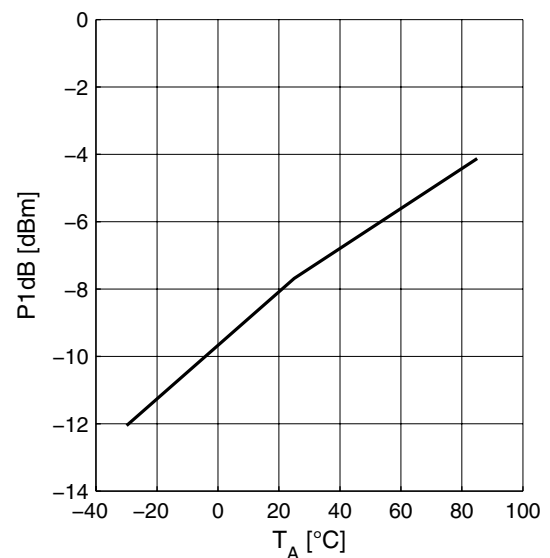

3 Application Circuit and Block Diagram

3.1 UMTS bands V and VI Application Circuit Schematic

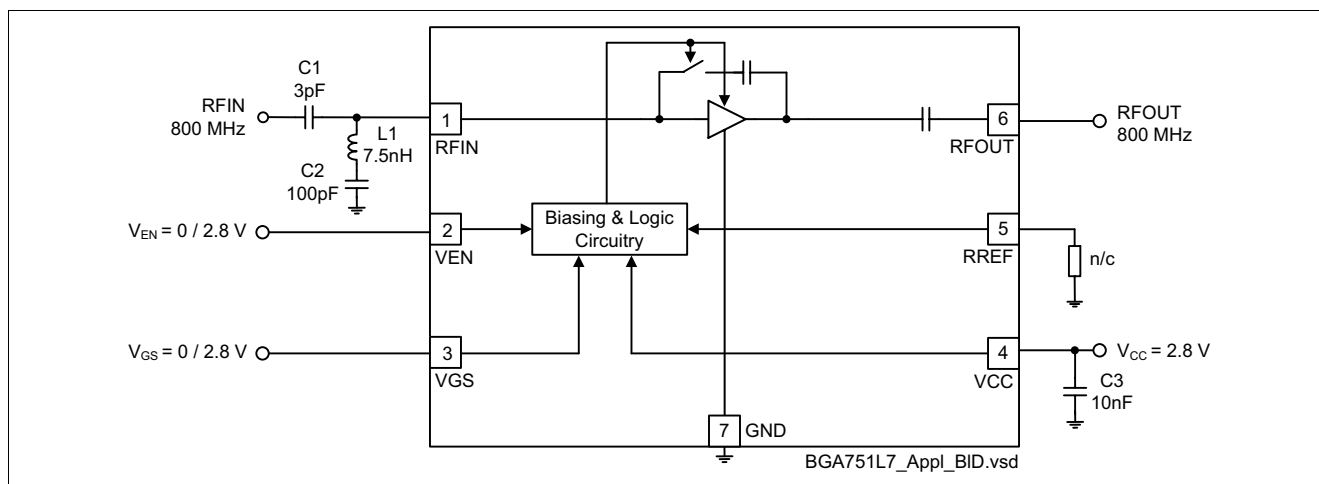


Figure 2 Application circuit with chip outline (top view)

Note: Package paddle (Pin 0) has to be RF grounded.

Table 9 Parts List

Part Number	Part Type	Manufacturer	Size	Comment
L1	Chip inductor	Various	0402	Wirewound, $Q \approx 50$
C1 ... C3	Chip capacitor	Various	0402	

3.2 UMTS band VIII Application Circuit Schematic

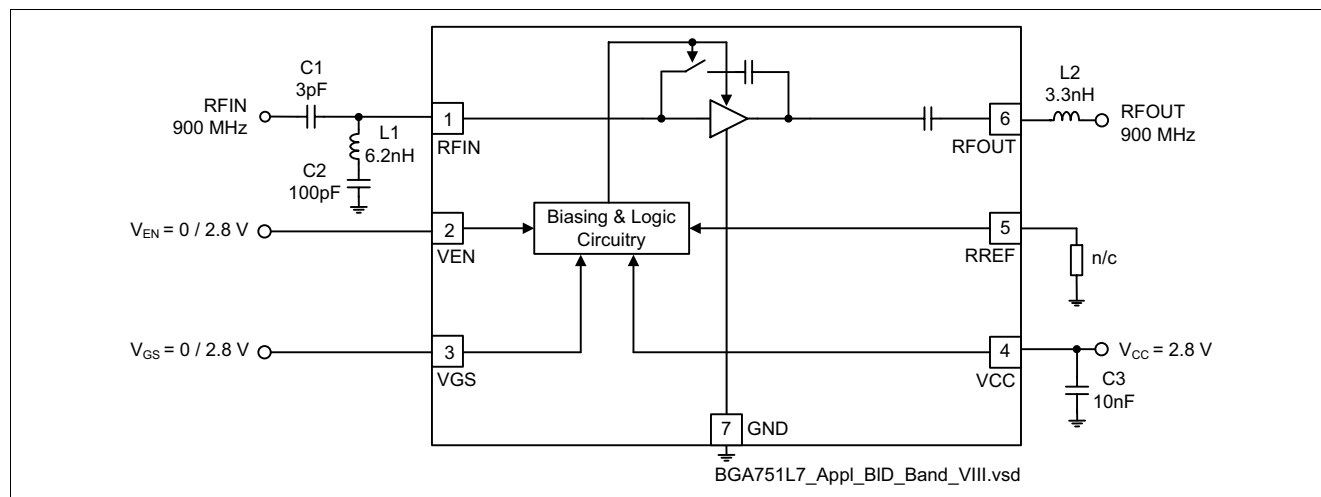


Figure 3 Application circuit with chip outline (top view)

Note: Package paddle (Pin 0) has to be RF grounded.

Table 10 Parts List

Part Number	Part Type	Manufacturer	Size	Comment
L1, L2	Chip inductor	Various	0402	Wirewound, Q ≈ 50
C1 ... C3	Chip capacitor	Various	0402	

3.3 Pin Definition

Table 11 Pin Definition and Function

Pin Number	Symbol	Function
1	RFIN	LNA input (800/900 MHz)
2	VEN	Band select control
3	VGS	Gain step control
4	VCC	Supply voltage
5	RREF	Bias current reference resistor (high gain mode)
6	RFOUT	LNA output (800/900 MHz)
7	GND	Package paddle; ground connection for LNA and control circuitry

3.4 Application Board

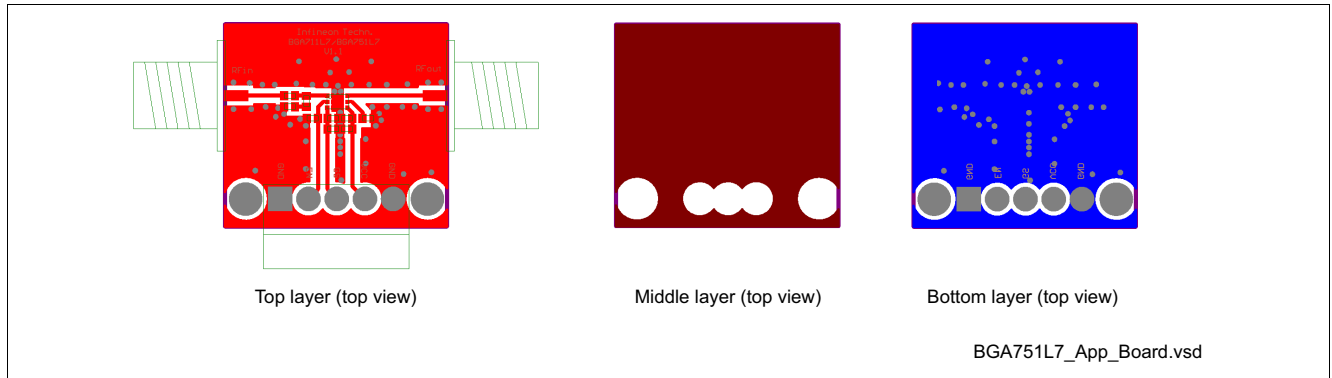


Figure 4 Application board layout on 3-layer FR4. Top layer thickness: 0.2 mm, bottom layer thickness: 0.8 mm, 17 μm Cu metallization, gold plated. Board size: 21 x 19 mm

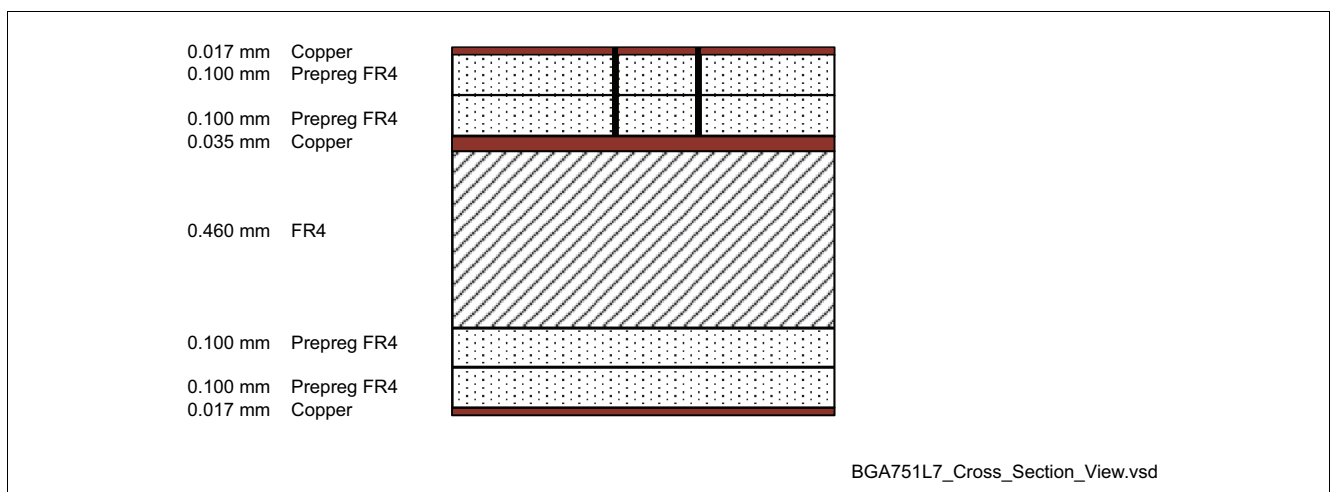


Figure 5 Cross-section view of application board

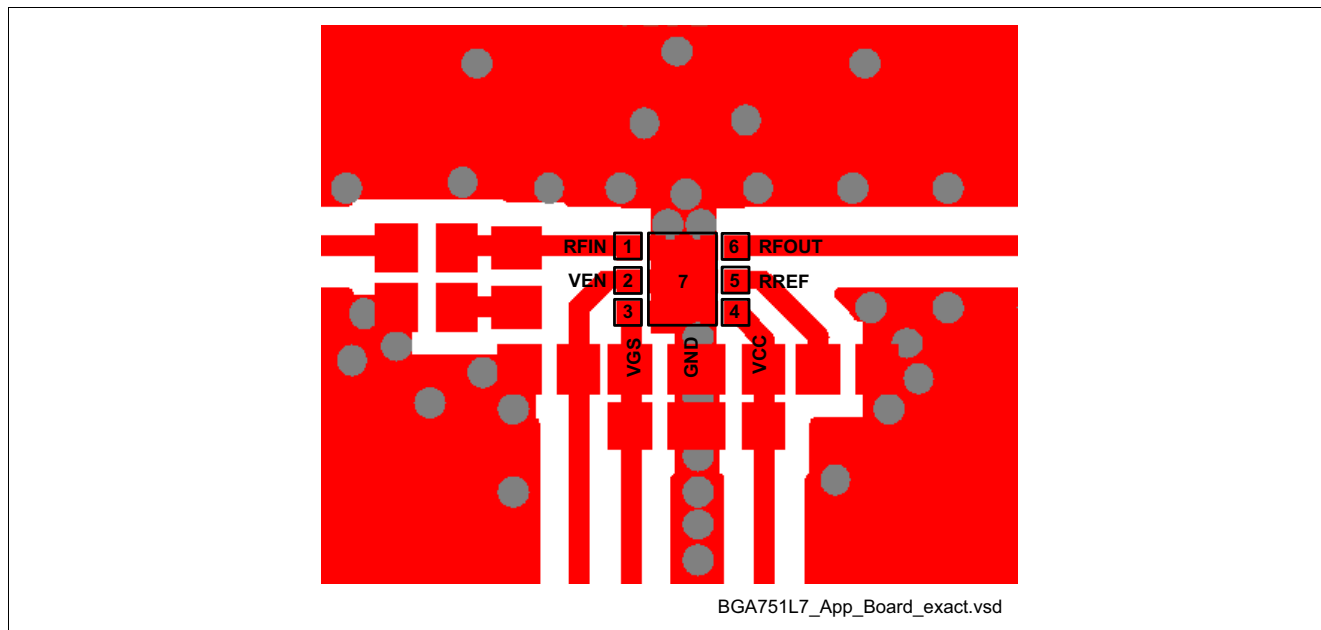


Figure 6 Detail of application board layout

Note: In order to achieve the same performance as given in this datasheet please follow the suggested PCB-layout as closely as possible. The position of the GND vias is critical for RF performance.

4 Physical Characteristics

4.1 Package Dimensions

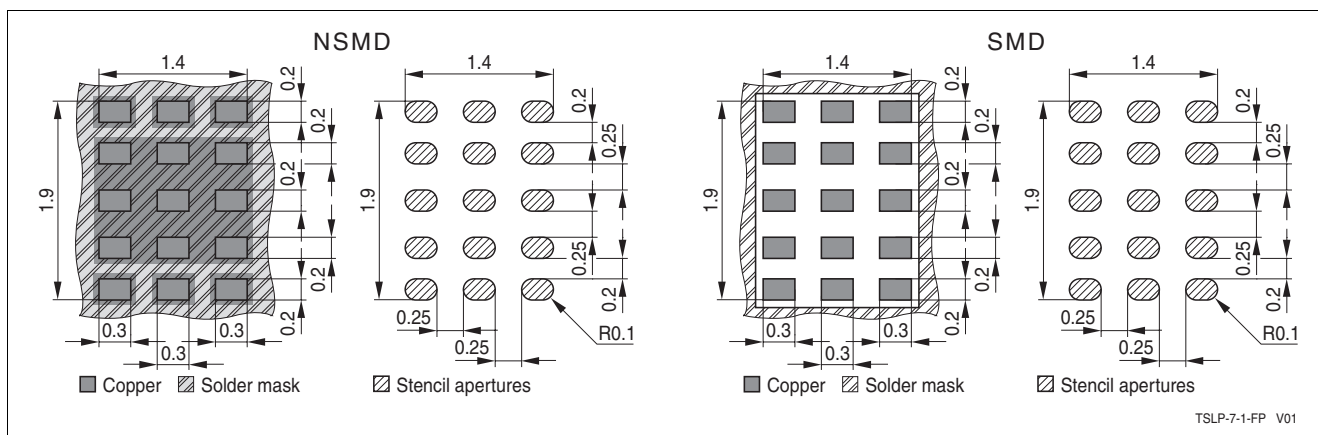


Figure 7 Recommended footprint and stencil layout for the TSLP-7-1 package

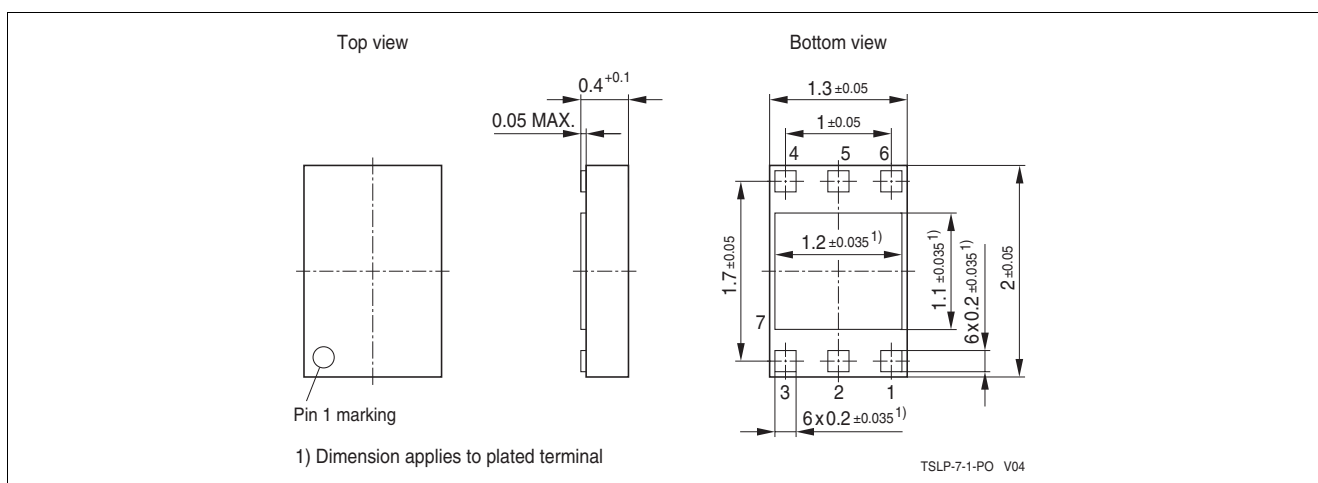


Figure 8 Package outline (top, side and bottom view)

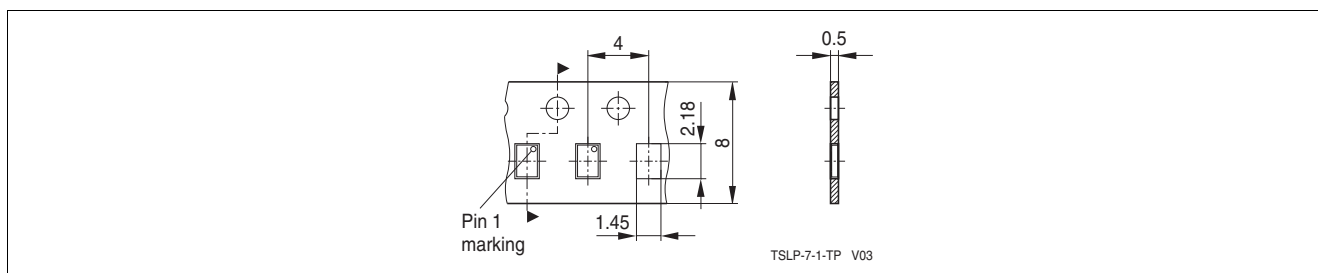


Figure 9 Tape & Reel Dimensions

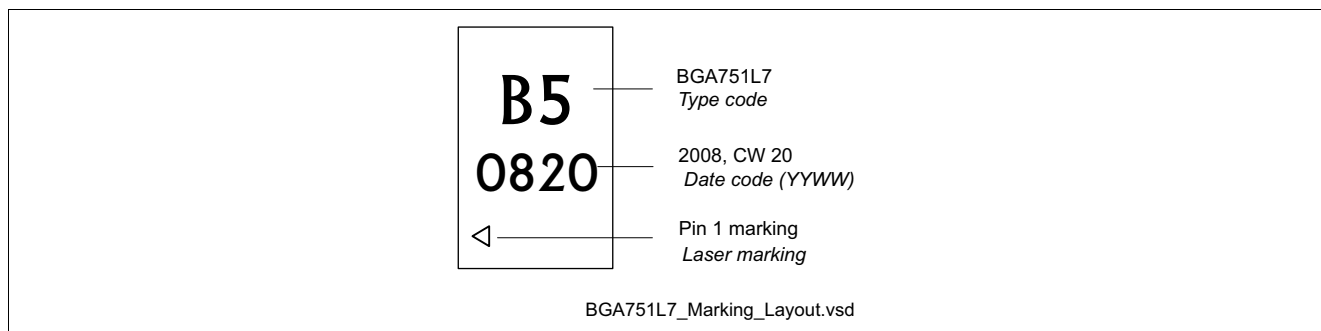


Figure 10 Marking Layout

www.infineon.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Infineon:](#)

[BGA 751L7 E6327](#)