

TANCERAM® chip capacitors can replace tantalum capacitors in many applications and offer several key advantages over traditional tantalums. Because TANCERAM® capacitors exhibit extremely low ESR, equivalent circuit performance can often be achieved using considerably lower capacitance values. Low DC leakage reduces current drain, extending the battery life of portable products. TANCERAM® high DC breakdown voltage ratings offer improved reliability and eliminate large voltage de-rating common when designing with tantalums.


ADVANTAGES

- Low ESR
- Low DC Leakage
- Higher Surge Voltage
- Non-polarized Devices
- Reduced CHIP Size
- Improved Reliability
- Higher Insulation Resistance
- Higher Ripple Current


APPLICATIONS

- Switching Power Supply Smoothing (Input/Output)
- DC/DC Converter Smoothing (Input/Output)
- Backlighting Inverters
- General Digital Circuits

Typical ESR Comparison

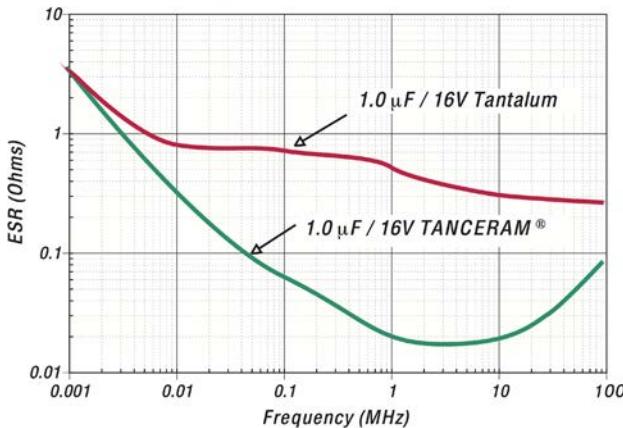

Typical Breakdown Voltage Comparison

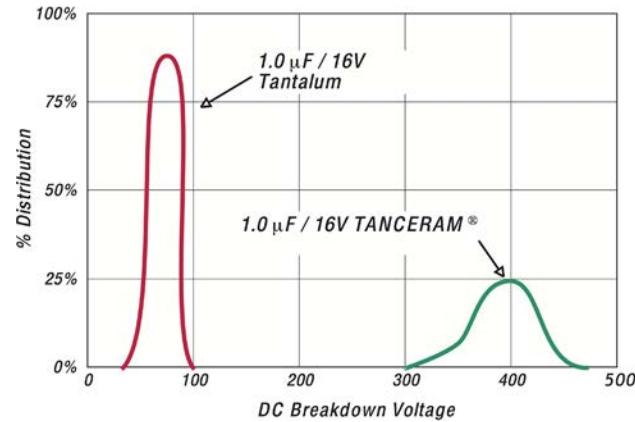

How to ORDER TANCERAM®

Part number written: 100R15X106MV4E

100

R15

X

106

M

V

4

E

VOLTAGE

6R3 = 6.3 V
100 = 10 V
160 = 16 V
250 = 25 V
500 = 50 V
101 = 100 V

SIZE

See Chart

DIELECTRIC

W = X7R
X = X5R

CAPACITANCE

1st two digits are significant; third digit denotes number of zeros.
105 = 1.00 μF
476 = 47.0 μF
107 = 100 μF

TOLERANCE

K = ±10%
M = ±20%


TERMINATION

V = Nickel Barrier with 100% Tin Plating (Matte)
T = SnPb*
(*available on select parts)

MARKING

4 = Unmarked

Code E Type Reel
T Plastic 7"
T Paper 7"
Tape specifications conform to EIA
RS481

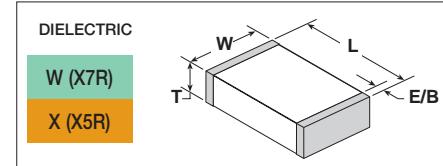

CASE SIZE

CAPACITANCE SELECTION

EIA / JDI	INCHES	(mm)	VDC	1.0 μ F	2.2 μ F	3.3 μ F	4.7 μ F	10 μ F	22 μ F	47 μ F	100 μ F		
				105	225	335	475	106	226	476	107		
- 0402 R07	L .040 ±.004 W .020 ±.004 T .025 Max. EB .008 ±.004	(1.02 ±.10) (0.51 ±.10) (0.64) (0.20±.10)		16 10 6.3									
- 0603 R14	L .063 ±.008 W .032 ±.008 T .035 Max. EB .010±.005	(1.60 ±.20) (0.81 ±.20) (0.89) (.25±.13)		25 16 10 6.3									
- 0805 R15	L .080 ±.010 W .050 ±.010 T .060 Max. EB .020±.010	(2.03 ±.25) (1.27 ±.25) (1.52) (0.51±.25)		50 25 16 10 6.3									
- 1206 R18	L .125 ±.013 W .062 ±.010 T .070 Max. EB .020 +.015-.01	(3.17 ±.35) (1.57 ±.25) (1.78) (0.51+38-.25)		50 35 25 16 10 6.3									
- 1210 S41	L .126 ±.016 W .098 ±.012 T .110 Max. EB .020 +.015-.010	(3.20 ±.40) (2.50 ±.30) (2.8) (0.51+38-.25)		100 50 35 25 16 10 6.3									
1812 S43	L .177 ±.016 W .126 ±.015 T .140 Max. EB .035 ±.020	(4.50 ±.40) (3.20 ±.38) (3.55) (0.89 ±.51)		100 50 25									
					W X W X W X W X W X W X W X								
					"K" OR "M" TOLERANCE						ONLY "M" TOLERANCE		

ELECTRICAL CHARACTERISTICS

DIELECTRIC:	X7R	X5R
TEMPERATURE COEFFICIENT:	±15% (-55 to +125°C)	±15% (-55 to +85°C)
DISSIPATION FACTOR:	For ≥ 50 VDC: 5% max. For ≤ 35 VDC: 10% max.	For ≥ 50 VDC: 5% max. For ≤ 35 VDC: 10% max.
INSULATION RESISTANCE (MIN. @ 25°C, WVDC)	100 MΩ or 10 GΩ, whichever is less	
DIELECTRIC STRENGTH:	2.5 X WVDC, 25°C, 50mA max.	
TEST CONDITIONS:	Capacitance values ≤ 10 μ F: 1.0kHz±50Hz @ 1.0±0.2 Vrms Capacitance values > 10 μ F: 120Hz±10Hz @ 0.5V±0.1 Vrms	
OTHER:	See page 79 for additional dielectric specifications.	



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Johanson:

[251R15W223KV4E](#) [251S43W474KV4E](#) [251R18W473KV4E](#) [6R3R15X476MV4E](#) [6R3R07Y105ZV4T](#)
[6R3R14W225KV4T](#) [251R18W333KV4E](#) [6R3R15X226KV4E](#) [6R3R05X473MV4T](#) [6R3R05X123MV4T](#)
[6R3R05X823MV4T](#) [6R3R18X475MV4E](#) [6R3R05X224MV4T](#) [6R3R15X225MV4E](#) [6R3R05X103MV4T](#)
[6R3R18X335KV4E](#) [6R3R05X273MV4T](#) [6R3R14X106MV4T](#) [6R3R15X335MV4E](#) [6R3R14X225MV4T](#)
[6R3R15X225KV4E](#) [6R3R05X183KV4T](#) [6R3R07X105MV4T](#) [6R3R15X335KV4E](#) [6R3R07X474ZV4T](#)
[6R3R05X393KV4T](#) [6R3R14X225ZV4T](#) [6R3R07X224MV4T](#) [6R3R18X106KV4E](#) [6R3R05X104MV4T](#)
[6R3R05X683MV4T](#) [6R3R14X225KV4T](#) [6R3R07X475MV4T](#) [6R3R07X475KV4T](#) [6R3R14X335KV4T](#)
[6R3R15X226MV4E](#) [6R3R18X476MV4E](#) [6R3R05X183MV4T](#) [6R3R15X106MV4E](#) [6R3R05X103KV4T](#)
[6R3R15X475KV4E](#) [6R3R05X223MV4T](#) [6R3R05X333MV4T](#) [6R3R18X335MV4E](#) [6R3R14X106KV4T](#)
[6R3R18X107MV4E](#) [6R3R05X123KV4T](#) [6R3R07X224ZV4T](#) [6R3R05X153MV4T](#) [6R3R07X224KV4T](#)
[6R3R05X104KV4T](#) [6R3R07X474KV4T](#) [6R3R14X475KV4T](#) [6R3R18X226KV4E](#) [6R3R05X273KV4T](#)
[6R3R05X393MV4T](#) [6R3R14X475ZV4T](#) [6R3R05X223KV4T](#) [6R3R07X105KV4T](#) [6R3R15X106KV4E](#)
[6R3R15X475MV4E](#) [6R3R18X475KV4E](#) [6R3R14X475MV4T](#) [6R3R07X225ZV4T](#) [6R3R05X563MV4T](#)
[6R3R07X105ZV4T](#) [6R3R18X226MV4E](#) [6R3R05X333KV4T](#) [6R3R05X473KV4T](#) [6R3R05X153KV4T](#)
[6R3R05X683KV4T](#) [6R3R05X823KV4T](#) [6R3R18X106MV4E](#) [6R3R07X225MV4T](#) [6R3R05X563KV4T](#)
[6R3R07X474MV4T](#) [6R3S43X107MV4E](#) [6R3S41X107MV4E](#) [251R18W104KV4E](#) [251S48W125KV4E](#)
[251S49W105KV4E](#) [251S43W154KV4E](#) [251R15W392KV4T](#) [251R15W561KV4T](#) [251R18W153KV4E](#)
[251R15W182KV4E](#) [251S41W224MV4E](#) [251S49W474KV4E](#) [251R15W153MV4T](#) [251S41W104MV4E](#)
[251R15W472KV4E](#) [251R15W682KV4T](#) [251R15W272KV4T](#) [251R15W561MV4E](#) [251S47W105KV4E](#)
[251R15W222MV4E](#) [251S48W105KV4E](#) [251S41W224KV4E](#) [251S41W223KV4E](#) [251S43W473KV4E](#)