



FEATURES

- RoHS compliant
- 1600W (220Vac), 1200W (110Vac) Output power
- 48V Main output, 3.3V, 5V or 12V standby output
- 1U sized; dimensions 4.75"x12.00"x1.61"
- 17.5 Watts per cubic inch density
- N+1 redundancy capable, including hot-docking
- Active current sharing on main output
- Over-voltage, over-current, over-temperature protection
- Internal cooling fans
- I²C Bus Interface with status indicators

PRODUCT OVERVIEW

The D1U-W-1600 is a 1600 Watt, power-factor-corrected (PFC) front-end power supply for hot-swapping redundant systems. The main output is 48V and standby output of either 12V, 5V or 3.3V. Packaged in 1U low profile, it is designed to deliver reliable bulk power to servers, workstations, storage systems or any 48V distributed power architecture systems requiring high power density. The highly efficient electrical and thermal design with internal cooling fans supports reliable operation conditions. The D1U-W-1600 is designed to auto-recover from over-temperature faults. Status information is provided with front panel LEDs, logic signals and I²C management interface. Three units can be packaged into a 19" 1U power shelf to provide up to 4.8kW of power.

SELECTION GUIDE

Part Number	Power Output High Line AC	Power Output Low Line AC	Main Output	Standby Output	Airflow
D1U-W-1600-48-HC2C	Discontinued	1600W	1200W	48V	3.3V
D1U-W-1600-48-HA2C	In Production	1600W	1200W	48V	5V
D1U-W-1600-48-HB2C	In Production	1600W	1200W	48V	12V
D1U-W-1600-48-HC1C	Discontinued	1600W	1200W	48V	3.3V
D1U-W-1600-48-HA1C	Discontinued	1600W	1200W	48V	5V
D1U-W-1600-48-HB1C	Discontinued	1600W	1200W	48V	12V

INPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Operating Range		90	115/230	264	Vac
Input Frequency		47	50/60	63	Hz
Turn-on Input Voltage	Ramp up	78.5		86.5	Vac
Turn-off Input Voltage	Ramp down	70.5		78	
Maximum Input Current	Low Line AC 90Vac			15	Arms
	High Line AC 180Vac			10	
Inrush Current	Cold start between 0-1msec			90	Apk
Power Factor	Output load >90%	95%			
	Output load >50%	75%			



For full details go to
www.murata-ps.com/rohs



OUTPUT VOLTAGE CHARACTERISTICS						
Output Voltage	Parameter	Conditions	Min.	Typ.	Max.	Units
48V	Voltage Set Point Accuracy			48		
	Line and Load Regulation		46.54		49.44	Vdc
	Ripple Voltage & Noise ¹	20MHz Bandwidth			480	mV p-p
	Output Current		2		33	A
	Load Capacitance				10000	μF
3.3Vsb	Voltage Set Point Accuracy			3.3		
	Line and Load Regulation		3.2		3.4	Vdc
	Ripple Voltage & Noise ¹	20MHz Bandwidth			50	mV p-p
	Operating Range		0		4.5	A
	Load Capacitance				1530	μF
5Vsb	Voltage Set Point Accuracy			5		
	Line and Load Regulation		4.85		5.15	Vdc
	Ripple Voltage & Noise ¹	20MHz Bandwidth			50	mV p-p
	Operating Range		0		4	A
	Load Capacitance				1530	μF
12Vsb	Voltage Set Point Accuracy			12		
	Line and Load Regulation		11.6		12.4	Vdc
	Ripple Voltage & Noise ¹	20MHz Bandwidth			120	mV p-p
	Operating Range		0		1.7	A
	Load Capacitance				1530	μF

OUTPUT CHARACTERISTICS						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Remote Sense			240			mV
Efficiency	220Vac		90.6			%
Output Rise Monotonicity	Overshoot less than 10% for all outputs, no voltage negative between 10% to 95% during ramp up					
Start-up Time	AC ramp up	1.5				s
	PS_On activated	150				ms
Transient Response	48V Ramp 1A/μs, 50% load step			±2700		mV
	3.3Vsb Ramp 1A/μs, 50% load step			±165		
	5Vsb Ramp 1A/μs, 50% load step			±250		
	12Vsb Ramp 1A/μs, 50% load step			±600		
Current sharing accuracy (up to 6 in parallel)	At 100% load			±10		%
Hot Swap Transients	All outputs within regulation					
Hold-up Time	Max. load, nominal Vin	20				ms

GENERAL CHARACTERISTICS						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Storage Temperature Range	Non-condensing	-40		70		
Operating Temperature Range		0		50	°C	
Operating Humidity	Non-condensing		10	90		
Storage Humidity			5	90	%	
Shock	30G non operating					
Sinusoidal Vibration	0.5G, 5 – 500 Hz operating					
MTBF	Calculated per Bellcore at Ta=30°C	200			Khrs	
	Demonstrated	200			Khrs	
Acoustic	ISO 7779-1999			60	dB LpAm	
Safety Approvals	c-CSA-us (CSA 60950-1-03/UL 60950-1, Second Edition) TUV approval (Bauart) EN 60950-1:2001					
Input Fuse	Power Supply has internal 20A/250V fast blow fuse on the AC line input					
Material Flammability	UL 94V-0					
Switching Frequency	90KHz for Boost PFC Converter 165KHz for Main Output Converter 200KHz for Standby Output Converter					
Weight	2.1kg					

¹ Ripple and noise are measured with 0.1 μF of ceramic capacitance and 10 μF of tantalum capacitance on each of the power supply outputs. The output noise requirements apply over a 0 Hz to 20 MHz bandwidth. A short coaxial cable with 50ohm scope termination is used.

PROTECTION CHARACTERISTICS						
Output Voltage	Parameter	Conditions	Min.	Typ.	Max.	Units
48V	Over-temperature	Auto-restart	55		65	°C
	Over Voltage	Latching	54		59	V
12Vsb	Over Current	Latching	37		42	A
	Over Voltage	Latching	13		14	V
3.3Vsb	Over Current	Latching	2.5		3	A
	Over Voltage	Latching	3.57		4.02	V
5Vsb	Over Current	Latching	6.5		8	A
	Over Voltage	Latching	5.6		6	V
	Over Current	Latching	5		7	A

ISOLATION CHARACTERISTICS						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Insulation Safety Rating / Test Voltage	Input to Output - Reinforced	3000			Vrms	
	Input to Chassis - Basic	1500			Vrms	
Isolation	Output to Chassis					
	Output to Output					
Material Flammability	UL 94V-0					
Grounding	Main Output Return and Standby Output Return are connected internally. 100kΩ resistor parallel with 100nF capacitor is connected between Return and power supply chassis. Main Output Return should be connected to the System Chassis.					

CONTROL SIGNALS		
Status	Conditions	Description
LED	Off	No AC input to all PS
	Flashing Yellow	Power Supply Failure
	Flashing Green	Main Output Absent
	Green	Power Supply Good
I ² C Registers	Status	PS-ON, PGOOD, ACOK, PS_BAD, FANFAIL, OT Warning & shutdown, AC Range
	Output Fault	48V OV, 48V UV, 48V OC, Vsb Fail, Fan1 Fail, Fan2 Fail
	48V Output	8 bit scaled output voltage
	48V	8 bit scaled output current
	Fan1 Monitor	8 bit scaled output current
	Fan2 Monitor	8 bit scaled output current

EMISSIONS AND IMMUNITY		
Characteristic	Description	Criteria
Harmonics	IEC/EN 61000-3-2	
Voltage Fluctuation and Flicker	IEC/EN 61000-3-3	
Emission Conducted	FCC 47 CFR Parts 15/CISPR 22/EN55022	Class A, 6dB margin
Emission Radiated	FCC 47 CFR Parts 15/CISPR 22/EN55022	Class A, 6dB margin
ESD		4kV contact discharge
	IEC/EN 61000-4-2	8kV operational air discharge
		15kV non-operational air discharge
Electromagnetic Field	IEC/EN 61000-4-3	
Electrical Fast Transients/Burst	IEC/EN 61000-4-4	
Surge	IEC/EN 61000-4-5	1kV/2kV, Performance Criteria B
RF Conducted Immunity	IEC/EN 61000-4-6	3 Vac, 80% AM, 1kHz, Performance Criteria A
Magnetic Immunity	IEC/EN 61000-4-8	3 A/m
Voltage dips, interruptions	IEC/EN 61000-4-11	

OUTPUT CONNECTOR AND SIGNAL SPECIFICATION

DC and Signal Connector: Tyco Part # 1-6450332-7, or FCI PowerBlade # 51732-028

P1	P2	P3	P4	P5	P6	x1	x2	x3	x4	x5	
V _{OUT}	V _{OUT}	V _{OUT}	V _{RTN}	V _{RTN}	V _{RTN}	AC_OK	P_GOOD	V _{SB} +OUT	V _{SB} RETURN	V _{SB} RETURN	D
						PS_ON	V _{SB} +OUT	V _{SB} +OUT	V _{SB} RETURN	V _{SB} RETURN	C
						I_SHARE	I ² C ADRO	I ² C ADR1	I ² C ADR2	PS_PRESENT	B
						PS_KILL	V _{OUT} SENSE+	V _{OUT} SENSE-	I ² C DATA	I ² C CLOCK	A


Pin Assignment	Signal Name	Description	High Level Low Level	I Max
P1, P2, P3	V _{OUT}	Main output voltage		
P4, P5, P6	V _{RTN}	Main output voltage, return		
A2	Sense +	V _{OUT} remote sense, positive node input, connected to the +ve load point		
A3	Sense -	V _{OUT} remote sense, negative node input, connected to the -ve load point		
C2, C3, D3	V _{SB}	Standby voltage output		
C4, C5, D4, D5	V _{SB} Return	Standby voltage, return, tied internally to Output Return		
B1	I_Share	Active load sharing bus	0 – 8V	-4 mA / +5 mA
D1	AC_OK	Input AC Voltage "OK" signal output (Internal pull up is 10kΩ to V _{sb})	>2.4V (active, OK) <0.4V	+4 mA -2 mA
D2	P_Good	Power good signal output (Internal pull up is 10kΩ to V _{sb})	>2.4V (active, Good) <0.4V	+4 mA -2 mA
A1	PS_Kill	Floating pin will turn off P/S (shorter pin, last-make and first-break contact for hot plugging). This signal overrides PS-On in disabling the Main Output	>2.1V (open, or V _{sb}) <0.7V (active, PS:On)	N/A
B5	PS_Present	Internally tied to V _{sb} return	0 V	
C1	PS_On	Internal 1K ohm pull-up to V _{sb} , (accepts open collector/drain drive), This signal to be pulled low to turn-on power supply	>2.1V (open, or V _{sb}) <0.7V (active, PS:On)	-4 mA -1 mA
A4	I ² C Data	I ² C serial data bus	V _{sb}	
A5	I ² C Clock	I ² C serial clock bus	V _{sb}	
B2	I ² C Adr0	Address input 0, internal pull-up to V _{sb}	>2.1V, <V _{sb} <0.8V	±1 mA
B3	I ² C Adr1	Address input 1, internal pull-up to V _{sb}	>2.1V, <V _{sb} <0.8V	±1 mA
B4	I ² C Adr2	Address input 2, internal pull-up to V _{sb}	>2.1V, <V _{sb} <0.8V	±1 mA

D1U MATING CONNECTORS

48V D1U mating connector	Press Fit			Solder ²	
	Straight	Right Angle		Straight	Right Angle
MPS	N/A	Pending	N/A	36-0440026-0	
FCI	51742-10602000CALF	51762-10602000CBLF	51742-10602000AALF	51762-10602000ABL	
Tyco	TBD	TBD	TBD	TBD	

² Solder connector recommended for board thickness of <0.090

MECHANICAL DIMENSIONS - D1U-W-1600-48-Hx

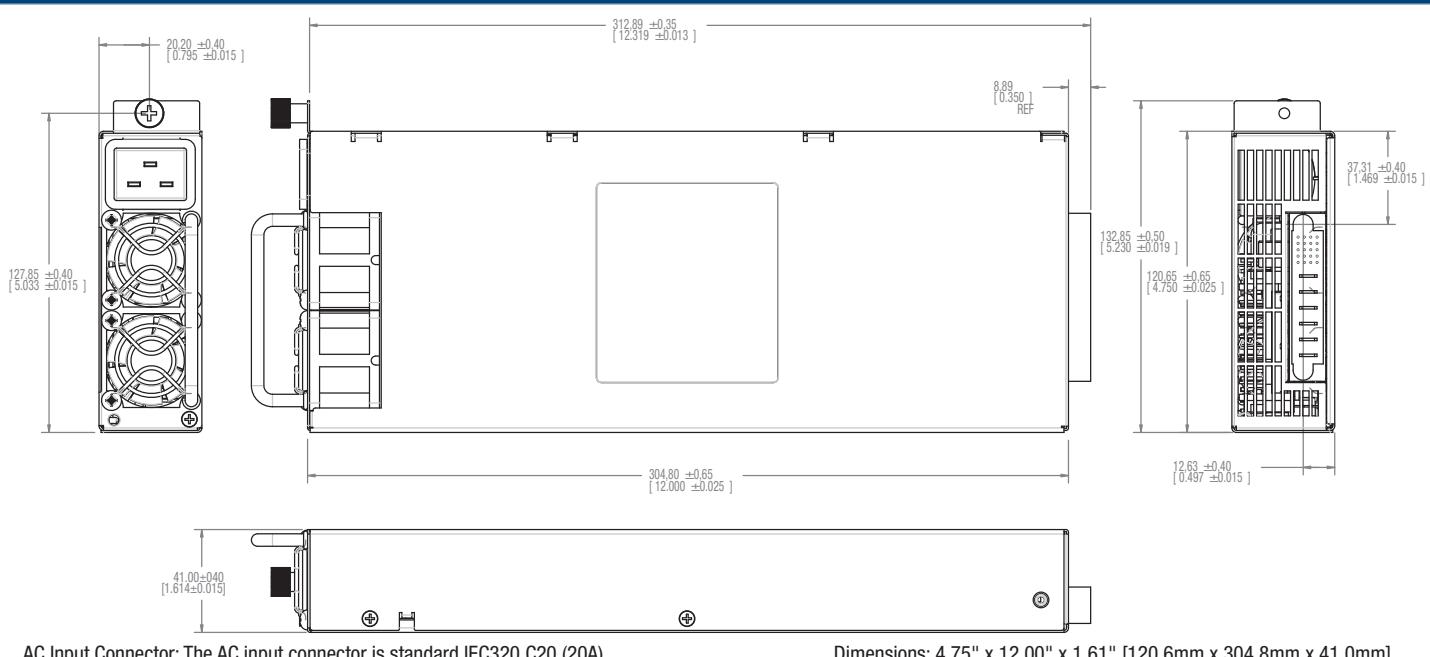

AC Input Connector: The AC input connector is standard IEC320 C20 (20A).

Dimensions: 4.75" x 12.00" x 1.61" [120.6mm x 304.8mm x 41.0mm]

OPTIONAL ACCESSORIES

Description	Part Number
48V D1U-48 output connector card	D1U-48-CONC

APPLICATION NOTES

Document Number	Description	Link
ACAN-25	D1U System Connection	www.murata-ps.com/data/apnotes/akan-25.pdf
ACAN-26	D1U-48 Output Connector Card	www.murata-ps.com/data/apnotes/akan-26.pdf
ACAN-29	D1U Communications Protocol	www.murata-ps.com/data/apnotes/akan-29.pdf

Murata Power Solutions, Inc.
11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.
ISO 9001 and 14001 REGISTERED



This product is subject to the following [operating requirements](#) and the [Life and Safety Critical Application Sales Policy](#). Refer to: <http://www.murata-ps.com/requirements/>

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

© 2017 Murata Power Solutions, Inc.