

# 1411 size Single SAW filter

Type Name:SF14-0915M5UUA1

2012.05.15


**KYOCERA Corporation**Circuit Device division


Kokubu Engineering Section



### **Dimensions**


#### **Dimensions**

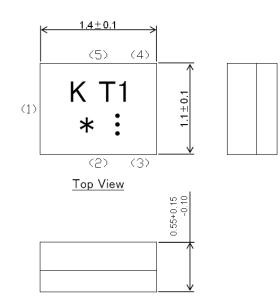




PIN	Connection
(1)	Input
(2)	GND
(3)	GND
(4)	Output
(5)	GND

#### **Recommendable Land Pattern**

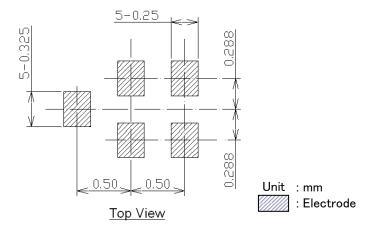

#### **Measurement Circuit**

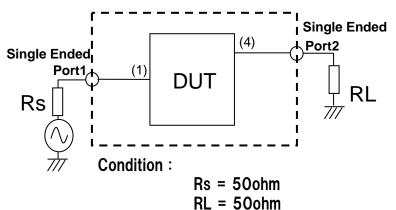

: 4mg max. Weight Unit : mm

: 0.1mm max. The degree of terminal flat

Terminal quality of the material: Ni Plating + Au Plating

: Kyocera K : Part Number T1 \*: : Monthly Code

: Weekly Code ( 1st-10th, 11th-20th. 21th-31th)



# Characteristics

#### Type Name: SF14-0915M5UUA1


#### Table1


l abie1	Frequency Range			Unit	Tentative Spec.	typ.	
Norminal Frequency					MHz	-	915
Maximum Insertion Loss	902	to	928	MHz	dB	3.0 max	1.8
Amplitude Ripple(P-P)					dB	1.8 max	0.5
Input VSWR						2.0 max	1.7
Output VSWR						2.0 max	1.7
Absolute Attenuation	0.3	to	800	MHz	dB	50 min	56
	800	to	845	MHz	dB	45 min	62
	845	to	880	MHz	dB	33 min	47
	947	to	992	MHz	dB	13 min	27
	992	to	1020	MHz	dB	35 min	<b>53</b>
	1020	to	1200	MHz	dB	45 min	<b>53</b>
Input Impedance					ohms	50	
Output Impedance					ohms	50	
Operating Temperature					deg.C	-30 to +85	
Package size					mm	1.4x1.1x0.55 typ.	

EQM10-4KZ-D3ZX1220 3/5



# Typical Curve data (on Board)

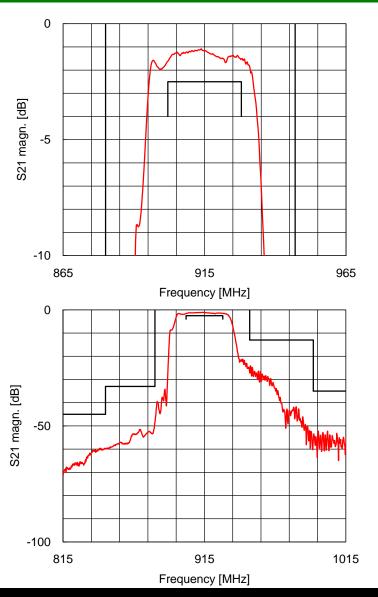

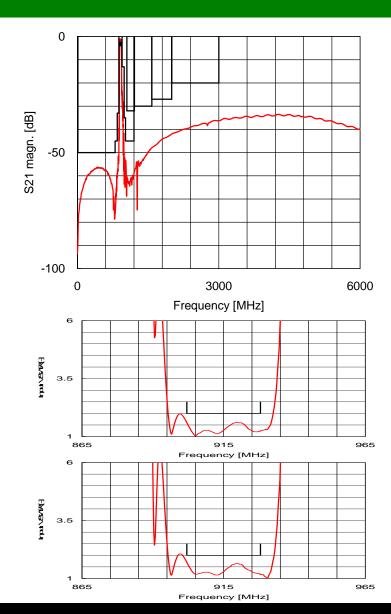



EQM10-4KZ-D3ZX1220 4/5



## **Environmental Characteristics**

Item	Condition					
Humidity Storage	Subject the filter to 60+/-2 deg C and 90%RH to 95%RH for 168 hours.					
	Then, release the filter into the room conditions for 2 hours minimum to					
	the measurement.It shall fulfill the specifications in Table 1.					
High Temperature	Subject the filter to 85+/-2 deg C for 168 Hours.					
Storage	Then, release the filter into the room conditions for 2 hours minimum to					
	the measurement.It shall fulfill the specifications in Table 1.					
Low Temperature	Subject the filter to -40+/-2 deg C for 168 Hours.					
Storage	Then, release the filter into the room conditions for 2 hours minimum to					
	the measurement.lt shall fulfill the specifications in Table 1.					
Temperature Cycle	10 Cycles (1 cycles:-40 deg C for 30minutes then 25 deg C for 15minutes					
	then 85 deg C for 30minutes.) An examination is done under the evaluation					
	circuit board mounting condition.					
	Then, release the filter into the room conditions for 2 hours minimum to					
	the measurement.It shall fulfill the specifications in Table 1.					
Random Drop	Drop the filter randomly onto a concrete floor from the height of 1m,3 times.					
	It shall fulfill the specifications in Table 1.					
Mechanical Shock	Subject the filter to 10 shocks in each direction of six mutually					
	perpendicular planes (a total of 60 shocks). Drop the filter onto					
	a concrete floor with the weight of 150g and from the height of 1.7m.					
	It shall fulfill the specifications in Table 1.					
Vibration	Subject the filter to vibration for 2hour each in the X,Y and Z axes with the					
	amplitude of 1.5mm,10 to 55 Hz/min. It shall fulfill the specifications in					
	Table 1.					
Resistance to Reflow	Expose filter to increasing temperature with Recommendable					
Solder Heat	Reflow Soldering Profile, twice. Then 110 deg C for 35 minutes are performed.					
	Then, release the filter into the room conditions for 2 hours minimum to					
	the measurement.It shall fulfill the specifications in Table 1.					
Circuit Board	It is mounted on the circuit board for the evaluation, and the center of the circuit					
Deflection	board is pushed from the product mounting side and the anti-interview, and a					
	circuit board is made to sag 2mm.lt carried out 3 times in X and the direction of					
	Y,respectvely. (Fig1)					
ESD	A direct current voltage is increased to DEVICE mounted on the					
	evaluation circuit board. The failure rate which occurred by the direct					
	current voltage is investigated. A direct current voltage begins from 39V.					
	As for the voltage, it increses with step of E12 series. A failure voltage					
	is prescribed in the direct current voltage that an accumulate trouble rate					
	is 10%. It is judged with the trouble when increase in the insertion loss					
	occurs beyond 0.3dB before and after the examination.A failure voltage					
	is more than 50V.( Fig2 )					

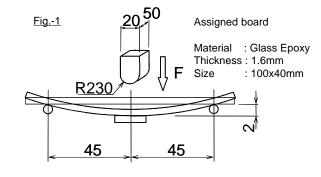

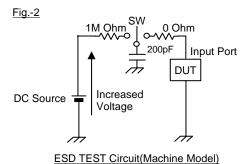

EQM10-4KZ-D3ZX1220 5/5

#### THE NEW VALUE FRONTIER



**KYOCERA Corporation**