

TOSHIBA BIPOLAR LINEAR INTEGRATED CIRCUIT SILICON MONOLITHIC

TA8505P


SUPPLY VOLTAGE SUPERVISOR

TA8505P is a bipolar monolithic IC developed for Reset Controller in digital systems, especially in microcomputer systems.

Wide Range detecting voltage can be set freely by a few external parts.

FEATURES



- A detected voltage and hysteresis can be set with 2 external resistances.
- Provided the 2 Outputs of Reset and Reset.
- Reset-IN signal can reset two Outputs' Voltage.
- Wide operating Voltage Range : 1.8~32V
- Output current : $I_{OL} = 20\text{mA}$ (Max.)

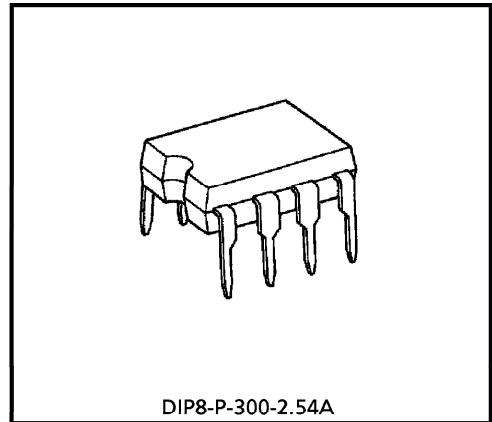

Weight : 0.5g (Typ.)

BLOCK DIAGRAM

PIN CONNECTION (TOP VIEW)

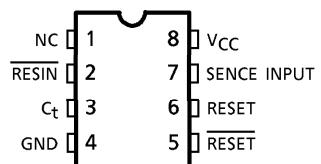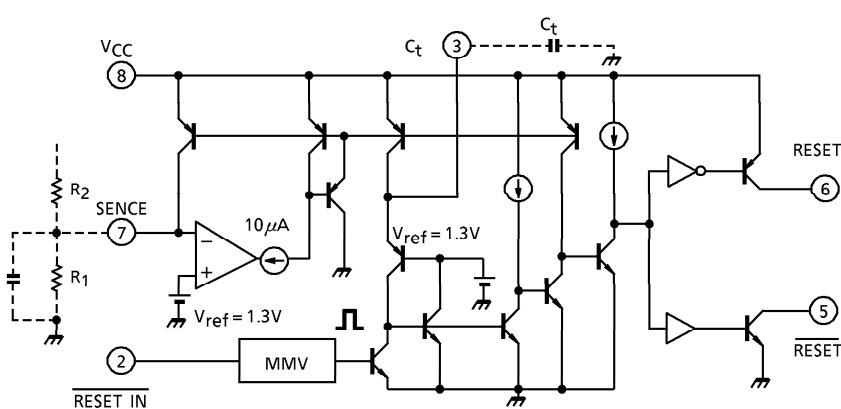

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	V _{CC}	36	V
Breakdown Voltage	RESIN SENCE	36	V
Output Current	I _{OH} I _{OL}	-1 20	mA
Power Dissipation	P _D	0.6	W
Operating Temperature	T _{opr}	-40~85	°C
Storage Temperature	T _{stg}	-55~150	°C

RECOMMENDED OPERATING CONDITION

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Voltage	V _{CC}	—	1.8	—	32	V
Input Voltage	V _{IN}	—	0	—	V _{CC}	V
Input Voltage	V _{IH}	—	2.0	—	V _{CC}	V
"H" Level	RESIN	—	0	—	0.6	
"L" Level	RESIN	—	0	—	16	mA
Output Current	I _{OH}	—	0	—	-1	
RESET	I _{OL}	—	0	—	16	
Operation Temperature	T _{opr}	—	0	—	70	°C


ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT			
Input Current	"H" Level	RESIN SENSE	I _{IH}	V _{IN} = 2.0V V _{IN} = 1.5V V _{IN} = 0.4V V _{IN} = 1V	—	—	2	μA		
					-8	-12	-16			
	"L" Level	RESIN SENSE			0	-0.8	-6			
					0	—	±2			
C _t Charge Current	I _{ct}	—	V _{CC} = 5.0V, V _{ct} = 0V	-12	-19	-26	μA			
Output Voltage	RESET	V _{OH}	V _{CC} = 5.0V	I _{OL} = -1mA	4.5	4.8	—	V		
	RESET	V _{OL}		I _{OH} = 16mA	—	0.1	0.4			
Output Current	RESET	I _{OL}	V _{CC} = 5.0V	V _{OL} = 0V	—	—	-2	μA		
	RESET	I _{OH}		V _{OH} = 5.0V	—	—	2			
Reference Voltage	V _{ref}	—	V _{CC} = 5.0V	1.24	1.31	1.38	V			
Supply Current	I _{CC}	—	V _{CC} = 5.0V, All inputs and outputs open	—	1.6	3.0	mA			

AC CHARACTERISTICS ($V_{CC} = 5V$, $T_a = 25^\circ C$)

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Pulse Width	t_w sence	—	$V_{IH} = V_{ref} \text{ Typ} + 200\text{mA}$ $V_{IL} = V_{ref} \text{ Typ} - 200\text{mA}$	1.0	—	—	μs
	t_w reset in	—	—	0.4	1.4	—	
Output Pulse Width	t_w	—	$C_t = 0.1\mu\text{F}$ $V_{ct}(t=0) = 1\text{V}$ $V_{ct}(t=0) = 0\text{V}$	0.65	1.3	2.6	ms
	t_{pd}	—	$C_L = 100\text{pF}$, $R_L = 4.7\text{k}\Omega$	—	5.7	—	
Propagation Delay Time (RESIN-RESET)				—	1	—	μs

TIMING CHART

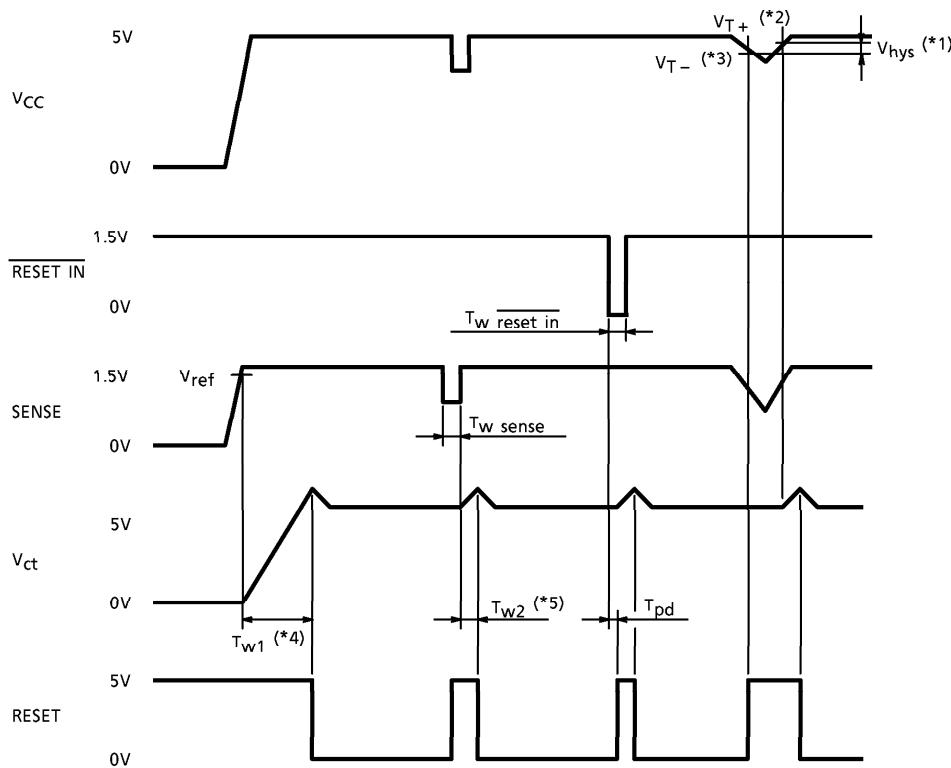







$$(*1) \quad V_{hys} = (R_1 + R_2) \times 10^{-5} \text{ (V)}$$



$$(*2) \quad V_{T+} = \frac{R_1 + R_2}{R_1} \times 1.31 \text{ (V)}$$

$$(*3) \quad V_{T-} = \frac{R_1 + R_2}{R_1} \times (1.31 - R_1 \times 10^{-5}) \text{ (V)}$$

$$(*4) \quad t_{w1} = G_t \cdot (V_{ref} - 0\text{V}) / I_{CT} \quad (I_{CT} = 23\mu\text{A})$$


$$(*5) \quad t_{w2} = G_t \cdot (V_{ref} - 1\text{V}) / I_{CT}$$

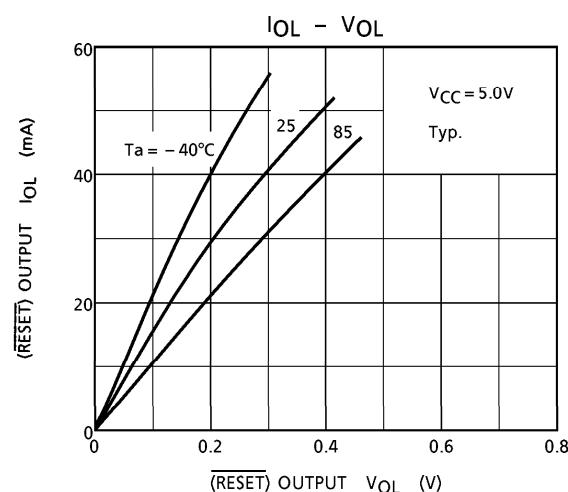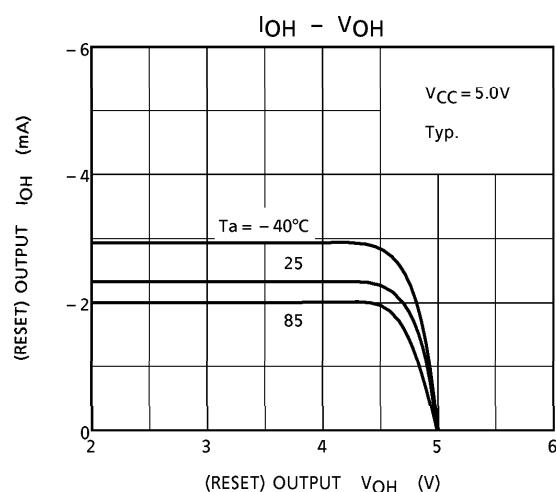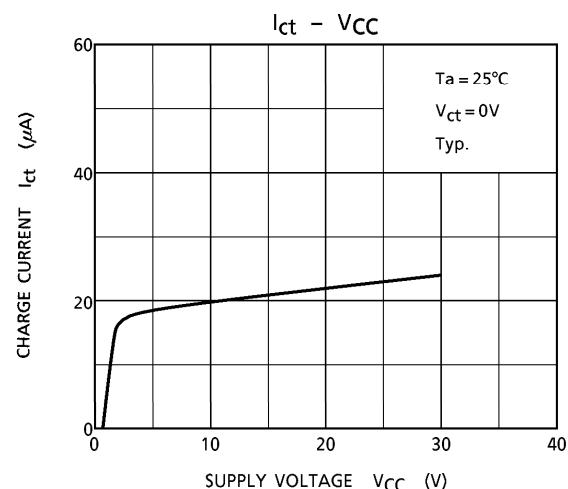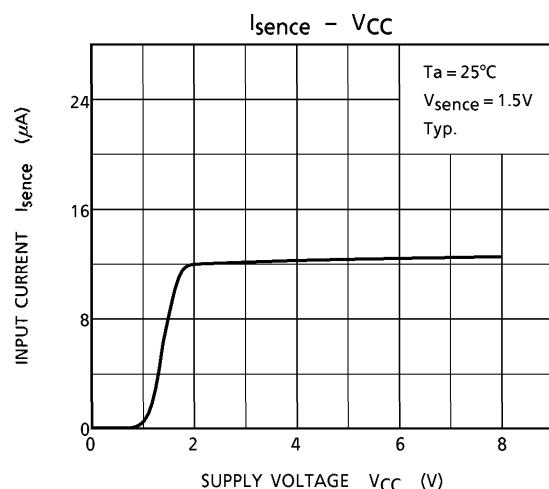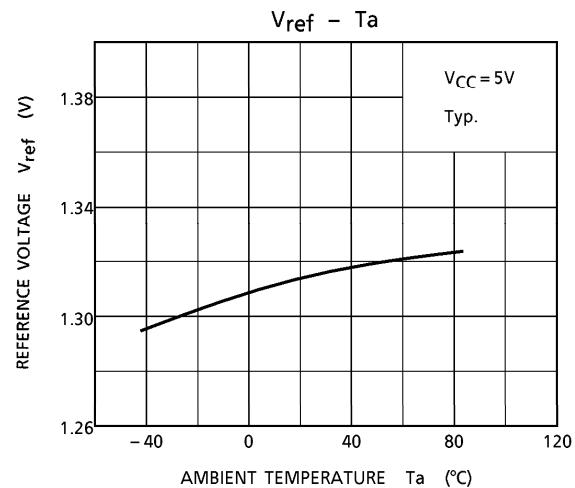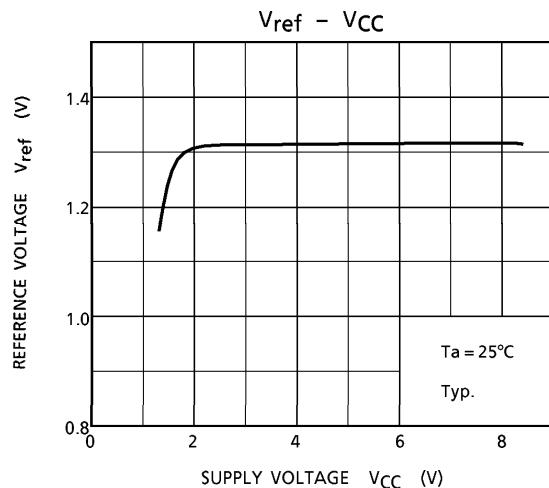

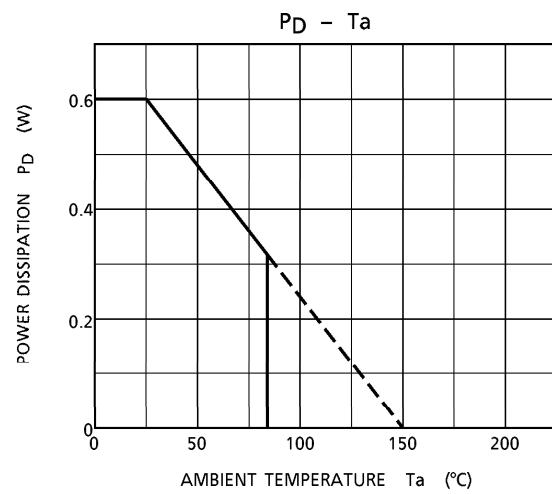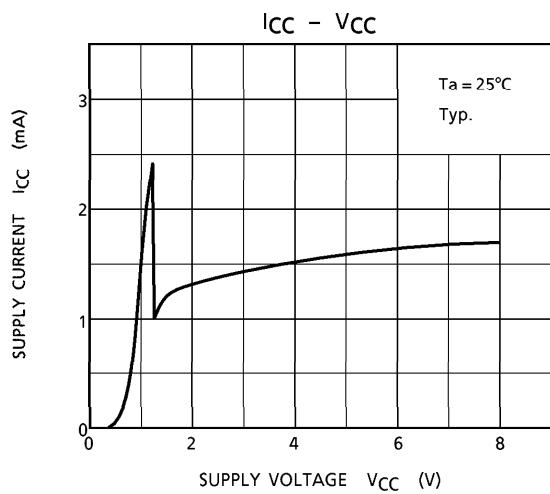

PACKAGE DIMENSIONS
DIP8-P-300-2.54A

Unit : mm

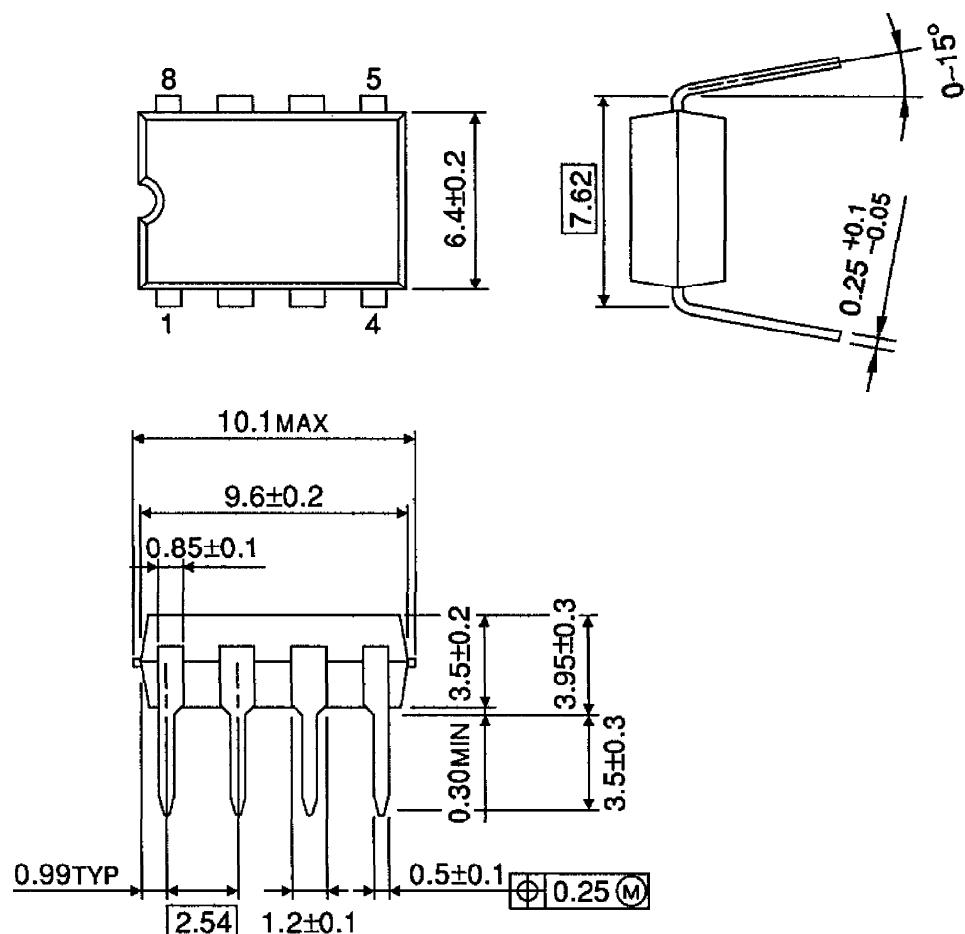

Weight : 0.5g (Typ.)

RESTRICTIONS ON PRODUCT USE

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.