



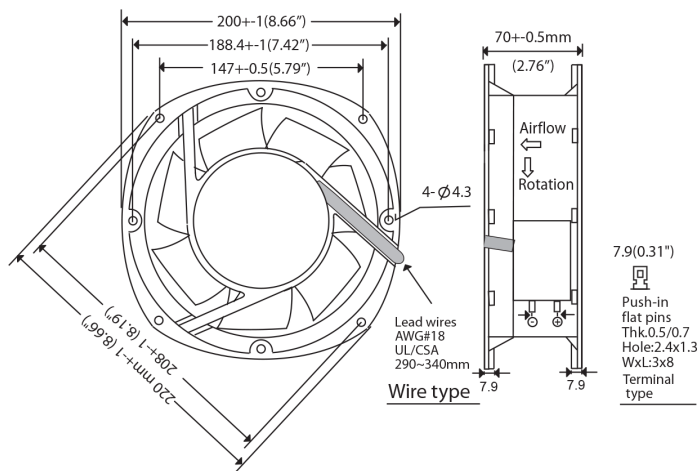

Frame	Aluminum Die-cast	Notes
Impeller	Metal alloy	Date: 050113
Connection *	Lead wires or Terminal	Environmental Protection: IP56
Motor	AC Capacitor Inductance, Thermal protection	Storage Temp: -40C ~ +100C
Bearing System	Dual Ball bearing	Weight: 1800g (3.97 lbs)
Insulation Resistance	>100MOhm at 500VDC	Available AC voltages by special order: 12, 24, 28, 38, 42, 48, 440, 480. Dual speed also available. Call for information.
Dielectric Strength	> 60 seconds at 1500VAC	
Operating Temp Range	-30C ~ +80C (non-condensing)	
Life Expectancy	50000 hours (55C)	* Specify configuration: TB = Terminal, Ball bearing WB = Wire leads, Ball bearing

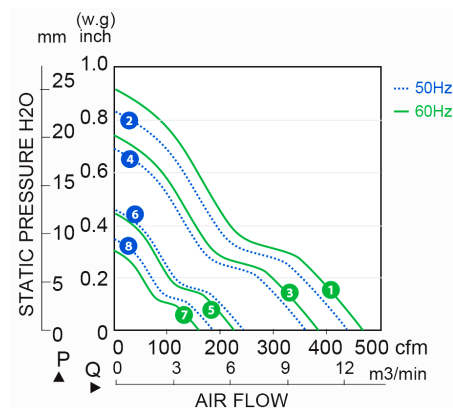

Model No.	Func. Code	Speed (RPM)	Airflow (CFM)	Noise	Volts AC	Voltage Range AC	Watts	Max. Static Pressure ("H ₂ O)	Curves
OA200AN-11-1 *	1856	2800 3300	430 485	68	115	100 ~ 120	95 105	0.82 0.93	2 (50Hz) 1 (60Hz)
OA200AN-11-2 *	1856	2400 2600	365 395	54	115	100 ~ 120	80 95	0.68 0.75	4 (50Hz) 3 (60Hz)
OA200AN-11-3 *	1856	1600 1500	245 230	43	115	100 ~ 120	32 40	0.46 0.42	6 (50Hz) 5 (60Hz)
OA200AN-22-1 *	1856	2800 3300	430 485	68	230	200 ~ 240	95 105	0.82 0.93	2 (50Hz) 1 (60Hz)
OA200AN-22-2 *	1856	2400 2600	365 395	54	230	200 ~ 240	80 95	0.68 0.75	4 (50Hz) 3 (60Hz)
OA200AN-22-3 *	1856	1600 1500	245 230	43	230	200 ~ 240	32 40	0.46 0.42	6 (50Hz) 5 (60Hz)