

PolySwitch LVR/LVRL Line Voltage Rated Devices

PolySwitch LVR devices help protect electric motors and transformers used in commercial and home appliances from damage caused by mechanical overloads, overheating, stall, lost neutral and other potentially harmful conditions.

The PolySwitch LVR product line of polymeric positive thermal coefficient (PPTC) line voltage devices includes components that are rated for line voltages of 120 VAC and 240 VAC, for up to 2A of operating current at 20°C. They help protect against damage caused by both overcurrent surges and overtemperature faults, offer low resistance, and are compatibly sized with fuse solutions.

Unlike single-use fuses, PolySwitch devices do not require replacement after a fault event. After power has been removed and the overcurrent condition eliminated, the circuit is restored to normal operating condition. Compared to bimetal breakers, they offer greater flexibility, longer lifespan, and lower EMI.

The PolySwitch LVR devices' resettable functionality and latching attributes make them a reliable, cost-effective circuit protection solution for both intermittent- and continuous-operation motor applications. Their low resistance, fast time-to-trip, and low profile help circuit designers provide a safe and dependable product, comply with regulatory agency requirements, and reduce warranty repair costs.



Benefits:

- Reduced board space and assembly
- Reduced repair and replacement cost
- Fast time-to-trip helps reduce current-generated heat to motor windings and sensitive electronic components
- Reduced nuisance tripping

Features:

- Overcurrent and overtemperature protection in a single component
- Resettable functionality
- Latching device
- Compliant with UL 1434 safety standards

Applications:

- Continuous-operation motors
- Intermittent-operation motors
- Transformers
- Power supplies
- Fans and blowers
- Electronic controllers

Electrical Characteristics

Part Number	I _{HOLD} (A)	I _{TRIP} (A)	V _{MAX} (V)	V _{MAX} Interrupt (VAC)	I _{MAX} Interrupt (A)	Power Dissipation (W)	Typ	Max. Time-to-trip (s)	R _{MIN} (Ω)	R _{MAX} (Ω)	R _{1 MAX} (Ω)	Lead Size [mm ² (AWG)]
LVR005K	0.05	0.12	240	265	1.0	0.7		0.25 15.0	18.50	31.00	65.00	[0.205mm ² (24)]
LVR005S	0.05	0.12	240	265	1.0	0.7		0.25 15.0	18.50	31.00	65.00	[0.205mm ² (24)]
LVR008K	0.08	0.19	240	265	1.2	0.8		0.40 15.0	7.40	12.00	26.00	[0.205mm ² (24)]
LVR008S	0.08	0.19	240	265	1.2	0.8		0.40 15.0	7.40	12.00	26.00	[0.205mm ² (24)]
LVR012K	0.12	0.30	240	265	1.2	1.0		0.60 15.0	3.00	6.50	12.00	[0.205mm ² (24)]
LVR012S	0.12	0.30	240	265	1.2	1.0		0.60 15.0	3.00	6.50	12.00	[0.205mm ² (24)]
LVR016K	0.16	0.37	240	265	2.0	1.4		0.80 15.0	2.50	4.10	7.80	[0.205mm ² (24)]
LVR016S	0.16	0.37	240	265	2.0	1.4		0.80 15.0	2.50	4.10	7.80	[0.205mm ² (24)]
LVR025K	0.25	0.56	240	265	3.5	1.5		1.25 18.5	1.30	2.10	3.80	[0.33mm ² (22)]
LVR025S	0.25	0.56	240	265	3.5	1.5		1.25 18.5	1.30	2.10	3.80	[0.33mm ² (22)]
LVR033S	0.33	0.74	240	265	4.5	1.7		1.65 21.0	0.77	1.24	2.60	[0.33mm ² (22)]
LVR033K	0.33	0.74	240	265	4.5	1.7		1.65 21.0	0.77	1.24	2.60	[0.33mm ² (22)]
LVR040K	0.40	0.90	240	265	5.5	2.0		2.00 24.0	0.60	0.97	1.90	[0.33mm ² (22)]
LVR040S	0.40	0.90	240	265	5.5	2.0		2.00 24.0	0.60	0.97	1.90	[0.33mm ² (22)]
LVR055K	0.55	1.25	240	265	7.0	3.4		2.75 26.0	0.45	0.73	1.45	[0.81mm ² (20)]
LVR055S	0.55	1.25	240	265	7.0	3.4		2.75 26.0	0.45	0.73	1.45	[0.81mm ² (20)]
NEW LVR075S	0.75	1.5	240	265	7.5	2.6		3.75 18.0	0.32	0.48	0.84	[0.81mm ² (20)]
NEW LVR100S	1.00	2.00	240	265	10.0	2.9		5.00 21.0	0.22	0.33	0.58	[0.81mm ² (20)]
NEW LVR125S	1.25	2.50	240	265	12.5	3.3		6.25 23.0	0.17	0.18	0.44	[0.81mm ² (20)]
NEW LVR200S	2.00	4.00	240	265	20.0	4.5		10.00 28.0	0.09	0.13	0.22	[0.81mm ² (20)]
LVRL075S	0.75	1.52	120	135	7.5	1.8		3.75 14.0	0.25	0.40	0.69	[0.81mm ² (20)]
LVRL100S	1.00	2.00	120	135	10.0	2.2		5.00 13.6	0.18	0.27	0.47	[0.81mm ² (20)]
LVRL125S	1.25	2.50	120	135	12.5	2.0		6.25 18.0	0.12	0.18	0.32	[0.81mm ² (20)]
LVRL135S	1.35	2.70	120	135	13.5	2.8		6.75 20.0	0.11	0.17	0.30	[0.81mm ² (20)]
LVRL200S	2.00	4.20	120	135	20.0	3.9		10.00 36.0	0.08	0.12	0.21	[0.81mm ² (20)]

Dimensions in Millimeters (Inches)





Part Number	A		B		C		D		E		Figure
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
LVR005K	—	8.3 (0.33)	—	12.9 (0.51)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	—	—	3.8 (0.15)	R7
LVR005S	—	8.3 (0.33)	—	10.7 (0.43)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	—	—	3.8 (0.15)	R17
LVR008K	—	8.3 (0.33)	—	12.9 (0.51)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	—	—	3.8 (0.15)	R7
LVR008S	—	8.3 (0.33)	—	10.7 (0.43)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	—	—	3.8 (0.15)	R17
LVR012K	—	8.3 (0.33)	—	12.9 (0.51)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	—	—	3.8 (0.15)	R7
LVR012S	—	8.3 (0.33)	—	10.7 (0.43)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	—	—	3.8 (0.15)	R17
LVR016K	—	9.9 (0.39)	—	13.8 (0.54)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	—	—	3.8 (0.15)	R7
LVR016S	—	9.9 (0.39)	—	12.5 (0.50)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	—	—	3.8 (0.15)	R17
LVR025K	—	9.6 (0.38)	—	18.8 (0.74)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	—	—	3.8 (0.15)	R8
LVR025S	—	9.6 (0.38)	—	17.4 (0.69)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	—	—	3.8 (0.15)	R18
LVR033S	—	11.4 (0.45)	—	16.5 (0.65)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	—	—	3.8 (0.15)	R18
LVR033K	—	11.4 (0.45)	—	19.0 (0.75)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	—	—	3.8 (0.15)	R8
LVR040K	—	11.5 (0.46)	—	20.9 (0.82)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	—	—	3.8 (0.15)	R8
LVR040S	—	11.5 (0.46)	—	19.5 (0.77)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	—	—	3.8 (0.15)	R18
LVR055K	—	14.0 (0.55)	—	22.4 (0.88)	2.0 (0.08)	3.0 (0.12)	7.6 (0.30)	—	—	4.1 (0.16)	R8
LVR055S	—	14.0 (0.55)	—	21.7 (0.85)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	—	—	4.1 (0.16)	R18
NEW LVR075S	—	11.5 (0.45)	—	23.4 (0.92)	4.1 (0.16)	6.1 (0.24)	5.1 (0.20)	—	—	4.8 (0.19)	R18
NEW LVR100S	—	18.70 (0.74)	—	24.40 (0.96)	8.9 (0.36)	11.4 (0.45)	5.1 (0.20)	—	—	5.10 (0.20)	R17
NEW LVR125S	—	21.20 (0.84)	—	27.40 (1.08)	8.9 (0.35)	11.4 (0.45)	5.1 (0.20)	—	—	5.30 (0.21)	R17
NEW LVR200S	—	24.90 (0.98)	—	33.80 (1.33)	8.9 (0.35)	11.4 (0.45)	5.1 (0.20)	—	—	6.1 (0.24)	R18
LVRL075S	—	10.9 (0.43)	—	17.0 (0.67)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	—	—	4.1 (0.16)	R18
LVRL100S	—	11.5 (0.45)	—	20.1 (0.79)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	—	—	4.1 (0.16)	R18
LVRL125S	—	14.0 (0.55)	—	21.7 (0.85)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	—	—	4.1 (0.16)	R18
LVRL135S	—	16.3 (0.64)	—	21.7 (0.85)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	—	—	4.1 (0.16)	R18
LVRL200S	—	23.5 (0.93)	—	31.8 (1.25)	9.4 (0.37)	10.9 (0.43)	7.6 (0.30)	—	—	4.1 (0.16)	R18

R7


R17

R8


R18




Typical Thermal Derating (Preliminary)

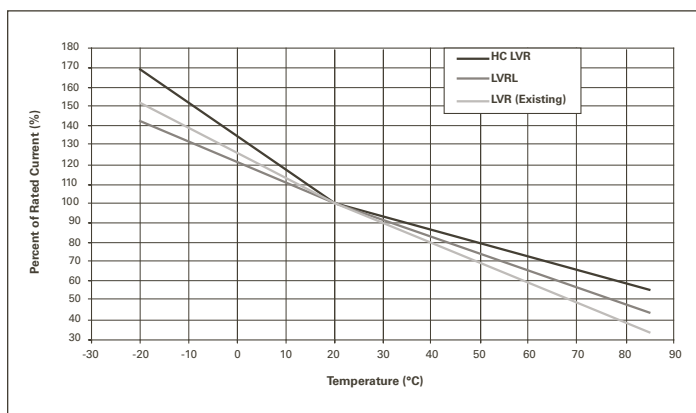

Typical Trip Current vs. Temperature*

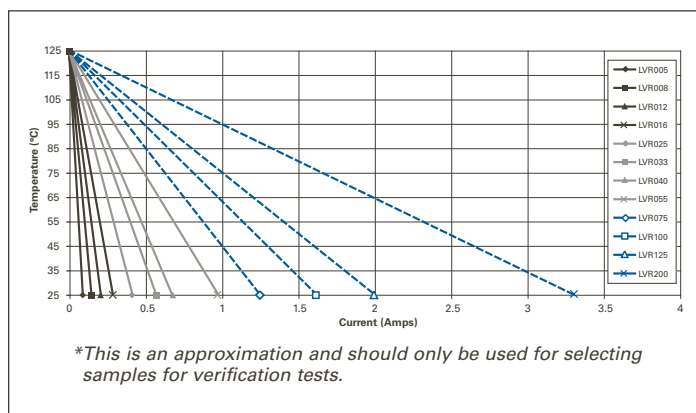

Typical Time-to-Trip at 20°C (Preliminary)

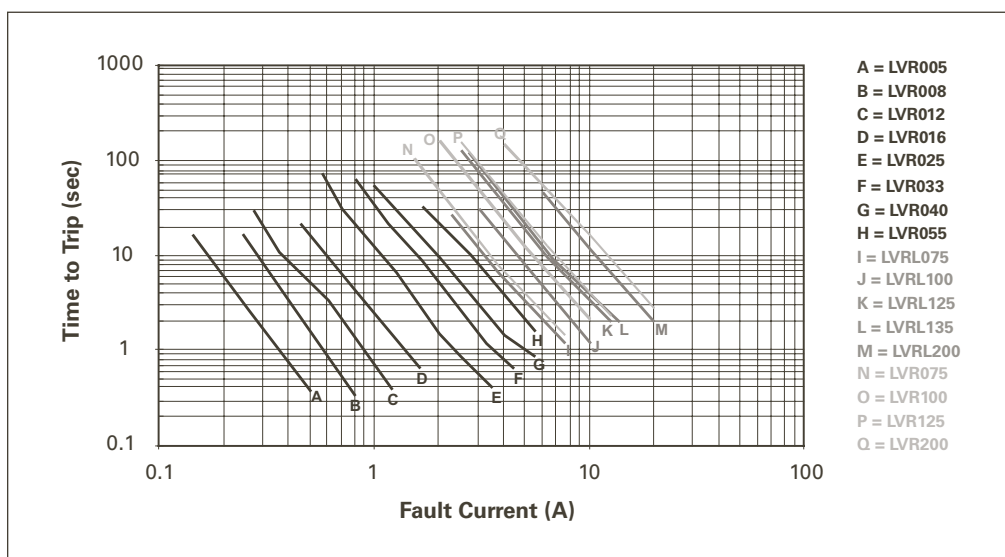


Agency Recognitions


For LVR Devices

UL	1434 - Thermistor type devices, File # E74889
CSA	class 9073-32 Thermistor PTC type, File # CA78165C
TÜV	Certificate number available on request (per IEC 60730-1).

Part Numbering System

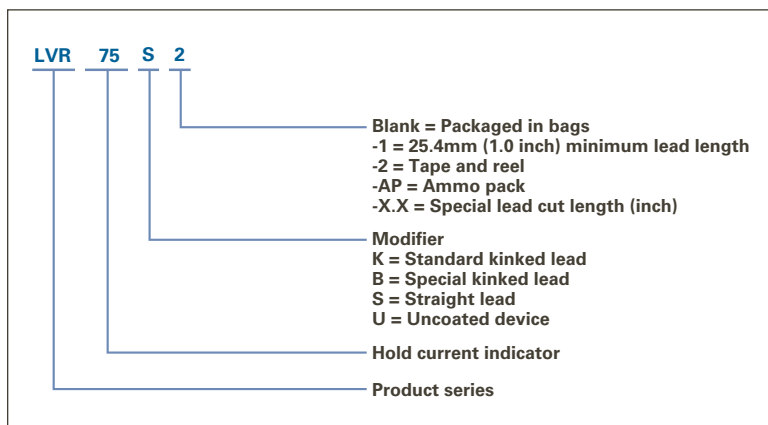

Marking

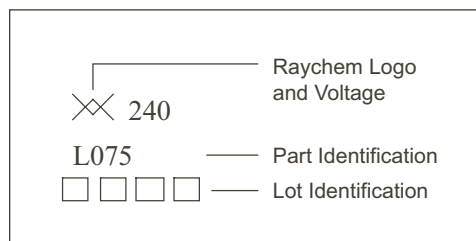

Physical Characteristics

Lead material	LVR005-016: Tin-plated copper, 0.205mm ² (24AWG), ø0.51mm (0.020in.) LVR025-040: Tin-plated copper, 0.32mm ² (22AWG), ø0.64mm (0.025in.) LVR055-200: Tin-plated copper, 0.52mm ² (20AWG), ø0.81mm (0.032in.) LVRL: Tin-plated copper, 0.52mm ² (20AWG), ø0.81mm (0.032in.)
Insulating material	LVR005-055: Cured flame retardant epoxy polymer, meets UL94V-0 LVR075-200: Cured flame retardant modified silicone meets UL94V-0 LVRL: Cured flame retardant epoxy polymer, meets UL94V-0
Soldering characteristics	Solderability pre ANSI/J-STD-002 Category 3
Solder heat withstand	Per IEC-STD 68-2-20, Test Tb, Method 1a, condition b, can withstand 10 seconds at 260°C ±5°C

Devices are not designed to be placed through a reflow process.

Environmental Characteristics

Test	Conditions	Resistance Change
Passive aging	70°C, 1000 hours	±5%
	85°C, 1000 hours	±5%
Humidity aging	85°C, 85%RH, 1000 hours	±5%
Thermal Shock	85°C, -40°C (10 times)	±5%
Solvent resistance	MIL-STD-202, Method 215F	No change

WARNING: Application Limitations for the LVR Product Line

- 1) Users should independently evaluate the suitability of and test each product selected for their own application.
- 2) This product should not be used in an application where the maximum interrupt voltage or maximum interrupt current can be exceeded in a fault condition. Operation beyond the maximum ratings or improper use may result in device damage and possible electrical arcing and flame.
- 3) A PPTC device is not a fuse—it is a nonlinear thermistor that limits current. Because under a fault condition all PPTC devices go into a high resistance state but not open circuit, hazardous voltage may be present at PPTC locations.
- 4) The devices are intended for protection against occasional overcurrent or overtemperature fault conditions and should not be used when repeated fault conditions or prolonged trip events are anticipated.
- 5) In most applications, power must be removed and the fault condition cleared in order to reset a PPTC device. However, under certain unusual conditions, a PPTC device may automatically reset. Accordingly, in applications where an automatic reset could create a safety hazard, such as garbage disposals and blenders, appropriate qualification testing should be performed.
- 6) It is the responsibility of the user to determine the need for back up or fail safe protection to prevent damage that may occur in the event of abnormal function or failure of the PPTC device.
- 7) Operation in circuits with a large inductance can generate a circuit voltage (Ldi/dt) above the rated voltage of a PPTC device.
- 8) Devices are not recommended for reflow soldering.
- 9) Device performance can be impacted negatively if devices are handled in a manner inconsistent with recommended electronic, thermal, or mechanical procedures for electronic components.
- 10) PTC devices are not recommended to be installed in applications where the device is constrained such that its PPTC properties are inhibited, for example in rigid potting materials or in rigid housings, which lack adequate clearance to accommodate device expansion.
- 11) Contamination of the PPTC material with certain silicone-based oils or some aggressive solvents can adversely impact the performance of the devices.



a vital part of your world

Worldwide Headquarters

308 Constitution Drive, MS R21/2A
Menlo Park, CA USA 94025-1164

Tel (800) 227-7040

(650) 361-6900

Fax (650) 361-2508

www.circuitprotection.com

www.circuitprotection.com.hk (Chinese)

www.raychem.co.jp/polyswitch (Japanese)

Raychem, PolySwitch, and Tyco are trademarks. All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their application. Tyco Electronics Corporation makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. Tyco Electronics' only obligations are those in the Company's Standard Terms and Conditions of Sale for this product, and in no case will Tyco Electronics be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use or misuse of the product. Specifications are subject to change without notice. In addition, Tyco Electronics reserves the right to make changes—without notification to Buyer—to materials or processing that do not affect compliance with any applicable specification.