

Designated client product

This product will be discontinued its production in the near term.
And it is provided for customers currently in use only, with a time limit.
It can not be available for your new project. Please select other new or existing products.

For more information, please contact our sales office in your region.

New Japan Radio Co.,Ltd.

<http://www.njr.com/>

High Drive 3rd. Over Tone Quartz Crystal Oscillator

■GENERAL DESCRIPTION

The NJU6378 series is a C-MOS 3rd. over tone quartz crystal oscillator that consists of an oscillation amplifier and 3-state output buffer.

The NJU6378 series has 4-types according to their frequency ranges as shown in the line-up table.

The oscillation amplifier is realized very low stand-by current using NAND circuit.

The 3-state output buffer is C-MOS compatible and can drive 50pF(@5V) C-MOS load.

Furthermore, the package is small-sized MTP-6.

■PACKAGE OUTLINE




NJU6378XC-C NJU6378XF1

■FEATURES

- Operating Voltage 2.7 to 5.5V
- Oscillation Frequency Range (See Line-up Table)
- Low Operating Current
- High Fan-out $I_{OH}/I_{OL}=8mA @3.3V$
 $I_{OH}/I_{OL}=16mA@5.0V$
- Oscillation Stop and Output Stand-by Function
- 3-State Output Buffer
- Oscillation Capacitors Cg and Cd on-chip
- Package Outline Thin-Chip/MTP-6
- C-MOS Technology

■PAD LOCATION

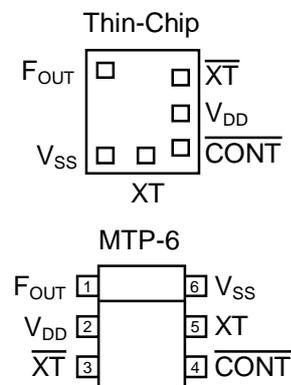

■LINE-UP TABLE


| Type No. | Recommended Oscillation Frequency Range | Output Frequency | Cg/Cd |
|----------|---|------------------|---------|
| NJU6378 | A | 30 to 40MHz | 18/18pF |
| | B | 40 to 50MHz | 16/16pF |
| | C | 50 to 60MHz | 11/11pF |
| | D | 60 to 75MHz | 10/10pF |

■COORDINATES

| Pad Name | X | Y |
|------------------|------|------|
| F _{OUT} | -220 | 245 |
| V _{SS} | -205 | -230 |
| XT | 13 | -230 |
| CONT | 205 | -191 |
| V _{DD} | 205 | 0 |
| X _T | 205 | 191 |

Starting Point:Chip Center Unit[um]
 Chip Size: 0.70x0.75mm
 Thin-Chip Thickness(-C):260±20um
 Pad Size:90x90um

■BLOCK DIAGRAM

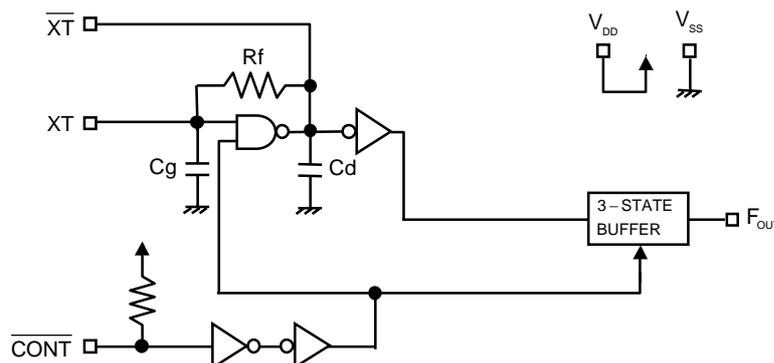

■TERMINAL DESCRIPTION

| SYMBOL | FUNCTION |
|--------------------------|---|
| | Oscillation and 3-state Output Buffer Control |
| | $\overline{\text{CONT}}$ F_{OUT} |
| $\overline{\text{CONT}}$ | H or OPEN Output frequency f_0 Note1) |
| | L Oscillation Stop and High impedance Output |
| $\overline{\text{XT}}$ | Quartz Crystal Connecting Terminals |
| XT | |
| V_{SS} | $V_{\text{SS}}=0\text{V}$ |
| F_{OUT} | Frequency Output |
| V_{DD} | $V_{\text{DD}}=3.3\text{V}/5.0\text{V}$ |

Note1) Refer to the line-up table.

■ABSOLUTE MAXIMUM RATINGS

($T_a=25^\circ\text{C}$)

| PARAMETER | SYMBOL | RATING | UNIT |
|-----------------------------|------------------|--|------------------|
| Supply Voltage | V_{DD} | -0.5 to +7.0 | V |
| Input Voltage | V_{IN} | $V_{\text{SS}}-0.5$ to $V_{\text{DD}}+0.5$ | V |
| Output Voltage | V_{O} | -0.5 to $V_{\text{DD}}+0.5$ | V |
| Input Current | I_{IN} | ± 10 | mA |
| Output Current | I_{O} | ± 25 | mA |
| Power Dissipation Note4) | P_{D} | 200(MTP-6) | mW |
| Operating Temperature Range | T_{opr} | -40 to +85 | $^\circ\text{C}$ |
| Storage Temperature Range | T_{stg} | -55 to +125 | $^\circ\text{C}$ |

Note2) If the supply voltage(V_{DD}) is less than 7.0V, the input voltage must not over the V_{DD} level though 7.0V is limit specified.

Note3) Decoupling capacitor should be connected between V_{DD} and V_{SS} due to the stabilized operation for the circuit.

Note4) The power dissipation is the maximum value at only the package.

■ ELECTRICAL CHARACTERISTICS

(Ta=25°C)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNIT |
|-------------------|-----------------|------------|-----|-----|-----|------|
| Operating Voltage | V _{DD} | | 2.7 | | 5.5 | V |

(V_{DD}=3.3V, Ta=25°C)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNIT |
|-------------------------------|--------------------------------|---|------|-------|------|------|
| Operating Current | I _{DD} | A version, fosc=40MHz, C _L =30pF | | | 14 | mA |
| | | B version, fosc=50MHz, C _L =30pF | | | 16 | |
| | | C version, fosc=60MHz, C _L =30pF | | | 20 | |
| | | D version, fosc=75MHz, C _L =30pF | | | 25 | |
| Oscillation Stopping Current | I _{STB} | $\overline{\text{CONT}} = V_{SS}$, No load | | 2 | 5 | uA |
| Stand-by Current | I _{st} | $\overline{\text{CONT}} = \text{XT} = V_{SS}$, No load Note5) | | | 1 | uA |
| Input Voltage | V _{IH} | | 2.31 | | 3.3 | V |
| | V _{IL} | | 0 | | 0.99 | V |
| Output Current | I _{OH} | V _{OH} =2.97V | 8 | | | mA |
| | I _{OL} | V _{OL} =0.33V | 8 | | | mA |
| Input Current | I _{IN} | $\overline{\text{CONT}} = 0.8V_{DD}$ | | 10.0 | 15.0 | uA |
| | | $\overline{\text{CONT}} = 0.2V_{DD}$ | | 1.8 | 3.0 | uA |
| 3-state Off Leakage Current | I _{oz} | $\overline{\text{CONT}} = V_{SS}$, F _{OUT} = V _{DD} or V _{SS} | | | ±0.1 | uA |
| Feedback Resistance | R _f | A version | | 4.5 | | KΩ |
| | | B version | | 3.1 | | |
| | | C version | | 3.9 | | |
| | | D version | | 3.1 | | |
| Internal Capacitor | C _g /C _d | A version, fosc=40MHz | | 18/18 | | pF |
| | | B version, fosc=50MHz | | 16/16 | | |
| | | C version, fosc=60MHz | | 11/11 | | |
| | | D version, fosc=75MHz | | 10/10 | | |
| Maximum Oscillation Frequency | F _{MAX} | A version | 40 | | | MHz |
| | | B version | 50 | | | |
| | | C version | 60 | | | |
| | | D version | 75 | | | |
| Output Signal Symmetry | SYM | C _L =15pF, @V _{DD} /2 | 45 | 50 | 55 | % |
| | | C _L =30pF, @V _{DD} /2 | 45 | 50 | 55 | % |
| Output Signal Rise Time | tr | C _L =15pF, 10% to 90% | | 2.5 | 5 | ns |
| | | C _L =30pF, 10% to 90% | | 4 | 8 | |
| Output Signal Fall Time | tf | C _L =15pF, 90% to 10% | | 2.5 | 5 | ns |
| | | C _L =30pF, 90% to 10% | | 4 | 8 | |
| Output Disable time | T _{PLZ} | C _L =15pF, R _{UP} =10kΩ | | | 150 | ns |
| Output Enable Time | T _{PZL} | C _L =15pF, R _{UP} =10kΩ | | | 150 | ns |

Note5) Excluding input current on $\overline{\text{CONT}}$ Terminal.



(V_{DD}=5.0V, Ta=25°C)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNIT |
|-------------------------------|--------------------------------|---|-----|-------|------|------|
| Operating Current | I _{DD} | A version, fosc=40MHz, C _L =50pF | | | 35 | mA |
| | | B version, fosc=50MHz, C _L =50pF | | | 40 | |
| | | C version, fosc=60MHz, C _L =50pF | | | 52 | |
| | | D version, fosc=75MHz, C _L =50pF | | | 60 | |
| Oscillation Stopping Current | I _{STB} | $\overline{\text{CONT}} = V_{SS}$, No load | | 5 | 10 | uA |
| Stand-by Current | I _{st} | $\overline{\text{CONT}} = \text{XT} = V_{SS}$, No load Note5) | | | 1 | uA |
| Input Voltage | V _{IH} | | 3.5 | | 5.0 | V |
| | V _{IL} | | 0 | | 1.5 | V |
| Output Current | I _{OH} | V _{OH} =4.5V | 16 | | | mA |
| | I _{OL} | V _{OL} =0.5V | 16 | | | mA |
| Input Current | I _{IN} | $\overline{\text{CONT}} = 0.8V_{DD}$ | | 27.0 | 40.0 | uA |
| | | $\overline{\text{CONT}} = 0.2V_{DD}$ | | 5.5 | 8.0 | uA |
| 3-state Off Leakage Current | I _{OZ} | $\overline{\text{CONT}} = V_{SS}$, F _{OUT} = V _{DD} or V _{SS} | | | ±0.1 | uA |
| Feedback Resistance | R _f | A version | | 4.5 | | KΩ |
| | | B version | | 3.1 | | |
| | | C version | | 3.9 | | |
| | | D version | | 3.1 | | |
| Internal Capacitor | C _g /C _d | A version, fosc=40MHz | | 18/18 | | pF |
| | | B version, fosc=50MHz | | 16/16 | | |
| | | C version, fosc=60MHz | | 11/11 | | |
| | | D version, fosc=75MHz | | 10/10 | | |
| Maximum Oscillation Frequency | F _{MAX} | A version | 40 | | | MHz |
| | | B version | 50 | | | |
| | | C version | 60 | | | |
| | | D version | 75 | | | |
| Output Signal Symmetry | SYM | C _L =15pF, @V _{DD} /2 | 45 | 50 | 55 | % |
| | | C _L =50pF, @V _{DD} /2 | 45 | 50 | 55 | |
| Output Signal Rise Time | Tr | C _L =15pF, 10%~90% | | 2 | 4 | ns |
| | | C _L =50pF, 10%~90% | | 5 | 10 | |
| Output Signal Fall Time | tf | C _L =15pF, 90%~10% | | 2 | 4 | ns |
| | | C _L =50pF, 90%~10% | | 5 | 10 | |
| Output Disable time | T _{PLZ} | C _L =15pF, R _{UP} =10kΩ | | | 100 | ns |
| Output Enable Time | T _{PZL} | C _L =15pF, R _{UP} =10kΩ | | | 100 | ns |



Note5) Excluding input current on $\overline{\text{CONT}}$ Terminal.

MEASUREMENT CIRCUITS



(1) Output Signal Symmetry ($C_L=15/30/50\text{pF}$)

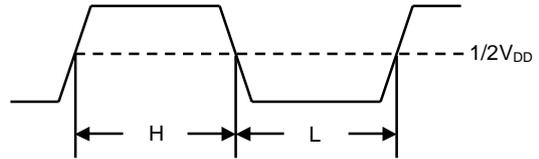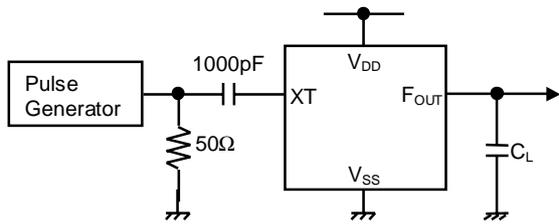

(2) Output Signal Rise/Fall Time ($C_L=15/30/50\text{pF}$)

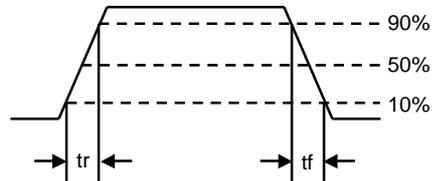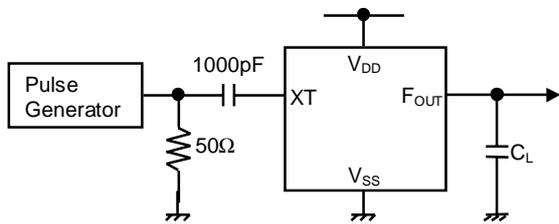

(3) Output Disable/Enable Time ($C_L=15\text{pF}, R_{UP}=10\text{k}\Omega$)

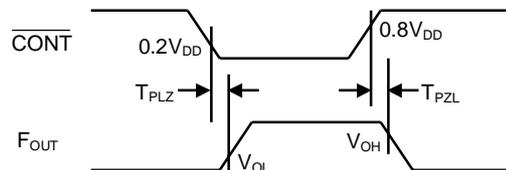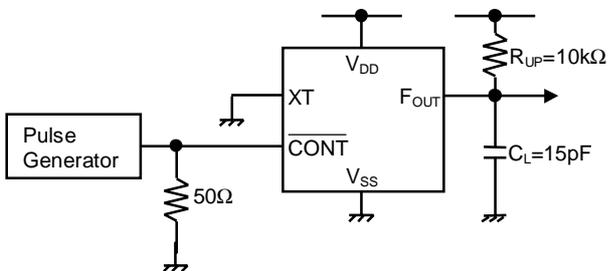

[CAUTION]
 The specifications on this data book are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this data book are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJU6378DF1-TE1](#) [NJU6378CF1-TE1](#) [NJU6378AF1-TE1](#) [NJU6378BF1-TE1](#) [NJU6378DC-C](#) [NJU6378C](#)
[NJU6378CC-C](#) [NJU6378AC-C](#) [NJU6378BC-C](#)