




# ITT

## Interconnect Solutions

### Combo D

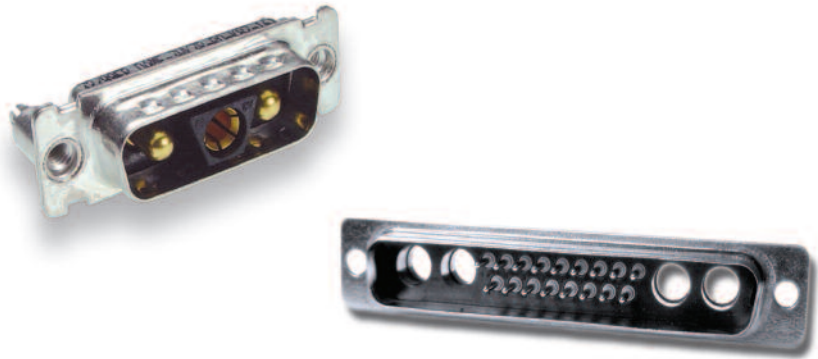

*Engineered for life*

# Cannon, VEAM, BIW


## A Historical Achievement of Technology Leadership

### Defining and Championing Innovation

Showcasing a portfolio of creativity, ITT's "Engineered For Life" execution embraces products which have become ubiquitous in a broad collection of markets including: Military/Aerospace, Civil Aircraft, Industrial Instrumentation, Medical, Oil & Gas, Energy, Transportation, Telecom/Handset, Computer, Consumer, and Automotive.

ITT's rich interconnect history embraces contributions to both technological breakthroughs and social movements. With one of the industry's broadest product offerings, ITT's interconnect products have supported:

- Every Free World space mission, bringing the universe to our doorstep.
- Motion picture, radio, and television equipment, serving laughter and entertainment to millions.
- Commercial and military communications systems, linking the voices of the world.
- Computerized tools, reshaping the information highway.
- Aircraft, rapid transit, and automobiles, mobilizing our expanding society.
- Oil and natural gas production, powering the world's economies.
- Agricultural equipment, attacking the roots of world hunger.

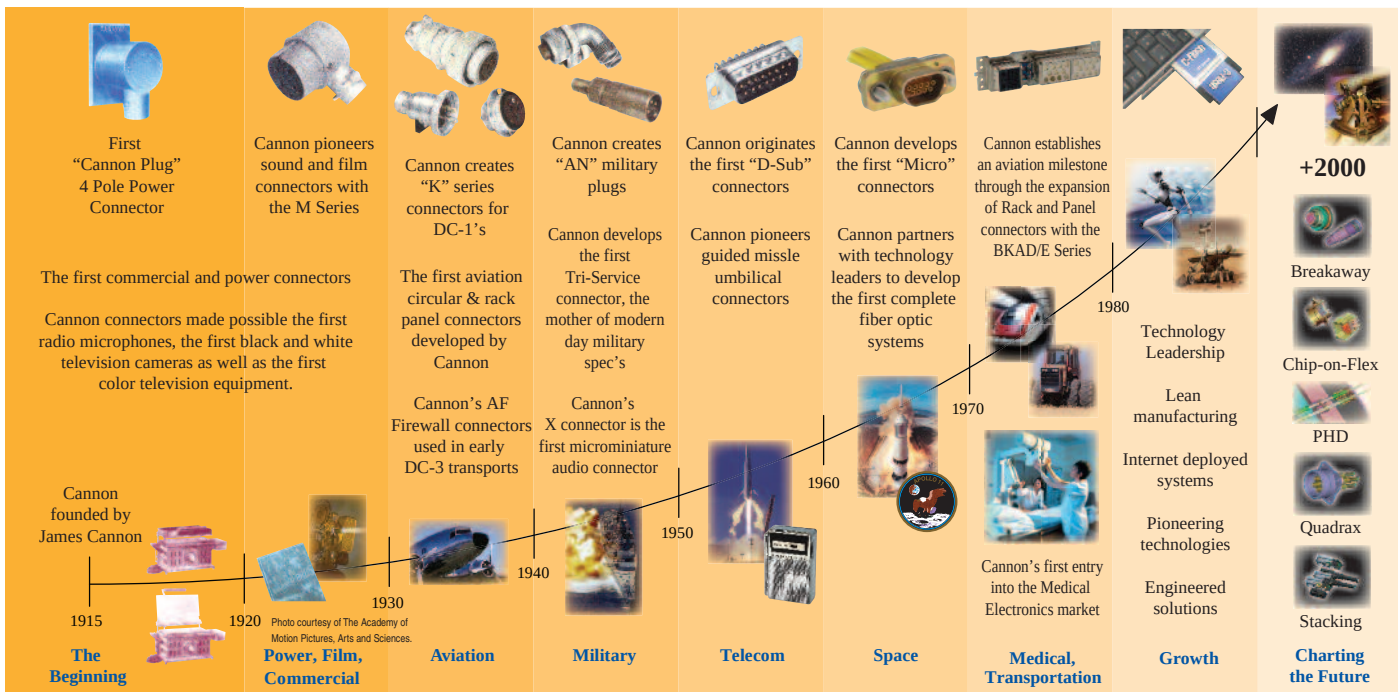

# ITT Interconnect Solutions

ITT Interconnect Solutions is a division of the multi-national ITT Corporation, a \$7.8 billion dollar global enterprise representing the brands Cannon, VEAM, and BIW. Our connector portfolio remains the most extensive in the industry offering the most reliable and cost effective range of interconnect solutions. These innovations have enabled ITT to provide products and technologies to such markets as:

- Automotive
- Computer/Consumer
- Industrial/Instrumentation
- Military/Aerospace
- Oil Fields
- Telecom/Handset
- Transportation

When you specify a Cannon, VEAM or BIW connector, you can rely on a product designed, developed, and manufactured to the highest quality and reliability standards. This tradition of excellence is based on ITT's corporate culture of operating its businesses under the principles of Six Sigma. At ITT, Six Sigma is not just a quality philosophy but a complete corporate culture that drives the entire business. Our Value Based Management and Value Based Product Development systems are two cornerstones that allow for the development of both leadership and product engineering principles, ensuring the correct industry leading products are developed to the accepted market driven lead times. These principles have allowed ITT to become the market leader in all of our business portfolios.

## Six Sigma Manufacturing

ITT operates manufacturing facilities in the United States, Germany, Italy, Mexico, China, Japan and the UK, all of which have particular product area strengths allowing ITT to offer a truly global footprint to our customers. Our facilities are world class and accommodate full vertical integration utilizing the latest manufacturing technologies including: automated and robotic machining centers, Super Market manufacturing cells, Kanban pull systems, and automated electrical, mechanical, and optical test and inspection equipment. The combination of our manufacturing strength and our advanced manufacturing facilities allows ITT to offer products at market driven

prices. Our capabilities, especially in robotics, computerized precision tooling, Kaizen Project Management, Six Sigma tools, and testing, give ITT the most optimized global manufacturing footprint in the interconnect industry.

## The Custom Difference

As the industry leader in harsh environment interconnect applications, ITT's world class engineering teams will work directly with our customers to design and develop cost effective solutions for their applications. In many cases we may modify one of our standard designs to ensure a highly reliable solution where timing is critical. Yet, in those cases where a complete custom interconnect solution is required, ITT will work with our customer's Engineers to design an interconnect solution which will be cost effective yet highly reliable. As professional consultants, our Engineering teams will provide a thorough systems and mechanical analysis of any proposed solution. These analyses provide our customers with sophisticated electrical signal and mechanical characterizations to determine the best solution for their application.

## RoHS Compliance Information

ITT has implemented a strict parts control plan for all ITT electronics plants worldwide that allows the Cannon, VEAM, and BIW connector product portfolios to meet the requirements of European Union Directive 2002/95/EC better known as the Reduction of Hazardous Substances initiative. As appropriate, specific Cannon, VEAM, and BIW products may be ordered with an R prefix number which insures our customers will receive RoHS compliant parts for their commercial electronics applications and equipment. Since most RoHS hazardous substances center around specific metal plating and lead solder coatings, ITT's products for RoHS compliance are available in the following plating finishes: electroless nickel, stainless steel, Anodize over aluminum and Gold plating. It should be noted that gold plating would be recommended as the replacement for tin-lead solder when ordering board mount connectors.



|                                    |            |
|------------------------------------|------------|
| <b>Combo D* Introduction .....</b> | <b>5-8</b> |
|------------------------------------|------------|

#### **Combo D\* PCB Connectors with Coaxial Contacts**

|                                                                 |    |
|-----------------------------------------------------------------|----|
| – 90°, PCB Plug (sizes DE-DC), with metal bracket.....          | 9  |
| – 90°, PCB Plug (size DD), with metal bracket. ....             | 10 |
| – 90°, PCB Receptacle (sizes DE-DC) with metal bracket.....     | 11 |
| – 90°, PCB Receptacle (sizes DD) with metal bracket.....        | 12 |
| – European 90°, PCB Plug (size DE-DC), with bracket. ....       | 13 |
| – European 90°, PCB Receptacle (size DE-DC), with bracket. .... | 14 |
| – Straight PCB Plug (sizes DE-DD) .....                         | 15 |
| – Straight PCB Receptacle (sizes DE-DD) .....                   | 16 |
| – Straight, European solder pins (sizes DE-DD) .....            | 17 |
| – Straight, European solder socket (sizes DE-DD) .....          | 18 |

#### **Combo D\* PCB Connectors with High Power Contacts 40 A**

|                                                                             |    |
|-----------------------------------------------------------------------------|----|
| – 90°, PCB Plug (sizes DE-DC), with metal bracket.....                      | 19 |
| – 90°, PCB Plug (size DD), with metal bracket. ....                         | 20 |
| – 90°, PCB Receptacle (sizes DE-DC) with metal bracket.....                 | 21 |
| – 90°, PCB Receptacle (sizes DD) with metal bracket.....                    | 22 |
| – 90°, PCB Plug, European footprint (sizes DE-DC), with bracket. ....       | 23 |
| – 90°, PCB Plug, European footprint (size DD), with bracket. ....           | 24 |
| – 90°, PCB Receptacle, European footprint (sizes DE-DC), with bracket. .... | 25 |
| – 90°, PCB Receptacle, European footprint (size DD), with bracket. ....     | 26 |
| – Straight PCB Plug (sizes DE-DC) .....                                     | 27 |
| – Straight PCB Plug (size DD) .....                                         | 28 |
| – Straight PCB Receptacle (sizes DE-DC) .....                               | 29 |
| – Straight PCB Receptacle (size DD) .....                                   | 30 |
| – Straight, European solder pins (sizes DE-DC) .....                        | 31 |
| – Straight, European solder socket (sizes DE-DC) .....                      | 32 |
| – Plug, Pressfit Termination .....                                          | 33 |
| – Receptacle, Pressfit Termination .....                                    | 34 |

#### **Combo D\* Connectors with empty Contact Cavities Size 8**

|                                                                        |       |
|------------------------------------------------------------------------|-------|
| – Plug, Solder cup (sizes DE – DC) .....                               | 35    |
| – Receptacle , Solder cup (Size DE-DC) .....                           | 36    |
| – Plug, Crimp connectors, without contacts (sizes DE – DD) .....       | 37    |
| – Receptacle, Crimp connectors, without contacts (sizes DE – DD) ..... | 38    |
| – Crimp contacts size 20 .....                                         | 39-40 |
| – Loose contacts size 8 .....                                          | 41-53 |

|                               |           |
|-------------------------------|-----------|
| <b>Mounting Methods .....</b> | <b>59</b> |
|-------------------------------|-----------|

|                                   |              |
|-----------------------------------|--------------|
| <b>Contact Arrangements .....</b> | <b>61-62</b> |
|-----------------------------------|--------------|

|                                |              |
|--------------------------------|--------------|
| <b>PCB Holes Pattern .....</b> | <b>66-98</b> |
|--------------------------------|--------------|

|                      |           |
|----------------------|-----------|
| <b>Tooling .....</b> | <b>99</b> |
|----------------------|-----------|

|                                         |            |
|-----------------------------------------|------------|
| <b>Product Safety Information .....</b> | <b>101</b> |
|-----------------------------------------|------------|



## Cannon Combo D®

Combination D Subminiature connectors for the advantages of an industry standard shield I/O interconnect, with the flexibility of a customized special, designed for any application.

This connector system is ideal for applications that require optimization of space while improving overall shielding. Combo D® accomplishes this by combining multiple interconnect types into one fully shielded product, decreasing the number I/O interfaces and reducing the possibility of EMI/RFI leakage.

### Applications

- Video Coaxial Transmission (75 Ω)
- RF and Telecom Transmission (50 Ω)
- Power interconnects (Up to 40 A)

### Product Features

- Standard and European Footprints
- Pre-installed 75 Ω/50 Ω Coaxial or High Power contacts (One Part Number)
- Vertical Standoffs or 90° Brackets
- 90° or Straight PCB
- PC Boards up to 3,2 (.125) Thick
- PCB Variants Available with Boardlocks and/or Screw Locks (#4-40 or M3)
- Fiber Optics (PhD)
- High Voltage up to 2800 VAC

## Specifications

### Standard materials & finishes

|                                         |                                       |                                 |                                        |
|-----------------------------------------|---------------------------------------|---------------------------------|----------------------------------------|
| Temperature Rating                      | -55°C to 125°C                        | Coaxial VSWR                    | Less than 1.40 + .03F for F up to 1GHz |
| Signal Contact Current Rating           | 7.5 A current capacity                | Coaxial Insertion Loss          | .2dB loss at 1 GHz                     |
| Signal Contact Resistance               | 55 millivolt max. at 7.5 test current | High Power current Rating       | Up to 40 A                             |
| Signal Contact                          |                                       | High Power                      |                                        |
| Dielectric Withstanding Voltage         | 1250 VAC at Sea Level                 | Dielectric Withstanding Voltage | 1000 VAC at Sea Level                  |
| Coaxial Current Rating                  | 5 A                                   | High Voltage Current Rating     | 5 A                                    |
| Coaxial Dielectric Withstanding Voltage | 1000 VAC at Sea Level                 | High Voltage Contact            |                                        |
| Coaxial Impedance                       | 75 Ω or 50 Ω                          | Dielectric Withstanding Voltage | 2800 V at Sea Level                    |

## Materials and Finishes

### Connector Assembly

| Description    | Material                  | Finish/Treatment                                   |
|----------------|---------------------------|----------------------------------------------------|
| Shell          | Carbon Steel              | Tin-Nickel (Industrial), Chromate/Zinc (Military)* |
| Insulator      | Black Polyester, UL 94V-0 | None                                               |
| Pin Contact    | Copper Alloy              | Gold over Nickel                                   |
| Socket Contact | Copper Alloy              | Gold over Nickel                                   |
| Standoff       | Steel                     | Trivalent Chromate over Zinc                       |
| Bracket        | Steel                     | Tin                                                |
| Rivnut         | Steel                     | Tin                                                |
| Boardlock      | Copper Alloy              | Tin                                                |

### Coaxial/High Power/High Voltage Contact Assemblies

|                               |               |                  |
|-------------------------------|---------------|------------------|
| Contacts and outer shells     | Copper Alloy  | Gold over Nickel |
| Ring, Retaining               | Copper Alloy  | Nickel           |
| Insulator (Coaxial only)      | Teflon        | None             |
| Insulator (High Voltage only) | Thermoplastic | none             |

\* Cadmium and Stainless Also Available



Dimensions shown in mm  
Specifications and dimensions subject to change

[www.ittcannon.com](http://www.ittcannon.com)

## Materials and Finishes

**Connector Assembly (Shells- Gold over Copper) (Modifier NMBK52)**

|                                              |                                                                                                                       |                                                                                                   |
|----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| Shell                                        | Brass per QQ-B-613                                                                                                    | Gold 50 microinches min., thickness per MIL-G-45204, Type II, Class 1 over copper per MIL-C-14550 |
| Insulator                                    | Polycyclohexle Dimethyl, Terephthalate or Polyphenylene, Sulfide co-polymer per MIL-DTL-24308 white or black in color | None                                                                                              |
| Float Mount, Brackets, Captive Nuts Hardware | Brass                                                                                                                 | Gold                                                                                              |

**Coaxial/High Power/High Voltage Contact Assemblies**

|                          |              |                                                                                              |
|--------------------------|--------------|----------------------------------------------------------------------------------------------|
| Outer Coaxial Shell      | Copper Alloy | Gold microinches min.thickness per MIL-G-45204, Type II, Class 1 over copper per MIL-C-14550 |
| Center Coaxial Contact   | Copper Alloy | Gold microinches min.thickness per MIL-G-45204, Type II, Class 1 over copper per MIL-C-14550 |
| Insulator (Coaxial only) | Teflon       | None                                                                                         |
| Insulator (Coaxial Only) | Teflon       | None                                                                                         |
| Retaining Ring           | Copper alloy | Gold                                                                                         |
| High Power Contact       | Copper alloy | Gold microinches min.thickness per MIL-G-45204, Type II, Class 1 over copper per MIL-C-14550 |

**Connector Assembly (Shells- Yellow Chromate over Cadmium) (Modifier "NMB")**

|                                              |                                                                                                                       |                                                                                                  |
|----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| Shell                                        | Brass per QQ-B-613                                                                                                    | Yellow chromate over cadmium QQ-P-46, Type II, Class 2                                           |
| Insulator                                    | Polycyclohexle Dimethyl, Terephthalate or Polyphenylene, Sulfide co-polymer per MIL-DTL-24308 white or black in color | None                                                                                             |
| Contact                                      | Copper Alloy                                                                                                          | Gold 50 microinches min. thickness per MIL-G-45204, Type II, Class 1 over copper per MIL-C-14550 |
| Float Mount, Brackets, Captive Nuts Hardware | Brass                                                                                                                 | Yellow chromate over cadmium QQ-P-416, Type II, Class 2                                          |

## For Crimp, Solder Cup and PCB Type Combo-D's

Typical Part Number:

DBM C 13C3 S J A197

**Product Family Designator**

D\*M = Solder Cup Industrial &amp; Space/Non-Magnetic Version

D\*MM = Military/Hi-Rel Solder Cup version (50 micro-inch gold contact plating)

D\*A = Crimp Version

**\*\*Hardware Modifier**

= 0.120" (3.05mm) Through Hole

C = 90° Metal Bracket, 4-40 Fastener, &amp; Boardlock

D = 90° Metal Bracket, 4-40 Fastener and 4-40 Screwlock

E = 4-40 Clinchnut

G = 90° Metal Bracket, 4-40 Fastener, 4-40 Screwlock, Boardlock

H = .300" (7.6mm) Standoff, 4-40 Screwlock

J = 90° Metal Bracket, Fastener, M-3 Fastener, Boardlock

K = 0.162" (4.11mm) Through Hole

L = 90° Metal Bracket, M-3 Fastener, Boardlock

N = .300" (7.6mm) Standoff, 4-40 Screwlock, Boardlock

O = 90° Metal Bracket, Fastener, M-3 Screwlock

P = 90° Metal Bracket, 4-40 Fastener

Q = .300" (7.6mm) M-3 Standoff

S = 90° Metal Bracket, M-3 Fastener

T = .300" (7.6mm) M-3 Standoff

U = .300" (7.6mm) Standoff, M-3 Screwlock, Boardlock

V = .300" (7.6mm) 4-40 Standoff

W = .300" (7.6mm) Standoff, M-3 Screwlock

X = M-3 Clinchnut

Y = Dual Float Mount

Z = .300" (7.6mm) 4-40 Standoff, Boardlock

\* = Shell Sizes are E, A, B, C, D

\*\* = Hardware Modifier not allowed with Non-Magnetic, Low Outgassing Combo-D

**Shell Modifier (Standard)**

= Carbon steel, yellow chromate over zinc

A197 = Carbon steel, tin-nickel plating (receptacles only) (RoHS)

K87 = Carbon steel, tin-nickel plating (plugs only) (RoHS)

F225 = Stainless steel shells

NMBK52 = Space/Non-Magnetic version, gold plated

A101 = Carbon Steel, Cadmium plating

**PC Tail Modifier (Standard)**

= Solder cup (D\*M/D\*MM; Crimp, D\*A)

J = 90° Std. PCB signal contact (.170" lg by .030" )

N = Straight Std. PCB signal contact (.178 lg by .030" )

V = 90° Euro PCB signal contact (.157" lg by .024" )

Y = Straight Euro PCB signal contact (.178" lb by .024" )

**Gender**

P = Male Plug, Pin

S = Female Receptacle, Socket

**Layouts Combo-D**

E- 5W1, 2W2, 2WK2

A- 3W3, 3WK3, 7W2, 11W1

B- 5W5, 9W4, 13W3, 17W2, 21W1

C- 8W8, 13W6, 17W5, 21WA4, 25W3, 27W2

D- 24W7, 36W4, 43W2, 47W1

**Combo-D Size 8 Contact Designators:**

W\*\* = w/o Contacts (letters below denote with contacts)

C = 75 Ohm Coax Contacts Installed

X = 50 Ohm Coax Contacts Installed

H = High Power Installed (US Standard)

P = High Power Installed (European)

V = High Voltage Installed (Cable and PCB only)

R = Mini Hi Power 90° installed

\*\* All cable side connectors use the "W" designation (without contacts) for ordering and have size and contacts ordered separately



Dimensions shown in mm  
Specifications and dimensions subject to change

www.ittcannon.com

## Combo D European Versions

Typical Part Number: DBM E- 9C4 P-P00-1A5N- A191-K87-146

**Product Family Designator**

D\*M = Combo D  
 = shell size E, A, B, C and D

**Hardware Modifier**

without code = 3.05mm" (.120 in.) Through Hole  
 E = 4-40 Clinchnut, solder cup, solder pin straight and 1A0N  
 N = 7.66 mm (.300 in.) with 4-40 post and pushfit, only OL4  
 Q = 7.66 mm (.300 in.) M3 with pushfit, only OL4  
 T = 7.66 mm (.300 in.) M3 standoff, only OL4  
 U = 7.66 mm (.300 in.) M3 post and pushfit, only OL4  
 V = 7.66 mm (.300 in.) 4-40 with pushfit, only OL4  
 X = M-3 Clinchnut, solder cup, solder pin straight and 1A0N  
 Y = Dual Float Mount, only solder cup  
 Z = 7.66 mm (.300 in.) 4-40 with pushfit, only OL4

**Layout (Total # of contacts + # of Size 8 Cavities)**

without code = Non Combo (9, 15, 25, 37, 50)  
 W = Empty size 8 Cavities  
 C = 75 Ohm Coax installed (straight or 90°)  
 X = 50 Ohm Coax installed (straight or 90°)  
 H = High power installed (straight)  
 P = High power installed (Euro, 90° only)  
 V = High voltage installed (available in straight PC only)  
 G = Guide pin or guide socket installed

**Gender**

P = Male (plug, pin)  
 S = Female (receptacle, socket)

**Code only applicable for Pressfit High power #8 contacts**

P00 = Pressfit High power PCB dia 2,9 mm  
 P01 = Pressfit High power PCB dia 3,1 mm  
 P02 = Pressfit High power PCB dia 3,5 mm

**PCB Mounting Method**

146 = Pushfit for PCB hold diameter 3.0, 90° version only  
 162 = Pushfit for PCB hold diameter 3.2, 90° version only

**Plating Modification**

without code = Tellow chromate over zinc on shells  
 A197 = Tin on shells  
 K87 = Tin with dimples on shells (pin only)

**Contact Finishes**

without code = performance class 3 (50 mating cycles)  
 A191 = performance class 2 (200 mating cycles) Euro standard  
 A190 = performance class 1 (500 mating cycles)

**Tail Modifier**

[OL2] = No standard, please call factory  
 = Solder cup (size 8 contacts not loaded on these versions)  
 OL4 = Solder pin straight  
 1A0N = without mouting bracket, hole dia. 3.05 mm  
 1A5N = plastic bracket with bushing dia. 3.05 mm  
 1A6N = plastic bracket with post 4-40  
 1A7N = metal bracket and captive nut 4-40  
 1A8N = metal bracket with post 4-40  
 1A9N = metal bracket and captive nut M3  
 1ADN = plastic bracket with grounding bracket and bushing dia. 3.05 mm  
 1AFN = metal bracket with bushing dia. 3.05 mm  
 1AGN = plastic bracket with grounding bracket and post M3  
 1AHN = metal bracket with post M3  
 1AJN = plastic bracket with grounding bracket and post 4-40  
 1APN = plastic bracket with post M3  
 1ATN = plastic bracket and captive nut M3  
 1AUN = plastic bracket and captive nut 4-40  
 1AVN = plastic bracket with grounding bracket and captive nut M3  
 1AWN = plastic bracket with grounding bracket and captive nut 4-40  
 1AEN = 90° low profile metal bracket captive nut M3  
 1AAN = 90° low profile metal bracket captive nut 4-40  
 1ABN = 90° low profile metal bracket post M3  
 1ACN = low profile metal bracket post 4-40  
 1ALN = low profile metal bracket with buhing dia. 3.05 mm

## Coaxial 90° PCB Plug, sizes DE – DC, with metal bracket

|            |        | INDUSTRIAL – US<br>75 Ohm* coax inserted with<br>US footprint metal bracket<br>and UNC 4-40 captive nut |                    | INDUSTRIAL – EU**<br>75 Ohm* coax inserted with<br>EU footprint metal bracket<br>and UNC 4-40 captive nut |                    | MILITARY/HI-REL – US<br>50 Ohm* coax inserted with<br>US footprint metal bracket<br>and UNC 4-40 screw lock |                    | NON-MAGNETIC-LOW OUTGASSING–US***<br>50 Ohm* coax inserted with<br>US footprint metal bracket<br>and UNC 4-40 screw lock |                       |
|------------|--------|---------------------------------------------------------------------------------------------------------|--------------------|-----------------------------------------------------------------------------------------------------------|--------------------|-------------------------------------------------------------------------------------------------------------|--------------------|--------------------------------------------------------------------------------------------------------------------------|-----------------------|
| Shell size | Layout | P/N without Boardlock                                                                                   | P/N with Boardlock | P/N without Boardlock                                                                                     | P/N with Boardlock | P/N without Boardlock                                                                                       | P/N with Boardlock | P/N with Cadmium Plating                                                                                                 | P/N with Gold Plating |
| DE         | 2W2    | DEMP2C2P-JK87                                                                                           | DEMC2C2P-JK87      | DEMP2C2P-VK87                                                                                             | DEMC2C2P-VK87      | DEMMD2X2P-J                                                                                                 | DEMMG2X2P-J        | DEM2X2P-JNMB                                                                                                             | DEM2X2P-JNMBK52       |
| DE         | 2WK2   | DEMP2CK2P-JK87                                                                                          | DEMC2CK2P-JK87     | DEMP2CK2P-VK87                                                                                            | DEMC2CK2P-VK87     | DEMMD2XK2P-J                                                                                                | DEMMG2XK2P-J       | DEM2XK2P-JNMB                                                                                                            | DEM2XK2P-JNMBK52      |
| DE         | 5W1    | DEMP5C1P-JK87                                                                                           | DEMC5C1P-JK87      | DEMP5C1P-VK87                                                                                             | DEMC5C1P-VK87      | DEMMD5X1P-J                                                                                                 | DEMMG5X1P-J        | DEM5X1P-JNMB                                                                                                             | DEM5X1P-JNMBK52       |
| DA         | 7W2    | DAMP7C2P-JK87                                                                                           | DAMC7C2P-JK87      | DAMP7C2P-VK87                                                                                             | DAMC7C2P-VK87      | DAMMD7X2P-J                                                                                                 | DAMMG7X2P-J        | DAM7X2P-JNMB                                                                                                             | DAM7X2P-JNMBK52       |
| DA         | 11W1   | DAMP11C1P-JK87                                                                                          | DAMC11C1P-JK87     | DAMP11C1P-VK87                                                                                            | DAMC11C1P-VK87     | DAMMD11X1P-J                                                                                                | DAMMG11X1P-J       | DAM11X1P-JNMB                                                                                                            | DAM11X1P-JNMBK52      |
| DA         | 3W3    | DAMP3C3P-JK87                                                                                           | DAMC3C3P-JK87      | DAMP3C3P-VK87                                                                                             | DAMC3C3P-VK87      | DAMMD3X3P-J                                                                                                 | DAMMG3X3P-J        | DAM3X3P-JNMB                                                                                                             | DAM3X3P-JNMBK52       |
| DA         | 3WK3   | DAMP3CK3P-JK87                                                                                          | DAMC3CK3P-JK87     | DAMP3CK3P-VK87                                                                                            | DAMC3CK3P-VK87     | DAMMD3XK3P-J                                                                                                | DAMMG3XK3P-J       | DAM3XK3P-JNMB                                                                                                            | DAM3XK3P-JNMBK52      |
| DB         | 5W5    | DBMP5C5P-JK87                                                                                           | DBMC5C5P-JK87      | DBMP5C5P-VK87                                                                                             | DBMC5C5P-VK87      | DBMMD5X5P-J                                                                                                 | DBMMG5X5P-J        | DBM5X5P-JNMB                                                                                                             | DBM5X5P-JNMBK52       |
| DB         | 9W4    | DBMP9C4P-JK87                                                                                           | DBMC9C4P-JK87      | DBMP9C4P-VK87                                                                                             | DBMC9C4P-VK87      | DBMMD9X4P-J                                                                                                 | DBMMG9X4P-J        | DBM9X4P-JNMB                                                                                                             | DBM9X4P-JNMBK52       |
| DB         | 13W3   | DBMP13C3P-JK87                                                                                          | DBMC13C3P-JK87     | DBMP13C3P-VK87                                                                                            | DBMC13C3P-VK87     | DBMMD13X3P-J                                                                                                | DBMMG13X3P-J       | DBM13X3P-JNMB                                                                                                            | DBM13X3P-JNMBK52      |
| DB         | 17W2   | DBMP17C2P-JK87                                                                                          | DBMC17C2P-JK87     | DBMP17C2P-VK87                                                                                            | DBMC17C2P-VK87     | DBMMD17X2P-J                                                                                                | DBMMG17X2P-J       | DBM17X2P-JNMB                                                                                                            | DBM17X2P-JNMBK52      |
| DB         | 21W1   | DBMP21C1P-JK87                                                                                          | DBMC21C1P-JK87     | DBMP21C1P-VK87                                                                                            | DBMC21C1P-VK87     | DBMMD21X1P-J                                                                                                | DBMMG21X1P-J       | DBM21X1P-JNMB                                                                                                            | DBM21X1P-JNMBK52      |
| DC         | 8W8    | DCMP8C8P-JK87                                                                                           | DCMC8C8P-JK87      | DCMP8C8P-VK87                                                                                             | DCMC8C8P-VK87      | DCMMD8X8P-J                                                                                                 | DCMMG8X8P-J        | DCM8X8P-JNMB                                                                                                             | DCM8X8P-JNMBK52       |
| DC         | 13W6   | DCMP13C6P-JK87                                                                                          | DCMC13C6P-JK87     | DCMP13C6P-VK87                                                                                            | DCMC13C6P-VK87     | DCMMD13X6P-J                                                                                                | DCMMG13X6P-J       | DCM13X6P-JNMB                                                                                                            | DCM13X6P-JNMBK52      |
| DC         | 17W5   | DCMP17C5P-JK87                                                                                          | DCMC17C5P-JK87     | DCMP17C5P-VK87                                                                                            | DCMC17C5P-VK87     | DCMMD17X5P-J                                                                                                | DCMMG17X5P-J       | DCM17X5P-JNMB                                                                                                            | DCM17X5P-JNMBK52      |
| DC         | 21WA4  | DCMP21CA4P-JK87                                                                                         | DCMC21CA4P-JK87    | DCMP21CA4P-VK87                                                                                           | DCMC21CA4P-VK87    | DCMMD21XA4P-J                                                                                               | DCMMG21XA4P-J      | DCM21CX4P-JNMB                                                                                                           | DCM21XA4P-JNMBK52     |
| DC         | 25W3   | DCMP25C3P-JK87                                                                                          | DCMC25C3P-JK87     | DCMP25C3P-VK87                                                                                            | DCMC25C3P-VK87     | DCMMD25X3P-J                                                                                                | DCMMG25X3P-J       | DCM25X3P-JNMB                                                                                                            | DCM25X3P-JNMBK52      |
| DC         | 27W2   | DCMP27C2P-JK87                                                                                          | DCMC27C2P-JK87     | DCMP27C2P-VK87                                                                                            | DCMC27C2P-VK87     | DCMMD27X2P-J                                                                                                | DCMMG27X2P-J       | DCM27X2P-JNMB                                                                                                            | DCM27X2P-JNMBK52      |




\* For 50 ohm coaxial inserts replace C with X, e.g.:DCM13C6P-J becomes DCM13X6P-J. \*\*For M-3 hardware, see part number designator, page 7.

\*\*\* Hardware Modifier not allowed with Non Magnetic/ Low Outgassing Combo-D- Contact factory for more information

## Plug

- For contact cavity arrangements, see page 61.
- For pcb hole pattern, see pages 67-68.
- For mounting methods, see pages 59-60.

For 50 ohm coaxial version, see readers resource section page 63..

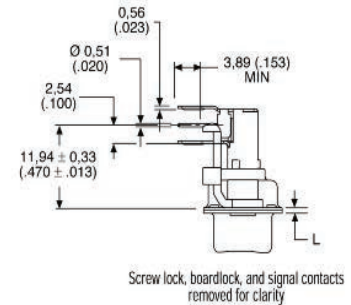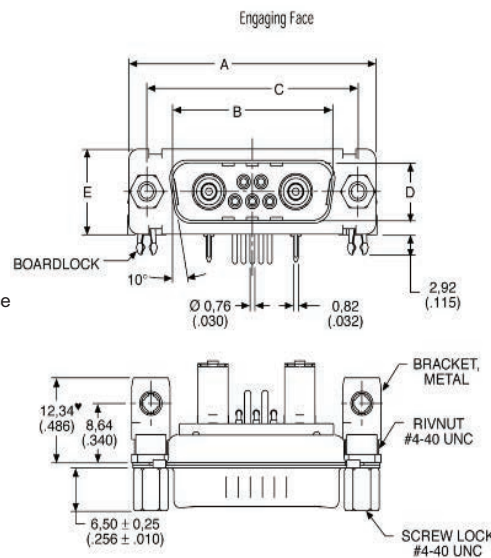

## Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | W<br>± 0,368 (.0145) | W<br>± 0,41 (.016) | L<br>± 0,25 (.010) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|----------------------|--------------------|--------------------|
| DE         | 30,81 (1.213)      | 16,92 (.665)       | 24,99 (.984)       | 8,36 (.329)        | 12,55 (.494)       | 10,72 (.422)       | 6,693 (.2635)        | —                  | 0,76 (.030)        |
| DA         | 39,14 (1.541)      | 25,25 (.994)       | 33,32 (1.312)      | 8,36 (.329)        | 12,55 (.494)       | 10,72 (.422)       | 6,693 (.2635)        | —                  | 0,76 (.030)        |
| DB         | 53,04 (2.088)      | 38,96 (1.534)      | 47,04 (1.852)      | 8,36 (.329)        | 12,55 (.494)       | 10,82 (.426)       | —                    | 6,84 (.269)        | 0,99 (.039)        |
| DC         | 69,32 (2.729)      | 55,42 (2.182)      | 63,50 (2.500)      | 8,36 (.329)        | 12,55 (.494)       | 10,82 (.426)       | —                    | 6,84 (.269)        | 0,99 (.039)        |



Dimensions shown in mm  
Specifications and dimensions subject to change

www.ittcannon.com



## Coaxial 90° PCB Plug, size DD, with metal bracket

| Shell size | Layout | INDUSTRIAL – US<br>75 Ohm* coax inserted with<br>US footprint metal bracket<br>and UNC 4-40 captive nut |                    | INDUSTRIAL – EU**<br>75 Ohm* coax inserted with<br>EU footprint metal bracket<br>and UNC 4-40 captive nut |                    | MILITARY/HI-REL – US<br>50 Ohm* coax inserted with<br>US footprint metal bracket<br>and UNC 4-40 screw lock |                    | NON-MAGNETIC/LOW OUTGASSING-EU***<br>50 Ohm* coax inserted with<br>US footprint metal bracket<br>and UNC 4-40 screw lock |                       |
|------------|--------|---------------------------------------------------------------------------------------------------------|--------------------|-----------------------------------------------------------------------------------------------------------|--------------------|-------------------------------------------------------------------------------------------------------------|--------------------|--------------------------------------------------------------------------------------------------------------------------|-----------------------|
|            |        | P/N without Boardlock                                                                                   | P/N with Boardlock | P/N without Boardlock                                                                                     | P/N with Boardlock | P/N without Boardlock                                                                                       | P/N with Boardlock | P/N with Cadmium Plating                                                                                                 | P/N with Gold Plating |
| DD         | 24W7   | DDMP24C7P-JK87                                                                                          | DDMC24C7P-JK87     | DDMP24C7P-VK87                                                                                            | DDMC24C7P-VK87     | DDMMD24X7P-J                                                                                                | DDMMG24X7P-J       | DDM24X7P-JNMB                                                                                                            | DDM24X7P-JNMBK52      |
| DD         | 36W4   | DDMP36C4P-JK87                                                                                          | DDMC36C4P-JK87     | DDMP36C4P-VK87                                                                                            | DDMC36C4P-VK87     | DDMMD36X4P-J                                                                                                | DDMMG36X4P-J       | DDM36X4P-JNMB                                                                                                            | DDM36X4P-JNMBK52      |
| DD         | 43W2   | DDMP43C2P-JK87                                                                                          | DDMC43C2P-JK87     | DDMP43C2P-VK87                                                                                            | DDMC43C2P-VK87     | DDMMD43X2P-J                                                                                                | DDMMG43X2P-J       | DDM43X2P-JNMB                                                                                                            | DDM43X2P-JNMBK52      |
| DD         | 47W1   | DDMP47C1P-JK87                                                                                          | DDMC47C1P-JK87     | DDMP47C1P-VK87                                                                                            | DDMC47C1P-VK87     | DDMMD47X1P-J                                                                                                | DDMMG47X1P-J       | DDM47X1P-JNMB                                                                                                            | DDM47X1P-JNMBK52      |


\* For 50 ohm coaxial inserts replace C with X, e.g.:DCM13C6P-J becomes DCM13X6P-J. \*\*For M-3 hardware, see part number designator, page 7.

\*\*\* Hardware Modifier not allowed with Non Magnetic/ Low Outgassing Combo-D- Contact factory for more information

## Plug



- For contact cavity arrangements, see page 61.
- For pcb hole pattern, see pages 67-68.
- For mounting methods, see pages 59-60.

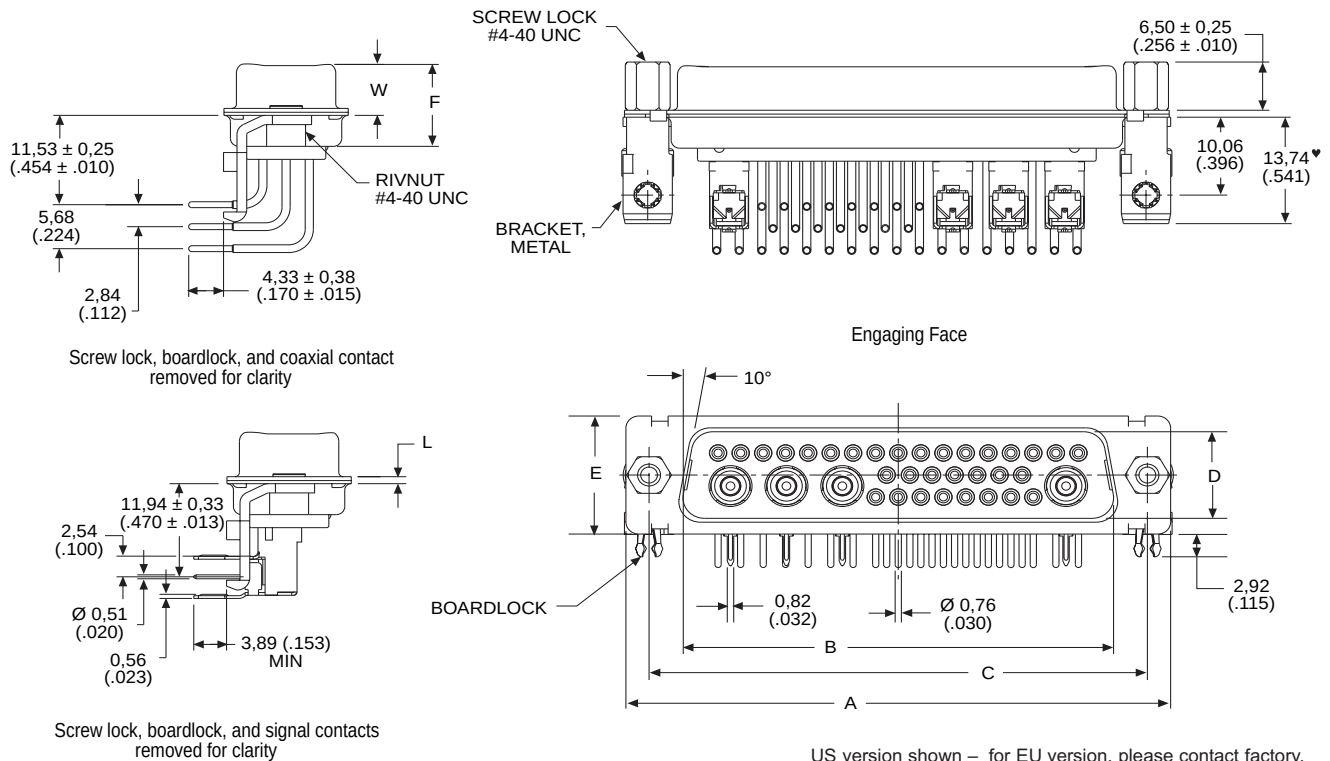

## Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | W<br>± 0,41 (.015) | L<br>± 0,25 (.010) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| DD         | 66,93 (2.635)      | 52,81 (2.079)      | 61,11 (2.406)      | 11,07 (.436)       | 15,37 (.605)       | 10,82 (.426)       | 6,84 (.269)        | 0,99 (.039)        |

Dimensions shown in mm

Specifications and dimensions subject to change

www.ittcannon.com

## Coaxial 90° PCB Receptacle, sizes DE – DC, with metal bracket

INDUSTRIAL – US  
75 Ohm\* coax inserted with  
US Footprint metal bracket  
and UNC 4-40 captive nut

INDUSTRIAL – EU\*\*  
75 Ohm\* coax inserted with  
EU Footprint metal bracket  
and UNC 4-40 captive nut

MILITARY/HI-REL – US  
50 Ohm\* coax inserted with  
US Footprint metal bracket  
and UNC 4-40 screw lock

NON-MAGNETIC/LOW OUTGASSING – US\*\*\*  
50 Ohm\* coax inserted with  
US Footprint metal bracket  
and UNC 4-40 screw lock

| Shell size | Layout | P/N without Boardlock | P/N with Boardlock | P/N without Boardlock | P/N with Boardlock | P/N without Boardlock | P/N with Boardlock | P/N with Cadmium Plating | P/N with Gold Plating |
|------------|--------|-----------------------|--------------------|-----------------------|--------------------|-----------------------|--------------------|--------------------------|-----------------------|
| DE         | 2W2    | DEMP2C2S-JA197        | DEMC2C2S-JA197     | DEMP2C2S-VA197        | DEMC2C2S-VA197     | DEMMP2X2S-J           | DEMMC2X2S-J        | DEM2X2S-JNMB             | DEM2X2S-JNMBK52       |
| DE         | 2WK2   | DEMP2CK2S-JA197       | DEMC2CK2S-JA197    | DEMP2CK2S-VA197       | DEMC2CK2S-VA197    | DEMMP2XK2S-J          | DEMMC2XK2S-J       | DEM2XK2S-JNMB            | DEM2XK2S-JNMBK52      |
| DE         | 5W1    | DEMP5C1S-JA197        | DEMC5C1S-JA197     | DEMP5C1S-VA197        | DEMC5C1S-VA197     | DEMMP5X1S-J           | DEMMC5X1S-J        | DEM5X1S-JNMB             | DEM5X1S-JNMBK52       |
| DA         | 7W2    | DAMP7C2S-JA197        | DAMC7C2S-JA197     | DAMP7C2S-VA197        | DAMC7C2S-VA197     | DAMMP7X2S-J           | DAMMC7X2S-J        | DAM7X7S-JNMB             | DAM7X2S-JNMBK52       |
| DA         | 11W1   | DAMP11C1S-JA197       | DAMC11C1S-JA197    | DAMP11C1S-VA197       | DAMC11C1S-VA197    | DAMMP11X1S-J          | DAMMC11X1S-J       | DAM11X1S-JNMB            | DAM11X1S-JNMBK52      |
| DA         | 3W3    | DAMP3C3S-JA197        | DAMC3C3S-JA197     | DAMP3C3S-VA197        | DAMC3C3S-VA197     | DAMMP3X3S-J           | DAMMC3X3S-J        | DAM3X3S-JNMB             | DAM3X3S-JNMBK52       |
| DA         | 3WK3   | DAMP3CK3S-JA197       | DAMC3CK3S-JA197    | DAMP3CK3S-VA197       | DAMC3CK3S-VA197    | DAMMP3XK3S-J          | DAMMC3XK3S-J       | DAM3XK3S-JNMB            | DAM3XK3S-JNMBK52      |
| DB         | 5W5    | DBMP5C5S-JA197        | DBMC5C5S-JA197     | DBMP5C5S-VA197        | DBMC5C5S-VA197     | DBMMP5X5S-J           | DBMMC5X5S-J        | DBM5X5S-JNMB             | DBM5X5S-JNMBK52       |
| DB         | 9W4    | DBMP9C4S-JA197        | DBMC9C4S-JA197     | DBMP9C4S-VA197        | DBMC9C4S-VA197     | DBMMP9X4S-J           | DBMMC9X4S-J        | DBM9X4S-JNMB             | DBM9X4S-JNMBK52       |
| DB         | 13W3   | DBMP13C3S-JA197       | DBMC13C3S-JA197    | DBMP13C3S-VA197       | DBMC13C3S-VA197    | DBMMP13X3S-J          | DBMMC13X3S-J       | DBM13X3S-JNMB            | DBM13X3S-JNMBK52      |
| DB         | 17W2   | DBMP17C2S-JA197       | DBMC17C2S-JA197    | DBMP17C2S-VA197       | DBMC17C2S-VA197    | DBMMP17X2S-J          | DBMMC17X2S-J       | DBM17X2S-JNMB            | DBM17X2S-JNMBK52      |
| DB         | 21W1   | DBMP21C1S-JA197       | DBMC21C1S-JA197    | DBMP21C1S-VA197       | DBMC21C1S-VA197    | DBMMP21X1S-J          | DBMMC21X1S-J       | DBM21X1S-JNMB            | DBM21X1S-JNMBK52      |
| DC         | 8W8    | DCMP8C8S-JA197        | DCMC8C8S-JA197     | DCMP8C8S-VA197        | DCMC8C8S-VA197     | DCMMP8X8S-J           | DCMMC8X8S-J        | DCM8X8S-JNMB             | DCM8X8S-JNMBK52       |
| DC         | 13W6   | DCMP13C6S-JA197       | DCMC13C6S-JA197    | DCMP13C6S-VA197       | DCMC13C6S-VA197    | DCMMP13X6S-J          | DCMMC13X6S-J       | DCM13X6S-JNMB            | DCM13X6S-JNMBK52      |
| DC         | 17W5   | DCMP17C5S-JA197       | DCMC17C5S-JA197    | DCMP17C5S-VA197       | DCMC17C5S-VA197    | DCMMP17X5S-J          | DCMMC17X5S-J       | DCM17X5S-JNMB            | DCM17X5S-JNMBK52      |
| DC         | 21WA4  | DCMP21CA4S-JA197      | DCMC21CA4S-JA197   | DCMP21CA4S-VA197      | DCMC21CA4S-VA197   | DCMMP21XA4S-J         | DCMMC21XA4S-J      | DCM21XA4S-JNMB           | DCM21XA4S-JNMBK52     |
| DC         | 25W3   | DCMP25C3S-JA197       | DCMC25C3S-JA197    | DCMP25C3S-VA197       | DCMC25C3S-VA197    | DCMMP25X3S-J          | DCMMC25X3S-J       | DCM25X3S-JNMB            | DCM25X3S-JNMBK52      |
| DC         | 27W2   | DCMP27C2S-JA197       | DCMC27C2S-JA197    | DCMP27C2S-VA197       | DCMC27C2S-VA197    | DCMMP27X2S-J          | DCMMC27X2S-J       | DCM27X2S-JNMB            | DCM27X2S-JNMBK52      |


\* For 50 ohm coaxial inserts replace C with X, e.g.:DCM13C6S-J becomes DCM13X6S-J. \*\*For M-3 and other hardware options, see part number designator, page 7.

\*\*\* Hardware Modifier not allowed with Non Magnetic/ Low Outgassing Combo-D- Contact factory for more information

## Receptacle



US version shown – for EU version, please see page 14.  
For 50 ohm coaxial version, see readers resource section, page 63.

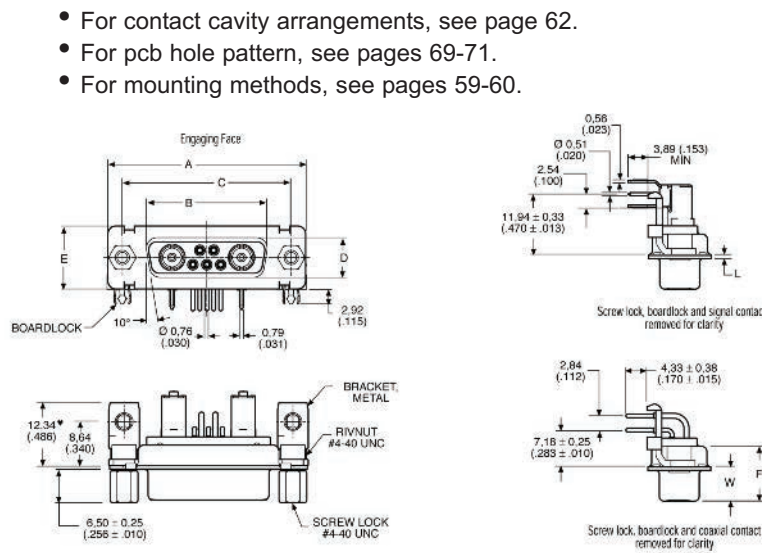

## Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | W<br>± 0,38 (.015) | L<br>± 0,25 (.010) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| DE         | 30,81 (1.213)      | 16,33 (.643)       | 24,99 (.984)       | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,94 (.273)        | 0,76 (.030)        |
| DA         | 39,14 (1.541)      | 24,65 (.971)       | 33,32 (1.312)      | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,94 (.273)        | 0,76 (.030)        |
| DB         | 53,04 (2.088)      | 38,38 (1.511)      | 47,04 (1.852)      | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,94 (.273)        | 0,76 (.030)        |
| DC         | 69,32 (2.729)      | 54,84 (2.159)      | 63,50 (2.500)      | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,94 (.273)        | 0,76 (.030)        |



Dimensions shown in mm  
Specifications and dimensions subject to change

www.ittcannon.com

## Coaxial 90° PCB Receptacle, size DD, with metal bracket



|            |        | INDUSTRIAL – US<br>75 Ohm* coax inserted with<br>US Footprint metal bracket<br>and UNC 4-40 captive nut |                    | INDUSTRIAL – EU**<br>75 Ohm* coax inserted with<br>EU Footprint metal bracket<br>and UNC 4-40 captive nut |                    | MILITARY/HI-REL – US<br>75 Ohm* coax inserted with<br>US Footprint metal bracket<br>and UNC 4-40 screw lock |                    | NON-MAGNETIC/LOW OUTGASSING – US***<br>75 Ohm* coax inserted with<br>US Footprint metal bracket<br>and UNC 4-40 screw lock |                       |
|------------|--------|---------------------------------------------------------------------------------------------------------|--------------------|-----------------------------------------------------------------------------------------------------------|--------------------|-------------------------------------------------------------------------------------------------------------|--------------------|----------------------------------------------------------------------------------------------------------------------------|-----------------------|
| Shell size | Layout | P/N without Boardlock                                                                                   | P/N with Boardlock | P/N without Boardlock                                                                                     | P/N with Boardlock | P/N without Boardlock                                                                                       | P/N with Boardlock | P/N with Cadmium Plating                                                                                                   | P/N with Gold Plating |
| DD         | 24W7   | DDMP24C7S-JA197                                                                                         | DDMC24C7S-JA197    | DDMP24C7S-VA197                                                                                           | DDMC24C7S-VA197    | DDMMD24X7S-J                                                                                                | DDMMG24X2S-J       | DDM24X7S-JNMB                                                                                                              | DDM24X7S-JNMBK52      |
| DD         | 36W4   | DDMP36C4S-JA197                                                                                         | DDMC36C4S-JA197    | DDMP36C4S-VA197                                                                                           | DDMC36C4S-VA197    | DDMMD36X4S-J                                                                                                | DDMMG36X1S-J       | DDM36X4S-JNMB                                                                                                              | DDM36X4S-JNMBK52      |
| DD         | 43W2   | DDMP43C2S-JA197                                                                                         | DDMC43C2S-JA197    | DDMP43C2S-VA197                                                                                           | DDMC43C2S-VA197    | DDMMD43X2S-J                                                                                                | DDMMG43X2S-J       | DDM43X7S-JNMB                                                                                                              | DDM43X2S-JNMBK52      |
| DD         | 47W1   | DDMP47C1S-JA197                                                                                         | DDMC47C1S-JA197    | DDMP47C1S-VA197                                                                                           | DDMC47C1S-VA197    | DDMMD47X1S-J                                                                                                | DDMMG47X1S-J       | DDM47X1S-JNMB                                                                                                              | DDM47X1S-JNMBK52      |

\* For 50 ohm coaxial inserts replace C with X, e.g.: DCM13C6 becomes DCM13X6S-JA197


\*\*For M-3 and other hardware options, see part number designator, page 7.

\*\*\* Hardware Modifier not allowed with Non Magnetic/ Low Outgassing Combo-D- Contact factory for more information

## Receptacle

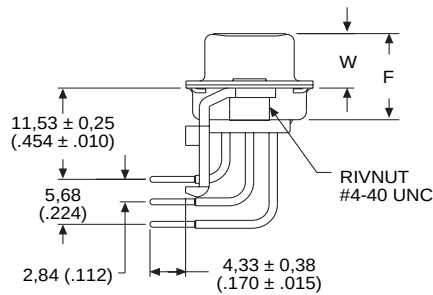
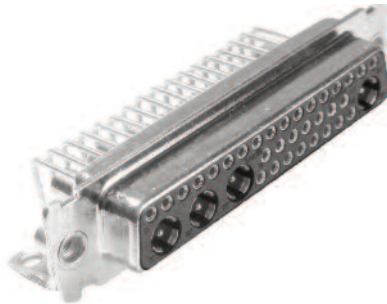


Screw lock, boardlock, and coaxial contacts removed for clarity

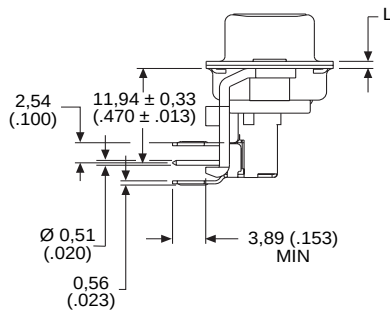

Screw lock, boardlock, and signal contacts removed for clarity

Note: Dimension varies with alternate bracket configuration, see Reader's Resource page 64.

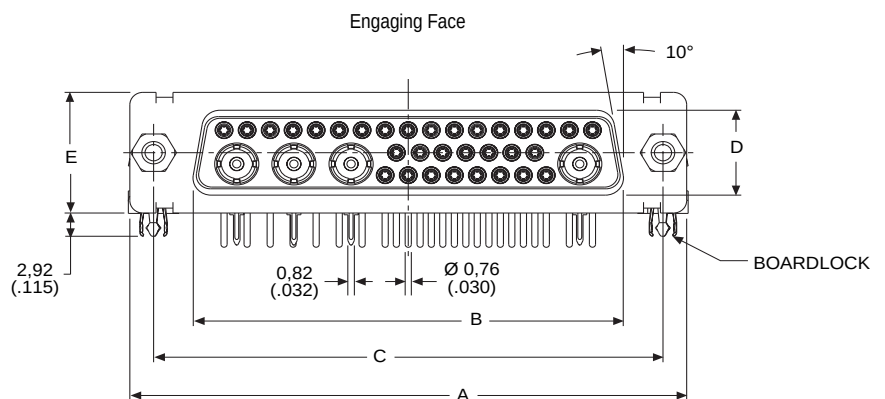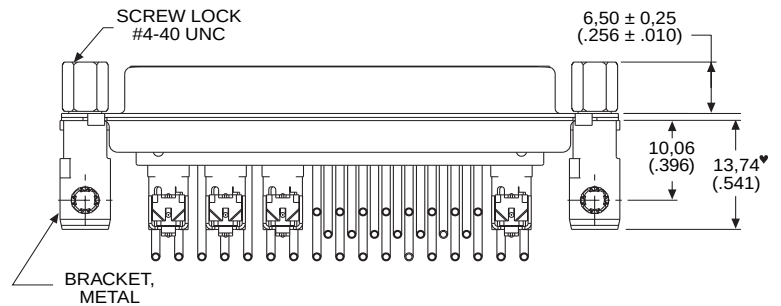

US version shown – for EU version, please see contact factory.  
For 50 ohm coaxial version, see readers resource section, page 63.

## Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | W<br>± 0,38 (.015) | L<br>± 0,25 (.010) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| DD         | 66,93 (2.635)      | 52,42 (2.064)      | 61,11 (2.406)      | 10,74 (.423)       | 15,37 (.605)       | 10,90 (.429)       | 6,94 (.273)        | 0,76 (.030)        |

Dimensions shown in mm

Specifications and dimensions subject to change

www.ittcannon.com

## Coaxial 90° PCB Plug, sizes DE – DC, with bracket

75 Ohm part numbers with bracket and captive nut M3

75 Ohm part numbers with bracket with  
bushing dia. 3,05

75 Ohm part number with bracket with post M3

| Shell Layout size |       | Plastic Bracket          | Metal Bracket            | Plastic Bracket          | Metal Bracket            | Plastic Bracket          | Metal Bracket            |
|-------------------|-------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| DE                | 2W2   | DEM-2C2P-1ATN-A191-K87   | DEM02C2P-1A9N-A191-K87   | DEM-2C2P-1A5N-A191-K87   | DEM-2C2P-1AFN-A191-K87   | DEM-2C2P-APN-A191-K87    | DEM-2C2P-1AHN-A191-K87   |
| DE                | 2WK2  | DEM-2CK2P-1ATN-A191-K87  | DEM02CK2P-1A9N-A191-K87  | DEM-2CK2P-1A5N-A191-K87  | DEM-2CK2P-1AFN-A191-K87  | DEM-2CK2P-APN-A191-K87   | DEM-2CK2P-1AHN-A191-K87  |
| DE                | 5W1   | DEM-5C1P-1ATN-A191-K87   | DEM-5C1P-1A9N-A191-K87   | DEM-5C1P-1A5N-A191-K87   | DEM-5C1P-1AFN-A191-K87   | DEM-5C1P-APN-A191-K87    | DEM-5C1P-1AHN-A191-K87   |
| DA                | 7W2   | DAM-7C2P-1ATN-A191-K87   | DAM-7C2P-1A9N-A191-K87   | DAM-7C2P-1A5N-A191-K87   | DAM-7C2P-1AFN-A191-K87   | DAM-7C2P-1APN-A191-K87   | DAM-7C2P-1AHN-A191-K87   |
| DA                | 11W1  | DAM-11C1P-1ATN-A191-K87  | DAM-11C1P-1A9N-A191-K87  | DAM-11C1P-1A5N-A191-K87  | DAM-11C1P-1AFN-A191-K87  | DAM-11C1P-1APN-A191-K87  | DAM-11C1P-1AHN-A191-K87  |
| DA                | 3W3   | DAM-3C3P-1ATN-A191-K87   | DAM-3C3P-1A9N-A191-K87   | DAM-3C3P-1A5N-A191-K87   | DAM-3C3P-1AFN-A191-K87   | DAM-3C3P-1APN-A191-K87   | DAM-3C3P-1AHN-A191-K87   |
| DA                | 3WK3  | DAM-3CK3P-1ATN-A191-K87  | DAM-3CK3P-1A9N-A191-K87  | DAM-3CK3P-1A5N-A191-K87  | DAM-3CK3P-1AFN-A191-K87  | DAM-3CK3P-1APN-A191-K87  | DAM-3CK3P-1AHN-A191-K87  |
| DB                | 5W5   | DBM-5C5P-1ATN-A191-K87   | DBM-5C5P-1A9N-A191-K87   | DBM-5C5P-1A5N-A191-K87   | DBM-5C5P-1AFN-A191-K87   | DBM-5C5P-1APN-A191-K87   | DBM-5C5P-1AHN-A191-K87   |
| DB                | 9W4   | DBM-9C4P-1ATN-A191-K87   | DBM-9C4P-1A9N-A191-K87   | DBM-9C4P-1A5N-A191-K87   | DBM-9C4P-1AFN-A191-K87   | DBM-9C4P-1APN-A191-K87   | DBM-9C4P-1AHN-A191-K87   |
| DB                | 13W3  | DBM-13C3P-1ATN-A191-K87  | DBM-13C3P-1A9N-A191-K87  | DBM-13C3P-1A5N-A191-K87  | DBM-13C3P-1AFN-A191-K87  | DBM-13C3P-1APN-A191-K87  | DBM-13C3P-1AHN-A191-K87  |
| DB                | 17W2  | DBM-17C2P-1ATN-A191-K87  | DBM-17C2P-1A9N-A191-K87  | DBM-17C2P-1A5N-A191-K87  | DBM-17C2P-1AFN-A191-K87  | DBM-17C2P-1APN-A191-K87  | DBM-17C2P-1AHN-A191-K87  |
| DB                | 21W1  | DBM-21C1P-1ATN-A191-K87  | DBM-21C1P-1A9N-A191-K87  | DBM-21C1P-1A5N-A191-K87  | DBM-21C1P-1AFN-A191-K87  | DBM-21C1P-1APN-A191-K87  | DBM-21C1P-1AHN-A191-K87  |
| DC                | 8W8   | DCM-8C8P-1ATN-A191-K87   | DCM-8C8P-1A9N-A191-K87   | DCM-8C8P-1A5N-A191-K87   | DCM-8C8P-1AFN-A191-K87   | DCM-8C8P-1APN-A191-K87   | DCM-8C8P-1AHN-A191-K87   |
| DC                | 13W6  | DCM-13C6P-1ATN-A191-K87  | DCM-13C6P-1A9N-A191-K87  | DCM-13C6P-1A5N-A191-K87  | DCM-13C6P-1AFN-A191-K87  | DCM-13C6P-1APN-A191-K87  | DCM-13C6P-1AHN-A191-K87  |
| DC                | 17W5  | DCM-17C5P-1ATN-A191-K87  | DCM-17C5P-1A9N-A191-K87  | DCM-17C5P-1A5N-A191-K87  | DCM-17C5P-1AFN-A191-K87  | DCM-17C5P-1APN-A191-K87  | DCM-17C5P-1AHN-A191-K87  |
| DC                | 21WA4 | DCM-21CA4P-1ATN-A191-K87 | DCM-21CA4P-1A9N-A191-K87 | DCM-21CA4P-1A5N-A191-K87 | DCM-21CA4P-1AFN-A191-K87 | DCM-21CA4P-1APN-A191-K87 | DCM-21CA4P-1AHN-A191-K87 |
| DC                | 25W3  | DCM-25C3P-1ATN-A191-K87  | DCM-25C3P-1A9N-A191-K87  | DCM-25C3P-1A5N-A191-K87  | DCM-25C3P-1AFN-A191-K87  | DCM-25C3P-1APN-A191-K87  | DCM-25C3P-1AHN-A191-K87  |
| DC                | 27W2  | DCM-27C2P-1ATN-A191-K87  | DCM-27C2P-1A9N-A191-K87  | DCM-27C2P-1A5N-A191-K87  | DCM-27C2P-1AFN-A191-K87  | DCM-27C2P-1APN-A191-K87  | DCM-27C2P-1AHN-A191-K87  |

For performance class 1 replace A191 with A190.  
For performance class 3 delete A191.


For 50 ohm coaxial replace C with X, Example:  
DCM-13C6P-1AFN-A191-K87-146 becomes  
DCM-13X6P-1AFN-A191-K87-146.

For pushfit add -146 modifier.  
For pushfit 90° pcb hole diameter 3,2 replace 146  
with 162.

## Plug



- For contact cavity arrangements, see page 61.
- For pcb hole pattern, see pages 72-73.
- For mounting methods, see pages 59-60.

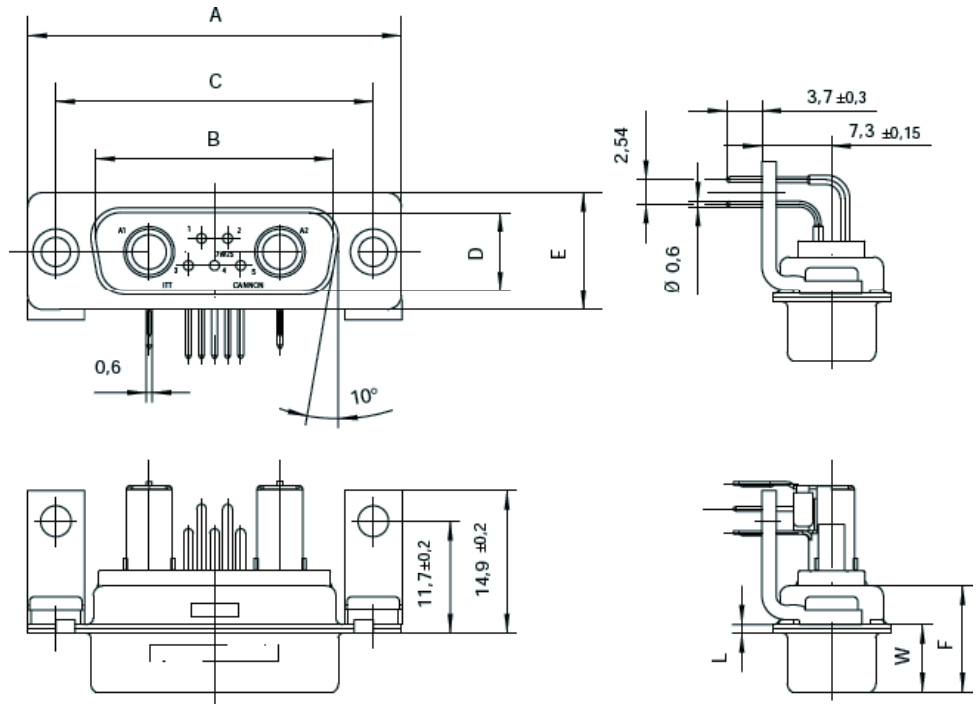

## Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | W<br>± 0,25 (.010) | L<br>± 0,38 (.015) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| DE         | 30,8 (1.213)       | 16,9 (.665)        | 25,0 (.984)        | 8,35 (.329)        | 12,55 (.494)       | 10,7 (.421)        | 6,7 (.264)         | 0,8 (.031)         |
| DA         | 39,15 (1.541)      | 25,5 (.994)        | 33,33 (1.311)      | 8,35 (.329)        | 12,55 (.494)       | 10,7 (.421)        | 6,7 (.264)         | 0,8 (.031)         |
| DB         | 53,05 (2.089)      | 38,95 (1.533)      | 47,05 (1.852)      | 8,35 (.329)        | 12,55 (.494)       | 10,8 (.425)        | 6,8 (.268)         | 0,9 (.035)         |
| DC         | 69,3 (2.728)       | 55,4 (2.181)       | 63,5 (2.5)         | 8,35 (.329)        | 12,55 (.494)       | 10,8 (.425)        | 6,8 (.268)         | 0,9 (.035)         |



Dimensions shown in mm  
Specifications and dimensions subject to change

www.ittcannon.com

## Coaxial 90° PCB Receptacle, sizes DE – DC, with bracket

75 Ohm part numbers with bracket and captive nut M3

75 Ohm part numbers with bracket with  
bushing dia. 3,05

75 Ohm part number with bracket with post M3



| Shell size | Layout | Plastic Bracket           | Metal Bracket             | Plastic Bracket           | Metal Bracket             | Plastic Bracket           | Metal Bracket             |
|------------|--------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| DE         | 2W2    | DEM-2C2S-1ATN-A191-A197   | DEM-2C2S-1A9N-A191-A197   | DEM-2C2S-1A5N-A191-A197   | DEM-2C2S-1AFN-A191-A197   | DEM-2C2S-1APN-A191-A197   | DEM-2C2S-1AHN-A191-A197   |
| DE         | 2WK2   | DEM-2CK2S-1ATN-A191-A197  | DEM-2CK2S-1A9N-A191-A197  | DEM-2CK2S-1A5N-A191-A197  | DEM-2CK2S-1AFN-A191-A197  | DEM-2CK2S-1APN-A191-A197  | DEM-2CK2S-1AHN-A191-A197  |
| DE         | 5W1    | DEM-5C1S-1ATN-A191-A197   | DEM-5C1S-1A9N-A191-A197   | DEM-5C1S-1A5N-A191-A197   | DEM-5C1S-1AFN-A191-A197   | DEM-5C1S-1APN-A191-A197   | DEM-5C1S-1AHN-A191-A197   |
| DA         | 7W2    | DAM-7C2S-1ATN-A191-A197   | DAM-7C2S-1A9N-A191-A197   | DAM-7C2S-1A5N-A191-A197   | DAM-7C2S-1AFN-A191-A197   | DAM-7C2S-1APN-A191-A197   | DAM-7C2S-1AHN-A191-A197   |
| DA         | 11W1   | DAM-11C1S-1ATN-A191-A197  | DAM-11C1S-1A9N-A191-A197  | DAM-11C1S-1A5N-A191-A197  | DAM-11C1S-1AFN-A191-A197  | DAM-11C1S-1APN-A191-A197  | DAM-11C1S-1AHN-A191-A197  |
| DA         | 3W3    | DAM-3C3S-1ATN-A191-A197   | DAM-3C3S-1A9N-A191-A197   | DAM-3C3S-1A5N-A191-A197   | DAM-3C3S-1AFN-A191-A197   | DAM-3C3S-1APN-A191-A197   | DAM-3C3S-1AHN-A191-A197   |
| DA         | 3WK3   | DAM-3CK3S-1ATN-A191-A197  | DAM-3CK3S-1A9N-A191-A197  | DAM-3CK3S-1A5N-A191-A197  | DAM-3CK3S-1AFN-A191-A197  | DAM-3CK3S-1APN-A191-A197  | DAM-3CK3S-1AHN-A191-A197  |
| DB         | 5W5    | DBM-5C5S-1ATN-A191-A197   | DBM-5C5S-1A9N-A191-A197   | DBM-5C5S-1A5N-A191-A197   | DBM-5C5S-1AFN-A191-A197   | DBM-5C5S-1APN-A191-A197   | DBM-5C5S-1AHN-A191-A197   |
| DB         | 9W4    | DBM-9C4S-1ATN-A191-A197   | DBM-9C4S-1A9N-A191-A197   | DBM-9C4S-1A5N-A191-A197   | DBM-9C4S-1AFN-A191-A197   | DBM-9C4S-1APN-A191-A197   | DBM-9C4S-1AHN-A191-A197   |
| DB         | 13W3   | DBM-13C3S-1ATN-A191-A197  | DBM-13C3S-1A9N-A191-A197  | DBM-13C3S-1A5N-A191-A197  | DBM-13C3S-1AFN-A191-A197  | DBM-13C3S-1APN-A191-A197  | DBM-13C3S-1AHN-A191-A197  |
| DB         | 17W2   | DBM-17C5S-1ATN-A191-A197  | DBM-17C5S-1A9N-A191-A197  | DBM-17C5S-1A5N-A191-A197  | DBM-17C5S-1AFN-A191-A197  | DBM-17C5S-1APN-A191-A197  | DBM-17C5S-1AHN-A191-A197  |
| DB         | 21W1   | DBM-21C1S-1ATN-A191-A197  | DBM-21C1S-1A9N-A191-A197  | DBM-21C1S-1A5N-A191-A197  | DBM-21C1S-1AFN-A191-A197  | DBM-21C1S-1APN-A191-A197  | DBM-21C1S-1AHN-A191-A197  |
| DC         | 8W8    | DCM-8C8S-1ATN-A191-A197   | DCM-8C8S-1A9N-A191-A197   | DCM-8C8S-1A5N-A191-A197   | DCM-8C8S-1AFN-A191-A197   | DCM-8C8S-1APN-A191-A197   | DCM-8C8S-1AHN-A191-A197   |
| DC         | 13W6   | DCM-13C6S-1ATN-A191-A197  | DCM-13C6S-1A9N-A191-A197  | DCM-13C6S-1A5N-A191-A197  | DCM-13C6S-1AFN-A191-A197  | DCM-13C6S-1APN-A191-A197  | DCM-13C6S-1AHN-A191-A197  |
| DC         | 17W5   | DCM-17C5S-1ATN-A191-A197  | DCM-17C5S-1A9N-A191-A197  | DCM-17C5S-1A5N-A191-A197  | DCM-17C5S-1AFN-A191-A197  | DCM-17C5S-1APN-A191-A197  | DCM-17C5S-1AHN-A191-A197  |
| DC         | 21W4   | DCM-21CA4S-1ATN-A191-A197 | DCM-21CA4S-1A9N-A191-A197 | DCM-21CA4S-1A5N-A191-A197 | DCM-21CA4S-1AFN-A191-A197 | DCM-21CA4S-1APN-A191-A197 | DCM-21CA4S-1AHN-A191-A197 |
| DC         | 25W3   | DCM-25C3S-1ATN-A191-A197  | DCM-25C3S-1A9N-A191-A197  | DCM-25C3S-1A5N-A191-A197  | DCM-25C3S-1AFN-A191-A197  | DCM-25C3S-1APN-A191-A197  | DCM-25C3S-1AHN-A191-A197  |
| DC         | 27W2   | DCM-27C2S-1ATN-A191-A197  | DCM-27C2S-1A9N-A191-A197  | DCM-27C2S-1A5N-A191-A197  | DCM-27C2S-1AFN-A191-A197  | DCM-27C2S-1APN-A191-A197  | DCM-27C2S-1AHN-A191-A197  |

For performance class 1 replace A191 with A190.  
For performance class 3 delete A191.



For 50 ohm coaxial replace C with X, Example:  
DCM-13C6S-1AFN-A191-A197-146 becomes  
DCM-13X6S-1AFN-A191-A197-146.

For 3,0 mm pushfit add -146 modifier,  
For 3,2 mm pushfit add -162 modifier.

## Receptacle

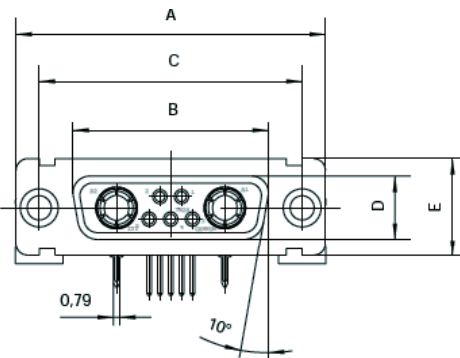

- For contact cavity arrangements, see page 62.
- For pcb hole pattern, see pages 74-75.
- For mounting methods, see pages 59-60.

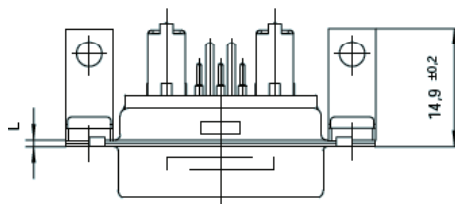

## Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | W<br>± 0,25 (.010) | L<br>± 0,38 (.015) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| DE         | 30,8 (1.213)       | 16,35 (.644)       | 25 (.984)          | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,95 (.274)        | 0,8 (.031)         |
| DA         | 39,15 (1.541)      | 24,65 (.970)       | 33,33 (1.311)      | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,95 (.274)        | 0,8 (.031)         |
| DB         | 53,05 (2.089)      | 38,4 (1.512)       | 47,05 (1.852)      | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,95 (.274)        | 0,8 (.031)         |
| DC         | 69,3 (2.728)       | 54,85 (2.159)      | 63,5 (2.5)         | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,95 (.274)        | 0,8 (.031)         |

Dimensions shown in mm

Specifications and dimensions subject to change

www.ittcannon.com



## Coaxial straight PCB Plug, sizes DE – DD



75 Ohm\* coax inserted with straight contacts  
and standoff with UNC 4-40 thread

| Shell size | Layout | 75 OHM INDUSTRIAL     |                    | 50 OHM MILITARY/HI-REL |                        | NON-MAGNETIC/LOW OUTGASSING*** |                       |
|------------|--------|-----------------------|--------------------|------------------------|------------------------|--------------------------------|-----------------------|
|            |        | P/N without Boardlock | P/N with Boardlock | P/N without Boardlock  | P/N with UNC Boardlock | P/N with Cadmium Plating       | P/N with Gold Plating |
| DE         | 2W2    | DEMV2C2P-NK87         | DEMZ2C2P-NK87      | DEMMV2X2P-N            | DEMMZ2X2P-N            | DEMV2X2P-NNMB                  | DEMZ2X2P-NNMBK52      |
| DE         | 2WK2   | DEMV2CK2P-NK87        | DEMZ2CK2P-NK87     | DEMMV2XK2P-N           | DEMMZ2XK2P-N           | DEMV2XK2P-NNMB                 | DEMZ2XK2P-NNMBK52     |
| DE         | 5W1    | DEMV5C1P-NK87         | DEMZ5C1P-NK87      | DEMMV5X1P-N            | DEMMZ5X12P-N           | DEMV5X1P-NNMB                  | DEMZ5X1P-NNMBK52      |
| DA         | 7W2    | DAMV7C2P-NK87         | DAMZ7C2P-NK87      | DAMMV7X2P-N            | DAMMZ7X2P-N            | DAMV7X2P-NNMB                  | DAMZ7X2P-NNMBK52      |
| DA         | 7W2    | DAMV7C2P-NAK87        | DAMZ7C2P-NAK87     | DAMMV7X2P-N            | DAMMZ7X2P-N            | DAMV7X2P-NNMB                  | DAMZ7X2P-NNMBK52      |
| DA         | 11W1   | DAMV11C1P-NK87        | DAMZ11C1P-NK87     | DAMMV11X1P-N           | DAMMZ11X1P-N           | DAMV11X1P-NNMB                 | DAMZ11X1P-NNMBK52     |
| DA         | 3W3    | DAMV3C3P-NK87         | DAMZ3C3P-NK87      | DAMMV3X3P-N            | DAMMZ3X3P-N            | DAMV3X3P-NNMB                  | DAMZ3X3P-NNMBK52      |
| DA         | 3WK3   | DAMV3CK3P-NK87        | DAMZ3CK3P-NK87     | DAMMV3XK3P-N           | DAMMZ3XK3P-N           | DAMV3XK3P-NNMB                 | DAMZ3XK3P-NNMBK52     |
| DB         | 5W5    | DBMV5C5P-NK87         | DBMZ5C5P-NK87      | DBMMV5X5P-N            | DBMMZ5X5P-N            | DBMV5X5P-NNMB                  | DBMZ5X5P-NNMBK52      |
| DB         | 9W4    | DBMV9C4P-NK87         | DBMZ9C4P-NK87      | DBMMV9X4P-N            | DBMMZ9X4P-N            | DBMV9X4P-NNMB                  | DBMZ9X4P-NNMBK52      |
| DB         | 13W3   | DBMV13C3P-NK87        | DBMZ13C3P-NK87     | DBMMV13X3P-N           | DBMMZ13X3P-N           | DBMV13X3P-NNMB                 | DBMZ13X3P-NNMBK52     |
| DB         | 17W2   | DBMV17C2P-NK87        | DBMZ17C2P-NK87     | DBMMV17X2P-N           | DBMMZ17X2P-N           | DBMV17X2P-NNMB                 | DBMZ17X2P-NNMBK52     |
| DB         | 21W1   | DBMV21C1P-NK87        | DBMZ21C1P-NK87     | DBMMV21X1P-N           | DBMMZ21X1P-N           | DBMV21X1P-NNMB                 | DBMZ21X1P-NNMBK52     |
| DC         | 8W8    | DCMV8C8P-NK87         | DCMZ8C8P-NK87      | DCMMV8X8P-N            | DCMMZ8X8P-N            | DCMV8X8P-NNMB                  | DCMZ8X8P-NNMBK52      |
| DC         | 13W6   | DCMV13C6P-NK87        | DCMZ13C6P-NK87     | DCMMV13X6P-N           | DCMMZ13X6P-N           | DCMV13X6P-NNMB                 | DCMZ13X6P-NNMBK52     |
| DC         | 17W5   | DCMV17C5P-NK87        | DCMZ17C5P-NK87     | DCMMV17X5P-N           | DCMMZ17X5P-N           | DCMV17X5P-NNMB                 | DCMZ17X5P-NNMBK52     |
| DC         | 21WA4  | DCMV21CA4P-NK87       | DCMZ21CA4P-NK87    | DCMMV21XA4P-N          | DCMMZ21XA4P-N          | DCMV21XA4P-NNMB                | DCMZ21XA4P-NNMBK52    |
| DC         | 25W3   | DCMV25C3P-NK87        | DCMZ25C3P-NK87     | DCMMV25X3P-N           | DCMMZ25X3P-N           | DCMV25X3P-NNMB                 | DCMZ25X3P-NNMBK52     |
| DC         | 27W2   | DCMV27C2P-NK87        | DCMZ27C2P-NK87     | DCMMV27X2P-N           | DCMMZ27X2P-N           | DCMV27X2P-NNMB                 | DCMZ27X2P-NNMBK52     |
| DD         | 24W7   | DDMV24C7P-NK87        | DDMZ24C7P-NK87     | DDMMV24X7P-N           | DDMMZ24X7P-N           | DDMV24X7P-NNMB                 | DDMZ24X7P-NNMBK52     |
| DD         | 36W4   | DDMV36C4P-NK87        | DDMZ36C4P-NK87     | DDMMV36X4P-N           | DDMMZ36X4P-N           | DDMV36X4P-NNMB                 | DDMZ36X4P-NNMBK52     |
| DD         | 43W2   | DDMV43C2P-NK87        | DDMZ43C2P-NK87     | DDMMV43X2P-N           | DDMMZ43X2P-N           | DDMV43X2P-NNMB                 | DDMZ43X2P-NNMBK52     |
| DD         | 47W1   | DDMV47C1P-NK87        | DDMZ47C1P-NK87     | DDMMV47X1P-N           | DDMMZ47X1P-N           | DDMV47X1P-NNMB                 | DDMZ47X1P-NNMBK52     |

\* For 50 ohm coaxial inserts replace C with X, e.g.:DEMZ43C2P-N becomes DDMZ43X2P-N. For M-3 and other hardware options, see part number designator, page 7.

\*\*\* Hardware Modifier not allowed with Non Magnetic/ Low Outgassing Combo-D- Contact factory for more information



## Plug



Screw lock, boardlock, and signal contacts removed for clarity

For contact cavity arrangements, see page 61.

- For pcb hole pattern, see pages 76-78.
- For mounting methods, see pages 59-60.

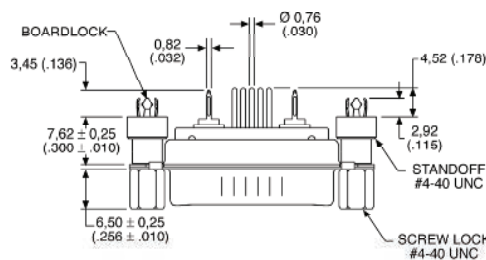

Screw lock, boardlock, and coaxial contact removed for clarity

## Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | W<br>± 0,368 (.0145) | W<br>± 0,41 (.016) | L<br>± 0,25 (.010) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|----------------------|--------------------|--------------------|
| DE         | 30,81 (1.213)      | 16,92 (.665)       | 24,99 (.984)       | 8,36 (.329)        | 12,55 (.494)       | 10,72 (.422)       | 6,693 (.2635)        | —                  | 0,76 (.030)        |
| DA         | 39,14 (1.541)      | 25,25 (.994)       | 33,32 (1.312)      | 8,36 (.329)        | 12,55 (.494)       | 10,72 (.422)       | 6,693 (.2635)        | —                  | 0,76 (.030)        |
| DB         | 53,04 (2.088)      | 38,96 (1.534)      | 47,04 (1.852)      | 8,36 (.329)        | 12,55 (.494)       | 10,82 (.426)       | —                    | 6,84 (.269)        | 0,99 (.039)        |
| DC         | 69,32 (2.729)      | 55,42 (2.182)      | 63,50 (2.500)      | 8,36 (.329)        | 12,55 (.494)       | 10,82 (.426)       | —                    | 6,84 (.269)        | 0,99 (.039)        |
| DD         | 66,93 (2.635)      | 52,81 (2.079)      | 61,11 (2.406)      | 11,07 (.436)       | 15,37 (.605)       | 10,82 (.426)       | 6,84 (.269)          | 0,99 (.039)        | —                  |



Dimensions shown in mm  
Specifications and dimensions subject to change

www.ittcannon.com



# Coaxial straight PCB Receptacle, sizes DE – DD

75 Ohm\* coax inserted with straight contacts  
and standoff with UNC 4-40 thread

| Shell size | Layout | 75 OHM INDUSTRIAL     |                    | 50 OHM MILITARY/HI-REL |                        | 50 OHM NON-MAGNETIC/LOW OUTGASSING*** |                       |
|------------|--------|-----------------------|--------------------|------------------------|------------------------|---------------------------------------|-----------------------|
|            |        | P/N without Boardlock | P/N with Boardlock | P/N without Boardlock  | P/N with UNC Boardlock | P/N with Cadmium Plating              | P/N with Gold Plating |
| DE         | 2W2    | DEMV2C2S-NA197        | DEMZ2C2S-NA197     | DEMMV2X2S-N            | DEMMZ2X2S-N            | DEM2X2S-NNMB                          | DEM2X2S-NNMBK52       |
| DE         | 2WK2   | DEMV2CK2S-NA197       | DEMZ2CK2S-NA197    | DEMMV2XK2S-N           | DEMMZ2XK2S-N           | DEM2XK2S-NNMB                         | DEM2XK2S-NNMBK52      |
| DE         | 5W1    | DEMV5C1S-NA197        | DEMZ5C1S-NA197     | DEMMV5X1S-N            | DEMMZ5X1S-N            | DEM5X1S-NNMB                          | DEM5X1S-NNMBK52       |
| DA         | 7W2    | DAMV7C2S-NA197        | DAMZ7C2S-NA197     | DAMMV7X2S-N            | DAMMZ7X2S-N            | DAM7X2S-NNMB                          | DAM7X2S-NNMBK52       |
| DA         | 11W1   | DAMV11C1S-NA197       | DAMZ11C1S-NA197    | DAMMV11X1S-N           | DAMMZ11X1S-N           | DAM11X1S-NNMB                         | DAM11X1S-NNMBK52      |
| DA         | 3W3    | DAMV3C3S-NA197        | DAMZ3C3S-NA197     | DAMMV3X3S-N            | DAMMZ3X3S-N            | DAM3X3S-NNMB                          | DAM3X3S-NNMBK52       |
| DA         | 3WK3   | DAMV3CK3S-NA197       | DAMZ3CK3S-NA197    | DAMMV3XK3S-N           | DAMMZ3XK3S-N           | DAM3XK3S-NNMB                         | DAM3XK3S-NNMBK52      |
| DB         | 5W5    | DBMV5C5S-NA197        | DBMZ5C5S-NA197     | DBMMV5X5S-N            | DBMMZ5X5S-N            | DBM5X5S-NNMB                          | DBM5X5S-NNMBK52       |
| DB         | 9W4    | DBMV9C4S-NA197        | DBMZ9C4S-NA197     | DBMMV9X4S-N            | DBMMZ9X4S-N            | DBM9X4S-NNMB                          | DBM9X4S-NNMBK52       |
| DB         | 13W3   | DBMV13C3S-NA197       | DBMZ13C3S-NA197    | DBMMV13X3S-N           | DBMMZ13X3S-N           | DBM13X3S-NNMB                         | DBM13X3S-NNMBK52      |
| DB         | 17W2   | DBMV17C2S-NA197       | DBMZ17C2S-NA197    | DBMMV17X2S-N           | DBMMZ17X2S-N           | DBM17X2S-NNMB                         | DBM17X2S-NNMBK52      |
| DB         | 21W1   | DBMV21C1S-NA197       | DBMZ21C1S-NA197    | DBMMV21X1S-N           | DBMMZ21X1S-N           | DBM21X1S-NNMB                         | DBM21X1S-NNMBK52      |
| DC         | 8W8    | DCMV8C8S-NA197        | DCMZ8C8S-NA197     | DCMMV8X8S-N            | DCMMZ8X8S-N            | DCM8X8S-NNMB                          | DCM8X8S-NNMBK52       |
| DC         | 13W6   | DCMV13C6S-NA197       | DCMZ13C6S-NA197    | DCMMV13X6S-N           | DCMMZ13X6S-N           | DCM13X6S-NNMB                         | DCM13X6S-NNMBK52      |
| DC         | 17W5   | DCMV17C5S-NA197       | DCMZ17C5S-NA197    | DCMMV17X5S-N           | DCMMZ17X5S-N           | DCM17X5S-NNMB                         | DCM17X5S-NNMBK52      |
| DC         | 21WA4  | DCMV21CA4S-NA197      | DCMZ21CA4S-NA197   | DCMMV21XA4S-N          | DCMMZ21XA4S-N          | DCM21XA4S-NNMB                        | DCM21XA4S-NNMBK52     |
| DC         | 25W3   | DCMV25C3S-NA197       | DCMZ25C3S-NA197    | DCMMV25X3S-N           | DCMMZ25X3S-N           | DCM25X3S-NNMB                         | DCM25X3S-NNMBK52      |
| DC         | 27W2   | DCMV27C2S-NA197       | DCMZ27C2S-NA197    | DCMMV27X2S-N           | DCMMZ27X2S-N           | DCM27X2S-NNMB                         | DCM27X2S-NNMBK52      |
| DD         | 24W7   | DDMV24C7S-NA197       | DDMZ24C7S-NA197    | DDMMV24X7S-N           | DDMMZ24X7S-N           | DDM24X7S-NNMB                         | DDM24X7S-NNMBK52      |
| DD         | 36W4   | DDMV36C4S-NA197       | DDMZ36C4S-NA197    | DDMMV36X4S-N           | DDMMZ36X4S-N           | DDM36X4S-NNMB                         | DDM36X4S-NNMBK52      |
| DD         | 43W2   | DDMV43C2S-NA197       | DDMZ43C2S-NA197    | DDMMV43X2S-N           | DDMMZ43X2S-N           | DDM43X2S-NNMB                         | DDM43X2S-NNMBK52      |
| DD         | 47W1   | DDMV47C1S-NA197       | DDMZ47C1S-NA197    | DDMMV47X1S-N           | DDMMZ47X1S-N           | DDM47X1S-NNMB                         | DDM47X1S-NNMBK52      |



\* For 50 ohm coaxial inserts replace C with X, e.g.:DDMZ43C2S-N becomes DDMZ43X2S-J. \*\*For M-3 and other hardware options, see part number designator, page 7.

\*\*\* Hardware Modifier not allowed with Non Magnetic/ Low Outgassing Combo-D- Contact factory for more information


## Receptacle



- For contact cavity arrangements, see page 62.
- For pcb hole pattern, see pages 79-81.
- For mounting methods, see pages 59-60.

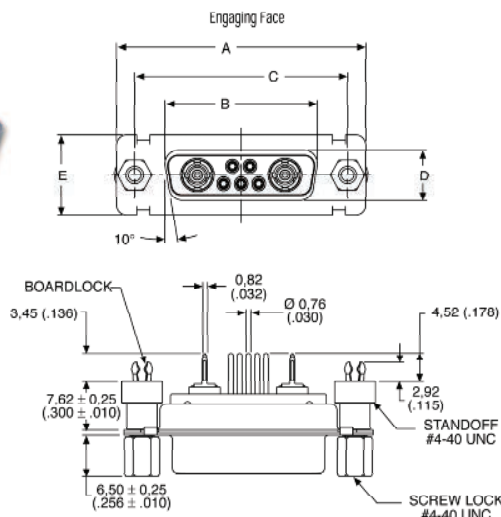

Hardware and signal contacts removed for clarity



Hardware and coaxial contact removed for clarity

## Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | W<br>± 0,38 (.015) | L<br>± 0,25 (.010) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| DE         | 30,81 (1.213)      | 16,33 (.643)       | 24,99 (.984)       | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,94 (.273)        | 0,76 (.030)        |
| DA         | 39,14 (1.541)      | 24,65 (.971)       | 33,32 (1.312)      | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,94 (.273)        | 0,76 (.030)        |
| DB         | 53,04 (2.088)      | 38,38 (1.511)      | 47,04 (1.852)      | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,94 (.273)        | 0,76 (.030)        |
| DC         | 69,32 (2.729)      | 54,84 (2.159)      | 63,50 (2.500)      | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,94 (.273)        | 0,76 (.030)        |
| DD         | 66,93 (2.635)      | 52,42 (2.064)      | 61,11 (2.406)      | 10,74 (.423)       | 15,37 (.605)       | 10,90 (.429)       | 6,94 (.273)        | 0,76 (.030)        |

Dimensions shown in mm

Specifications and dimensions subject to change

www.ittcannon.com

## Coaxial straight- European solder pins, sizes DE – DD

75 Ohm\* coax inserted with straight contacts





| Shell | Layout | with standoff M3 with pushfit | with standoff M3 with pushfit | standoff, M3 post and    | with M3 clinch nut       | with through hole 3,05 mm |
|-------|--------|-------------------------------|-------------------------------|--------------------------|--------------------------|---------------------------|
| DE    | 2W2    | DEMT-2C2P-OL4-A191-K87        | DEMQ-2C2P-OL4-A191-K87        | DEMU-2C2P-OL4-A191-K87   | DEMX-2C2P-OL4-A191-K87   | DEM-2C2P-OL4-A191-K87     |
| DE    | 2WK2   | DEMT-2CK2P-OL4-A191-K87       | DEMQ-2CK2P-OL4-A191-K87       | DEMU-2CK2P-OL4-A191-K87  | DEMX-2CK2P-OL4-A191-K87  | DEM-2CK2P-OL4-A191-K87    |
| DE    | 5W1    | DEMT-5C1P-OL4-A191-K87        | DEMQ-5C1P-OL4-A191-K87        | DEMU-5C1P-OL4-A191-K87   | DEMX-5C1P-OL4-A191-K87   | DEM-5C1P-OL4-A191-K87     |
| DA    | 7W2    | DAMT-7C2P-OL4-A191-K87        | DAMQ-7C2P-OL4-A191-K87        | DAMU-7C2P-OL4-A191-K87   | DAMX-7C2P-OL4-A191-K87   | DAM-7C2P-OL4-A191-K87     |
| DA    | 11W1   | DAMT-11C1P-OL4-A191-K87       | DAMQ-11C1P-OL4-A191-K87       | DAMU-11C1P-OL4-A191-K87  | DAMX-11C1P-OL4-A191-K87  | DAM-11C1P-OL4-A191-K87    |
| DA    | 3W3    | DAMT-3C3P-OL4-A191-K87        | DAMQ-3C3P-OL4-A191-K87        | DAMU-3C3P-OL4-A191-K87   | DAMX-3C3P-OL4-A191-K87   | DAM-3C3P-OL4-A191-K87     |
| DA    | 3WK3   | DAMT-3CK3P-OL4-A191-K87       | DAMQ-3CK3P-OL4-A191-K87       | DAMU-3CK3P-OL4-A191-K87  | DAMX-3CK3P-OL4-A191-K87  | DAM-3CK3P-OL4-A191-K87    |
| DB    | 5W5    | DBMT-5C5P-OL4-A191-K87        | DBMQ-5C5P-OL4-A191-K87        | DBMU-5C5P-OL4-A191-K87   | DBMX-5C5P-OL4-A191-K87   | DBM-5C5P-OL4-A191-K87     |
| DB    | 9W4    | DBMT-9C4P-OL4-A191-K87        | DBMQ-9C4P-OL4-A191-K87        | DBMU-9C4P-OL4-A191-K87   | DBMX-9C4P-OL4-A191-K87   | DBM-9C4P-OL4-A191-K87     |
| DB    | 13W3   | DBMT-13C3P-OL4-A191-K87       | DBMQ-13C3P-OL4-A191-K87       | DBMU-13C3P-OL4-A191-K87  | DBMX-13C3P-OL4-A191-K87  | DBM-13C3P-OL4-A191-K87    |
| DB    | 17W2   | DBMT-17C2P-OL4-A191-K87       | DBMQ-17C2P-OL4-A191-K87       | DBMU-17C2P-OL4-A191-K87  | DBMX-17C2P-OL4-A191-K87  | DBM-17C2P-OL4-A191-K87    |
| DB    | 21W1   | DBMT-21C1P-OL4-A191-K87       | DBMQ-21C1P-OL4-A191-K87       | DBMU-21C1P-OL4-A191-K87  | DBMX-21C1P-OL4-A191-K87  | DBM-21C1P-OL4-A191-K87    |
| DC    | 8W8    | DCMT-8C8P-OL4-A191-K87        | DCMQ-8C8P-OL4-A191-K87        | DCMU-8C8P-OL4-A191-K87   | DCMX-8C8P-OL4-A191-K87   | DCM-8C8P-OL4-A191-K87     |
| DC    | 13W6   | DCMT-13C6P-OL4-A191-K87       | DCMQ-13C6P-OL4-A191-K87       | DCMU-13C6P-OL4-A191-K87  | DCMX-13C6P-OL4-A191-K87  | DCM-13C6P-OL4-A191-K87    |
| DC    | 17W5   | DCMT-17C5P-OL4-A191-K87       | DCMQ-17C5P-OL4-A191-K87       | DCMU-17C5P-OL4-A191-K87  | DCMX-17C5P-OL4-A191-K87  | DCM-17C5P-OL4-A191-K87    |
| DC    | 21WA4  | DCMT-21CA4P-OL4-A191-K87      | DCMQ-21CA4P-OL4-A191-K87      | DCMU-21CA4P-OL4-A191-K87 | DCMX-21CA4P-OL4-A191-K87 | DCM-21CA4P-OL4-A191-K87   |
| DC    | 25W3   | DCMT-25C3P-OL4-A191-K87       | DCMQ-25C3P-OL4-A191-K87       | DCMU-25C3P-OL4-A191-K87  | DCMX-25C3P-OL4-A191-K87  | DCM-25C3P-OL4-A191-K87    |
| DC    | 27W2   | DCMT-27C2P-OL4-A191-K87       | DCMQ-27C2P-OL4-A191-K87       | DCMU-27C2P-OL4-A191-K87  | DCMX-27C2P-OL4-A191-K87  | DCM-27C2P-OL4-A191-K87    |
| DD    | 24W7   | DDMT-24C7P-OL4-A191-K87       | DDMQ-24C7P-OL4-A191-K87       | DDMU-24C7P-OL4-A191-K87  | DDMX-24C7P-OL4-A191-K87  | DDM-24C7P-OL4-A191-K87    |
| DD    | 36W4   | DDMT-36C4P-OL4-A191-K87       | DDMQ-36C4P-OL4-A191-K87       | DDMU-36C4P-OL4-A191-K87  | DDMX-36C4P-OL4-A191-K87  | DDM-36C4P-OL4-A191-K87    |
| DD    | 43W2   | DDMT-43C2P-OL4-A191-K87       | DDMQ-43C2P-OL4-A191-K87       | DDMU-43C2P-OL4-A191-K87  | DDMX-43C2P-OL4-A191-K87  | DDM-43C2P-OL4-A191-K87    |
| DD    | 47W1   | DDMT-47C1P-OL4-A191-K87       | DDMQ-47C1P-OL4-A191-K87       | DDMU-47C1P-OL4-A191-K87  | DDMX-47C1P-OL4-A191-K87  | DDM-47C1P-OL4-A191-K87    |

For performance class 1 replace A191 with A190.  
For Performance class 3 delete A191.

For 50 ohm coaxial replace C with X, Example:  
DCM-13C6P-A191-K87-146 becomes  
DCM-13X6P-A191-K87-146.

For 3,0 mm pushfit please add -146 modifier;  
For 3,2 mm pushfit please add -162 modifier.

## Plug

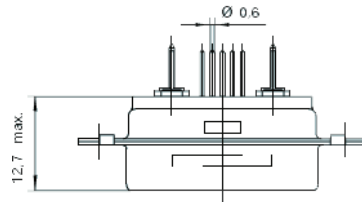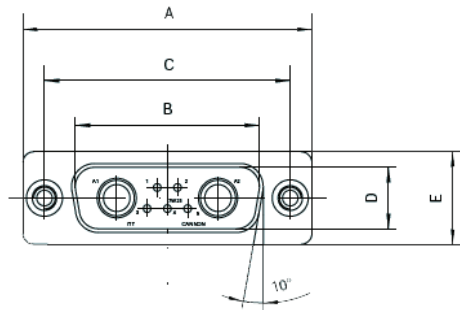

- For contact cavity arrangements, see page 61.
- For pcb hole pattern, see pages 76-78.
- For mounting methods, see pages 59-60.

## Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | L<br>± 0,2 (.008) | W<br>± 0,41 (.016) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|-------------------|--------------------|
| DE         | 30,8 (1.213)       | 16,9 (.665)        | 25 (.984)          | 8,35 (.329)        | 12,55 (.494)       | 10,70 (.421)       | 0,8 (.031)        | 6,7 (.264)         |
| DA         | 39,15 (1.541)      | 25,25 (.994)       | 33,3 (1.311)       | 8,35 (.329)        | 12,55 (.494)       | 10,70 (.421)       | 0,8 (.031)        | 6,7 (.264)         |
| DB         | 53,05 (2.089)      | 38,95 (1.533)      | 47,05 (1.852)      | 8,35 (.329)        | 12,55 (.494)       | 10,80 (.425)       | 0,8 (.031)        | 6,8 (.268)         |
| DC         | 69,3 (2.089)       | 55,4 (2.181)       | 63,50 (2.500)      | 8,35 (.329)        | 12,55 (.494)       | 10,80 (.425)       | 0,9 (.035)        | 6,8 (.268)         |
| DD         | 66,95 (2.636)      | 52,8 (2.079)       | 61,11 (2.406)      | 11,1 (.437)        | 15,4 (.606)        | 10,80 (.425)       | 0,9 (.035)        | 6,85 (.270)        |



Dimensions shown in mm  
Specifications and dimensions subject to change

www.ittcannon.com

# Coaxial straight- European solder socket, sizes DE – DD

75 Ohm\* coax inserted with straight contacts


| Shell | Layout | with standoff M3 pushfit  | with standoff M3 with pushfit | standoff, M3 post and     | with M3 clinch nut        | with through hole 3,05 mm |
|-------|--------|---------------------------|-------------------------------|---------------------------|---------------------------|---------------------------|
| DE    | 2W2    | DEMT-2C2S-OL4-A191-A197   | DEMQ-2C2S-OL4-A191-A197       | DEMU-2C2S-OL4-A191-A197   | DEMX-2C2S-OL4-A191-A197   | DEM-2C2S-OL4-A191-A197    |
| DE    | 2WK2   | DEMT-2CK2S-OL4-A191-A197  | DEMQ-2CK2S-OL4-A191-A197      | DEMU-2CK2S-OL4-A191-A197  | DEMX-2CK2S-OL4-A191-A197  | DEM-2CK2S-OL4-A191-A197   |
| DE    | 5W1    | DEMT-5C1S-OL4-A191-A197   | DEMQ-5C1S-OL4-A191-A197       | DEMU-5C1S-OL4-A191-A197   | DEMX-5C1S-OL4-A191-A197   | DEM-5C1S-OL4-A191-A197    |
| DA    | 7W2    | DAMT-7C2S-OL4-A191-A197   | DAMQ-7C2S-OL4-A191-A197       | DAMU-7C2S-OL4-A191-A197   | DAMX-7C2S-OL4-A191-A197   | DAM-7C2S-OL4-A191-A197    |
| DA    | 11W1   | DAMT-11C1S-OL4-A191-A197  | DAMQ-11C1S-OL4-A191-A197      | DAMU-11C1S-OL4-A191-A197  | DAMX-11C1S-OL4-A191-A197  | DAM-11C1S-OL4-A191-A197   |
| DA    | 3W3    | DAMT-3C3S-OL4-A191-A197   | DAMQ-3C3S-OL4-A191-A197       | DAMU-3C3S-OL4-A191-A197   | DAMX-3C3S-OL4-A191-A197   | DAM-3C3S-OL4-A191-A197    |
| DA    | 3WK3   | DAMT-3CK3S-OL4-A191-A197  | DAMQ-3CK3S-OL4-A191-A197      | DAMU-3CK3S-OL4-A191-A197  | DAMX-3CK3S-OL4-A191-A197  | DAM-3CK3S-OL4-A191-A197   |
| DB    | 5W5    | DBMT-5C5S-OL4-A191-A197   | DBMQ-5C5S-OL4-A191-A197       | DBMU-5C5S-OL4-A191-A197   | DBMX-5C5S-OL4-A191-A197   | DBM-5C5S-OL4-A191-A197    |
| DB    | 9W4    | DBMT-9C4S-OL4-A191-A197   | DBMQ-9C4S-OL4-A191-A197       | DBMU-9C4S-OL4-A191-A197   | DBMX-9C4S-OL4-A191-A197   | DBM-9C4S-OL4-A191-A197    |
| DB    | 13W3   | DBMT-13C3S-OL4-A191-A197  | DBMQ-13C3S-OL4-A191-A197      | DBMU-13C3S-OL4-A191-A197  | DBMX-13C3S-OL4-A191-A197  | DBM-13C3S-OL4-A191-A197   |
| DB    | 17W2   | DBMT-17C2S-OL4-A191-A197  | DBMQ-17C2S-OL4-A191-A197      | DBMU-17C2S-OL4-A191-A197  | DBMX-17C2S-OL4-A191-A197  | DBM-17C2S-OL4-A191-A197   |
| DB    | 21W1   | DBMT-21C1S-OL4-A191-A197  | DBMQ-21C1S-OL4-A191-A197      | DBMU-21C1S-OL4-A191-A197  | DBMX-21C1S-OL4-A191-A197  | DBM-21C1S-OL4-A191-A197   |
| DC    | 8W8    | DCMT-8C8S-OL4-A191-A197   | DCMQ-8C8S-OL4-A191-A197       | DCMU-8C8S-OL4-A191-A197   | DCMX-8C8S-OL4-A191-A197   | DCM-8C8S-OL4-A191-A197    |
| DC    | 13W6   | DCMT-13C6S-OL4-A191-A197  | DCMQ-13C6S-OL4-A191-A197      | DCMU-13C6S-OL4-A191-A197  | DCMX-13C6S-OL4-A191-A197  | DCM-13C6S-OL4-A191-A197   |
| DC    | 17W5   | DCMT-17C5S-OL4-A191-A197  | DCMQ-17C5S-OL4-A191-A197      | DCMU-17C5S-OL4-A191-A197  | DCMX-17C5S-OL4-A191-A197  | DCM-17C5S-OL4-A191-A197   |
| DC    | 21WA4  | DCMT-21CA4S-OL4-A191-A197 | DCMQ-21CA4S-OL4-A191-A197     | DCMU-21CA4S-OL4-A191-A197 | DCMX-21CA4S-OL4-A191-A197 | DCM-21CA4S-OL4-A191-A197  |
| DC    | 25W3   | DCMT-25C3S-OL4-A191-A197  | DCMQ-25C3S-OL4-A191-A197      | DCMU-25C3S-OL4-A191-A197  | DCMX-25C3S-OL4-A191-A197  | DCM-25C3S-OL4-A191-A197   |
| DC    | 27W2   | DCMT-27C2S-OL4-A191-A197  | DCMQ-27C2S-OL4-A191-A197      | DCMU-27C2S-OL4-A191-A197  | DCMX-27C2S-OL4-A191-A197  | DCM-27C2S-OL4-A191-A197   |
| DD    | 24W7   | DDMT-24C7S-OL4-A191-A197  | DDMQ-24C7S-OL4-A191-A197      | DDMU-24C7S-OL4-A191-A197  | DDMX-24C7S-OL4-A191-A197  | DDM-24C7S-OL4-A191-A197   |
| DD    | 36W4   | DDMT-36C4S-OL4-A191A197   | DDMQ-36C4S-OL4-A191-A197      | DDMU-36C4S-OL4-A191-A197  | DDMX-36C4S-OL4-A191-A197  | DDM-36C4S-OL4-A191-A197   |
| DD    | 43W2   | DDMT-43C2S-OL4-A191-A197  | DDMQ-43C2S-OL4-A191-A197      | DDMU-43C2S-OL4-A191-A197  | DDMX-43C2S-OL4-A191-A197  | DDM-43C2S-OL4-A191-A197   |
| DD    | 47W1   | DDMT-47C1S-OL4-A191-A197  | DDMQ-47C1S-OL4-A191-A197      | DDMU-47C1S-OL4-A191-A197  | DDMX-47C1S-OL4-A191-A197  | DDM-47C1S-OL4-A191A197    |

For performance class 1 replace A191 with A190.  
For Performance class 3 delete A191.

For 50 ohm coaxial replace C with X, Example:  
DCM-13C6S-A191-A197-146 becomes  
DCM-13X6S-A191-A197-146.

For 3,0 mm pushfit please add -142 modifier;  
For 3,2 mm pushfit please add -162 modifier.

## Receptacle

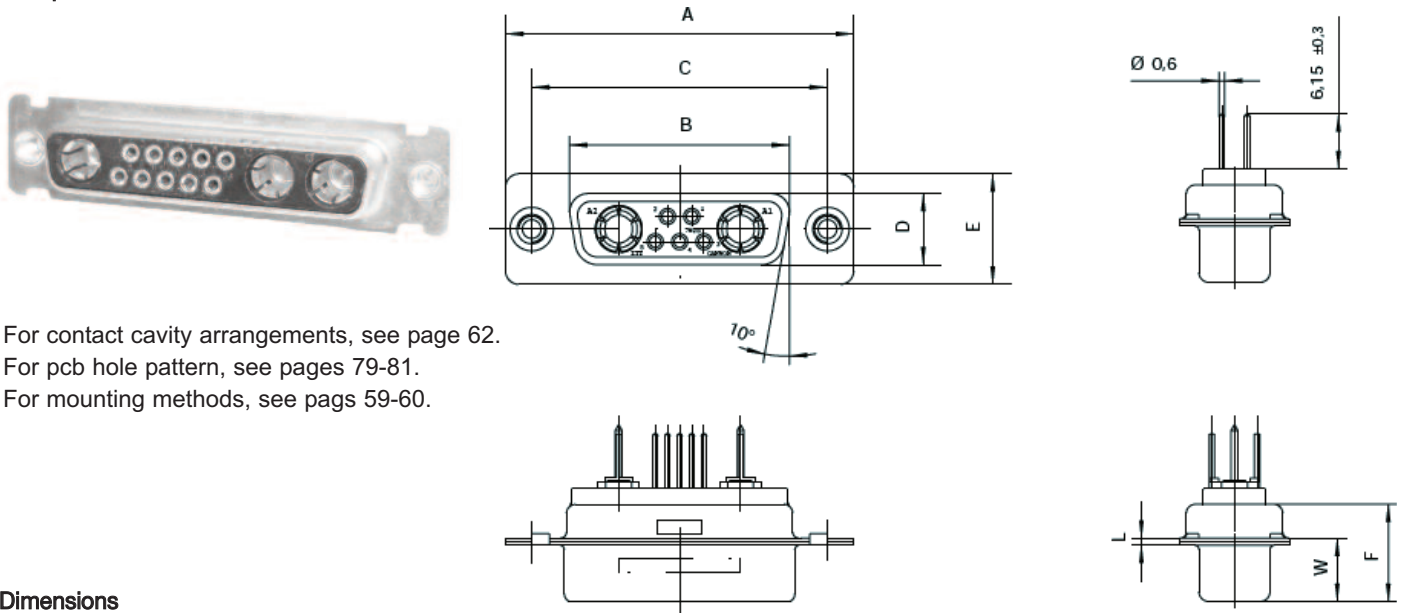

- For contact cavity arrangements, see page 62.
- For pcb hole pattern, see pages 79-81.
- For mounting methods, see pages 59-60.

## Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | L<br>± 0,2 (.008) | W<br>± 0,41 (.016) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|-------------------|--------------------|
| DE         | 30,8 (1.213)       | 16,35 (.644)       | 25 (.984)          | 7,9 (.311)         | 12,55 (.494)       | 10,90 (.429)       | 0,8 (.031)        | 6,95 (.274)        |
| DA         | 39,15 (1.541)      | 24,65 (.970)       | 33,3 (1.311)       | 7,9 (.311)         | 12,55 (.494)       | 10,90 (.429)       | 0,8 (.031)        | 6,95 (.274)        |
| DB         | 53,05 (2.089)      | 38,4 (1.512)       | 47,05 (1.852)      | 7,9 (.311)         | 12,55 (.494)       | 10,90 (.429)       | 0,8 (.031)        | 6,95 (.274)        |
| DC         | 69,3 (2.089)       | 55,85 (2.159)      | 63,50 (2.500)      | 7,9 (.311)         | 12,55 (.494)       | 10,90 (.429)       | 0,8 (.031)        | 6,95 (.274)        |
| DD         | 66,95 (2.636)      | 52,4 (2.063)       | 61,11 (2.406)      | 10,75 (.423)       | 15,4 (.606)        | 10,90 (.429)       | 0,8 (.031)        | 6,95 (.274)        |

Dimensions shown in mm  
Specifications and dimensions subject to change



www.ittcannon.com

## 40 A High power 90° PCB Plug, sizes DE – DC, with metal bracket

|            |        | INDUSTRIAL – US<br>40 A High power inserted with<br>US footprint metal bracket<br>and UNC 4-40 captive nut |                    | INDUSTRIAL – EU<br>40 A High power inserted with<br>EU footprint metal bracket<br>and UNC 4-40 captive nut |                    | MILITARY/HI-REL – US<br>40 A High power inserted with<br>US footprint metal bracket<br>and UNC 4-40 screw lock |                    | NON-MAGNETIC/LOW OUTGASSING – US*<br>40 A High power inserted with<br>US footprint metal bracket<br>and UNC 4-40 screw lock |                       |
|------------|--------|------------------------------------------------------------------------------------------------------------|--------------------|------------------------------------------------------------------------------------------------------------|--------------------|----------------------------------------------------------------------------------------------------------------|--------------------|-----------------------------------------------------------------------------------------------------------------------------|-----------------------|
| Shell size | Layout | P/N without boardlock                                                                                      | P/N with boardlock | P/N without boardlock                                                                                      | P/N with boardlock | P/N without boardlock                                                                                          | P/N with boardlock | P/N with Cadmium Plating                                                                                                    | P/N with Gold Plating |
| DE         | 2W2    | DEMP2H2P-JK87                                                                                              | DEMC2H2P-JK87      | DEMP2P2P-VK87                                                                                              | DEMC2PK2P-VK87     | DEMMP2H2P-J                                                                                                    | DEMMC2H2P-J        | DEM2H2P-JNMB                                                                                                                | DEM2H2P-JNMBK52       |
| DE         | 2WK2   | DEMP2HK2P-JK87                                                                                             | DEMC2HK2P-JK87     | DEMP2PK2P-VK87                                                                                             | DEMC2PK2P-VK87     | DEMMP2HK2P-J                                                                                                   | DEMMC2HK2P-J       | DEM2HK2P-JNMB                                                                                                               | DEM2HK2P-JNMBK52      |
| DE         | 5W1    | DEMP5H1P-JK87                                                                                              | DEMC5H1P-JK87      | DEMP5P1P-VK87                                                                                              | DEMC5P1P-VK87      | DEMMP5H1P-J                                                                                                    | DEMMC5H1P-J        | DEM5H1P-JNMB                                                                                                                | DEM5H1P-JNMBK52       |
| DA         | 7W2    | DAMP7H2P-JK87                                                                                              | DAMC7H2P-JK87      | DAMP7P2P-VK87                                                                                              | DAMC7P2P-VK87      | DAMMP7H2P-J                                                                                                    | DAMMC7H2P-J        | DAM7H2P-JNMB                                                                                                                | DAM7H2P-JNMBK52       |
| DA         | 11W1   | DAMP11H1P-JK87                                                                                             | DAMC11H1P-JK87     | DAMP11P1P-VK87                                                                                             | DAMC11P1P-VK87     | DAMMP11H1P-J                                                                                                   | DAMMC11H1P-J       | DAM11H1P-JNMB                                                                                                               | DAM11H1P-JNMBK52      |
| DA         | 3W3    | DAMP3H3P-JK87                                                                                              | DAMC3H3P-JK87      | DAMP3P3P-VK87                                                                                              | DAMC3P3P-VK87      | DAMMP3H3P-J                                                                                                    | DAMMC3H3P-J        | DAM3H3P-JNMB                                                                                                                | DAM3H3P-JNMBK52       |
| DA         | 3WK3   | DAMP3HK3P-JK87                                                                                             | DAMC3HK3P-JK87     | DAMP3PK3P-VK87                                                                                             | DAMC3PK3P-VK87     | DAMMP3HK3P-J                                                                                                   | DAMMC3HK3P-J       | DAM3HK3P-JNMB                                                                                                               | DAM3HK3P-JNMBK52      |
| DB         | 5W5    | DBMP5H5P-JK87                                                                                              | DBMC5H5P-JK87      | DBMP5P5P-VK87                                                                                              | DBMC5P5P-VK87      | DBMMP5H5P-J                                                                                                    | DBMMC5H5P-J        | DBM5H5P-JNMB                                                                                                                | DBM5H5P-JNMBK52       |
| DB         | 9W4    | DBMP9H4P-JK87                                                                                              | DBMC9H4P-JK87      | DBMP9P4P-VK87                                                                                              | DBMC9P4P-VK87      | DBMMP9H4P-J                                                                                                    | DBMMC9H4P-J        | DBM9H4P-JNMB                                                                                                                | DBM9H4P-JNMBK52       |
| DB         | 13W3   | DBMP13H3P-JK87                                                                                             | DBMC13H3P-JK87     | DBMP13P3P-VK87                                                                                             | DBMC13P3P-VK87     | DBMMP13H3P-J                                                                                                   | DBMMC13H3P-J       | DBM13H3P-JNMB                                                                                                               | DBM13H3P-JNMBK52      |
| DB         | 17W2   | DBMP17H2P-JK87                                                                                             | DBMC17H2P-JK87     | DBMP17P2P-VK87                                                                                             | DBMC17P2P-VK87     | DBMMP17H2P-J                                                                                                   | DBMMC17H2P-J       | DBM17H2P-JNMB                                                                                                               | DBM17H2P-JNMBK52      |
| DB         | 21W1   | DBMP21H1P-JK87                                                                                             | DBMC21H1P-JK87     | DBMP21P1P-VK87                                                                                             | DBMC21P1P-VK87     | DBMMP21H1P-J                                                                                                   | DBMMC21H1P-J       | DBM21H1P-JNMB                                                                                                               | DBM21H1P-JNMBK52      |
| DC         | 8W8    | DCMP8H8P-JK87                                                                                              | DCMC8H8P-JK87      | DCMP8P8P-VK87                                                                                              | DCMC8P8P-VK87      | DCMMP8H8P-J                                                                                                    | DCMMC8H8P-J        | DCM8H8P-JNMB                                                                                                                | DCM8H8P-JNMBK52       |
| DC         | 13W6   | DCMP13H6P-JK87                                                                                             | DCMC13H6P-JK87     | DCMP13P6P-VK87                                                                                             | DCMC13P6P-VK87     | DCMMP13H6P-J                                                                                                   | DCMMC13H6P-J       | DCM13H6P-JNMB                                                                                                               | DCM13H6P-JNMBK52      |
| DC         | 17W5   | DCMP17H5P-JK87                                                                                             | DCMC17H5P-JK87     | DCMP17P5P-VK87                                                                                             | DCMC17P5P-VK87     | DCMMP17H5P-J                                                                                                   | DCMMC17H5P-J       | DCM17H5P-JNMB                                                                                                               | DCM17H5P-JNMBK52      |
| DC         | 21WA4  | DCMP21HA4P-JK87                                                                                            | DCMC21HA4P-JK87    | DCMP21PA4P-VK87                                                                                            | DCMC21PA4P-VK87    | DCMMP21HA4P-J                                                                                                  | DCMMC21HA4P-J      | DCM21HA4P-JNMB                                                                                                              | DCM21HA4P-JNMBK52     |
| DC         | 25W3   | DCMP25H3P-JK87                                                                                             | DCMC25H3P-VK87     | DCMC25P3P-VK87                                                                                             | DCMC25P3P-VK87     | DCMMP25H3P-J                                                                                                   | DCMMC25H3P-J       | DCM25H3P-JNMB                                                                                                               | DCM25H3P-JNMBK52      |
| DC         | 27W2   | DCMP27H2P-JK87                                                                                             | DCMC27H2P-JK87     | DCMP27P2P-VK87                                                                                             | DCMC27P2P-VK87     | DCMMP27H2P-J                                                                                                   | DCMMC27H2P-J       | DCM27H2P-JNMB                                                                                                               | DCM27H2P-JNMBK52      |

\* Hardware Modifier not allowed with Non Magnetic/ Low Outgassing Combo-D-; contact factory for more information

## Plug

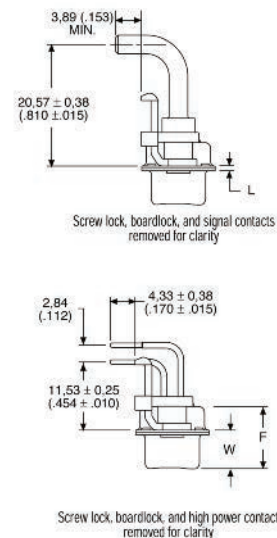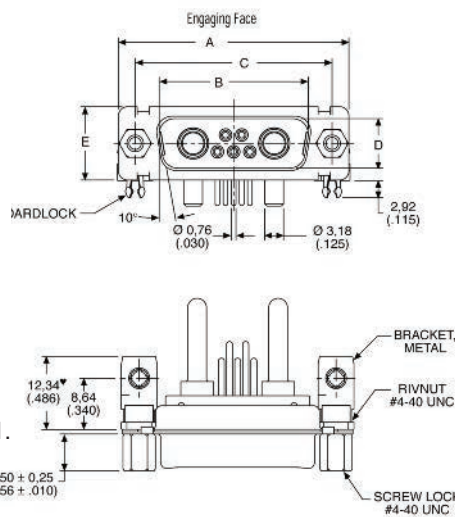

- For contact cavity arrangements, see page 61.
- For pcb hole pattern, see pages 82-84.
- For mounting methods, see pages 59-60.

US version shown – for EU version, please see readers resource section, page 92-93.

## Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | W<br>± 0,368 (.0145) | W<br>± 0,41 (.016) | L<br>± 0,25 (.010) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|----------------------|--------------------|--------------------|
| DE         | 30,81 (1.213)      | 16,92 (.665)       | 24,99 (.984)       | 8,36 (.329)        | 12,55 (.494)       | 10,72 (.422)       | 6,693 (.2635)        | —                  | 0,76 (.030)        |
| DA         | 39,14 (1.541)      | 25,25 (.994)       | 33,32 (1.312)      | 8,36 (.329)        | 12,55 (.494)       | 10,72 (.422)       | 6,693 (.2635)        | —                  | 0,76 (.030)        |
| DB         | 53,04 (2.088)      | 38,96 (1.534)      | 47,04 (1.852)      | 8,36 (.329)        | 12,55 (.494)       | 10,82 (.426)       | —                    | 6,84 (.269)        | 0,99 (.039)        |
| DC         | 69,32 (2.729)      | 55,42 (2.182)      | 63,50 (2.500)      | 8,36 (.329)        | 12,55 (.494)       | 10,82 (.426)       | —                    | 6,84 (.269)        | 0,99 (.039)        |



Dimensions shown in mm  
Specifications and dimensions subject to change

www.ittcannon.com


40 A High power 90° PCB Plug, size DD, with metal bracket

40 A High power inserted with US footprint  
metal bracket and UNC 4-40 captive nut





| Shell size | Layout | INDUSTRIAL            |                    | MILITARY/HI-REL       |                        | NON-MAGNETIC/LOW OUTGASSING* |                       |
|------------|--------|-----------------------|--------------------|-----------------------|------------------------|------------------------------|-----------------------|
|            |        | P/N without Boardlock | P/N with Boardlock | P/N without Boardlock | P/N with UNC Boardlock | P/N with Cadmium Plating     | P/N with Gold Plating |
| DD         | 24WK7  | DDMP24H7P-JK87        | DDMC24H7P-JK87     | DDMMP24H7P-J          | DDMMC24H7P-J           | DDM24H7P-JNMB                | DDM24H7P-JNMBK52      |
| DD         | 36W4   | DDMP36H4P-JK87        | DDMC36H4P-JK87     | DDMMP36H4P-J          | DDMMC36H4P-J           | DDM36H7P-JNMB                | DDM36H7P-JNMBK52      |
| DD         | 43W2   | DDMP43H2P-JK87        | DDMC43H2P-JK87     | DDMMP43H2P-J          | DDMMC43H2P-J           | DDM43H7P-JNMB                | DDM43H7P-JNMBK52      |
| DD         | 47W1   | DDMP47H1P-JK87        | DDMC47H1P-JK87     | DDMMP47H1P-J          | DDMMC47H1P-J           | DDM47H7P-JNMB                | DDM47H7P-JNMBK52      |

\* Hardware Modifier not allowed with Non Magnetic/ Low Outgassing Combo-D; contact factory for more information

## Plug

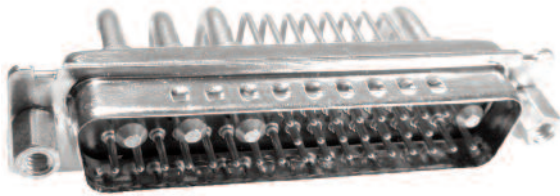

- For contact cavity arrangements, see page 61.
- For pcb hole pattern, see pages 82-84.
- For mounting methods, see pages 59-60.

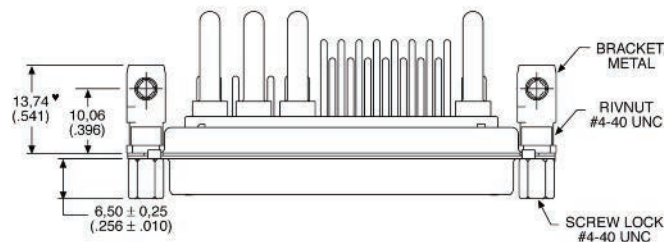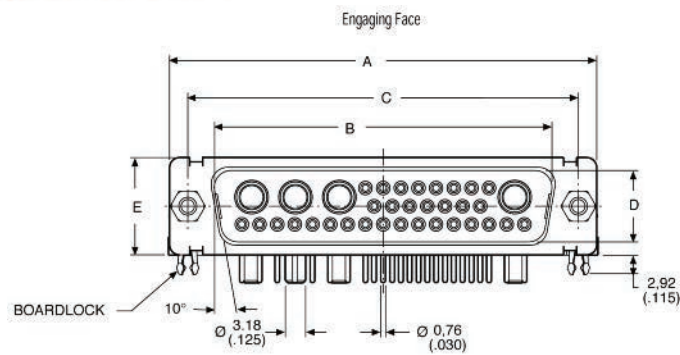

## Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | W<br>± 0,41 (.015) | L<br>± 0,25 (.010) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| DD         | 66,93 (2.635)      | 52,81 (2.079)      | 61,11 (2.406)      | 11,07 (.436)       | 15,37 (.605)       | 10,82 (.426)       | 6,84 (.269)        | 0,99 (.039)        |



40 A High power 90° PCB Receptacle, sizes DE – DC, with metal bracket





| Shell size | Layout | INDUSTRIAL – US<br>40 A High power inserted with<br>US footprint metal bracket<br>and UNC 4-40 captive nut |                    | INDUSTRIAL – EU<br>40 A High power inserted with<br>EU footprint metal bracket<br>and UNC 4-40 captive nut |                    | MILITARY/HI-REL – US<br>40 A High power inserted with<br>US footprint metal bracket<br>and UNC 4-40 captive nut |                    | NON-MAGNETIC/LOW OUTGASSING – US*<br>40 A High power inserted with<br>US footprint metal bracket<br>and UNC 4-40 screw lock |                       |
|------------|--------|------------------------------------------------------------------------------------------------------------|--------------------|------------------------------------------------------------------------------------------------------------|--------------------|-----------------------------------------------------------------------------------------------------------------|--------------------|-----------------------------------------------------------------------------------------------------------------------------|-----------------------|
|            |        | P/N without Boardlock                                                                                      | P/N with Boardlock | P/N without Boardlock                                                                                      | P/N with Boardlock | P/N without Boardlock                                                                                           | P/N with Boardlock | P/N with Cadmium Plating                                                                                                    | P/N with Gold Plating |
| DE         | 2W2    | DEMP2H2S-VA197                                                                                             | DEMC2H2S-VA197     | DEMP2P2S-JA197                                                                                             | DEMC2P2S-JA197     | DEMMP2H2S-V                                                                                                     | DEMMC2H2S-V        | DEM2H2S-VNMB                                                                                                                | DEM2H2S-VNMBK52       |
| DE         | 2WK2   | DEMP2HK2S-VA197                                                                                            | DEMC2HK2S-VA197    | DEMP2PK2S-JA197                                                                                            | DEMC2PK2S-JA197    | DEMMP2HK2S-V                                                                                                    | DEMMC2HK2S-V       | DEM2HK2S-VNMB                                                                                                               | DEM2HK2S-VNMBK52      |
| DE         | 5W1    | DEMP5H1S-VA197                                                                                             | DEMC5H1S-VA197     | DEMP5P1S-JA197                                                                                             | DEMC5P1S-JA197     | DEMMP5H1S-V                                                                                                     | DEMMC5H1S-V        | DEM5H1S-VNMB                                                                                                                | DEM5H1S-VNMBK52       |
| DA         | 7W2    | DAMP7H2S-VA197                                                                                             | DAMC7H2S-VA197     | DAMP7P2S-JA197                                                                                             | DAMC7P2S-JA197     | DAMMP7H2S-V                                                                                                     | DAMMC7H2S-V        | DAM7H2S-VNMB                                                                                                                | DAM7H2S-VNMBK52       |
| DA         | 11W1   | DAMP11H1S-VA197                                                                                            | DAMC11H1S-VA197    | DAMP11P1S-JA197                                                                                            | DAMC11P1S-JA197    | DAMMP11H1S-V                                                                                                    | DAMMC11H1S-V       | DAM11H1S-VNMB                                                                                                               | DAM11H1S-VNMBK52      |
| DA         | 3W3    | DAMP3H3S-VA197                                                                                             | DAMC3H3S-VA197     | DAMP3P3S-JA197                                                                                             | DAMC3P3S-JA197     | DAMMP3H3S-V                                                                                                     | DAMMC3H3S-V        | DAM3H3S-VNMB                                                                                                                | DAM3H3S-VNMBK52       |
| DA         | 3WK3   | DAMP3HK3S-VA197                                                                                            | DAMC3HK3S-VA197    | DAMP3PK3S-JA197                                                                                            | DAMC3PK3S-JA197    | DAMMP3HK3S-V                                                                                                    | DAMMC3HK3S-V       | DAM3HK3S-VNMB                                                                                                               | DAM3HK3S-VNMBK52      |
| DB         | 5W5    | DBMP5H5S-VA197                                                                                             | DBMC5H5S-VA197     | DBMP5P5S-JA197                                                                                             | DBMC5P5S-JA197     | DBMMP5H5S-V                                                                                                     | DBMMC5H5S-V        | DBM5H5S-VNMB                                                                                                                | DBM5H5S-VNMBK52       |
| DB         | 9W4    | DBMP9H4S-VA197                                                                                             | DBMC9H4S-VA197     | DBMP9P4S-JA197                                                                                             | DBMC9P4S-JA197     | DBMMP9H4S-V                                                                                                     | DBMMC9H4S-V        | DBM9H4S-VNMB                                                                                                                | DBM9H4S-VNMBK52       |
| DB         | 13W3   | DBMP13H3S-VA197                                                                                            | DBMC13H3S-VA197    | DBMP13P3S-JA197                                                                                            | DBMC13P3S-JA197    | DBMMP13H3S-V                                                                                                    | DBMMC13H3S-V       | DBM13H3S-VNMB                                                                                                               | DBM13H3S-VNMBK52      |
| DB         | 17W2   | DBMP17H2S-VA197                                                                                            | DBMC17H2S-VA197    | DBMP17P2S-JA197                                                                                            | DBMC17P2S-JA197    | DBMMP17H2S-V                                                                                                    | DBMMC17H2S-V       | DBM17H2S-VNMB                                                                                                               | DBM17H2S-VNMBK52      |
| DB         | 21W1   | DBMP21H1S-VA197                                                                                            | DBMC21H1S-VA197    | DBMP21P1S-JA197                                                                                            | DBMC21P1S-JA197    | DBMMP21H1S-V                                                                                                    | DBMMC21H1S-V       | DBM21H1S-VNMB                                                                                                               | DBM21H1S-VNMBK52      |
| DC         | 8W8    | DCMP8H8S-VA197                                                                                             | DCMC8H8S-VA197     | DCMP8P8S-JA197                                                                                             | DCMC8P8S-JA197     | DCMMP8H8S-V                                                                                                     | DCMMC8H8S-V        | DCM8H8S-VNMB                                                                                                                | DCM8H8S-VNMBK52       |
| DC         | 13W6   | DCMP13H6S-VA197                                                                                            | DCMC13H6S-VA197    | DCMP13P6S-JA197                                                                                            | DCMC13P6S-JA197    | DCMMP13H6S-V                                                                                                    | DCMMC13H6S-V       | DCM13H6S-VNMB                                                                                                               | DCM13H6S-VNMBK52      |
| DC         | 17W5   | DCMP17H5S-VA197                                                                                            | DCMC17H5S-VA197    | DCMP17P5S-JA197                                                                                            | DCMC17P5S-JA197    | DCMDMP17H5S-V                                                                                                   | DCMMC17H5S-V       | DCM17H5S-VNMB                                                                                                               | DCM17H5S-VNMBK52      |
| DC         | 21W4   | DCMP21H4S-VA197                                                                                            | DCMC21H4S-VA197    | DCMP21P4S-JA197                                                                                            | DCMC21P4S-JA197    | DCMMP21H4S-V                                                                                                    | DCMMC21H4S-V       | DCM21H4S-VNMB                                                                                                               | DCMG21H4S-VNMBK52     |
| DC         | 25W3   | DCMP25H3S-VA197                                                                                            | DCMC25H3S-VA197    | DCMP25P3S-JA197                                                                                            | DCMC25P3S-JA197    | DCMMP25H3S-V                                                                                                    | DCMMC25H3S-V       | DCM25H3S-VNMB                                                                                                               | DCM25H3S-VNMBK52      |
| DC         | 27W2   | DCMP27H2S-VA197                                                                                            | DCMC27H2S-VA197    | DCMP27P2S-JA197                                                                                            | DCMC27P2S-JA197    | DCMMP27H2S-V                                                                                                    | DCMMC27H2S-V       | DCM27H2S-VNMB                                                                                                               | DCM27H2S-VNMBK52      |

\* Hardware Modifier not allowed with Non Magnetic/ Low Outgassing Combo-D; contact factory for more information

Receptacle



- For contact cavity arrangements, see page 61.
- For pcb hole pattern, see pages 85-87.
- For mounting methods, see pages 59-60.

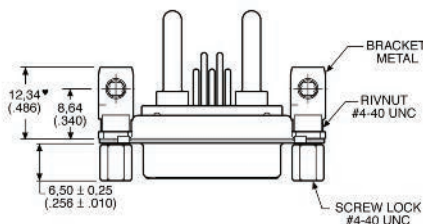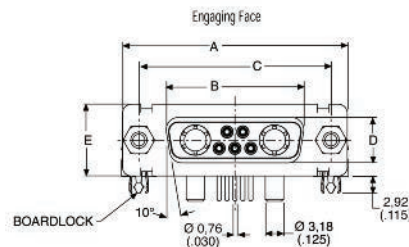

US version shown – for EU version, please see readers resource section, page 94-95.

Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | W<br>± 0,38 (.015) | L<br>± 0,25 (.010) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| DE         | 30,81 (1.213)      | 16,33 (.643)       | 24,99 (.984)       | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,94 (.273)        | 0,76 (.030)        |
| DA         | 39,14 (1.541)      | 24,65 (.971)       | 33,32 (1.312)      | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,94 (.273)        | 0,76 (.030)        |
| DB         | 53,04 (2.088)      | 38,38 (1.511)      | 47,04 (1.852)      | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,94 (.273)        | 0,76 (.030)        |
| DC         | 69,32 (2.729)      | 54,84 (2.159)      | 63,50 (2.500)      | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,94 (.273)        | 0,76 (.030)        |

Dimensions shown in mm

Specifications and dimensions subject to change

www.ittcannon.com






## 40 A High power 90° PCB Receptacle, size DD, with metal bracket

40 A High power inserted with US footprint  
metal bracket and UNC 4-40 captive nut





| Shell size | Layout | INDUSTRIAL            |                    | MILITARY/HI-REL       |                        | NON-MAGNETIC/LOW OUTGASSING* |                       |
|------------|--------|-----------------------|--------------------|-----------------------|------------------------|------------------------------|-----------------------|
|            |        | P/N without Boardlock | P/N with Boardlock | P/N without Boardlock | P/N with UNC Boardlock | P/N with Cadmium Plating     | P/N with Gold Plating |
| DD         | 24WK7  | DDMP24H7S-JA197       | DDMC24H7S-JA197    | DDMMP24H7S-J          | DDMMC24H7S-J           | DDM24H7S-JNMB                | DDM24H7S-JNMBK52      |
| DD         | 36W4   | DDMP36H4S-JA197       | DDMC36H4S-JA197    | DDMMP36H4S-J          | DDMMC36H4S-J           | DDM36H4S-JNMB                | DDM36H4S-JNMBK52      |
| DD         | 43W2   | DDMP43H2S-JA197       | DDMC43H2S-JA197    | DDMMP43H2S-J          | DDMMC43H2S-J           | DDM43H2S-JNMB                | DDM43H2S-JNMBK52      |
| DD         | 47W1   | DDMP47H1S-JA197       | DDMC47H1S-JA197    | DDMMP47H1S-J          | DDMMC47H1S-J           | DDM47H1S-JNMB                | DDM47H1S-JNMBK52      |

\* Hardware Modifier not allowed with Non Magnetic/ Low Outgassing Combo-D; contact factory for more information

## Plug

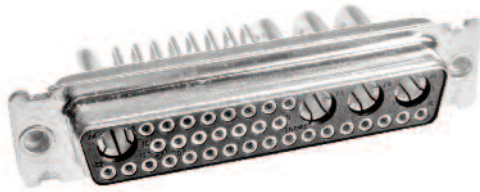

- For contact cavity arrangements, see page 62.
- For pcb hole pattern, see page 85-87.
- For mounting methods, see pages 59-60.

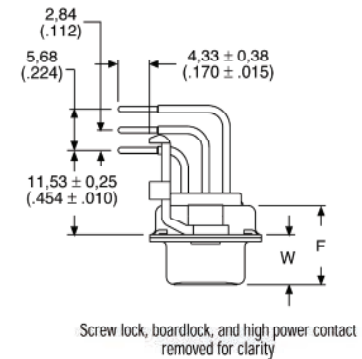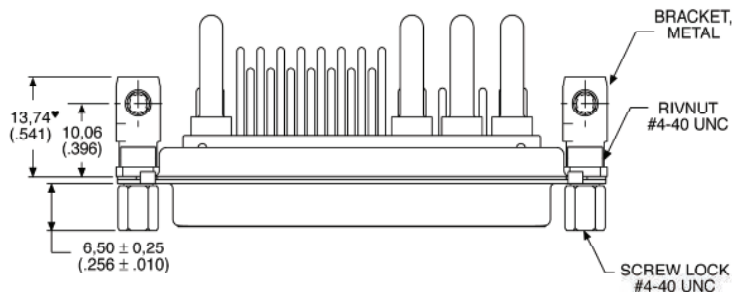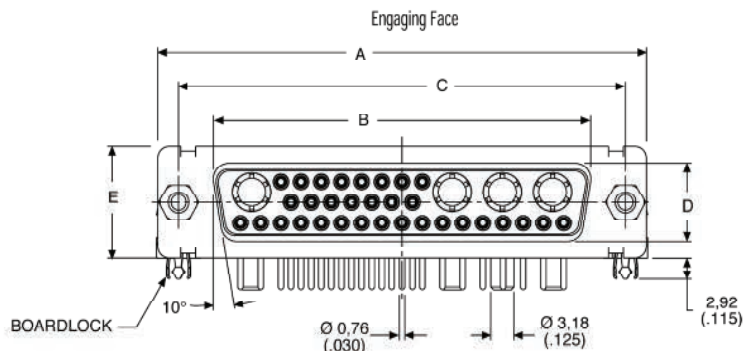

## Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | W<br>± 0,38 (.015) | L<br>± 0,25 (.010) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| DD         | 66,93 (2.635)      | 52,42 (2.064)      | 61,11 (2.406)      | 10,74 (.423)       | 15,37 (.605)       | 10,90 (.429)       | 6,94 (.273)        | 0,76 (.030)        |

40 A High Power 90° PCB Plug- European footprint, sizes DE-DC, with bracket



40 A High power inserted with US footprint  
metal bracket and UNC 4-40 captive nut

| Part numbers with bracket and captive nut M3 |        |                          |                          | Part numbers with bracket with dia. 3,05 |                          | Part numbers with bracket with post M3 |                          |
|----------------------------------------------|--------|--------------------------|--------------------------|------------------------------------------|--------------------------|----------------------------------------|--------------------------|
| Shell size                                   | Layout | Plastic Bracket          | Metal Bracket            | Plastic Bracket                          | Metal Bracket            | Plastic Bracket                        | Metal Bracket            |
| DE                                           | 2W2    | DEM-2P2P-1ATN-A191-K87   | DEM-2P2P-1A9N-A191-K87   | DEM-2P2P-1A5N-A191-K87                   | DEM-2P2P-1AFN-A191-K87   | DEM-2P2P-APN-A191-K87                  | DEM-SP2P-1AHN-A191-K87   |
| DE                                           | 2WK2   | DEM-2PK2P-1ATN-A191-K87  | DEM-2PK2P-1A9N-A191-K87  | DEM-2PK2P-1A5N-A191-K87                  | DEM-2PK2P-1AFN-A191-K87  | DEM-2PK2P-APN-A191-K87                 | DEM-2PK2P-1AHN-A191-K87  |
| DE                                           | 5W1    | DEM-5P1P-1ATN-A191-K87   | DEM-5P1P-1A9N-A191-K87   | DEM-5P1P-1A5N-A191-K87                   | DEM-5P1P-1AFN-A191-K87   | DEM-5P1P-APN-A191-K87                  | DEM-5P1P-1AHN-A191-K87   |
| DA                                           | 7W2    | DAM-7P2P-1ATN-A191-K87   | DAM-7P2P-1A9N-A191-K87   | DAM-7P2P-1A5N-A191-K87                   | DAM-7P2P-1AFN-A191-K87   | DAM-7P2P-1APN-A191-K87                 | DAM-7P2P-1AHN-A191-K87   |
| DA                                           | 11W1   | DAM-11P1P-1ATN-A191-K87  | DAM-11P1P-1A9N-A191-K87  | DAM-11P1P-1A5N-A191-K87                  | DAM-11P1P-1AFN-A191-K87  | DAM-11P1P-1APN-A191-K87                | DAM-11P1P-1AHN-A191-K87  |
| DA                                           | 3W3    | DAM-3P3P-1ATN-A191-K87   | DAM-3P3P-1A9N-A191-K87   | DAM-3P3P-1A5N-A191-K87                   | DAM-3P3P-1AFN-A191-K87   | DAM-3P3P-1APN-A191-K87                 | DAM-3P3P-1AHN-A191-K87   |
| DA                                           | 3WK3   | DAM-3PK3P-1ATN-A191-K87  | DAM-3PK3P-1A9N-A191-K87  | DAM-3PK3P-1A5N-A191-K87                  | DAM-3PK3P-1AFN-A191-K87  | DAM-3PK3P-1APN-A191-K87                | DAM-3PK3P-1AHN-A191-K87  |
| DB                                           | 5W5    | DBM-5P5P-1ATN-A191-K87   | DBM-5P5P-1A9N-A191-K87   | DBM-5P5P-1A5N-A191-K87                   | DBM-5P5P-1AFN-A191-K87   | DBM-5P5P-1APN-A191-K87                 | DBM-5P5P-1AHN-A191-K87   |
| DB                                           | 9W4    | DBM-9P4P-1ATN-A191-K87   | DBM-9P4P-1A9N-A191-K87   | DBM-9P4P-1A5N-A191-K87                   | DBM-9P4P-1AFN-A191-K87   | DBM-9P4P-1APN-A191-K87                 | DBM-9P4P-1AHN-A191-K87   |
| DB                                           | 13W3   | DBM-13P3P-1ATN-A191-K87  | DBM-13P3P-1A9N-A191-K87  | DBM-13P3P-1A5N-A191-K87                  | DBM-13P3P-1AFN-A191-K87  | DBM-13P3P-1APN-A191-K87                | DBM-13P3P-1AHN-A191-K87  |
| DB                                           | 17W2   | DBM-17PSP-1ATN-A191-K87  | DBM-17PSP-1A9N-A191-K87  | DBM-17PSP-1A5N-A191-K87                  | DBM-17PSP-1AFN-A191-K87  | DBM-17PSP-1APN-A191-K87                | DBM-17PSP-1AHN-A191-K87  |
| DB                                           | 21W1   | DBM-21P1P-1ATN-A191-K87  | DBM-21P1P-1A9N-A191-K87  | DBM-21P1P-1A5N-A191-K87                  | DBM-21P1P-1AFN-A191-K87  | DBM-21P1P-1APN-A191-K87                | DBM-21P1P-1AHN-A191-K87  |
| DC                                           | 8W8    | DCM-8P8P-1ATN-A191-K87   | DCM-8P8P-1A9N-A191-K87   | DCM-8P8P-1A5N-A191-K87                   | DCM-8P8P-1AFN-A191-K87   | DCM-8P8P-1APN-A191-K87                 | DCM-8P8P-1AHN-A191-K87   |
| DC                                           | 13W6   | DCM-13P6P-1ATN-A191-K87  | DCM-13P6P-1A9N-A191-K87  | DCM-13P6P-1A5N-A191-K87                  | DCM-13P6P-1AFN-A191-K87  | DCM-13P6P-1APN-A191-K87                | DCM-13P6P-1AHN-A191-K87  |
| DC                                           | 17W5   | DCM-17P5P-1ATN-A191-K87  | DCM-17P5P-1A9N-A191-K87  | DCM-17P5P-1A5N-A191-K87                  | DCM-17P5P-1AFN-A191-K87  | DCM-17P5P-1APN-A191-K87                | DCM-17P5P-1AHN-A191-K87  |
| DC                                           | 21WA4  | DCM-21PA4P-1ATN-A191-K87 | DCM-21PA4P-1A9N-A191-K87 | DCM-21PA4P-1A5N-A191-K87                 | DCM-21PA4P-1AFN-A191-K87 | DCM-21PA4S-1APN-A191-K87               | DCM-21PA4P-1AHN-A191-K87 |
| DC                                           | 25W3   | DCM-25P3P-1ATN-A191-K87  | DCM-25P3P-1A9N-A191-K87  | DCM-25P3P-1A5N-A191-K87                  | DCM-25P3P-1AFN-A191-K87  | DCM-25P3P-1APN-A191-K87                | DCM-25P3P-1AHN-A191-K87  |
| DC                                           | 27W2   | DCM-27P2P-1ATN-A191-K87  | DCM-27P2P-1A9N-A191-K87  | DCM-27P2P-1A5N-A191-K87                  | DCM-27P2P-1AFN-A191-K87  | DCM-27P2P-1APN-A191-K87                | DCM-27P2P-1AHN-A191-K87  |



For performance class 1 replace A191 with A190.  
For performance class 3 delete A191.

For 3,0 mm pushfit please add -146 modifier;  
For 3,2 mm pushfit please add -162 modifier.

## Plug

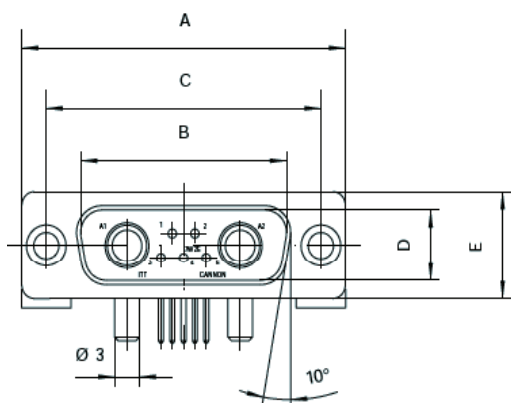

- For contact cavity arrangements, see page 61.
- For pcb hole pattern, see pages 88-89.
- For mounting methods, see pages 59-60.

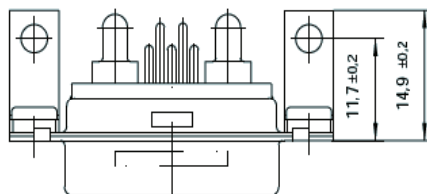

## Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | L<br>± 0,2 (.008) | W<br>± 0,40 (.016) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|-------------------|--------------------|
| DE         | 30,8 (1.213)       | 16,90 (.665)       | 25,0 (.984)        | 8,35 (.329)        | 12,55 (.494)       | 10,70 (.421)       | 0,8 (.031)        | 6,70 (.264)        |
| DA         | 39,15 (1.541)      | 24,25 (.994)       | 33,3 (1.311)       | 8,35 (.329)        | 12,55 (.494)       | 10,70 (.421)       | 0,8 (.031)        | 6,70 (.264)        |
| DB         | 53,05 (2.089)      | 38,95 (1.533)      | 47,05 (1.852)      | 8,35 (.329)        | 12,55 (.494)       | 10,80 (.425)       | 0,8 (.031)        | 6,80 (.268)        |
| DC         | 69,3 (2.089)       | 55,4 (2.181)       | 63,50 (2.500)      | 8,35 (.329)        | 12,55 (.494)       | 10,80 (.425)       | 0,8 (.031)        | 6,80 (.268)        |

Dimensions shown in mm

Specifications and dimensions subject to change

www.ittcannon.com

## 40 A High power 90° Plug- European footprint, size DD with bracket


Part numbers with bracket and captive nut M3

Part numbers with bracket with bushing diam. 3,05


Part numbers with bracket and post M3

| Shell size | Layout | P/N without Boardlock   | P/N with Boardlock      | P/N without Boardlock   | P/N with UNC Boardlock  | P/N with through Boardlock | P/N with Boardlock      |
|------------|--------|-------------------------|-------------------------|-------------------------|-------------------------|----------------------------|-------------------------|
| DD         | 24W7   | DDM-24P7P-1A9N-A191-K87 | DDM-24P7P-1ATN-A191-K87 | DDM-24P7P-1AFN-A191-K87 | DDM-24P7P-1A5N-A191-K87 | DDM-24P7P-1AHN-A191-K87    | DDM-24P7P-1APN-A191-K87 |
| DD         | 36W4   | DDM-36P4P-1A9N-A191-K87 | DDM-36P4P-1ATN-A191-K87 | DDM-36P4P-1AFN-A191-K87 | DDM-36P4P-1A5N-A191-K87 | DDM-36P4P-1AHN-A191-K87    | DDM-36P4P-1APN-A191-K87 |
| DD         | 43W2   | DDM-43P2P-1A9N-A191-K87 | DDM-43P2P-1ATN-A191-K87 | DDM-43P2P-1AFN-A191-K87 | DDM-43P2P-1A5N-A191-K87 | DDM-43P2P-1AHN-A191-K87    | DDM-43P2P-1APN-A191-K87 |
| DD         | 47W1   | DDM-47P1P-1A9N-A191-K87 | DDM-47P1P-1ATN-A191-K87 | DDM-47P1P-1AFN-A191-K87 | DDM-47P1P-1A5N-A191-K87 | DDM-47P1P-1AHN-A191-K87    | DDM-47P1P-1APN-A191-K87 |

## Plug

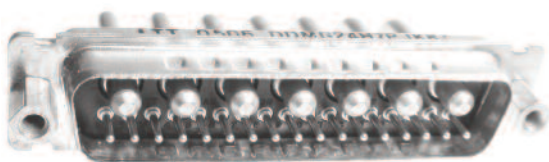

- For contact cavity arrangements, see page 61.
- For pcb hole pattern, see pages 88-89.
- For mounting methods, see pages 59-60.

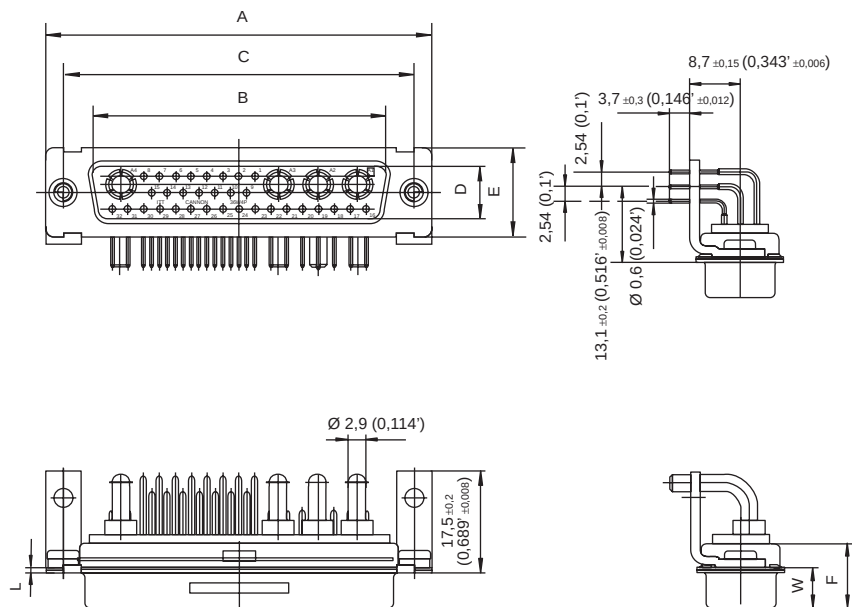

## Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | L<br>± 0,20 (.008) | W<br>± 0,40 (.015) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| DD         | 66,93 (2.636)      | 52,08 (2.050)      | 61,11 (2.406)      | 11,10 (.437)       | 15,40 (.606)       | 10,80 (.425)       | 0,90 (.035)        | 6,85 (.270)        |



Dimensions shown in mm  
Specifications and dimensions subject to change

www.ittcannon.com

40 A High power 90° Receptacle, European footprint, sizes DE-DC, with bracket

40 A High power inserted with US footprint  
metal bracket and UNC 4-40 captive nut

| Part numbers with bracket and captive nut M3 |        |                           |                           | Part numbers with bracket with dia. 3,05 |                           | Part numbers with bracket with post M3 |                           |
|----------------------------------------------|--------|---------------------------|---------------------------|------------------------------------------|---------------------------|----------------------------------------|---------------------------|
| Shell size                                   | Layout | Metal Bracket             | Plastic Bracket           | Metal Bracket                            | Plastic Bracket           | Metal Bracket                          | Plastic Bracket           |
| DE                                           | 2W2    | DEM-2P2S-1A9N-A191-A197   | DEM-2P2S-1ATN-A191-A197   | DEM-2P2-1AFN-A191-A197                   | DEM-2P2S-1A5N-A191-A197   | DEM-2P2S-1AHN-A191-A197                | DEM-2P2S-1APN-A191-A197   |
| DE                                           | 2WK2   | DEM-2PK2S-1A9N-A191-A197  | DEM-2PK2S-1ATN-A191-A197  | DEM-2PK2-1AFN-A191-A197                  | DEM-2PK2S-1A5N-A191-A197  | DEM-2PK2S-1AHN-A191-A197               | DEM-2PK2S-1APN-A191-A197  |
| DE                                           | 5W1    | DEM-5P1S-1A9N-A191-A197   | DEM-5P1S-1ATN-A191-A197   | DEM-5P1S-1AFN-A191-A197                  | DEM-5P1S-1A5N-A191-A197   | DEM-5P1S-1AHN-A191-A197                | DEM-5P1S-1APN-A191-A197   |
| DA                                           | 7W2    | DAM-7P2S-1A9N-A191-A197   | DAM-7P2S-1ATN-A191-A197   | DAM-7P2S-1AFN-A191-A197                  | DAM-7P2S-1A5N-A191-A197   | DAM-7P2S-1AHN-A191-A197                | DAM-7P2S-1APN-A191-A197   |
| DA                                           | 11W1   | DAM-11P1S-1A9N-A191-A197  | DAM-11P1S-1ATN-A191-A197  | DAM-11P1S-1AFN-A191-A197                 | DAM-11P1S-1A5N-A191-A197  | DAM-11P1S-1AHN-A191-A197               | DAM-11P1S-1APN-A191-A197  |
| DA                                           | 3W3    | DAM-3P3S-1A9N-A191-A197   | DAM-3P3S-1ATN-A191-A197   | DAM-3P3S-1AFN-A191-A197                  | DAM-11P1S-1A5N-A191-A197  | DAM-3P3S-1AHN-A191-A197                | DAM-3P3S-1APN-A191-A197   |
| DA                                           | 3WK3   | DAM-3PK3S-1A9N-A191-A197  | DAM-3PK3S-1ATN-A191-A197  | DAM-3PK3S-1AFN-A191-A197                 | DAM-3PK3S-1A5N-A191-A197  | DAM-3PK3S-1AHN-A191-A197               | DAM-3PK3S-1APN-A191-A197  |
| DB                                           | 5W5    | DBM-5P5S-1A9N-A191-A197   | DBM-5P5S-1ATN-A191-A197   | DBM-5P5S-1AFN-A191-A197                  | DBM-5P5S-1A5N-A191-A197   | DBM-5P5S-1AHN-A191-A197                | DBM-5P5S-1APN-A191-A197   |
| DB                                           | 9W4    | DBM-9P4S-1A9N-A191-A197   | DBM-9P4S-1ATN-A191-A197   | DBM-9P4S-1AFN-A191-A197                  | DBM-9P4S-1A5N-A191-A197   | DBM-9P4S-1AHN-A191-A197                | DBM-9P4S-1APN-A191-A197   |
| DB                                           | 13W3   | DBM-13P3S-1A9N-A191-A197  | DBM-13P3S-1ATN-A191-A197  | DBM-13P3S-1AFN-A191-A197                 | DBM-13P3S-1A5N-A191-A197  | DBM-13P3S-1AHN-A191-A197               | DBM-13P3S-1APN-A191-A197  |
| DB                                           | 17W2   | DBM-17P2S-1A9N-A191-A197  | DBM-17P2S-1ATN-A191-A197  | DBM-17P2S-1AFN-A191-A197                 | DBM-17P2S-1A5N-A191-A197  | DBM-17P2S-1AHN-A191-A197               | DBM-17P2S-1APN-A191-A197  |
| DB                                           | 21W1   | DBM-21P1S-1A9N-A191-A197  | DBM-21P1S-1ATN-A191-A197  | DBM-21P1S-1AFN-A191-A197                 | DBM-21P1S-1A5N-A191-A197  | DBM-21P1S-1AHN-A191-A197               | DBM-21P1S-1APN-A191-A197  |
| DC                                           | 8W8    | DCM-8P8S-1A9N-A191-A197   | DCM-8P8S-1ATN-A191-A197   | DCM-8P8S-1AFN-A191-A197                  | DCM-8P8S-1A5N-A191-A197   | DCM-8P8S-1AHN-A191-A197                | DCM-8P8S-1APN-A191-A197   |
| DC                                           | 13W6   | DCM-13P6S-1A9N-A191-A197  | DCM-13P6S-1ATN-A191-A197  | DCM-13P6S-1AFN-A191-A197                 | DCM-13P6S-1A5N-A191-A197  | DCM-13P6S-1AHN-A191-A197               | DCM-13P6S-1APN-A191-A197  |
| DC                                           | 17W5   | DCM-17P5S-1A9N-A191-A197  | DCM-17P5S-1ATN-A191-A197  | DCM-17P5S-1AFN-A191-A197                 | DCM-17P5S-1A5N-A191-A197  | DCM-17P5S-1AHN-A191-A197               | DCM-17P5S-1APN-A191-A197  |
| DC                                           | 21WA4  | DCM-21PA4S-1A9N-A191-A197 | DCM-21PA4S-1ATN-A191-A197 | DCM-21PA4S-1AFN-A191-A197                | DCM-21PA4S-1A5N-A191-A197 | DCM-21PA4S-1AHN-A191-A197              | DCM-21PA4S-1APN-A191-A197 |
| DC                                           | 25W3   | DCM-25P3S-1A9N-A191-A197  | DCM-25P3S-1ATN-A191-A197  | DCM-25P3S-1AFN-A191-A197                 | DCM-25P3S-1A5N-A191-A197  | DCM-25P3S-1AHN-A191-A197               | DCM-25P3S-1APN-A191-A197  |
| DC                                           | 27W2   | DCM-27P2S-1A9N-A191-A197  | DCM-27P2S-1ATN-A191-A197  | DCM-27P2S-1AFN-A191-A197                 | DCM-27P2S-1A5N-A191-A197  | DCM-27P2S-1AHN-A191-A197               | DCM-27P2S-1APN-A191-A197  |

For pushfit add -146 modifier.




For performance class 1 replace A191 with A190.

For performance class 3 delete A191.



For captive nut 4-40 UNC thread replace 1A9N with 1A7N and 1AHN with 1A8N.

For pushfit 90° pcb hole diameter 3,2 mm replace 146 with 162.

## Receptacle

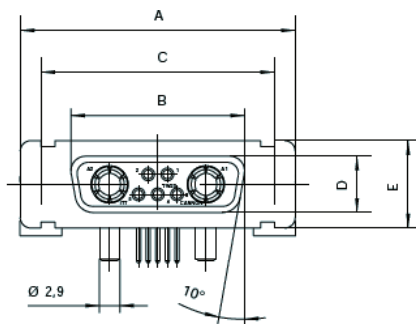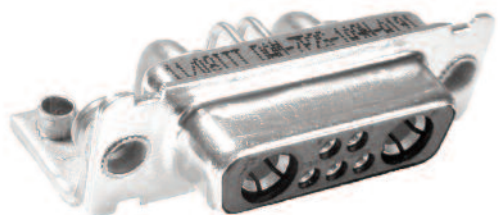

- For contact cavity arrangements, see page 62.
- For pcb hole pattern, see pages 90-91.
- For mounting methods, see pages 59-60.

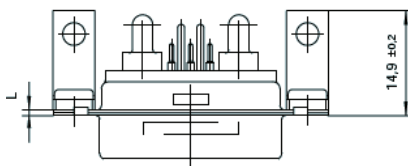

## Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | L<br>± 0,2 (.008) | W<br>± 0,40 (.016) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|-------------------|--------------------|
| DE         | 30,8 (1.213)       | 16,35 (.644)       | 25,0 (.984)        | 7,9 (.311)         | 12,55 (.494)       | 10,90 (.429)       | 0,8 (.031)        | 6,95 (.274)        |
| DA         | 39,15 (1.541)      | 24,65 (.970)       | 33,3 (1.311)       | 7,9 (.311)         | 12,55 (.494)       | 10,90 (.429)       | 0,8 (.031)        | 6,95 (.274)        |
| DB         | 53,05 (2.089)      | 38,4 (1.512)       | 47,05 (1.852)      | 7,9 (.311)         | 12,55 (.494)       | 10,90 (.429)       | 0,8 (.031)        | 6,95 (.274)        |
| DC         | 69,3 (2.089)       | 54,85 (2.159)      | 63,50 (2.500)      | 7,9 (.311)         | 12,55 (.494)       | 10,90 (.429)       | 0,8 (.031)        | 6,95 (.274)        |

Dimensions shown in mm

Specifications and dimensions subject to change

www.ittcannon.com

## 40 A High power 90° Receptacle - European footprint, size DD, with bracket

Part numbers with bracket and captive nut M3



Part numbers with bracket with bushing diam. 3,05

Part numbers with bracket and post M3


| Shell size | Layout | P/N without Boardlock    | P/N with Boardlock       | P/N without Boardlock    | P/N with UNC Boardlock   | P/N with through Boardlock | P/N with Boardlock       |
|------------|--------|--------------------------|--------------------------|--------------------------|--------------------------|----------------------------|--------------------------|
| DD         | 24WK7  | DDM-24P7S-1A9N-A191-A197 | DDM-24P7S-1ATN-A191-A197 | DDM-24P7S-1AFN-A191-A197 | DDM-24P7S-1A5N-A191-A197 | DDM-24P7S-1AHN-A191-A197   | DDM-24P7S-1APN-A191-A197 |
| DD         | 36W4   | DDM-36P4S-1A9N-A191-A197 | DDM-36P4S-1ATN-A191-A197 | DDM-36P4S-1AFN-A191-A197 | DDM-36P4S-1A5N-A191-A197 | DDM-36P4S-1AHN-A191-A197   | DDM-36P4S-1APN-A191-A197 |
| DD         | 43W2   | DDM-43P2S-1A9N-A191-A197 | DDM-43P2S-1ATN-A191-A197 | DDM-43P2S-1AFN-A191-A197 | DDM-43P2S-1A5N-A191-A197 | DDM-43P2S-1AHN-A191-A197   | DDM-43P2S-1APN-A191-A197 |
| DD         | 47W1   | DDM-47P1S-1A9N-A191-A197 | DDM-47P1S-1ATN-A191-A197 | DDM-47P1S-1AFN-A191-A197 | DDM-47P1S-1A5N-A191-A197 | DDM-47P1S-1AHN-A191-A197   | DDM-47P1S-1APN-A191-A197 |

For captive nut 4-40 UNC replace 1A9N with 1A7N and 1AHN with 1A8N.

## Receptacle

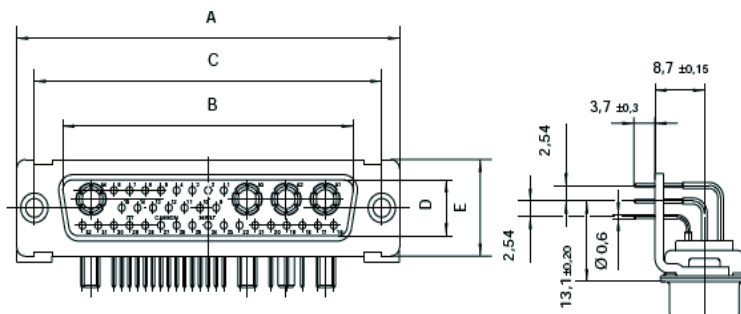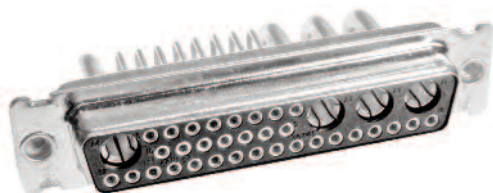

- For contact cavity arrangements, see page 62.
- For pcb hole pattern, see pages 90-91.
- For mounting methods, see pages 59-60.

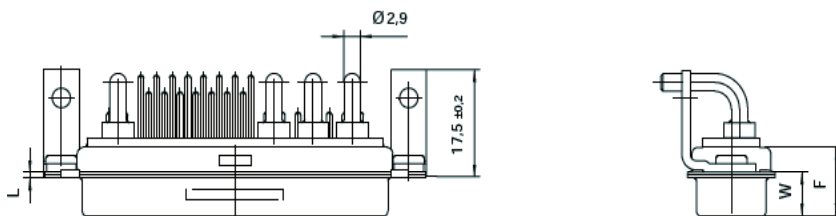

## Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | W<br>± 0,38 (.015) | L<br>± 0,25 (.010) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| DD         | 66,93 (2.635)      | 52,42 (2.064)      | 61,11 (2.406)      | 10,74 (.423)       | 15,37 (.605)       | 10,90 (.429)       | 6,84 (.269)        | 0,76 (.030)        |



## 40 A High power straight PCB Plug, sizes DE – DC

40 A High power inserted with straight contacts and standoff with UNC 4-40 thread




| Shell size | Layout | INDUSTRIAL            |                    | MILITARY/HI-REL       |                        | NON-MAGNETIC*/LOW OUTGASSING** |                       |
|------------|--------|-----------------------|--------------------|-----------------------|------------------------|--------------------------------|-----------------------|
|            |        | P/N without Boardlock | P/N with Boardlock | P/N without Boardlock | P/N with UNC Boardlock | P/N with Cadmium Plating       | P/N with Gold Plating |
| DE         | 2W2    | DEMV2H2P-NK87         | DEMZ2H2P-NK87      | DEMMV2H2P-N           | DEMMZ2H2P-N            | DEM2H2P-NNMB                   | DEMZ2H2P-NNMBK52      |
| DE         | 2WK2   | DEMV2HK2P-NK87        | DEMZ2HK2P-NK87     | DEMMV2HK2P-N          | DEMMZ2HK2P-N           | DEM2HK2P-NNMB                  | DEMZ2HK2P-NNMBK52     |
| DE         | 5W1    | DEMV5H1P-NK87         | DEMZ5H1P-NK87      | DEMMV5H1P-N           | DEMMZ5H1P-N            | DEM5H1P-NNMB                   | DEMZ5H1P-NNMBK52      |
| DA         | 7W2    | DAMV7H2P-NK87         | DAMZ7H2P-NK87      | DAMMV7H2P-N           | DAMMZ7H2P-N            | DAM7H2P-NNMB                   | DAMZ7H2P-NNMBK52      |
| DA         | 11W1   | DAMV11H1P-NK87        | DAMZ11H1P-NK87     | DAMMV11H1P-N          | DAMMZ11H1P-N           | DAM11H1P-NNMB                  | DAMZ11H1P-NNMBK52     |
| DA         | 3W3    | DAMV3H3P-NK87         | DAMZ3H3P-NK87      | DAMMV3H3P-N           | DAMMZ3H3P-N            | DAM3H3P-NNMB                   | DAMZ3H3P-NNMBK52      |
| DA         | 3WK3   | DAMV3HK3P-NK87        | DAMZ3HK3P-NK87     | DAMMV3HK3P-N          | DAMMZ3HK3P-N           | DAM3HK3P-NNMB                  | DAMZ3HK3P-NNMBK52     |
| DB         | 5W5    | DBMV5H5P-NK87         | DBMZ5H5P-NK87      | DBMMV5H5P-N           | DBMMZ5H5P-N            | DBM5H5P-NNMB                   | DBMZ5H5P-NNMBK52      |
| DB         | 9W4    | DBMV9H4P-NK87         | DBMZ9H4P-NK87      | DBMMV9H4P-N           | DBMMZ9H4P-N            | DBM9H4P-NNMB                   | DBMZ9H4P-NNMBK52      |
| DB         | 13W3   | DBMV13H3P-NK87        | DBMZ13H3P-NK87     | DBMMV13H3P-N          | DBMMZ13H3P-N           | DBM13H3P-NNMB                  | DBMZ13H3P-NNMBK52     |
| DB         | 17W2   | DBMV17H2P-NK87        | DBMZ17H2P-NK87     | DBMMV17H2P-N          | DBMMZ17H2P-N           | DBM17H2P-NNMB                  | DBMZ17H2P-NNMBK52     |
| DB         | 21W1   | DBMV21H1P-NK87        | DBMZ21H1P-NK87     | DBMMV21H1P-N          | DBMMZ21H1P-N           | DBM21H1P-NNMB                  | DBMZ21H1P-NNMBK52     |
| DC         | 8W8    | DCMV8H8P-NK87         | DCMZ8H8P-NK87      | DCMMV8H8P-N           | DCMMZ8H8P-N            | DCM8H8P-NNMB                   | DCMZ8H8P-NNMBK52      |
| DC         | 13W6   | DCMV13H6P-NK87        | DCMZ13H6P-NK87     | DCMMV13H6P-N          | DCMMZ13H6P-N           | DCM13H6P-NNMB                  | DCMZ13H6P-NNMBK52     |
| DC         | 17W5   | DCMV17H5P-NK87        | DCMZ17H5P-NK87     | DCMMV17H5P-N          | DCMMZ17H5P-N           | DCM17H5P-NNMB                  | DCMZ17H5P-NNMBK52     |
| DC         | 21WA4  | DCMV21HA4P-NK87       | DCMZ21HA4P-NK87    | DCMMV21HA4P-N         | DCMMZ21HA4P-N          | DCM21HA4P-NNMB                 | DCMZ21HA4P-NNMBK52    |
| DC         | 25W3   | DCMV25H3P-NK87        | DCMZ25H3P-NK87     | DCMMV25H3P-N          | DCMMZ25H3P-N           | DCM25H3P-NNMB                  | DCMZ25H3P-NNMBK52     |
| DC         | 27W2   | DCMV27H2P-NK87        | DCMZ27H2P-NK87     | DCMMV27H2P-N          | DCMMZ27H2P-N           | DCM27H2P-NNMBK                 | DCMZ27H2P-NNMBK52     |

\* For Spacers; Order P/N 253-0343-008, 2 each



\*\*For M-3 and other hardware options, see part number designator, page 7.

\*\* Hardware Modifier not allowed on Non-Magnetic/Low Outgassing Versions; consult factory for more information

## Plug

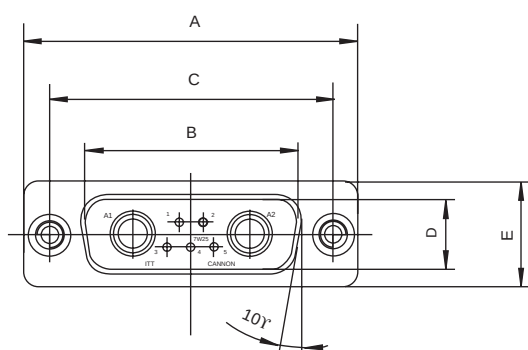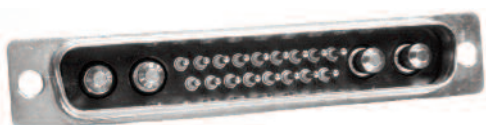

- For contact cavity arrangements, see page 61.
- For pcb hole pattern, see pages 92-94.
- For mounting methods, see pages 59-60.

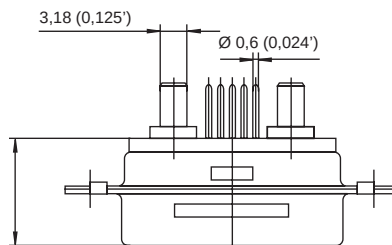

## Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | W<br>± 0,368 (.0145) | W<br>± 0,41 (.016) | L<br>± 0,25 (.010) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|----------------------|--------------------|--------------------|
| DE         | 30,81 (1.213)      | 16,92 (.665)       | 24,99 (.984)       | 8,36 (.329)        | 12,55 (.494)       | 10,72 (.422)       | 6,693 (.2635)        | —                  | 0,76 (.030)        |
| DA         | 39,14 (1.541)      | 25,25 (.994)       | 33,32 (1.312)      | 8,36 (.329)        | 12,55 (.494)       | 10,72 (.422)       | 6,693 (.2635)        | —                  | 0,76 (.030)        |
| DB         | 53,04 (2.088)      | 38,96 (1.534)      | 47,04 (1.852)      | 8,36 (.329)        | 12,55 (.494)       | 10,82 (.426)       | —                    | 6,84 (.269)        | 0,99 (.039)        |
| DC         | 69,32 (2.729)      | 55,42 (2.182)      | 63,50 (2.500)      | 8,36 (.329)        | 12,55 (.494)       | 10,82 (.426)       | —                    | 6,84 (.269)        | 0,99 (.039)        |

Dimensions shown in mm

Specifications and dimensions subject to change

www.ittcannon.com



## 40 A High power straight PCB Plug, size DD

40 A High power straight inserted with straight contacts and standoff with 4-40 thread


| Shell size | Layout | US             |              | European          |                         | NON-MAGNETIC/LOW OUTGASSING** |  |
|------------|--------|----------------|--------------|-------------------|-------------------------|-------------------------------|--|
|            |        | P/N Industrial | P/N Military | P/N Class 3*      | P/N Class 2*            | P/N Base**                    |  |
| DD         | 24W7   | DDM24H7P-NK87  | DDMM24H7P-N  | DDM-24H7P-OL4-K87 | DDM-Z24H7P-OL4-A191-K87 | DDM24H7P-NNMBK52              |  |
| DD         | 36W4   | DDM36H4P-NK87  | DDMM36H4P-N  | DDM-36H4P-OL4-K87 | DDM-Z36H4P-OL4-A191-K87 | DDM36H4P-NNMBK52              |  |
| DD         | 43W2   | DDM43H2P-NK87  | DDMM43H2P-N  | DDM-43H2P-OL4-K87 | DDM-Z43H2P-OL4-A191-K87 | DDM43H2P-NNMBK52              |  |
| DD         | 47W1   | DDM47H1P-NK87  | DDMM47H1P-N  | DDM-47H1P-OL4-K87 | DDM-Z47H1P-OL4-A191-K87 | DDM47H1P-NNMBK52              |  |

\*For M-3 hardware and other hardware options, see part number designator, page 7.


\*\*For spacers; order P/N 253-0343-008, two each per connector.

\*\*\* Hardware Modifier not allowed on Non-Magnetic/Low Outgassing Versions; consult factory for more information

### Plug

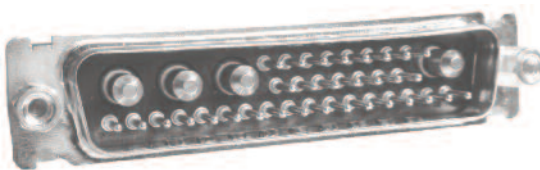

- For contact cavity arrangements, see page 61.
- For pcb hole pattern, see pages 92-94.
- For mounting methods, see pages 59-60.

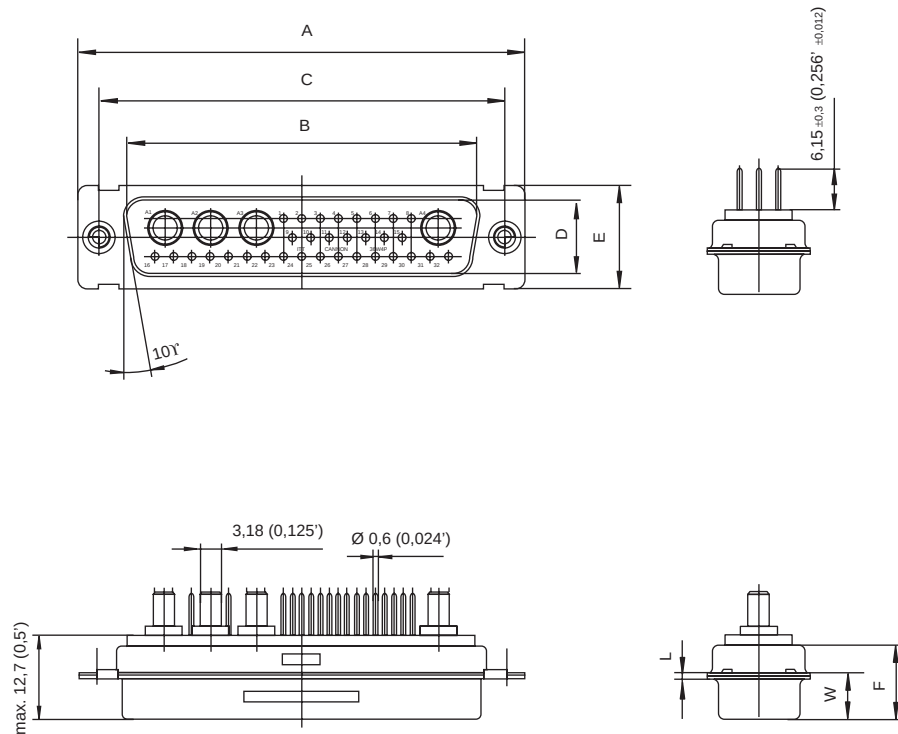

### Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | W<br>± 0,41 (.010) | L<br>± 0,25 (.010) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| DD         | 66,93 (2.635)      | 52,81 (2.079)      | 61,11 (2.406)      | 11,07 (.436)       | 15,37 (.605)       | 10,82 (.426)       | 6,84 (.264)        | 0,99 (.039)        |

## 40 A High power straight PCB Receptacle, sizes DE – DC

40 A High power inserted with straight contacts and standoff with UNC 4-40 thread






| Shell size | Layout | INDUSTRIAL          |                  | MILITARY/HI-REL     |                  | NON-MAGNETIC**/LOW OUTGASSING*** |                       |
|------------|--------|---------------------|------------------|---------------------|------------------|----------------------------------|-----------------------|
|            |        | P/N without pushfit | P/N with pushfit | P/N without pushfit | P/N with pushfit | P/N with Cadmium Plating         | P/N with Gold Plating |
| DE         | 2W2    | DEMV2H2S-NA197      | DEMZ2H2S-NA197   | DEMMV2H2S-N         | DEMMZ2H2S-N      | DEM2H2S-NNMB                     | DEM2H2S-NNMBK52       |
| DE         | 2WK2   | DEMV2HK2S-NA197     | DEMZ2HK2S-NA197  | DEMMV2HK2S-N        | DEMMZ2HK2S-N     | DEM2HK2S-NNMB                    | DEM2HK2S-NNMBK52      |
| DE         | 5W1    | DEMV5H1S-NA197      | DEMZ5H1S-NA197   | DEMMV5H1S-N         | DEMMZ2HK2S-N     | DEM5H1S-NNMB                     | DEM5H1S-NNMBK52       |
| DA         | 7W2    | DAMV7H2S-NA197      | DAMZ7H2S-NA197   | DAMMV7H2S-N         | DAMMZ7H2S-N      | DAM7H2S-NNMB                     | DAM7H2S-NNMBK52       |
| DA         | 11W1   | DAMV11H1S-NA197     | DAMZ11H1S-NA197  | DAMMV11H1S-N        | DAMMZ11H1S-N     | DAM11H1S-NNMB                    | DAM11H1S-NNMBK52      |
| DA         | 3W3    | DAMV3H3S-NA197      | DAMZ3H3S-NA197   | DAMMV3H3S-N         | DAMMZ3H3S-N      | DAM3H3S-NNMB                     | DAM3H3S-NNMBK52       |
| DA         | 3WK3   | DAMV3HK3S-NA197     | DAMZ3HK3S-NA197  | DAMMV3HK3S-N        | DAMMZ3HK3S-N     | DAM3HK3S-NNMB                    | DAM3HK3S-NNMBK52      |
| DB         | 5W5    | DBMV5H5S-NA197      | DBMZ5H5S-NA197   | DBMMV5H5S-N         | DBMMZ5H5S-N      | DBM5H5S-NNMB                     | DBM5H5S-NNMBK52       |
| DB         | 9W4    | DBMV9H4S-NA197      | DBMZ9H4S-NA197   | DBMMV9H4S-N         | DBMMZ9H4S-N      | DBM9H4S-NNMB                     | DBM9H4S-NNMBK52       |
| DB         | 13W3   | DBMV13H3S-NA197     | DBMZ13H3S-NA197  | DBMMV13H3S-N        | DBMMZ13H3S-N     | DBM13H3S-NNMB                    | DBM13H3S-NNMBK52      |
| DB         | 17W2   | DBMV17H2S-NA197     | DBMZ17H2S-NA197  | DBMMV17H2S-N        | DBMMZ17H2S-N     | DBM17H2S-NNMB                    | DBM17H2S-NNMBK52      |
| DB         | 21W1   | DBMV21H1S-NA197     | DBMZ21H1S-NA197  | DBMMV21H1S-N        | DBMMZ21H1S-N     | DBM21H1S-NNMB                    | DBM21H1S-NNMBK52      |
| DC         | 8W8    | DCMV8H8S-NA197      | DCMZ8H8S-NA197   | DCMMV8H8S-N         | DCMMZ8H8S-N      | DCM8H8S-NNMB                     | DCM8H8S-NNMBK52       |
| DC         | 13W6   | DCMV13H6S-NA197     | DCMZ13H6S-NA197  | DCMMV13H6S-N        | DCMMZ13H6S-N     | DCM13H6S-NNMB                    | DCM13H6S-NNMBK52      |
| DC         | 17W5   | DCMV17H5S-NA197     | DCMZ17H5S-NA197  | DCMMV17H5S-N        | DCMMZ17H5S-N     | DCM17H5S-NNMB                    | DCM17H5S-NNMBK52      |
| DC         | 21WA4  | DCMV21HA4S-NA197    | DCMZ21HA4S-NA197 | DCMMV21HA4S-N       | DCMMZ21HA4S-N    | DCM21HA4S-NNMB                   | DCM21HA4S-NNMBK52     |
| DC         | 25W3   | DCMV25H3S-NA197     | DCMZ25H3S-NA197  | DCMMV25H3S-N        | DCMMZ25H3S-N     | DCM25H3S-NNMB                    | DCM25H3S-NNMBK52      |
| DC         | 27W2   | DCMV27H2S-NA197     | DCMZ27H2S-NA197  | DCMMV27H2S-N        | DCMMZ27H2S-N     | DCM27H2S-NNMB                    | DCM27H2S-NNMBK52      |

\*For M-3 hardware and other hardware options, see part number designator, page 7.

\*\*For spacers; order P/N 23-0343-008, two each per connector.

\*\*\* Hardware Modifier not allowed on Non-Magnetic/Low Outgassing Versions; consult factory for more information.

### Receptacle

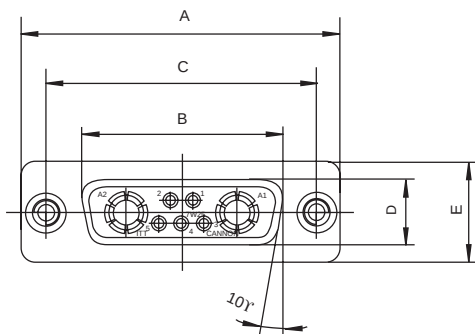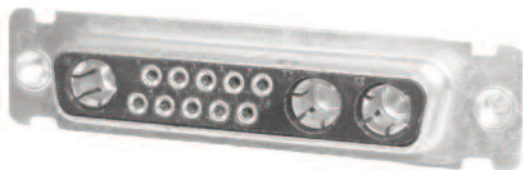

- For contact cavity arrangements, see page 62.
- For pcb hole pattern, see pages 95-97.
- For mounting methods, see pages 59-60.

### Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | W<br>± 0,38 (.015) | L<br>± 0,25 (.010) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| DE         | 30,81 (1.213)      | 16,33 (.643)       | 24,99 (.984)       | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,94 (.273)        | 0,76 (.030)        |
| DA         | 39,14 (1.541)      | 24,65 (.971)       | 33,32 (1.312)      | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,94 (.273)        | 0,76 (.030)        |
| DB         | 53,04 (2.088)      | 38,38 (1.511)      | 47,04 (1.852)      | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,94 (.273)        | 0,76 (.030)        |
| DC         | 69,32 (2.729)      | 54,84 (2.159)      | 63,50 (2.500)      | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,94 (.273)        | 0,76 (.030)        |

Dimensions shown in mm

Specifications and dimensions subject to change

www.ittcannon.com

40 A High power straight PCB Receptacle, size DD


40 A High power straight inserted with straight contacts and standoff with 4-40 thread

| Shell size | Layout | US             |              | European           |                          | NON-MAGNETIC/LOW OUTGASSING** |
|------------|--------|----------------|--------------|--------------------|--------------------------|-------------------------------|
|            |        | P/N Industrial | P/N Military | P/N Class 3        | P/N Class 2              |                               |
| DD         | 24W7   | DDM24H7S-NA197 | DDMM24H7S-N  | DDM-24P7S-OL4-A197 | DDM-Z24P7S-OL4-A191-A197 | DDM24H7S-NNMBK52              |
| DD         | 36W4   | DDM36H4S-NA197 | DDMM36H4S-N  | DDM-36P4S-OL4-A197 | DDM-Z36P4S-OL4-A191-A197 | DDM36H4S-NNMBK52              |
| DD         | 43W2   | DDM43H2S-NA197 | DDMM43H2S-N  | DDM-43P2S-OL4-A197 | DDM-Z43P2S-OL4-A191-A197 | DDM43H2S-NNMBK52              |
| DD         | 47W1   | DDM47H1S-NA197 | DDMM47H1S-N  | DDM-47P1S-OL4-A197 | DDM-Z47P1S-OL4-A191-A197 | DDM47H1S-NNMBK52              |

\*For M-3 hardware and other hardware options, see part number designator, page 7.  
\*\* For spacers; order P/N 23-0343-008, two each per connector.  
\*\*\*Hardware Modifier not allowed on Non-Magnetic/Low Outgassing Versions; consult factory for more information.

Receptacle

- For contact cavity arrangements, see page 62.
- For pcb hole pattern, see pages 95-97.
- For mounting methods, see pages 59-60.

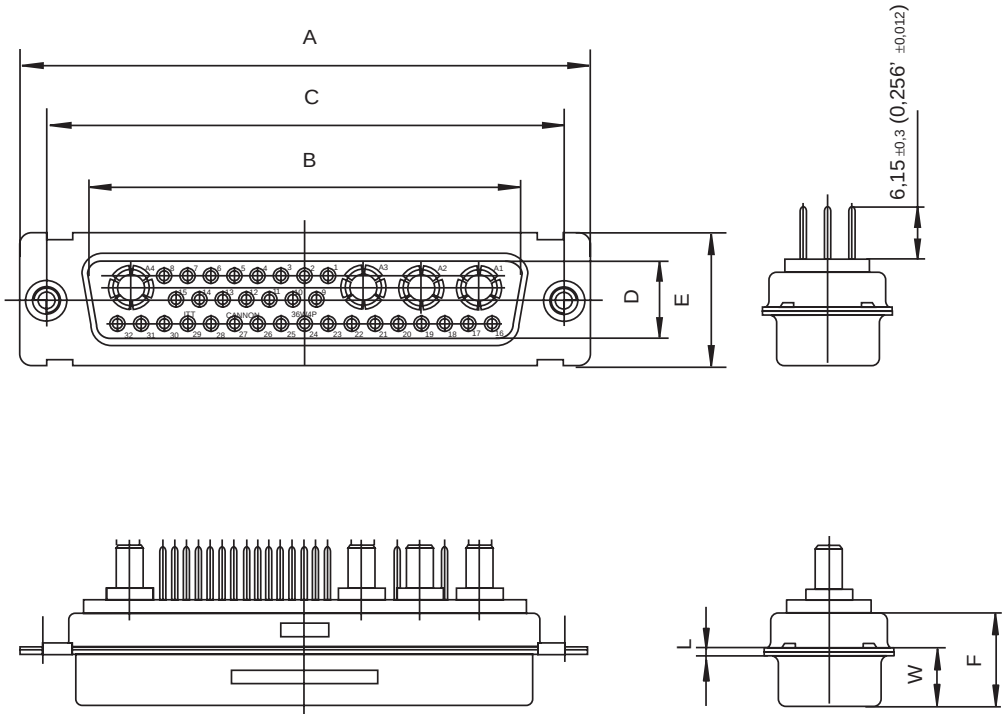

Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | W<br>± 0,38 (.015) | L<br>± 0,25 (.010) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| DD         | 66,93 (2,635)      | 52,42 (2,406)      | 61,11 (2,406)      | 10,74 (.423)       | 15,37 (.605)       | 10,90 (.429)       | 6,94 (.273)        | 0,76 (.030)        |



## 40 A High Power straight-European solder Pins, sizes DE-DC




### Part numbers with straight contacts

| Shell size | Layout | with standoff M3         | with standoff M3 with pushfit | standoff, M3 post and pushfit | with M3 clinch nut       | with through hole 3,05 mm |
|------------|--------|--------------------------|-------------------------------|-------------------------------|--------------------------|---------------------------|
| DE         | 2W2    | DEMT-2H2P-OL4-A191-K87   | DEMQ-2H2P-OL4-A191-K87        | DEMU-2H2P-OL4-A191-K87        | DEMX-2H2P-OL4-A191-K87   | DEM-2H2P-OL4-A191-K87     |
| DE         | 2WK2   | DEMT-2HK2P-OL4-A191-K87  | DEMQ-2HK2P-OL4-A191-K87       | DEMU-2HK2P-OL4-A191-K87       | DEMX-2HK2P-OL4-A191-K87  | DEM-2HK2P-OL4-A191-K87    |
| DE         | 5W1    | DEMT-5H1P-OL4-A191-K87   | DEMQ-5H1P-OL4-A191-K87        | DEMU-5H1P-OL4-A191-K87        | DEMX-5H1P-OL4-A191-K87   | DEM-5H1P-OL4-A191-K87     |
| DA         | 7W2    | DAMT-7H2P-OL4-A191-K87   | DAMQ-7H2P-OL4-A191-K87        | DAMU-7H2P-OL4-A191-K87        | DAMX-7H2P-OL4-A191-K87   | DAM-7H2P-OL4-A191-K87     |
| DA         | 11W1   | DAMT-11H1P-OL4-A191-K87  | DAMQ-11H1P-OL4-A191-K87       | DAMU-11H1P-OL4-A191-K87       | DAMX-11H1P-OL4-A191-K87  | DAM-11H1P-OL4-A191-K87    |
| DA         | 3W3    | DAMT-3H3P-OL4-A191-K87   | DAMQ-3H3P-OL4-A191-K87        | DAMU-3H3P-OL4-A191-K87        | DAMX-3H3P-OL4-A191-K87   | DAM-3H3P-OL4-A191-K87     |
| DA         | 3WK3   | DAMT-3HK3P-OL4-A191-K87  | DAMQ-3HK3P-OL4-A191-K87       | DAMU-3HK3P-OL4-A191-K87       | DAMX-3HK3P-OL4-A191-K87  | DAM-3HK3P-OL4-A191-K87    |
| DB         | 5W5    | DBMT-5H5P-OL4-A191-K87   | DBMQ-5H5P-OL4-A191-K87        | DBMU-5H5P-OL4-A191-K87        | DBMX-5H5P-OL4-A191-K87   | DBM-5H5P-OL4-A191-K87     |
| DB         | 9W4    | DBMT-9H4P-OL4-A191-K87   | DBMQ-9H4P-OL4-A191-K87        | DBMU-9H4P-OL4-A191-K87        | DBMX-9H4P-OL4-A191-K87   | DBM-9H4P-OL4-A191-K87     |
| DB         | 13W3   | DBMT-13H3P-OL4-A191-K87  | DBMQ-13H3P-OL4-A191-K87       | DBMU-13H3P-OL4-A191-K87       | DBMX-13H3P-OL4-A191-K87  | DBM-13H3P-OL4-A191-K87    |
| DB         | 17W2   | DBMT-17HSP-OL4-A191-K87  | DBMQ-17HSP-OL4-A191-K87       | DBMU-17HSP-OL4-A191-K87       | DBMX-17HSP-OL4-A191-K87  | DBM-17HSP-OL4-A191-K87    |
| DB         | 21W1   | DBMT-21H1P-OL4-A191-K87  | DBMQ-21H1P-OL4-A191-K87       | DBMU-21H1P-OL4-A191-K87       | DBMX-21H1P-OL4-A191-K87  | DBM-21H1P-OL4-A191-K87    |
| DC         | W8     | DCMT-8H8P-OL4-A191-K87   | DCMQ-8H8P-OL4-A191-K87        | DCMU-8H8P-OL4-A191-K87        | DCMX-8H8P-OL4-A191-K87   | DCM-8H8P-OL4-A191-K87     |
| DC         | 13W6   | DCMT-13H6P-OL4-A191-K87  | DCMQ-13H6P-OL4-A191-K87       | DCMU-13H6P-OL4-A191-K87       | DCMX-13H6P-OL4-A191-K87  | DCM-13H6P-OL4-A191-K87    |
| DC         | 17W5   | DCMT-17H5P-OL4-A191-K87  | DCMQ-17H5P-OL4-A191-K87       | DCMU-17H5P-OL4-A191-K87       | DCMX-17H5P-OL4-A191-K87  | DCM-17H5P-OL4-A191-K87    |
| DC         | 21WA4  | DCMT-21HA4P-OL4-A191-K87 | DCMQ-21HA4P-OL4-A191-K87      | DCMU-21HA4P-OL4-A191-K87      | DCMX-21HA4P-OL4-A191-K87 | DCM-21HA4P-OL4-A191-K87   |
| DC         | 25W3   | DCMT-25H3P-OL4-A191-K87  | DCMQ-25H3P-OL4-A191-K87       | DCMU-25H3P-OL4-A191-K87       | DCMX-25H3P-OL4-A191-K87  | DCM-25H3P-OL4-A191-K87    |
| DC         | 27W2   | DCMT-27H2P-OL4-A191-K87  | DCMQ-27H2P-OL4-A191-K87       | DCMU-27H2P-OL4-A191-K87       | DCMX-27H2P-OL4-A191-K87  | DCM-27H2P-OL4-A191-K87    |



For performance class 1 replace A191 with A190.  
For performance class 3 delete A191.

For 4-40 UNC thread standoff with pushfit replace Q with Z.  
For captive nut 4-40 NC replace X with E.

### Pin

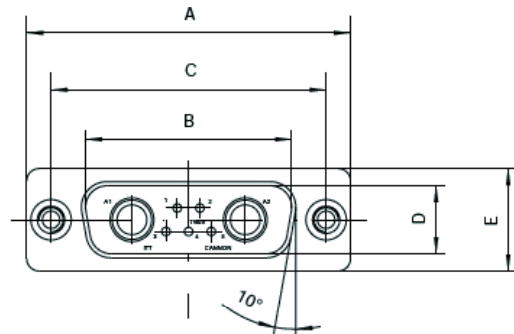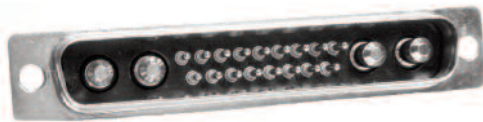

- For contact cavity arrangements, see page 61.
- For pcb hole pattern, see pages 92-94.
- For mounting methods, see pages 59-60.

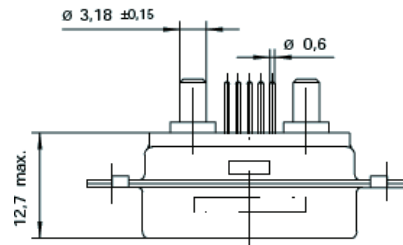

### Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | W<br>± 0,2 (.008) | L<br>± 0,40 (.016) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|-------------------|--------------------|
| DE         | 30,81 (1.213)      | 16,90 (.665)       | 25,0 (.984)        | 8,35 (.329)        | 12,55 (.494)       | 10,70 (.421)       | 6,70 (.264)       | 0,8 (.031)         |
| DA         | 39,15 (1.541)      | 24,25 (.994)       | 33,3 (1.311)       | 8,35 (.329)        | 12,55 (.494)       | 10,70 (.421)       | 6,70 (.264)       | 0,8 (.031)         |
| DB         | 53,05 (2.088)      | 38,95 (1.533)      | 47,05 (1.852)      | 8,35 (.329)        | 12,55 (.494)       | 10,80 (.425)       | 6,80 (.268)       | 0,9 (.031)         |
| DC         | 69,3 (2.089)       | 55,4 (2.181)       | 63,50 (2.500)      | 8,35 (.329)        | 12,55 (.494)       | 10,80 (.425)       | 6,80 (.268)       | 0,9 (.031)         |

Dimensions shown in mm  
Specifications and dimensions subject to change

[www.ittcannon.com](http://www.ittcannon.com)



## 40 A High Power straight-European solder Socket, sizes DE-DC

## Part numbers with straight contacts

| Shell size | Layout | with standoff M3          | with standoff M3 with pushfit | standoff, M3 post and pushfit | with M3 clinch nut        | with through hole 3,05 mm |
|------------|--------|---------------------------|-------------------------------|-------------------------------|---------------------------|---------------------------|
| DE         | 2W2    | DEMT-2H2S-OL4-A191-A197   | DEMQ-2H2S-OL4-A191-A197       | DEMU-2H2S-OL4-A191-A197       | DEMX-2H2S-OL4-A191-A197   | DEM-2H2S-OL4-A191-A197    |
| DE         | 2WK2   | DEMT-2HK3S-OL4-A191-A197  | DAMQ-2HK3S-OL4-A191-A197      | DAMU-2PH3S-OL4-A191-A197      | DAMX-2PH3S-OL4-A191-A197  | DAM-2HK3S-OL4-A191-A197   |
| DE         | 5W1    | DEMT-5H1S-OL4-A191-A197   | DEMQ-5H1S-OL4-A191-A197       | DEMU-5H1S-OL4-A191-A197       | DEMX-5H1S-OL4-A191-A197   | DEM-5H1S-OL4-A191-A197    |
| DA         | 7W2    | DAMT-7H2S-OL4-A191-A197   | DAMQ-7H2S-OL4-A191-A197       | DAMU-7H2S-OL4-A191-A197       | DAMX-7H2S-OL4-A191-A197   | DAM-7H2S-OL4-A191-A197    |
| DA         | 11W1   | DAMT-11H1S-OL4-A191-A197  | DAMQ-11H1S-OL4-A191-A197      | DAMU-11H1S-OL4-A191-A197      | DAMX-11H1S-OL4-A191-A197  | DAM-11H1S-OL4-A191-A197   |
| DA         | 3W3    | DAMT-3H3S-OL4-A191-A197   | DAMQ-3H3S-OL4-A191-A197       | DAMU-3H3S-OL4-A191-A197       | DAMX-3H3S-OL4-A191-A197   | DAM-3H3S-OL4-A191-A197    |
| DA         | 3WK3   | DAMT-3HK3S-OL4-A191-A197  | DAMQ-3HK3S-OL4-A191-A197      | DAMU-3PH3S-OL4-A191-A197      | DAMX-3PH3S-OL4-A191-A197  | DAM-3HK3S-OL4-A191-A197   |
| DB         | 5W5    | DBMT-5H5S-OL4-A191-A197   | DBMQ-5H5S-OL4-A191-A197       | DBMU-5H5S-OL4-A191-A197       | DBMX-5H5S-OL4-A191-A197   | DBM-5H5S-OL4-A191-A197    |
| DB         | 9W4    | DBMT-9H4S-OL4-A191-A197   | DBMQ-9H4S-OL4-A191-A197       | DBMU-9H4S-OL4-A191-A197       | DBMX-9H4S-OL4-A191-A197   | DBM-9H4S-OL4-A191-A197    |
| DB         | 13W3   | DBMT-13H3S-OL4-A191-A197  | DBMQ-13H3S-OL4-A191-A197      | DBMU-13H3S-OL4-A191-A197      | DBMX-13H3S-OL4-A191-A197  | DBM-13H3S-OL4-A191-A197   |
| DB         | 17W2   | DBMT-17H2S-OL4-A191-A197  | DBMQ-17H2S-OL4-A191-A197      | DBMU-17H2S-OL4-A191-A197      | DBMX-17H2S-OL4-A191-A197  | DBM-17H2S-OL4-A191-A197   |
| DB         | 21W1   | DBMT-21H1S-OL4-A191-A197  | DBMQ-21H1S-OL4-A191-A197      | DBMU-21H1S-OL4-A191-A197      | DBMX-21H1S-OL4-A191-A197  | DBM-21H1S-OL4-A191-A197   |
| DC         | W8     | DCMT-8H8S-OL4-A191-A197   | DCMQ-8H8S-OL4-A191-A197       | DCMU-8H8S-OL4-A191-A197       | DCMX-8H8S-OL4-A191-A197   | DCM-8H8S-OL4-A191-A197    |
| DC         | 13W6   | DCMT-13H6S-OL4-A191-A197  | DCMQ-13H6S-OL4-A191-A197      | DCMU-13H6S-OL4-A191-A197      | DCMX-13H6S-OL4-A191-A197  | DCM-13H6S-OL4-A191-A197   |
| DC         | 17W5   | DCMT-17H5S-OL4-A191-A197  | DCMQ-17H5S-OL4-A191-A197      | DCMU-17H5S-OL4-A191-A197      | DCMX-17H5S-OL4-A191-A197  | DCM-17H5S-OL4-A191-A197   |
| DC         | 21WA4  | DCMT-21HA4S-OL4-A191-A197 | DCMQ-21HA4S-OL4-A191-A197     | DCMU-21HA4S-OL4-A191-A197     | DCMX-21HA4S-OL4-A191-A197 | DCM-21HA4S-OL4-A191-A197  |
| DC         | 25W3   | DCMT-25H3S-OL4-A191-A197  | DCMQ-25H3S-OL4-A191-A197      | DCMU-25H3S-OL4-A191-A197      | DCMX-25H3S-OL4-A191-A197  | DCM-25H3S-OL4-A191-A197   |
| DC         | 27W2   | DCMT-27H2S-OL4-A191-A197  | DCMQ-27H2S-OL4-A191-A197      | DCMU-27H2S-OL4-A191-A197      | DCMX-27H2S-OL4-A191-A197  | DCM-27H2S-OL4-A191-A197   |






For performance class 1 replace A191 with A190.

For performance class 3 delete A191.

For 4-40 UNC thread standoff with pushfit replace Q with Z.

For captive nut 4-40 NC replace X with E.

## Socket

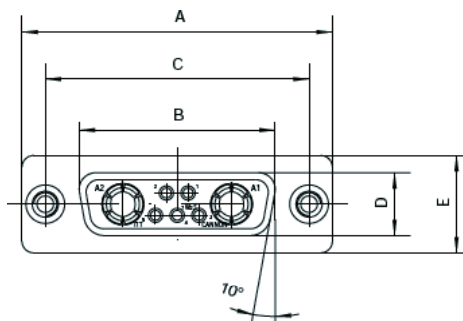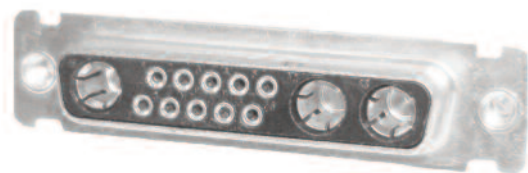

- For contact cavity arrangements, see page 62.
- For pcb hole pattern, see pages 95-97.
- For mounting methods, see pages 59-60.

## Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | L<br>± 0,2 (.008) | W<br>± 0,40 (.016) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|-------------------|--------------------|
| DE         | 30,8 (1.213)       | 16,35 (.644)       | 25 (.984)          | 7,9 (.311)         | 12,55 (.494)       | 10,90 (.429)       | 0,8 (.031)        | 6,95 (.274)        |
| DA         | 39,15 (1.541)      | 24,65 (.970)       | 33,3 (1.311)       | 7,9 (.311)         | 12,55 (.494)       | 10,90 (.429)       | 0,8 (.031)        | 6,95 (.274)        |
| DB         | 53,05 (2.089)      | 38,4 (1.512)       | 47,05 (1.852)      | 7,9 (.311)         | 12,55 (.494)       | 10,90 (.429)       | 0,8 (.031)        | 6,95 (.274)        |
| DC         | 69,3 (2.089)       | 54,85 (2.159)      | 63,50 (2.500)      | 7,9 (.311)         | 12,55 (.494)       | 10,90 (.429)       | 0,8 (.031)        | 6,95 (.274)        |

## 40 A High Power Plug, Pressfit Termination

## Plug



## Part Numbers

| Boardlock 4-40 UNC | Boardlock M3      | Stand-off 4-40    | Stand-off M3      |
|--------------------|-------------------|-------------------|-------------------|
| DAME3W3P-PO-161    | DAMX-3W3P-PO-161  | DAME-3W3P-PO-183  | DAMX-3W3P-PO-183  |
| DAME3WK3P-PO-161   | DAMX-3WK3P-PO-161 | DAME-3WK3P-PO-183 | DAMX-3WK3P-PO-183 |
| DBME5W5P-PO-161    | DBMX-5W5P-PO-161  | DBME-5W5P-PO-183  | DBMX-5W5P-PO-183  |
| DCME8W8P-PO-161    | DCMX-8W8P-PO-161  | DCME-8W8P-PO-183  | DCMX-8W8P-PO-183  |

- For contact cavity arrangements, see page 61.
- For pcb hole pattern, see pages 82-84.
- For mounting methods, see pages 59-60.


## Electrical Data

Insulation resistance  
 $\approx 1 \times 10^{10} \text{ W} / 100 \text{ V}$

Contact resistance  
 1 mW


Dielectric Withstanding Voltage  
 1000 VAC (sea level)

## Current Load

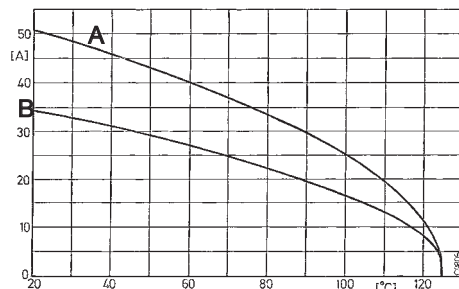


A – Multilayer 6 x 35 µm x 4,5 mm



B – Double layer 2 x 35 µm x 4,5 mm

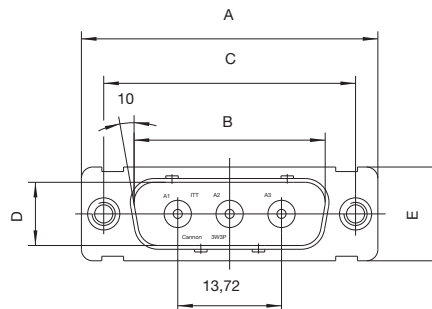

3W3



3WK3

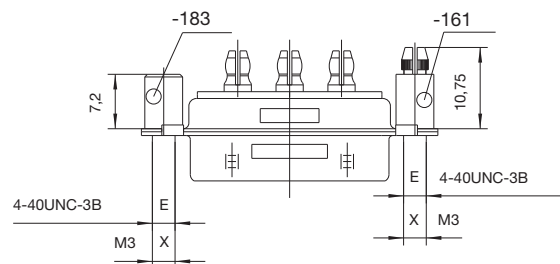

## Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | W<br>± 0,38 (.0145) | W<br>± 0,41 (.016) | L<br>± 0,25 (.010) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|---------------------|--------------------|--------------------|
| DA         | 39,14 (1.541)      | 25,25 (.994)       | 33,32 (1.312)      | 8,36 (.329)        | 12,55 (.494)       | 10,72 (.422)       | 6,693 (.2635)       | —                  | 0,76 (.030)        |
| DB         | 53,04 (2.088)      | 38,96 (1.534)      | 47,04 (1.852)      | 8,36 (.329)        | 12,55 (.494)       | 10,82 (.426)       | —                   | 6,84 (.269)        | 0,99 (.039)        |
| DC         | 69,32 (2.729)      | 55,42 (2.182)      | 63,50 (2.500)      | 8,36 (.329)        | 12,55 (.494)       | 10,82 (.426)       | —                   | 6,84 (.269)        | 0,99 (.039)        |

Dimensions shown in mm  
 Specifications and dimensions subject to change

www.ittcannon.com

## 40 A High Power Receptacle, Pressfit Termination




## Part Numbers

| Boardlock 4-40 UNC | Boardlock M3      | Stand-off 4-40    | Stand-off M3      |
|--------------------|-------------------|-------------------|-------------------|
| DEME3W3S-PO-161    | DEMX-3W3S-PO-161  | DEME-3W3S-PO-183  | DEMX-3W3S-PO-183  |
| DAME3WK3S-PO-161   | DAMX-3WK3S-PO-161 | DAME-3WK3S-PO-183 | DAMX-3WK3S-PO-183 |
| DBME5W5S-PO-161    | DBMX-5W5S-PO-161  | DBME-5W5S-PO-183  | DBMX-5W5S-PO-183  |
| DCME8W8S-PO-161    | DCMX-8W8S-PO-161  | DCME-8W8S-PO-183  | DCMX-8W8S-PO-183  |

## Receptacle



- For contact cavity arrangements, see page 62.
- For pcb hole pattern, see pages 85-87.
- For mounting methods, see page 59-60.

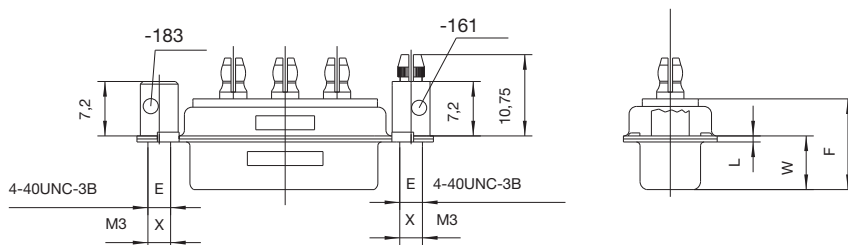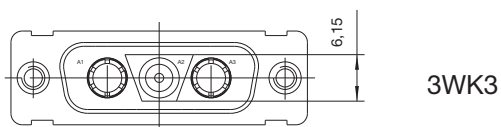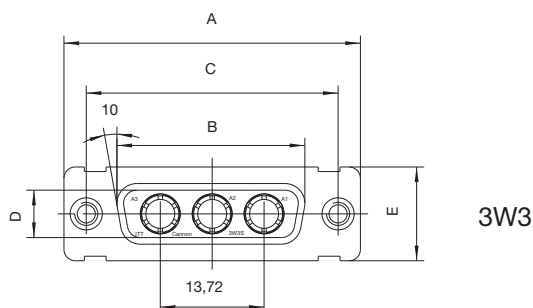


## Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | W<br>± 0,38 (.015) | L<br>± 0,25 (.010) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| DA         | 39,15 (1.541)      | 24,66 (.971)       | 33,32 (1.312)      | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,94 (.273)        | 6,76 (.030)        |
| DB         | 53,04 (2.088)      | 38,48 (1.511)      | 47,04 (1.852)      | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,94 (.273)        | 6,76 (.030)        |
| DC         | 69,32 (2.729)      | 54,84 (2.159)      | 63,50 (2.500)      | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,94 (.273)        | 6,76 (.030)        |

Plug, Solder cup, sizes DE – DC, with empty size 8 cavities

Empty size 8 contact cavities  
with solder pot termination

Plug

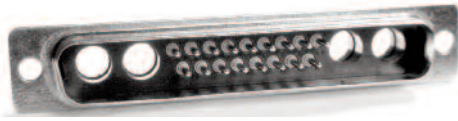


- For contact cavity arrangements, see page 61.
- For mounting methods, see page 59-60.

| Shell size | Layout | INDUSTRIAL<br>P/N with<br>through hole | MILITARY/HI-REL<br>P/N with<br>through hole | NON-MAGNETIC/LOW OUTGASSING**<br>P/N with<br>through hole |
|------------|--------|----------------------------------------|---------------------------------------------|-----------------------------------------------------------|
| DE         | 2W2    | DEM2W2PK87                             | DEMM2W2P                                    | DEM2W2PNMBK52                                             |
| DE         | 2WK2   | DEM2WK2PK87                            | DEMM2WK2P                                   | DEM2WK2PNMBK52                                            |
| DE         | 5W1    | DEM5W1PK87                             | DEMM5W1P                                    | DEM5W1PNMBK52                                             |
| DA         | 7W2    | DAM7W2PK87                             | DAMM7W2P                                    | DAM7W2PNMBK52                                             |
| DA         | 11W1   | DAM11W1PK87                            | DAMM11W1P                                   | DAM11W1PNMBK52                                            |
| DA         | 3W3    | DAM3W3PK87                             | DAMM3W3P                                    | DAM3W3PNMBK52                                             |
| DA         | 3WK3   | DAM3WK3PK87                            | DAMM3WK3P                                   | DAM3WK3PNMBK52                                            |
| DB         | 5W5    | DBM5W5PK87                             | DBMM5W5P                                    | DBM5W5PNMBK52                                             |
| DB         | 9W4    | DBM9W4PK87                             | DBMM9W4P                                    | DBM9W4PNMBK52                                             |
| DB         | 13W3   | DBM13W3PK87                            | DBMM13W3P                                   | DBM13W3PNMBK52                                            |
| DB         | 17W2   | DBM17W2PK87                            | DBMM17W2P                                   | DBM17W2PNMBK52                                            |
| DB         | 21W1   | DBM21W1PK87                            | DBMM21W1P                                   | DBM21W1PNMBK52                                            |
| DC         | 8W8    | DCM8W8PK87                             | DCMM8W8P                                    | DCM8W8PNMBK52                                             |
| DC         | 13W6   | DCM13W6PK87                            | DCMM13W6P                                   | DCM13W6PNMBK52                                            |
| DC         | 17W5   | DCM17W5PK87                            | DCMM17W5P                                   | DCM17W5PNMBK52                                            |
| DC         | 21WA4  | DCM21WA4PK87                           | DCMM21WA4P                                  | DCM21WA4PNMBK52                                           |
| DC         | 25W3   | DCM25W3PK87                            | DCMM25W3P                                   | DCM25W3PNMBK52                                            |
| DC         | 27W2   | DCM27W2PK87                            | DCMM27W2P                                   | DCM27W2PNMBK52                                            |

\*For clinch nut 4-40 UNC thread add "E", for float mount add "Y" after D\*M designation  
(Ex. DCMME27W2P, DGMY27W2PK87) 2W2/2WK2, 3W3/3WK3 (keyed) 5W5 and 8W8 without  
signal contacts.

\*\* Hardware Modifier not allowed on Non-Magnetic/Low Outgassing Versions; consult factory for  
more information

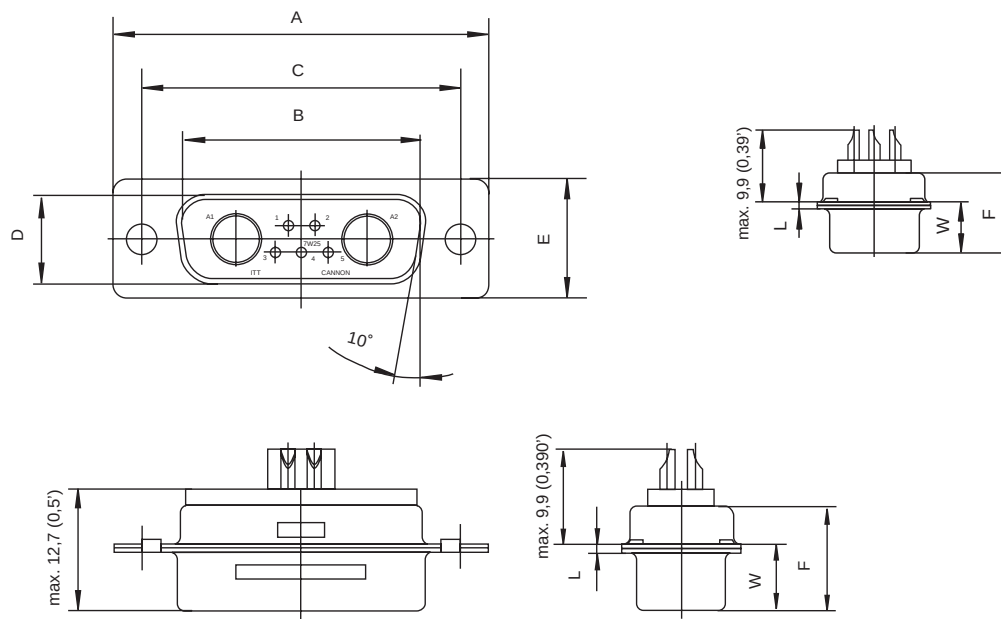

Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | W<br>± 0,368 (.0145) | W<br>± 0,41 (.016) | K<br>± 0,317 (.0125) | K<br>± 0,25 (.010) | L<br>± 0,25 (.010) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|----------------------|--------------------|----------------------|--------------------|--------------------|
| DE         | 30,81 (1.213)      | 16,92 (.666)       | 24,99 (.984)       | 8,36 (.329)        | 12,55 (.494)       | 10,72 (.422)       | 6,693 (.2635)        | —                  | 1,206 (.0475)        | —                  | 0,76 (.030)        |
| DA         | 39,14 (1.541)      | 25,25 (.994)       | 33,32 (1.312)      | 8,36 (.329)        | 12,55 (.494)       | 10,72 (.422)       | 6,693 (.2635)        | —                  | 1,206 (.0475)        | —                  | 0,76 (.030)        |
| DB         | 53,04 (2.088)      | 38,96 (1.534)      | 47,04 (1.852)      | 8,36 (.329)        | 12,55 (.494)       | 10,82 (.426)       | —                    | 6,84 (.269)        | —                    | 1,52 (.060)        | 0,99 (.039)        |
| DC         | 69,32 (2.729)      | 55,42 (2.182)      | 63,50 (2.500)      | 8,36 (.329)        | 12,55 (.494)       | 10,82 (.426)       | —                    | 6,84 (.269)        | —                    | 1,52 (.060)        | 0,99 (.039)        |

Dimensions shown in mm  
Specifications and dimensions subject to change

www.ittcannon.com



## Receptacle, Solder cup, sizes DE – DC, with empty size 8 cavities

Empty size 8 contact cavities  
with solder pot termination

## Receptacle




- For contact cavity arrangements, see page 62.
- For mounting methods, see pages 59-60.

| Shell size | Layout | INDUSTRIAL<br>P/N with<br>through hole | MILITARY/HI-REL<br>P/N with<br>through hole | NON-MAGNETIC/LOW OUTGASSING**<br>P/N with<br>through hole |
|------------|--------|----------------------------------------|---------------------------------------------|-----------------------------------------------------------|
| DE         | 2W2    | DEM2W2SA197                            | DEMM2W2S                                    | DEM2W2SNMBK52                                             |
| DE         | 2WK2   | DEM2WK2SA197                           | DEMM2WK2S                                   | DEM2WK2SNMBK52                                            |
| DE         | 5W1    | DEM5W1SA197                            | DEMM5W1S                                    | DEM5W1SNMBK52                                             |
| DA         | 7W2    | DAM7W2SA197                            | DAMM7W2S                                    | DAM7W2SNMBK52                                             |
| DA         | 11W1   | DAM11W1SA197                           | DAMM11W1S                                   | DAM11W1SNMBK52                                            |
| DA         | 3W3    | DAM3W3SA197                            | DAMM3W3S                                    | DAM3W3SNMBK52                                             |
| DA         | 3WK3   | DAM3WK3SA197                           | DAMM3WK3S                                   | DAM3WK3SNMBK52                                            |
| DB         | 5W5    | DBM5W5SA197                            | DBMM5W5S                                    | DBM5W5SNMBK52                                             |
| DB         | 9W4    | DBM9W4SA197                            | DBMM9W4S                                    | DBM9W4SNMBK52                                             |
| DB         | 13W3   | DBM13W3SA197                           | DBMM13W3S                                   | DBM13W3SNMBK52                                            |
| DB         | 17W2   | DBM17W2SA197                           | DBMM17W2S                                   | DBM17W2SNMBK52                                            |
| DB         | 21W1   | DBM21W1SA197                           | DBMM21W1S                                   | DBM21W1SNMBK52                                            |
| DC         | 8W8    | DCM8W8SA197                            | DCMM8W8S                                    | DCM8W8SNMBK52                                             |
| DC         | 13W6   | DCM13W6SA197                           | DCMM13W6S                                   | DCM13W6SNMBK52                                            |
| DC         | 17W5   | DCM17W5SA197                           | DCMM17W5S                                   | DCM17W5SNMBK52                                            |
| DC         | 21WA4  | DCM21WA4SA197                          | DCMM21WA4S                                  | DCM21WA4SNMBK52                                           |
| DC         | 25W3   | DCM25W3SA197                           | DCMM25W3S                                   | DCM25W3SNMBK52                                            |
| DC         | 27W2   | DCM27W2SA197                           | DCMM27W2S                                   | DCM27W2SNMBK52                                            |

\*For clinch nut 4-40 UNC thread add "E", for float mount add "Y" after D\*M designation  
(Ex. DCMME27W2P, DGM Y27W2PK87) 2W2/2WK2, 3W3/3WK3 (keyed) 5W5 and 8W8 without  
signal contacts.

\*\* Hardware Modifier not allowed on Non-Magnetic/Low Outgassing Versions; consult factory  
for more information

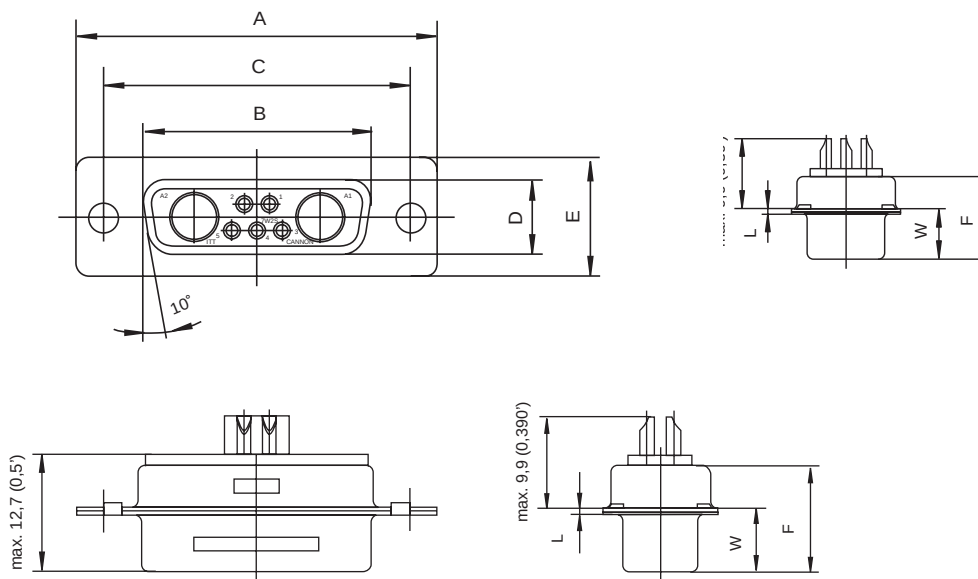


## Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | W<br>± 0,38 (.015) | K<br>± 0,317 (.0125) | L<br>± 0,25 (.010) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|----------------------|--------------------|
| DE         | 30,81 (1.213)      | 16,33 (.643)       | 24,99 (.984)       | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,94 (.273)        | 1,206 (.0475)        | 0,76 (.030)        |
| DA         | 39,14 (1.541)      | 24,65 (.971)       | 33,32 (1.312)      | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,94 (.273)        | 1,206 (.0475)        | 0,76 (.030)        |
| DB         | 53,04 (2.088)      | 38,38 (1.511)      | 47,04 (1.852)      | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,94 (.273)        | 1,206 (.0475)        | 0,76 (.030)        |
| DC         | 69,32 (2.729)      | 54,84 (2.159)      | 63,50 (2.500)      | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,94 (.273)        | 1,206 (.0475)        | 0,76 (.030)        |



Plug, Crimp cable connectors without contacts, sizes DE– DD

Plug

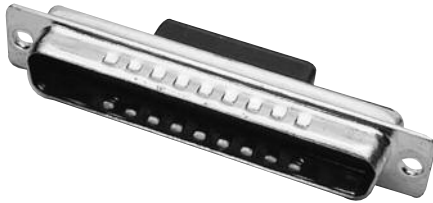

- For contact cavity arrangements, see page 61.
- For crimp contacts size 20, see pages 39-40.
- For mounting methods, see pages 59-60.

|            |        | INDUSTRIAL     | MILITARY/HI-REL | NON-MAGNETIC/LOW<br>OUTGASSING** |
|------------|--------|----------------|-----------------|----------------------------------|
| Shell size | Layout | Part number    | Part number     | Part number                      |
| DE         | 2W2    | DEA2W2PK87FO   | DEA2W2PFO       | DEA2W2PNMBK47FO                  |
| DE         | 2WK2   | DEA2WK2PK87FO  | DEA2WK2PFO      | DEA2WK2PNMBK47FO                 |
| DA         | 7W2    | DAA7W2PK87FO   | DAA7W2PFO       | DAA7W2PNMBK47FO                  |
| DA         | 11W1   | DAA11W1PK87FO  | DAA11W1PFO      | DAA11W1PNMBK47FO                 |
| DA         | 3W3    | DAA3W3PK87FO   | DAA3W3PFO       | DAA3W3PNMBK47FO                  |
| DA         | 3WK3   | DAA3WK3PK87FO  | DAA3WK3PFO      | DAA3WK3PNMBK47FO                 |
| DB         | 5W5    | DBA5W5PK87FO   | DBA5W5PFO       | DBA5W5PNMBK47FO                  |
| DB         | 9W4    | DBA9W4PK87FO   | DBA9W4PFO       | DBA9W4PNMBK47FO                  |
| DB         | 13W3   | DBA13W3PK87FO  | DBA13W3PFO      | DBA13W3PNMBK47FO                 |
| DB         | 17W2   | DBA17W2PK87FO  | DBA17W2PFO      | DBA17W2PNMBK47FO                 |
| DB         | 21W1   | DBA21W1PK87FO  | DBA21W1PFO      | DBA21W1PNMBK47FO                 |
| DC         | 8W8    | DCA8W8PK87FO   | DCA8W8PFO       | DCA8W8PNMBK47FO                  |
| DC         | 21WA4  | DCA21WA4PK87FO | DCA21WA4PFO     | DCA21WA4PNMBK47FO                |
| DD         | 24W7   | DDA24W7PK87FO  | DDA24W7PFO      | DDA24W7PNMBK47FO                 |
| DD         | 36W4   | DDA36W4PK87FO  | DDA36W4PFO      | DDA36W4PNMBK47FO                 |
| DD         | 43W2   | DDA43W2PK87FO  | DDA43W2PFO      | DDA43W2PNMBK47FO                 |

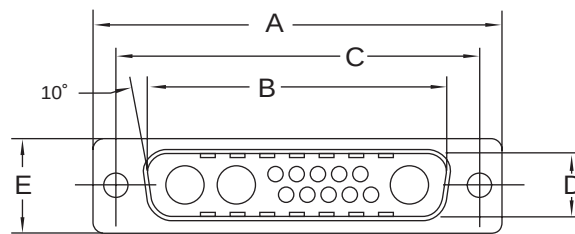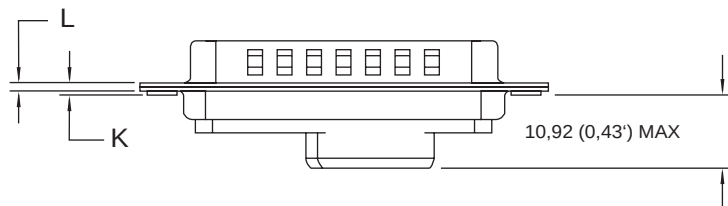

Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | W<br>± 0,368 (.0145) | W<br>± 0,41 (.016) | K<br>± 0,317 (.0125) | K<br>± 0,25 (.010) | L<br>± 0,25 (.010) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|----------------------|--------------------|----------------------|--------------------|--------------------|
| DE         | 30,81 (1.213)      | 16,92 (.666)       | 24,99 (.984)       | 8,36 (.329)        | 12,55 (.494)       | 10,72 (.422)       | 6,693 (.2635)        | —                  | 1,206 (.0475)        | —                  | 0,76 (.030)        |
| DA         | 39,14 (1.541)      | 25,25 (.994)       | 33,32 (1.312)      | 8,36 (.329)        | 12,55 (.494)       | 10,72 (.422)       | 6,693 (.2635)        | —                  | 1,206 (.0475)        | —                  | 0,76 (.030)        |
| DB         | 53,04 (2.088)      | 38,96 (1.534)      | 47,04 (1.852)      | 8,36 (.329)        | 12,55 (.494)       | 10,82 (.426)       | —                    | 6,84 (.269)        | —                    | 1,52 (.060)        | 0,99 (.039)        |
| DC         | 69,32 (2.729)      | 55,42 (2.182)      | 63,50 (2.500)      | 8,36 (.329)        | 12,55 (.494)       | 10,82 (.426)       | —                    | 6,84 (.269)        | —                    | 1,52 (.060)        | 0,99 (.039)        |
| DD         | 66,93 (2.635)      | 52,81 (2.079)      | 61,11 (2.406)      | 11,07 (.436)       | 15,37 (.605)       | 10,82 (.426)       | —                    | 6,84 (.269)        | —                    | 1,52 (.060)        | 0,99 (.039)        |

Dimensions shown in mm  
Specifications and dimensions subject to change

www.ittcannon.com





Receptacle



- For contact cavity arrangements, see page 62
- For crimp contacts size 20, see page 39-40.
- For mounting methods, see pages 59-60.

## Receptacle, Crimp cable connectors without contacts, sizes DE-DD

| Shell size | Layout | INDUSTRIAL      | MILITARY/HI-REL | NON-MAGNETIC/LOW<br>OUTGASSING** |
|------------|--------|-----------------|-----------------|----------------------------------|
|            |        | Part number     | Part number     | Part number                      |
| DE         | 2W2    | DEA2W2SA197FO   | DEA2W2SFO       | DEA2W2SNMBK47FO                  |
| DE         | 2WK2   | DEA2WK2SA197FO  | DEA2WK2SFO      | DEA2WK2SNMBK47FO                 |
| DA         | 7W2    | DAA7W2SA197FO   | DAA7W2SFO       | DAA7W2SNMBK47FO                  |
| DA         | 11W1   | DAA11W1SA197FO  | DAA11W1SFO      | DAA11W1SNMBK47FO                 |
| DA         | 3W3    | DAA3W3SA197FO   | DAA3W3SFO       | DAA3W3SNMBK47FO                  |
| DA         | 3WK3   | DAA3WK3SA197FO  | DAA3WK3SFO      | DAA3WK3SNMBK47FO                 |
| DB         | 5W5    | DBA5W5SA197FO   | DBA5W5SFO       | DBA5W5SNMBK47FO                  |
| DB         | 9W4    | DBA9W4SA197FO   | DBA9W4SFO       | DBA9W4SNMBK47FO                  |
| DB         | 13W3   | DBA13W3SA197FO  | DBA13W3SFO      | DBA13W3SNMBK47FO                 |
| DB         | 17W2   | DBA17W2SA197FO  | DBA17W2SFO      | DBA17W2SNMBK47FO                 |
| DB         | 21W1   | DBA21W1SA197FO  | DBA21W1SFO      | DBA21W1SNMBK47FO                 |
| DC         | 8W8    | DCA8W8SA197FO   | DCA8W8SFO       | DCA8W8SNMBK47FO                  |
| DC         | 21WA4  | DCA21WA4SA197FO | DCA21WA4SFO     | DCA21WA4SNMBK47FO                |
| DD         | 24W7   | DDA24W7SA197FO  | DDA24W7SFO      | DDA24W7SNMBK47FO                 |
| DD         | 36W4   | DDA36W4SA197FO  | DDA36W4SFO      | DDA36W4SNMBK47FO                 |
| DD         | 43W2   | DDA43W2SA197FO  | DDA43W2SFO      | DDA43W2SNMBK47FO                 |

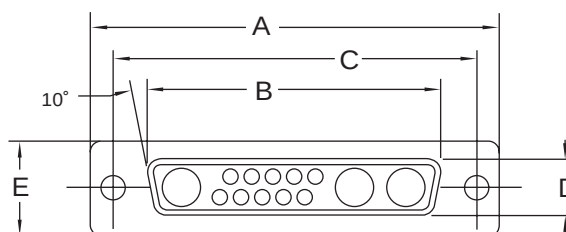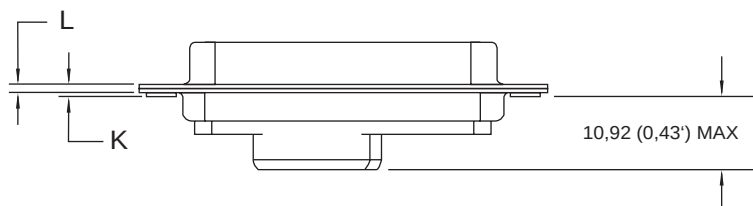

## Dimensions

| Shell size | A<br>± 0,38 (.015) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,38 (.015) | F<br>± 0,25 (.010) | W<br>± 0,38 (.015) | K<br>± 0,317 (.0125) | L<br>± 0,25 (.010) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|----------------------|--------------------|
| DE         | 30,81 (1.213)      | 16,33 (.643)       | 24,99 (.984)       | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,94 (.273)        | 1,206 (.0475)        | 0,76 (.030)        |
| DA         | 39,14 (1.541)      | 24,65 (.971)       | 33,32 (1.312)      | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,94 (.273)        | 1,206 (.0475)        | 0,76 (.030)        |
| DB         | 53,04 (2.088)      | 38,38 (1.511)      | 47,04 (1.852)      | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,94 (.273)        | 1,206 (.0475)        | 0,76 (.030)        |
| DC         | 69,32 (2.729)      | 54,84 (2.159)      | 63,50 (2.500)      | 7,90 (.311)        | 12,55 (.494)       | 10,90 (.429)       | 6,94 (.273)        | 1,206 (.0475)        | 0,76 (.030)        |
| DD         | 66,93 (2.635)      | 52,42 (2.064)      | 61,11 (2.406)      | 10,74 (.423)       | 15,37 (.494)       | 10,90 (.429)       | 6,94 (.273)        | 1,206 (.0475)        | 0,76 (.030)        |



Dimensions shown in mm  
Specifications and dimensions subject to change

www.ittcannon.com


## Crimp Contacts Size 20

## Machined Contacts


|                                  | Pin          |              | Socket       |              |
|----------------------------------|--------------|--------------|--------------|--------------|
| Contact size AWG                 | 26 – 30      | 20 – 24      | 26 – 30      | 20 – 24      |
| Gold Flash (Performance class 3) | 330-5291-004 | 330-5291-000 | 031-1007-004 | 031-1007-000 |
| 50 µn Au (Performance class 2)   | 330-5291-050 | 980-0009-472 | 031-1007-048 | 980-0009-471 |

| AWG size |        | A ± 0,05    | B ± 0,05    | C max.       |
|----------|--------|-------------|-------------|--------------|
| 20 – 24  | Pin    | 1,7 (0.067) | 1,0 (0.039) | 14,2 (0.559) |
|          | Socket | 1,7 (0.067) | 1,0 (0.039) | 13,7 (0.539) |
| 26 – 30  | Pin    | 1,7 (0.067) | 0,6 (0.039) | 14,2 (0.559) |
|          | Socket | 1,7 (0.067) | 0,6 (0.039) | 13,7 (0.539) |

Pin

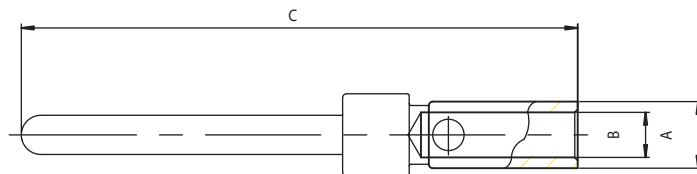

Socket

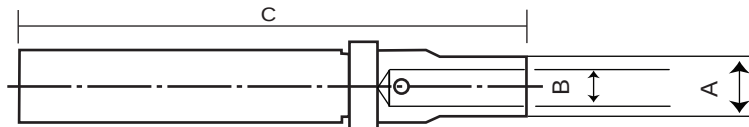

## MIL-C-39029 Cross Reference List

| Contact size AWG<br>Number | M39029   | / MIL24308* | Cannon Part  |
|----------------------------|----------|-------------|--------------|
| 20 /                       | / 63-368 | / Socket    | 980-0009-471 |
| 20 /                       | / 64-369 | / Pin       | 980-0009-472 |

\* Superseded by AS39029

Crimp Contacts Size 20 for D\*A Connectors

Contacts on Reels  
(5000 pcs / reel)

Stamped contacts with insulation support are supplied on reels of 5000 for use with semi-automatic strip and crimp machines. Two sizes are available to accommodate wire ranges 20 – 26 AWG.

Pin Contacts



Part Numbers

| AWG 24 - 26  | AWG 20 - 24  |
|--------------|--------------|
| 980-2000-925 | 980-2000-924 |
| 980-2000-946 | 980-2000-945 |

Socket Contacts



Part Numbers


| AWG 24 - 26  | AWG 20 - 24  |
|--------------|--------------|
| 980-2000-926 | 980-2000-923 |
| 980-2000-944 | 980-2000-943 |

Performance


Gold flash over Nickel (Performance class 3)  
30 µ in Au/Nickel (Performance class 2)

\* Mating Cycles

Pin Contacts

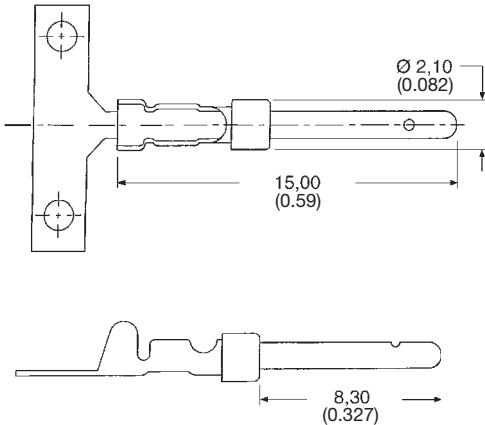

Socket Contacts

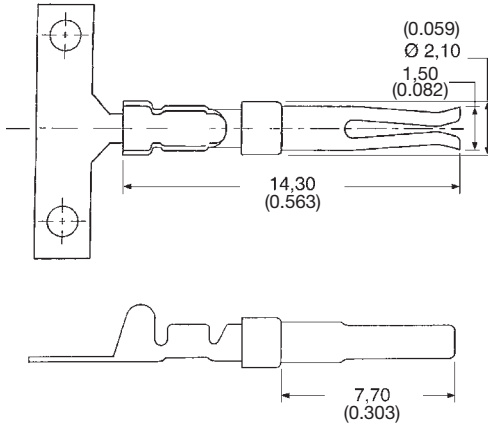

Loose Contacts

Stamped contacts with insulation support are supplied loose for use with hand crimp tooling. Two sizes are available to accommodate wire ranges 20 – 26 AWG.

Pin Contacts



Socket Contacts



| Finish                       |
|------------------------------|
| 30 µ inches Gold over Nickel |

| Part Number<br>Pin Contact |              |
|----------------------------|--------------|
| 24-26 AWG                  | 20-24 AWG    |
| 030-2487-017               | 030-2487-016 |

| Part Number<br>Socket Contact |              |
|-------------------------------|--------------|
| 24-26 AWG                     | 20-24 AWG    |
| 030-2488-017                  | 030-2488-016 |

Crimp Tooling



Hand Crimp Tool

| Description          | Part Number  |
|----------------------|--------------|
| CCT-D*A-1            | 995-2000-000 |
| CCT-2D*A (Alternate) | 995-2000-075 |

Extraction Tool



| Description    | Part Number  | Wire Size |
|----------------|--------------|-----------|
| CIET-D*A-20-24 | 980-0008-135 | 20-24 AWG |
| CIET-D*A 24-26 | 980-0008-136 | 24-26 AWG |



Cable (Size 8) Loose Contacts — Coaxial 75 Ohm

Stamped Crimp/Crimp

Recommended Wire Trim Dimensions

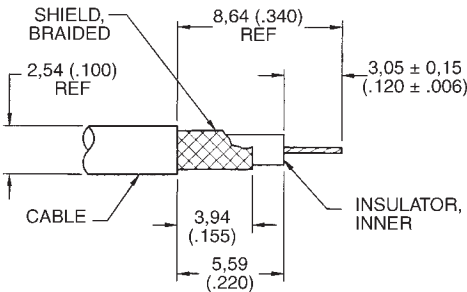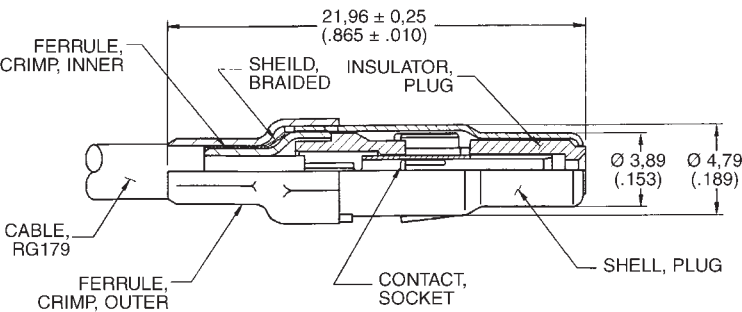

Kit (Body, Ferrule, Center Contact)

|                     | Kit<br>Gold over Ni | Kit<br>30µ in. Gold over Ni | Kit<br>50µ in. Gold over Ni | RG Cable Number |
|---------------------|---------------------|-----------------------------|-----------------------------|-----------------|
| Stamped Crimp/Crimp |                     |                             |                             |                 |
| Plug                | D130322-2           | D130322-1                   | D130322-6                   | 179/U           |
| Receptacle          | D130344-1           | D130344                     | D130344-2                   | 179/U           |

Loose Components for High Volume (3 Pieces — Body, Ferrule, Center Contact)

|                     | Body         | Ferrule      | Center Contact<br>Gold over Ni<br>10,000 Reel | Center Contact<br>30µ in. Gold over Ni<br>10,000 Reel |
|---------------------|--------------|--------------|-----------------------------------------------|-------------------------------------------------------|
| Stamped Crimp/Crimp |              |              |                                               |                                                       |
| Plug                | 249-2272-000 | 304-0444-000 | 110238-1015                                   | 110238-1012                                           |
| Receptacle          | 249-2271-000 | 304-0444-000 | 110238-1014                                   | 110238-1013                                           |

Tooling for Stamped Crimp/Crimp




| Description              | Crimping Tool          | Tool Number      |
|--------------------------|------------------------|------------------|
| Stamped Center Conductor | Hand Crimp, "B" Crimp  | CCTP-750HM       |
|                          | Semi-Automatic Crimper | ABT-607 (Leased) |
| Stamped Outer Conductor  | Hand Tool, Hex Crimp   | CCTP-DM          |
|                          | Pneumatic Hex Crimp    | 995-2000-094     |

For semi-automatic tooling, see page 98.


Cable (Size 8) Loose Contacts — Coaxial 75 Ohm — 90°

90° Crimp Braid/Solder Center Contact

|            | Part Number<br>Gold over Ni | Part Number<br>30 in. Gold over Ni | Part Number<br>50 in. Gold over Ni |
|------------|-----------------------------|------------------------------------|------------------------------------|
| Plug       | D130357-1                   | D130357                            | D130357-4                          |
| Receptacle | D130356-1                   | D130356                            | D130356-3                          |

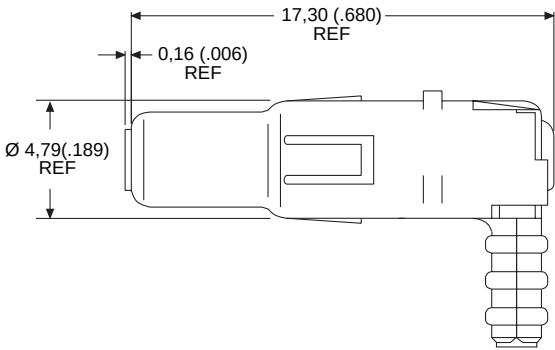

Plug

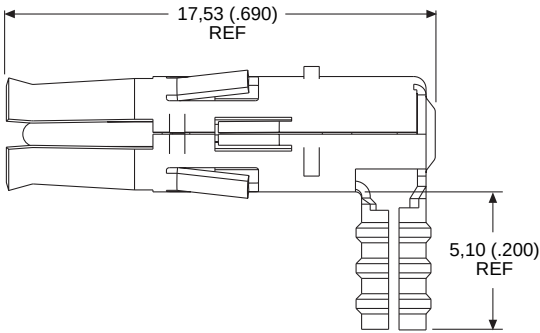

Receptacle

Note: Ferrule not shown.

Note: Ferrule not shown.

Tooling for 90° Crimp Braid





| Description | Part Number  |
|-------------|--------------|
| Hand Tool:  | 995-0001-761 |
| Die Set:    | 995-2000-110 |




## Loose Contacts Size 8 – Coaxial 50 Ohm, Straight

### Straight Crimp Braid



Plug





Receptacle

Note: Dimensions include outer sleeve.


|            | Part Number<br>Gold over Nickel | Part Number<br>(50 µin) 1,27 µm<br>Gold over Copper | A<br>max     | B<br>max      | D<br>min    | RG Cable Number<br>old | new    |
|------------|---------------------------------|-----------------------------------------------------|--------------|---------------|-------------|------------------------|--------|
| Plug       | DM53740                         | DM35740-17                                          | 18,80 (.74)  | 24,00 (.94)   | 1,00 (.039) | 196/U                  | 178B/U |
| Plug       | DM53740-1                       | DM53740-15                                          | 18,80 (.74)  | 24,00 (.94)   | 1,70 (.067) | 187/U                  | 179B/U |
|            |                                 |                                                     |              |               |             | 188/U                  | 316B/U |
| Plug       | DM53740-35                      | –                                                   | 18,80 (.74)  | 24,00 (.94)   | 1,70 (.067) | –                      | RD316  |
| Plug       | DM53740-3                       | DM53740-16                                          | 21,50 (.847) | 26,34 (1.037) | 2,79 (.110) | 195/U                  | 180B/U |
| Plug       | DM53740-5                       | DM53740-18                                          | 21,50 (.847) | 26,34 (1.037) | 3,18 (.125) | 58/U                   | 588/U  |
| Receptacle | DM53742                         | DM53742-18                                          | 18,80 (.74)  | 24,00 (.94)   | 1,00 (.039) | 196/U                  | 178B/U |
| Receptacle | DM53742-1                       | DM53742-16                                          | 18,80 (.74)  | 24,00 (.94)   | 1,70 (.067) | 187/U                  | 179B/U |
|            |                                 |                                                     |              |               |             | 188/U                  | 316B/U |
| Receptacle | DM53742-36                      | –                                                   | 18,80 (.74)  | 24,00 (.94)   | 1,70 (.067) | –                      | RD316  |
| Receptacle | DM53742-5                       | DM53742-19                                          | 21,50 (.847) | 26,34 (1.037) | 3,18 (.125) | 58/U                   | 58B/U  |
| Receptacle | DM53742-5                       | DM53742-19                                          | 21,50 (.847) | 26,34 (1.037) | 3,18 (.125) | 58/U                   | 588/U  |

For Crimp tooling, see page 47.

### Straight Solder Braid



Plug



Receptacle

|                    | Part Number<br>Gold over Nickel | Part Number<br>1,27 µm Gold over Copper | A<br>max     | B<br>max      | D<br>min    | RG Cable Number<br>old | new    |
|--------------------|---------------------------------|-----------------------------------------|--------------|---------------|-------------|------------------------|--------|
| Plug               | DM53740-5008                    | DM53740-5105                            | 18,80 (.74)  | 24,00 (.94)   | 1,00 (.039) | 196/U                  | 178B/U |
| Plug               | DM53740-5001                    | DM53740-5099                            | 18,80 (.74)  | 24,00 (.94)   | 1,70 (.067) | 187/U                  | 179B/U |
|                    |                                 |                                         |              |               |             | 188/U                  | 316B/U |
| Plug               | DM53740-5145                    | –                                       | 18,80 (.74)  | 24,00 (.94)   | 1,70 (.067) | –                      | RD316  |
| Plug               | DM53740-5002                    | DM53740-5104                            | 21,50 (.847) | 26,34 (1.037) | 2,79 (.110) | 195/U                  | 180B/U |
| Plug               | DM53740-5005                    | DM53740-5101                            | 21,50 (.847) | 26,34 (1.037) | 3,18 (.125) | 58/U                   | 58/U   |
| Plug (Short)       | DM53640-5000                    | DM53740-5100                            | 17,00 (.670) | 22,20 (.882)  | 1,14 (.045) | 196/U                  | 178B/U |
| Receptacle         | DM53742-5126                    | DM53742-5092                            | 18,80 (.74)  | 24,00 (.94)   | 1,00 (.039) | 196/U                  | 178B/U |
| Receptacle         | DM53742-5002                    | DM53742-5086                            | 18,80 (.74)  | 24,00 (.94)   | 1,70 (.067) | 187/U                  | 179B/U |
|                    |                                 |                                         |              |               |             | 188/U                  | 316B/U |
| Receptacle         | DM53742-5126                    | –                                       | 18,80 (.74)  | 24,00 (.94)   | 1,70 (.067) | –                      | RD316  |
| Receptacle         | DM53742-5002                    | DM53742-5091                            | 21,50 (.847) | 26,34 (1.037) | 2,79 (.110) | 195/U                  | 180B/U |
| Receptacle         | DM53742-5004                    | DM53742-5086                            | 21,50 (.847) | 26,34 (1.037) | 3,18 (.125) | 58/U                   | 58/U   |
| Receptacle (Short) | DM53742-5000                    | DM53742-5085                            | 17,00 (.670) | 22,20 (.882)  | 1,14 (.045) | 196/U                  | 178B/U |



Dimensions shown in mm  
Specifications and dimensions subject to change

www.ittcannon.com




## Loose Contacts Size 8 – Coaxial 50 Ohm, 90°

## 90° Crimp Braid



Plug





Receptacle

Note: Dimensions include outer sleeve.


|            | Part Number<br>Gold over Nickel | Part Number<br>50 $\mu$ in Gold over Copper | A<br>max     | B<br>max     | C            | D<br>$\pm 0,13$ | RG Cable Number<br>old | new    |
|------------|---------------------------------|---------------------------------------------|--------------|--------------|--------------|-----------------|------------------------|--------|
| Plug       | DM53741                         | DM53741-12                                  | 13,46 (.530) | 18,92 (.745) | 15,10 (.594) | 1,14 (.045)     | 196/U                  | 178B/U |
| Plug       | DM53741-1                       | DM53741-11                                  | 13,46 (.530) | 18,92 (.745) | 15,10 (.594) | 1,83 (.072)     | 187/U                  | 179B/U |
|            |                                 |                                             |              |              |              |                 | 188/U                  | 316B/U |
| Plug       | DM53741-3                       | DM53741-10                                  | 13,46 (.530) | 18,92 (.745) | 16,00 (.630) | 2,79 (.110)     |                        |        |
| Plug       | DM53741-4                       | DM53741-13                                  | 13,46 (.530) | 18,92 (.745) | 16,00 (.630) | 3,18 (.125)     | 58/U                   | 58B/U  |
| Receptacle | DM53743-2                       | DM53743-18                                  | 13,46 (.530) | 18,92 (.745) | 15,09 (.594) | 1,14 (.045)     | 196/U                  | 178B/U |
| Receptacle | DM53743-3                       | DM53743-16                                  | 13,46 (.530) | 18,92 (.745) | 15,09 (.594) | 1,83 (.072)     | 187/U                  | 179B/U |
|            |                                 |                                             |              |              |              |                 | 188/U                  | 316B/U |
| Receptacle | DM53743-5                       | DM53743-17                                  | 13,46 (.530) | 18,92 (.745) | 16,00 (.630) | 2,79 (.110)     |                        |        |
| Receptacle | DM53743-6                       | DM53743-19                                  | 13,46 (.530) | 18,92 (.745) | 16,00 (.630) | 3,18 (.125)     | 58/U                   | 58B/U  |

For Crimp tooling, see page 47.

## 90° Solder Braid



Plug





Receptacle


|            | Part Number<br>Gold over Nickel | Part Number<br>50 $\mu$ in Gold over Copper | A<br>max     | B<br>max     | C            | D<br>$\pm 0,13$ | RG Cable Number<br>old | new    |
|------------|---------------------------------|---------------------------------------------|--------------|--------------|--------------|-----------------|------------------------|--------|
| Plug       | DM53741-5000                    | DM53741-5059                                | 13,46 (.530) | 18,92 (.745) | 15,10 (.594) | 1,00 (.039)     | 196/U                  | 178B/U |
| Plug       | DM53741-5001                    | DM53741-5062                                | 13,46 (.530) | 18,92 (.745) | 15,10 (.594) | 1,70 (.067)     | 187/U                  | 179B/U |
|            |                                 |                                             |              |              |              |                 | 188/U                  | 316B/U |
| Plug       | DM53741-5003                    | DM53741-5063                                | 13,46 (.530) | 18,92 (.745) | 16,00 (.630) | 2,79 (.110)     |                        |        |
| Plug       | DM53741-5004                    | DM53741-5060                                | 13,46 (.530) | 18,92 (.745) | 16,00 (.630) | 3,18 (.125)     | 58/U                   | 58B/U  |
| Receptacle | DM53743-5000                    | DM53743-5073                                | 13,46 (.530) | 18,92 (.745) | 15,09 (.594) | 1,00 (.039)     | 196/U                  | 178B/U |
| Receptacle | DM53743-5001                    | DM53743-5076                                | 13,46 (.530) | 18,92 (.745) | 15,09 (.594) | 1,70 (.067)     | 187/U                  | 179B/U |
|            |                                 |                                             |              |              |              |                 | 188/U                  | 316B/U |
| Receptacle | DM53743-5003                    | DM53743-5077                                | 13,46 (.530) | 18,92 (.745) | 16,00 (.630) | 2,79 (.110)     |                        |        |
| Receptacle | DM53743-5004                    | DM53743-5074                                | 13,46 (.530) | 18,92 (.745) | 16,00 (.630) | 3,18 (.125)     | 58/U                   | 58B/U  |

Cable (Size 8) Loose Contacts — Coaxial 50 Ohm — Straight

Straight Crimp Braid



Plug





Receptacle


Note: Dimensions include outer sleeve

| Description | Part Number<br>50 $\mu$ in.<br>Gold Over Copper | A<br>max.    | B<br>max.    | D<br>min.   | RG Cable Number |        |
|-------------|-------------------------------------------------|--------------|--------------|-------------|-----------------|--------|
|             |                                                 |              |              |             | Old             | New    |
| Plug        | DM53740-36                                      | 18,80 (.739) | 24,00 (.945) | 1,70 (.067) | 187/U           | 179B/U |
|             |                                                 |              |              |             | 188/U           | 316B/U |
| Receptacle  | DM53742-37                                      | 18,80 (.739) | 24,00 (.945) | 1,70 (.067) | 187/U           | 179B/U |
|             |                                                 |              |              |             | 188/U           | 316B/U |

Straight Solder Braid



Plug



Receptacle


| Description | Part Number<br>50 $\mu$ in.<br>Gold Over Copper | A<br>max.    | B<br>max.    | D<br>min.   | RG Cable Number |        |
|-------------|-------------------------------------------------|--------------|--------------|-------------|-----------------|--------|
|             |                                                 |              |              |             | Old             | New    |
| Plug        | DM53740-5147                                    | 18,80 (.739) | 24,00 (.945) | 1,70 (.067) | 187/U           | 179B/U |
|             |                                                 |              |              |             | 188/U           | 316B/U |
| Receptacle  | DM53742-5127                                    | 18,80 (.739) | 24,00 (.945) | 1,70 (.067) | 187/U           | 179B/U |
|             |                                                 |              |              |             | 188/U           | 316B/U |

Insertion / Extraction Instructions for Coaxial, High Power and High Voltage Contacts

Insertion Tool

No insertion tool is required. The contact is easily snapped in from the rear of the connector manually.


Insertion Instructions

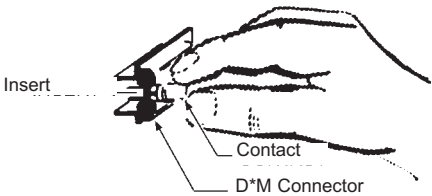

Extraction Tool

CET-CGB-2

Operating Instructions

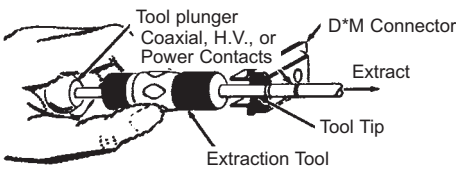

The CET-C6B-2 tool extracts all coaxial, high power and high voltage contacts (plug and receptacle).

| Description | Part Number |
|-------------|-------------|
| CET-C6B-2   | 070064-0002 |

To extract the coaxial contact, hold the tool by the body and insert the tip into the front of the contact cavity until it bottoms and closes the coaxial retaining ring. Holding the body in this position securely enough to keep coaxial retaining ring closed, push the plunger; contact will be pushed out of the rear of the assembly.




## Coaxial Assembly Instructions

## Straight and 90° Coaxial Assembly


## Step 1:

Slide the outer ring over the cable jacket. Trim the cable as specified in the table of Coaxial Cable Trim Dimensions (see this page). Insert the cable dielectric and center conductor into the inside diameter of the inner sleeve. Then solder the center conductor to the coaxial center contact.

## Straight Coaxial




## 90° Coaxial


Straight and 90° Coaxial Assembly  
Step 2:

Slide the outer ring forward until it is flush with the coaxial shell containing the braid between the outer ring and the inner sleeve. For solder type coaxes, soft solder the outer ring to the assembly through the cross-drilled solder hold. For crimp type coaxes, crimp with the appropriate tool in the area defined.


## Straight Coaxial



## 90° Coaxial



## Coaxial Cable Trim Dimensions



## Straight Coaxial

## RG Cable Number

|                                             | N           | O           | P           |
|---------------------------------------------|-------------|-------------|-------------|
| 196/U, 178B/U, 187/U, 188/U, 179B/U, 316B/U | 7,92 (.312) | 6,35 (.250) | 1,98 (.078) |
| 58/U, 58B/U                                 | 9,52 (.375) | 7,92 (.312) | 1,98 (.078) |

## 90° Coaxial

## RG Cable Number

|                                             | N     | O    | P    |
|---------------------------------------------|-------|------|------|
| 196/U, 178B/U, 187/U, 188/U, 179B/U, 316B/U | 9,52  | 5,94 | 1,57 |
| 58/U, 58B/U                                 | 10,69 | 7,92 | 2,39 |

## Crimp Tooling



| RG Cable Number<br>Closure   | Tool Part Number | Description |
|------------------------------|------------------|-------------|
| 196/U, 178B/U                | 070051-0000      | CCT-DM A    |
| 187/U, 179B/U, 188/U, 316B/U | 070051-0000      | CCT-DM B    |
| 58/U, 58B/U                  | 070051-0000      | CCT-DM C    |

Hand Tool with integral die set for all coaxial straight crimp braid.

Dimensions shown in mm



Specifications and dimensions subject to change

www.ittcannon.com





## Loose Contacts, Size 8 – High Power – Solder

## Plug



| Part Number<br>Gold over Copper | Part Number<br>(50 µin) 1,27 µm<br>Gold over Copper | Current Rating<br>A | Wire Size<br>AWG |
|---------------------------------|-----------------------------------------------------|---------------------|------------------|
| DM53745-1                       | DM53745-28                                          | 40 A                | 8 AWG            |
| DM53745-7                       | DM53745-27                                          | 20 A                | 12 AWG           |
| DM53745-8                       | DM53745-25                                          | 10 A                | 16 AWG           |
| Extended Length Pin             | DM53745-134                                         |                     |                  |



## Receptacle



| Part Number<br>Gold over Nickel | Part Number<br>(50 µin) 1,27 µm<br>Gold over Copper | Current Rating<br>A | Wire Size<br>AWG |
|---------------------------------|-----------------------------------------------------|---------------------|------------------|
| DM53744-1                       | DM53744-21                                          | 40 A                | 8 AWG            |
| DM53744-6                       | DM53744-25                                          | 20 A                | 12 AWG           |
| DM53744-7                       | DM53744-24                                          | 10 A                | 16 AWG           |



## Loose Contacts, Size 8 – High Power – Crimp

## Plug



| Part Number<br>Gold over Nickel | Part Number<br>(30 µin) 0,76 µm<br>Gold over Copper | Part Number<br>(50 µin) 1,27 µm<br>Gold over Copper | A           | B           | Current Rating<br>A | Wire Size<br>AWG |
|---------------------------------|-----------------------------------------------------|-----------------------------------------------------|-------------|-------------|---------------------|------------------|
| DM130338-4                      | DM130338                                            | DM130338-1                                          | 4,60 (.181) | 5,84 (.230) | 40 A                | 8 AWG            |
| DM130339-4                      | DM130339                                            | DM130339-1                                          | 2,54 (.100) | 5,54 (.218) | 20 A                | 12 AWG           |
| DM130340-4                      | DM130340                                            | DM130340-1                                          | 1,07 (.067) | 2,59 (.102) | 10 A                | 16 AWG           |
| Extended Length Pin             | DM130339-6                                          |                                                     |             |             |                     |                  |

## Receptacle



| Part Number<br>Gold over Nickel | Part Number<br>(30 µin) 0,76 µm<br>Gold over Copper | Part Number<br>(50 µin) 1,27 µm<br>Gold over Copper | A           | B           | Current Rating<br>A | Wire Size<br>AWG |
|---------------------------------|-----------------------------------------------------|-----------------------------------------------------|-------------|-------------|---------------------|------------------|
| DM130341-4                      | DM130341                                            | DM130341-1                                          | 4,60 (.181) | 5,84 (.230) | 40 A                | 8 AWG            |
| DM130342-4                      | DM130342                                            | DM130342-1                                          | 2,54 (.100) | 5,54 (.218) | 20 A                | 12 AWG           |
| DM130343-4                      | DM130343                                            | DM130343-1                                          | 1,07 (.067) | 2,59 (.102) | 10 A                | 16 AWG           |

## High Power Crimp Tooling





| Wire Size<br>AWG | Crimp Tool | Tool Setting<br>Number | Locator |
|------------------|------------|------------------------|---------|
| 8 AWG            | M300-BT    | 6                      | TP968   |
| 10 AWG           | M300-BT    | 5                      | TP968   |
| 12/14 AWG        | M300-BT    | 1                      | TP968   |
| 16 AWG           | FT-8       | 6                      | TH554   |
| 18 AWG           | FT-8       | 5                      | TH554   |

Dimensions shown in mm  
Specifications and dimensions subject to change

www.ittcannon.com



## Loose Contacts, Size 8 — High Power — Solder — Non-Magnetic

Plug



| Part Number<br>50 $\mu$ in. Gold Over Copper<br>Non-Magnetic | Part Number<br>50 $\mu$ in. Gold Over Copper<br>Non-Magnetic (European) | Current Rating | Wire Size |
|--------------------------------------------------------------|-------------------------------------------------------------------------|----------------|-----------|
| DM53745-72                                                   | DM115224-1040A                                                          | 40 A           | 8 AWG     |
| DM53745-71                                                   | DM115224-1020A                                                          | 20 A           | 12 AWG    |
| DM53745-70                                                   | DM115224-1010A                                                          | 10 A           | 16 AWG    |


Receptacle




| Part Number<br>50 $\mu$ in. Gold Over Copper<br>Non-Magnetic | Part Number<br>50 $\mu$ in. Gold Over Copper<br>Non-Magnetic (European) | Current Rating | Wire Size |
|--------------------------------------------------------------|-------------------------------------------------------------------------|----------------|-----------|
| DM53744-62                                                   | DM115224-2040A                                                          | 40 A           | 8 AWG     |
| DM53744-64                                                   | DM115224-2020A                                                          | 20 A           | 12 AWG    |
| DM53744-63                                                   | DM115224-2010A                                                          | 10 A           | 16 AWG    |

## Loose Contacts, Size 8 — High Power — Crimp—Non-Magnetic

Plug




Recommended Wire Trim Length




| Part Number<br>50 $\mu$ in. Gold Over Copper<br>Non-Magnetic | XA<br>max.  | XB<br>max.  | Part Number<br>50 $\mu$ in. Gold Over Copper<br>Non-Magnetic (European) | XA<br>min.  | XB<br>max.  | Current Rating | Wire Size |
|--------------------------------------------------------------|-------------|-------------|-------------------------------------------------------------------------|-------------|-------------|----------------|-----------|
| DM115224-3040                                                | 4,60 (.181) | 5,84 (.230) | DM115224-3040A                                                          | 4,20 (.165) | 5,80 (.228) | 40 A           | 8 AWG     |
| DM115224-3020                                                | 2,54 (.100) | 5,54 (.218) | DM115224-3020A                                                          | 3,25 (.128) | 4,70 (.185) | 20 A           | 12 AWG    |
| DM115224-3010                                                | 1,07 (.067) | 2,59 (.102) | DM115224-3010A                                                          | 2,50 (.098) | 3,80 (.150) | 10 A           | 16 AWG    |

Receptacle



Recommended Wire Trim Length



| Part Number<br>50 $\mu$ in. Gold Over Copper<br>Non-Magnetic | XA<br>max.  | XB<br>max.  | Part Number<br>50 $\mu$ in. Gold Over Copper<br>Non-Magnetic (European) | XA<br>min.  | XB<br>max.  | Current Rating | Wire Size |
|--------------------------------------------------------------|-------------|-------------|-------------------------------------------------------------------------|-------------|-------------|----------------|-----------|
| DM115224-4040                                                | 4,60 (.181) | 5,84 (.230) | DM115224-4040A                                                          | 4,20 (.165) | 5,80 (.228) | 40 A           | 8 AWG     |
| DM115224-4020                                                | 2,54 (.100) | 5,54 (.218) | DM115224-4020A                                                          | 3,25 (.128) | 4,70 (.185) | 20 A           | 12 AWG    |
| DM115224-4010                                                | 1,07 (.067) | 2,59 (.102) | DM115224-4010A                                                          | 2,50 (.098) | 3,80 (.150) | 10 A           | 16 AWG    |

## Crimp High Power Tooling

M300-BT





| Wire Size | Crimp Tool | Crimp Tool/Locator                       |                                          |         |
|-----------|------------|------------------------------------------|------------------------------------------|---------|
|           |            | Tool Setting Number<br>Standard Contacts | Tool Setting Number<br>European Contacts | Locator |
| 8 AWG     | M300-BT    | 6                                        | 6                                        | TP968   |
| 10 AWG    | M300-BT    | 5                                        | 2                                        | TP968   |
| 12 AWG    | M300-BT    | 1                                        | 1                                        | TP968   |



Cable (Size 8) Loose Contacts — High Voltage — Straight



Plug



For tooling, see page .

| Part Number<br>Gold over Ni | Part Number<br>50 $\mu$ in. Gold | Wire<br>Size |
|-----------------------------|----------------------------------|--------------|
| DM51157                     | DM51157-8                        | 20 AWG       |

Receptacle





For tooling, see page .

| Part Number<br>Gold over Ni | Part Number<br>50 $\mu$ in. Gold | Wire<br>Size |
|-----------------------------|----------------------------------|--------------|
| DM51155                     | DM51155-7                        | 20 AWG       |

Cable (Size 8) Loose Contacts — High Voltage — 90°



Plug



For tooling, see page

| Part Number<br>Gold over Ni | Part Number<br>50 $\mu$ in. Gold | Wire<br>Size |
|-----------------------------|----------------------------------|--------------|
| DM51157-5000                | DM51157-5005                     | 20 AWG       |

Receptacle



For tooling, see page

| Part Number<br>Gold over Ni | Part Number<br>50 $\mu$ in. Gold | Wire<br>Size |
|-----------------------------|----------------------------------|--------------|
| DM51155-5000                | DM51155-5004                     | 20 AWG       |

## PCB (Size 8) Loose Contact — Coaxial — Straight


## Plug

50 Ohm

| Description         | Part Number |
|---------------------|-------------|
| Plug 30 µin Gold DM | 130365      |
| Plug 50 µin Gold DM | 130365-2    |

75 Ohm

| Description    | Part Number |
|----------------|-------------|
| Plug 30 µin Au | DM130358-2  |
| Plug 50 µin Au | DM130358-4  |

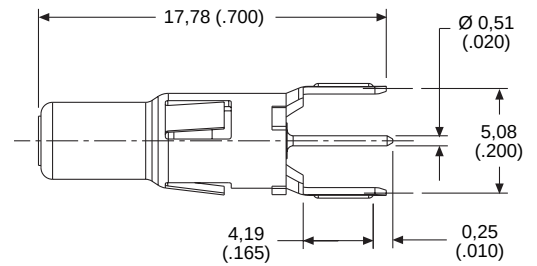


## Receptacle

50 Ohm

| Description               | Part Number |
|---------------------------|-------------|
| Receptacle 30 µin Gold DM | 130363      |
| Receptacle 50 µin Gold DM | 130363-2    |

75 Ohm

| Description            | Part Number |
|------------------------|-------------|
| Receptacle 30 µin Gold | DM130346-2  |
| Receptacle 50 µin Gold | DM130346-4  |

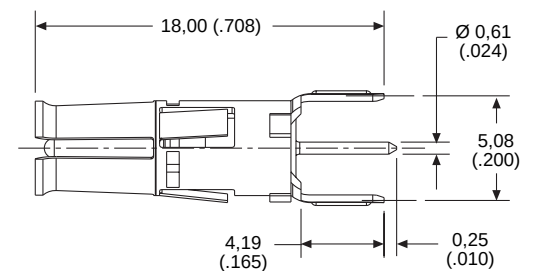

## PCB (Size 8) Loose Contact — Coaxial — 90°


## Plug

50 Ohm

| Description         | Part Number |
|---------------------|-------------|
| Plug 30 µin Gold DM | 130364      |
| Plug 50 µin Gold DM | 130364-2    |

75 Ohm

| Description      | Part Number |
|------------------|-------------|
| Plug 30 µin Gold | DM130352-2  |
| Plug 50 µin Gold | DM130352-4  |

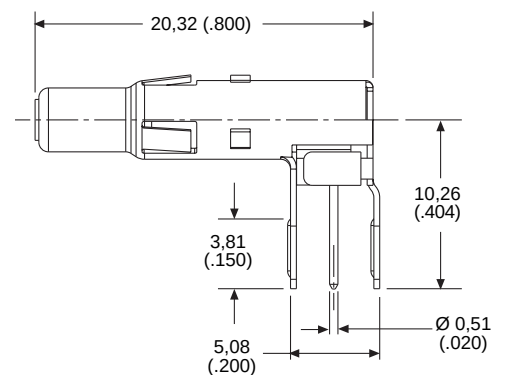


## Receptacle

50 Ohm

| Description               | Part Number |
|---------------------------|-------------|
| Receptacle 30 µin Gold DM | 130361      |
| Receptacle 50 µin Gold DM | 130361-2    |

75 Ohm

| Description            | Part Number |
|------------------------|-------------|
| Receptacle 30 µin Gold | DM130321-3  |
| Receptacle 50 µin Gold | DM130321-4  |

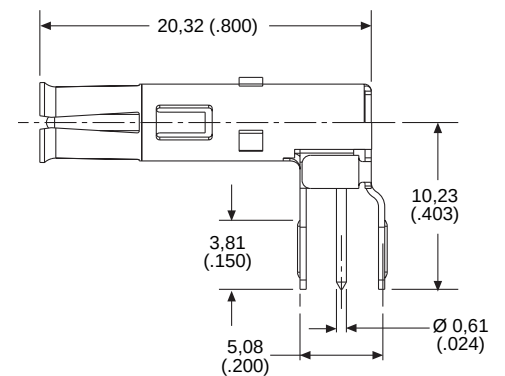

Dimensions shown in mm


Specifications and dimensions subject to change

www.ittcannon.com

## PCB (Size 8) Loose Contact — High Power— Straight


## Pin

| Description  | Part Number | 50 µin Gold |
|--------------|-------------|-------------|
| Pin          | DM53745-110 | DM53745-112 |
| Extended Pin | DM53745-133 |             |

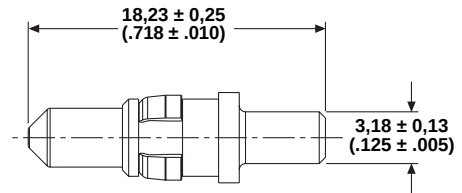


## Socket

| Description | Part Number | 50 µin Gold |
|-------------|-------------|-------------|
| Pin         | DM53744-98  | DM53744-100 |

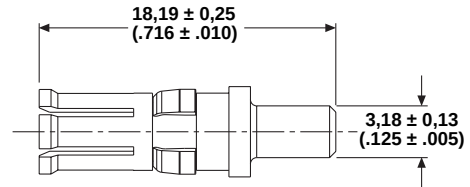


## PCB (Size 8) Loose Contact — High power — 90°

## Pin

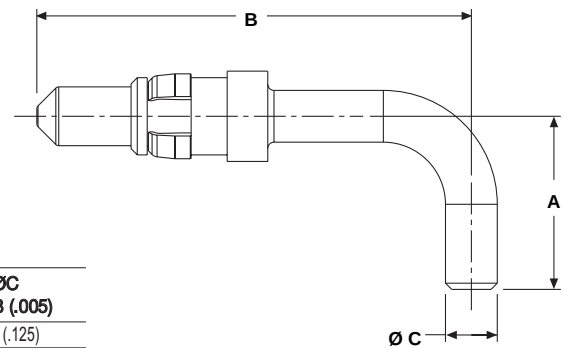

| Shell Size                            | 50 µin Gold<br>Part Number | Gold Over Nickel<br>Part Number | A<br>±0,25 (.010) | B<br>±0,25 (.010) | ØC<br>±0,13 (.005) |
|---------------------------------------|----------------------------|---------------------------------|-------------------|-------------------|--------------------|
| DE, DA, DB, DC                        | DM53745-106                | DM53745-104                     | 10,62 (.418)      | 26,64 (1.049)     | 3,18 (.125)        |
| DD                                    | DM53745-109                | DM53745-107                     | 13,41 (.528)      | 26,64 (1.049)     | 3,18 (.125)        |
| European Footprint DE, DA, DB, DC, DD |                            | DM53745-120                     | 18,06 (.711)      | 11,00 (.433)      | 2,90 (.114)        |
| Extended Pin                          |                            | DM53745-135                     |                   |                   |                    |


## Socket

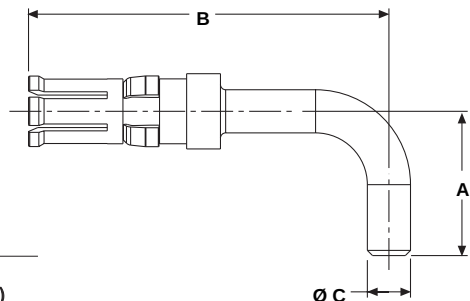

| Shell Size                            | 50 µin Gold<br>Part Number | Gold Over Nickel<br>Part Number | A<br>±0,25 (.010) | B<br>±0,25 (.010) | ØC<br>±0,13 (.005) |
|---------------------------------------|----------------------------|---------------------------------|-------------------|-------------------|--------------------|
| DE, DA, DB, DC                        | DM53744-94                 | DM53744-92                      | 13,41 (.528)      | 26,52 (1.044)     | 3,18 (.125)        |
| Extended DD                           | DM53744-97                 | DM53744-95                      | 10,62 (.418)      | 26,52 (1.044)     | 3,18 (.125)        |
| European Footprint DE, DA, DB, DC, DD |                            | DM53744-107                     | 11,00 (.433)      | 17,93 (.706)      | 2,90 (.114)        |


PCB (Size 8) Loose Contacts — High Voltage — Straight

Plug

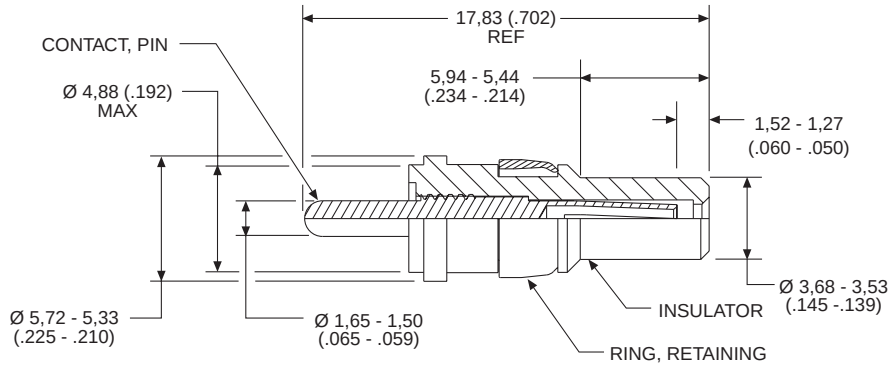

|                             |                             |
|-----------------------------|-----------------------------|
| Part Number<br>Gold over Ni | Part Number<br>50µ in. Gold |
| DM51157-13                  | DM51157-14                  |

Receptacle

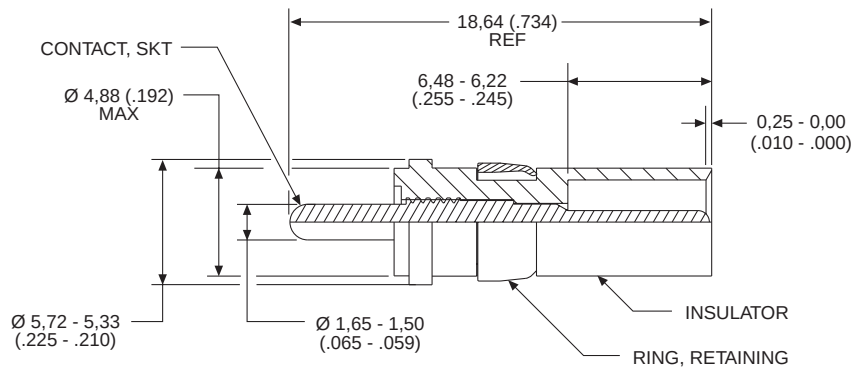

|                             |                             |
|-----------------------------|-----------------------------|
| Part Number<br>Gold over Ni | Part Number<br>50µ in. Gold |
| DM51155-12                  | DM51155-13                  |

## Hybrid Connector (Electrical/Fiber Optic)

Size 8 Terminus Adapter allows any PHD Optical Terminus to be coupled into any Combo D connector.

**Multi-functional Interconnect Series**

Combining: 30 Amp power contact  
 RF contacts (straight/right angle)  
 Size 22 LF signal contacts (straight/right angle)  
 Size 22 Fiber Optic Termini (Single & Multi Mode)

|                          | Multi Mode<br>62.5/125 | Single Mode<br>SMF 28 |
|--------------------------|------------------------|-----------------------|
| Ferrule (O.D.)           | 1.25 mm                | 1.25 mm               |
| Insertion Loss (dB typ.) | 0.30                   | 0.35                  |
| Maximum Loss (dB max.)   | 0.50                   | 0.60                  |
| Return Loss (dB typ.)    | 25                     | 55                    |
| Return Loss (dB min.)    | 20                     | 50                    |
| Channel Servicing        | Single                 |                       |
| Channel Repair           | Single                 |                       |
| Cyclic Durability        | 1000                   |                       |

Fiber Optic  
Pin Adapter

Fiber Optic  
Socket Adapter

## Product Notes

- Packaging identification includes manufacturer's name and part number.
- Material / Finish:  
 Ferrule: Zirconia Ceramic / N.A.  
 Terminus assembly: Brass Alloy / Gold plating  
 Adapter assembly: Stainless steel / Passivate-hardware
- Insertion / Removal tool: 274-0053-0000
- Consult factor for assembly and termination tools or factory build cable assemblies.
- Application include: Military/Aero space Fiber Optic Interconnect environments.

| PHD Adapter Part Numbers                                              |     |              |
|-----------------------------------------------------------------------|-----|--------------|
| Genderless Terminus<br>for use with PHD Adapters & Combo-D Connectors |     |              |
| Ferrule I.D.                                                          |     |              |
| Single Mode<br>SMF28                                                  | 125 | 031-9727-007 |
| Multi Mode<br>50/125 & 62.5/125                                       | 127 | 031-9727-008 |
| Multi Mode<br>100/140                                                 | 142 | 031-9727-003 |

| PHD Adapter Part Numbers |             |
|--------------------------|-------------|
| Pin                      | Socket      |
| 140285-0000              | 140286-0000 |

Fiber Optic  
Pin Adapter


Fiber Optic  
Socket Adapter



Dimensions shown in mm  
 Specifications and dimensions subject to change

www.ittcannon.com

PCB Guide Pin and Socket




Installs into any Combo D, Size 8 cavity. This guide pin and socket system is ideal for blind mate applications where space is limited.

PCB Guide Pin




| Part Number | Material     | Finish |
|-------------|--------------|--------|
| DM53745-126 | Copper Alloy | Tin    |

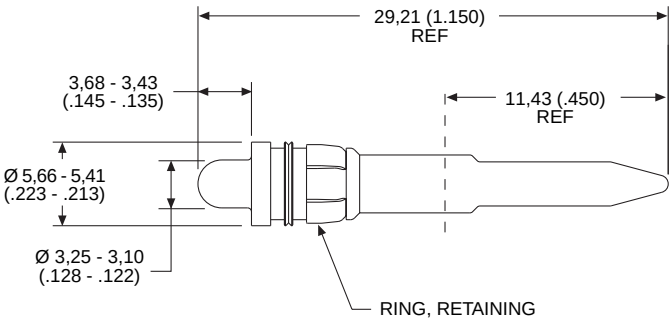

PCB Guide Socket



| Part Number  | Material     | Finish |
|--------------|--------------|--------|
| 248-2967-000 | Copper Alloy | Tin    |

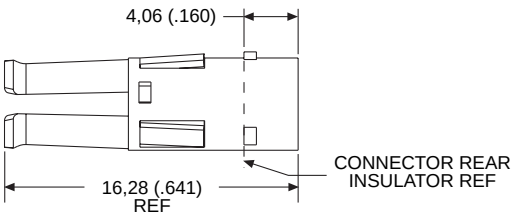

## NASA/GSFC Cross Reference

| NASA/GSFC Part Number                                                                              | ITT Cannon Part Number                                                                         | NASA/GSFC Part Number                                                                | ITT Cannon Part Number                                                          | NASA/GSFC Part Number                                            | ITT Cannon Part Number                                                    |
|----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------------------------------------------------------------------|---------------------------------------------------------------------------|
| GO8P1<br>GO8S1<br>S-311-P-4/6GCP1<br>S-311-P-4/6GCP2<br>S-311-P-4/6GCP3                            | 030-2042-002<br>031-1147-002<br>DM53740-17<br>DM53740-15<br>DM53740-16                         | 311-P-10-12S-B-15<br><br>311-P-10-13P-B-12<br>311-P-10-13P-B-15                      | DBM13W3S-NMB-76<br><br>DBM17W2PNMB77<br>DBM-17W2P-NMB-76                        | 311-P-10-24P-B-12                                                | DDM43W2P-NMB-77                                                           |
| S-311-P-4/6GCP4<br>S-311-P-4/6GCRP1<br>S-311-P-4/6GCRP2<br>S-311-P-4/6GCRP3<br>S-311-P-4/6GCRP4    | DM53740-18<br>DM53741-12<br>DM53741-11<br>DM53741-10<br>DM53741-13                             | 311-P-10-13S-B-12<br><br><br><br>311-P-10-14P-B-12                                   | DBM17W2SNMB77<br><br><br><br>DBM-21W1P-NMB-77                                   | 311-P-10-3S-B-12<br>311-P-10-3P-B-15                             | DBM25PNMB77<br>DBM25PNMB76                                                |
| S-311-P-4/6GCRS1<br>S-311-P-4/6GCRS2<br>S-311-P-4/6GCRS3<br>S-311-P-4/6GCRS4<br>S-311-P-4/6GCS1    | DM53743-18<br>DM53743-16<br>DM53743-17<br>DM53743-19<br>DM53742-18                             | 311-P-10-14P-B-15<br>311-P-10-14S-B-12<br>311-P-10-14S-B-15<br><br>311-P-10-15P-B-12 | DBM-21W1P-NMB-76<br>DBM-21W1S-NMB-77<br>DBM-21W1S-NMB-76<br><br>DCM-8W8P-NMB-77 | 311-P-10-3S-B-15<br><br><br>311-P-10-4P-B-12<br>311-P-10-4P-B-15 | DBM-25S-NMB-76<br><br><br>DCM37PNMB77<br>DCM37PNMB76                      |
| S-311-P-4/6GCS2<br>S-311-P-4/6GCS3<br>S-311-P-4/6GCS4<br>S-311-P-4/6GHP6<br>S-311-P-4/6GHRP6       | DM53742-16<br>DM53742-17<br>DM53742-19<br>DM51157-8<br>DM51157-5005                            | 311-P-10-15P-B-15<br><br><br>311-P-10-15S-B-12<br>311-P-10-15S-B-15                  | DCM8W8PNMB76<br><br><br>DCM-8W8S-NMB-77<br>DCM8W8SNMB76                         | 311-P-10-4S-B-12<br>311-P-10-4S-B-15                             | DCM37SNMB77<br>DCM-37S-NMB-76                                             |
| S-311-P-4/6GHS6<br>S-311-P-4/6GHS6<br>311P409-1P-B-12<br>311P409-1P-B-15<br>311P409-1S-B-12        | DM51155-5005<br>DM51155-7<br>DEMA9PNMBK47FO<br>DEMAK9PNMBK47FO<br>DEMA9SNMBK47FO               | 311-P-10-16P-B-12<br>311-P-10-16P-B-15                                               | DCM-13W6P-NMB-77<br>DCM-13W6P-NMB-76                                            | 311-P-10-5P-B-12<br>311-P-10-5P-B-15                             | DDM50PNMB77<br>DDM50PNMB76                                                |
| 311P409-1S-B-15<br>311P409-2P-B-12<br>311P409-2P-B-15<br>311P409-2S-B-12<br>311P409-2S-B-15        | DEMAK9SNMBK47FO<br>DEMA15PNMBK47FO<br>DEMAK15PNMBK47FO<br>DEMA15SNMBK47FO<br>DEMAK15SNMBK47FO  | 311-P-10-16S-B-12                                                                    | DCM-13W6S-NMB-77                                                                | 311-P-10-5S-B-12<br>311-P-10-5S-B-15                             | DDM50SNMB77<br>DDM50SNMB76                                                |
| 311P409-3P-B-12<br>311P409-3P-B-15<br>311P409-3S-B-12<br>311P409-3S-B-15<br>311P409-4P-B-12        | DEMA25PNMBK47FO<br>DEMAK25PNMBK47FO<br>DEMA25SNMBK47FO<br>DEMAK25SNMBK47FO<br>DEMA37PNMBK47FO  | 311-P-10-17P-B-15<br><br><br>311-P-10-17S-B-12<br>311-P-10-17S-B-15                  | DCM-17W5P-NMB-76<br><br><br>DCM-17W5S-NMB-77<br>DCM17W5S-NMB-76                 | 311-P-10-6P-B-15<br><br><br>311-P-10-7P-B-12<br>311-P-10-7P-B-15 | DEM-5W1P-NMB-77<br>DEM-5W1P-NMB-76<br><br>DEM-5W1S-NMB-77<br>DAM3W3PNMB77 |
| 311P409-4P-B-15<br>311P409-4S-B-12<br>311P409-4S-B-15<br>311P409-5P-B-12<br>311P409-5S-B-15        | DEMAK37PNMBK47FO<br>DEMA37SNMBK47FO<br>DEMAK37SNMBK47FO<br>DEMA50PNMBK47FO<br>DEMAK50PNMBK47FO | 311-P-10-18P-B-12<br>311-P-10-18P-B-12                                               | DCM-21WA4P-NMB-77<br>DCM21WA4P-NMB-76                                           | 311-P-10-7P-B-15<br><br>311-P-10-7S-B-12<br>311-P-10-7S-B-15     | DAM-3W3P-NMB-76<br><br>DAM3W3SNMB77<br>DAM3W3SNMB76                       |
| 311P409-5S-B-12<br>311P409-5S-B-15<br>S-311-P-4/10G1OP1<br>S-311-P-4/10G1OS1<br>311-P-10-B-1S-B-15 | DEMA50SNMBK47FO<br>DEMAK50PNMBK47FO<br>330-5291-081-02<br>031-1007-052-05<br>DEMB9S-NMB-76     | 311-P-10-18S-B-12<br>311-P-10-18S-B-15<br>311-P-10-19P-B-12<br>311-P-10-19S-B-12     | DCM-21WA4S-NMB-77<br>DCM21WA4S-NMB-76<br>DCM-21W4P-NMB-77<br>DCM-21W4S-NMB-77   | 311-P-10-8P-B-12<br>311-P-10-8P-B-15                             | DAM-7W2P-NMB-77<br>DAM-7W2P-NMB-76                                        |
| 311-P-10-B-4S-B-15<br>311-P-10-1P-B-12<br>311-P-10-1P-B-15                                         | DCMB37S-NMB-76<br>DEMPPNMB77<br>DEM-9P-NMB-76                                                  | 311-P-10-2P-B-12<br>311-P-10-2P-B-15<br><br>311-P-10-2S-B-12                         | DAM15PNMB77<br>DAM15PNMB76<br><br>DAM15SNMB77                                   | 311-P-10-8S-B-12<br><br>311-P-10-9P-B-12<br>311-P-10-9P-B-15     | DAM-7W2S-NMB-77<br><br>DAM-11W1P-NMB-77<br>DAM-11W1P-NMB-76               |
| 311-P-10-1S-B-12<br>311-P-10-1S-B-15                                                               | DEM9SNMB77<br>DEM-9S-NMB-76                                                                    | 311-P-10-2S-B-15                                                                     | DAM-15S-NMB-76                                                                  | 311-P-10-9S-B-12<br>311-P-10-9S-B-15                             | DAM-11W1S-NMB-77<br>DAM-11W1S-NMB-76                                      |
| 311-P-10-10P-B-12                                                                                  | DBM5W5PNMB77                                                                                   | 311-P-10-20P-B-12                                                                    | DCM-25W3P-NMB-77                                                                | 311-P-10B-1S-B-12                                                | DEMB9SNMB77                                                               |
| 311-P-10-10P-B-15                                                                                  | DBM-5W5P-NMB-76                                                                                | 311-P-10-20S-B-12                                                                    | DCM-25W36-NMB-77                                                                | 311-P-10B-13S-B-15                                               | DBMB-17W2S-NMB-76                                                         |
| 311-P-10-10S-B-12<br>311-P-10-10S-B-15                                                             | DBM-5W5S-NMB-77<br>DBM-5W5S-NMB-76                                                             | 311-P-10-22P-B-12<br>311-P-10-22P-B-15                                               | DDM-24W7P-NMB-77<br>DDM24W7PNMB76                                               | 311-P-10B-17S-B-15<br>311-P-10B-2S-B-12                          | DCMB-17W5S-NMB-76<br>DAMB15SNMB77                                         |
| 311-P-10-11P-B-12                                                                                  | DBM-9W4P-NMB-77                                                                                | 311-P-10-22S-B-12<br>311-P-10-22S-B-15                                               | DDM24W7SNMB77<br>DDM-24W7S-NMB-76                                               | 311-P-10B-22S-B-15                                               | DDMB-247S-NMB-76                                                          |
| 311-P-10-12P-B-12<br>311-P-10-12P-B-15                                                             | DBM13W3P-NMB-77<br>DBM-13W3P-NMB-76                                                            | 311-P-10-23P-B-12<br>311-P-10-23S-B-12<br>311-P-10-23S-B-15                          | DDM-36W4P-NMB-77<br>DDM-36W4S-NMB-77<br>DDM36W4SNMB76                           | 311-P-10B-3S-B-12<br>311-P-10B-3S-B-15                           | DBMB-25S-NMB-77<br>DBMB-25S-NMB-76                                        |
| 311-P-10-12S-B-12                                                                                  | DBM-13W3S-NMB-77                                                                               |                                                                                      |                                                                                 | 311-P-10B-4S-B-12                                                | DCMB-37S-NMB-77                                                           |



## NASA/GSFC Cross Reference

| NASA/GSFC<br>Part Number               | ITT Cannon<br>Part Number         | NASA/GSFC<br>Part Number               | ITT Cannon<br>Part Number            | NASA/GSFC<br>Part Number               | ITT Cannon<br>Part Number             |
|----------------------------------------|-----------------------------------|----------------------------------------|--------------------------------------|----------------------------------------|---------------------------------------|
| 311-P-10B-5S-B-12<br>311-P-10B-5S-B-15 | DDMB-50S-NMB-77<br>DDMB50S-NMB-76 | 311-P-10B-6S-B-15<br>311-P-10B-8S-B-12 | DEMB-5W1S-NMB-76<br>DAMB-7W2S-NMB-77 | 311-P-10B-8S-B-15<br>311-P-10B-9S-B-12 | DAMB-7W2S-NMB-76<br>DAMB-11W1S-NMB-77 |

## ESA/SCC Cross Reference

| ESA-SCC<br>Part Number     | ITT Cannon<br>Part Number | ESA-SCC<br>Part Number      | ITT Cannon<br>Part Number | ESA-SCC<br>Part Number       | ITT Cannon<br>Part Number |
|----------------------------|---------------------------|-----------------------------|---------------------------|------------------------------|---------------------------|
| 340100101B DEM5W1SNMB      | DEM5W1SNMBK52             | 340100101B DBM17W2POL3NMB   | DBM17W2POL3NMBK52         | 340100101B DAM7W2P1A7NNMB    | DAM7W2P1A7NNMBK52         |
| 340100101B DAM3W3SNMB      | DAM3W3SNMBK52             | 340100101B DBM21W1POL3NMB   | DBM21W1POL3NMBK52         | 340100101B DAM11W1P1A7NNMB   | DAM11W1P1A7NNMBK52        |
| 340100101B DAM7W2SNMB      | DAM7W2SNMBK52             | 340100101B DCM13W6POL3NMB   | DCM13W6POL3NMBK52         | 340100101B DBM9W4P1A7NNMB    | DBM9W4P1A7NNMBK52         |
| 340100101B DAM11W1SNMB     | DAM11W1SNMBK52            | 340100101B DCM17W5POL3NMB   | DCM17W5POL3NMBK52         | 340100101B DBM13W3P1A7NNMB   | DBM13W3P1A7NNMBK52        |
| 340100101B DBM5W5SNMB      | DBM5W5SNMBK52             | 340100101B DCM21WA4POL3NMB  | DCM21WA4POL3NMBK52        | 340100101B DBM17W2P1A7NNMB   | DBM17W2P1A7NNMBK52        |
| 340100101B DBM9W4SNMB      | DBM9W4SNMBK52             | 340100101B DCM25W3POL3NMB   | DCM25W3POL3NMBK52         | 340100101B DBM21W1P1A7NNMB   | DBM21W1P1A7NNMBK52        |
| 340100101B DBM13W3SNMB     | DBM13W3SNMBK52            | 340100101B DCM27W2POL3NMB   | DCM27W2POL3NMBK52         | 340100101B DCM13W6P1A7NNMB   | DCM13W6P1A7NNMBK52        |
| 340100101B DBM17W2SNMB     | DBM17W2SNMBK52            | 340100101B DDM24W7POL3NMB   | DDM24W7POL3NMBK52         | 340100101B DCM17W5P1A7NNMB   | DCM17W5P1A7NNMBK52        |
| 340100101B DBM21W1SNMB     | DBM21W1SNMBK52            | 340100101B DDM36W4POL3NMB   | DDM36W4POL3NMBK52         | 340100101B DCM21WA4P1A7NNMB  | DCM21WA4P1A7NNMBK52       |
| 340100101B DCM8W8SNMB      | DCM8W8SNMBK52             | 340100101B DDM43W2POL3NMB   | DDM43W2POL3NMBK52         | 340100101B DCM25W3P1A7NNMB   | DCM25W3P1A7NNMBK52        |
| 340100101B DCM13W6SNMB     | DCM13W6SNMBK52            | 340100101B DDM47W1POL3NMB   | DDM47W1POL3NMBK52         | 340100101B DCM27W2P1A7NNMB   | DCM27W2P1A7NNMBK52        |
| 340100101B DCM17W5SNMB     | DCM17W5SNMBK52            | 340100101B DEM5W1S1AONNMB   | DEM5W1S1AONNMBK52         | 340100101B DCM24W7P1A7NNMB   | DCM24W7P1A7NNMBK52        |
| 340100101B DCM21WA4SNMB    | DCM21WA4SNMBK52           | 340100101B DAM7W2S1AONNMB   | DAM7W2S1AONNMBK52         | 340100101B DDM36W4P1A7NNMB   | DDM36W4P1A7NNMBK52        |
| 340100101B DCM25W3SNMB     | DCM25W3SNMBK52            | 340100101B DAM11W1S1AONNMB  | DAM11W1S1AONNMBK52        | 340100101B DDM43W2P1A7NNMB   | DDM43W2P1A7NNMBK52        |
| 340100101B DCM27W2SNMB     | DCM27W2SNMBK52            | 340100101B DBM9W4S1AONNMB   | DBM9W4S1AONNMBK52         | 340100101B DDM47W1P1A7NNMB   | DDM47W1P1A7NNMBK52        |
| 340100101B DDM24W7SNMB     | DDM24W7SNMBK52            | 340100101B DBM13W3S1AONNMB  | DBM13W3S1AONNMBK52        | 340100101B DEM5W1S1A9NNMB    | DEM5W1S1A9NNMBK52         |
| 340100101B DDM36W4SNMB     | DDM36W4SNMBK52            | 340100101B DBM17W2S1AONNMB  | DBM17W2S1AONNMBK52        | 340100101B DAM7W2S1A9NNMB    | DAM7W2S1A9NNMBK52         |
| 340100101B DDM43W2SNMB     | DDM43W2SNMBK52            | 340100101B DBM21W1S1AONNMB  | DBM21W1S1AONNMBK52        | 340100101B DAM11W1S1A9NNMB   | DAM11W1S1A9NNMBK52        |
| 340100101B DDM47W1SNMB     | DDM47W1SNMBK52            | 340100101B DCM13W6S1AONNMB  | DCM13W6S1AONNMBK52        | 340100101B DBM9W4S1A9NNMB    | DBM9W4S1A9NNMBK52         |
| 340100101B DEM5W1PNMB      | DEM5W1PNMBK52             | 340100101B DCM17W5S1AONNMB  | DCM17W5S1AONNMBK52        | 340100101B DBM13W3S1A9NNMB   | DBM13W3S1A9NNMBK52        |
| 340100101B DAM3W3PNMB      | DAM3W3PNMBK52             | 340100101B DCM21WA4S1AONNMB | DCM21WA4S1AONNMBK52       | 340100101B DBM17W2S1A9NNMB   | DBM17W2S1A9NNMBK52        |
| 340100101B DAM7W2PNMB      | DAM7W2PNMBK52             | 340100101B DCM25W3S1AONNMB  | DCM25W3S1AONNMBK52        | 340100101B DBM21W1S1A9NNMB   | DBM21W1S1A9NNMBK52        |
| 340100101B DAM11W1PNMB     | DAM11W1PNMBK52            | 340100101B DCM27W2S1AONNMB  | DCM27W2S1AONNMBK52        | 340100101B DCM13W6S1A9NNMB   | DCM13W6S1A9NNMBK52        |
| 340100101B DBM5W5PNMB      | DBM5W5PNMBK52             | 340100101B DDM24W7S1AONNMB  | DDM24W7S1AONNMBK52        | 340100101B DCM17W5S1A9NNMB   | DCM17W5S1A9NNMBK52        |
| 340100101B DBM9W4PNMB      | DBM9W4PNMBK52             | 340100101B DDM36W4S1AONNMB  | DDM36W4S1AONNMBK52        | 340100101B DCM21WA4S1A9NNMB  | DCM21WA4S1A9NNMBK52       |
| 340100101B DBM13W3PNMB     | DBM13W3PNMBK52            | 340100101B DDM43W2S1AONNMB  | DDM43W2S1AONNMBK52        | 340100101B DCM25W3S1A9NNMB   | DCM25W3S1A9NNMBK52        |
| 340100101B DBM17W2PNMB     | DBM17W2PNMBK52            | 340100101B DDM47W1S1AONNMB  | DDM47W1S1AONNMBK52        | 340100101B DCM27W2S1A9NNMB   | DCM27W2S1A9NNMBK52        |
| 340100101B DBM21W1PNMB     | DBM21W1PNMBK52            | 340100101B DEM5W1P1AONNMB   | DEM5W1P1AONNMBK52         | 340100101B DDM24W7S1A9NNMB   | DDM24W7S1A9NNMBK52        |
| 340100101B DCM8W8PNMB      | DCM8W8PNMBK52             | 340100101B DAM7W2P1AONNMB   | DAM7W2P1AONNMBK52         | 340100101B DDM36W4S1A9NNMB   | DDM36W4S1A9NNMBK52        |
| 340100101B DCM13W6PNMB     | DCM13W6PNMBK52            | 340100101B DAM11W1P1AONNMB  | DAM11W1P1AONNMBK52        | 340100101B DDM43W2S1A9NNMB   | DDM43W2S1A9NNMBK52        |
| 340100101B DCM17W5PNMB     | DCM17W5PNMBK52            | 340100101B DBM9W4P1AONNMB   | DBM9W4P1AONNMBK52         | 340100101B DDM47W1S1A9NNMB   | DDM47W1S1A9NNMBK52        |
| 340100101B DCM21WA4PNMB    | DCM21WA4PNMBK52           | 340100101B DBM13W3P1AONNMB  | DBM13W3P1AONNMBK52        | 340100101B DEM5W1P1A9NNMB    | DEM5W1P1A9NNMBK52         |
| 340100101B DCM25W3PNMB     | DCM25W3PNMBK52            | 340100101B DBM17W2P1AONNMB  | DBM17W2P1AONNMBK52        | 340100101B DAM7W2P1A9NNMB    | DAM7W2P1A9NNMBK52         |
| 340100101B DCM27W2PNMB     | DCM27W2PNMBK52            | 340100101B DBM21W1P1AONNMB  | DBM21W1P1AONNMBK52        | 340100101B DAM11W1P1A9NNMB   | DAM11W1P1A9NNMBK52        |
| 340100101B DDM24W7PNMB     | DDM24W7PNMBK52            | 340100101B DCM13W6P1AONNMB  | DCM13W6P1AONNMBK52        | 340100101B DBM9W4P1A9NNMB    | DBM9W4P1A9NNMBK52         |
| 340100101B DDM36W4PNMB     | DDM36W4PNMBK52            | 340100101B DCM17W5P1AONNMB  | DCM17W5P1AONNMBK52        | 340100101B DBM13W3P1A9NNMB   | DBM13W3P1A9NNMBK52        |
| 340100101B DDM43W2PNMB     | DDM43W2PNMBK52            | 340100101B DCM21WA4P1AONNMB | DCM21WA4P1AONNMBK52       | 340100101B DBM17W2P1A9NNMB   | DBM17W2P1A9NNMBK52        |
| 340100101B DDM47W1PNMB     | DDM47W1PNMBK52            | 340100101B DCM25W3P1AONNMB  | DCM25W3P1AONNMBK52        | 340100101B DBM21W1P1A9NNMB   | DBM21W1P1A9NNMBK52        |
| 340100101B DEM5W1SOL3NMB   | DEM5W1SOL3NMBK52          | 340100101B DCM27W2P1AONNMB  | DCM27W2P1AONNMBK52        | 340100101B DCM13W6P1A9NNMB   | DCM13W6P1A9NNMBK52        |
| 340100101B DAM7W2SOL3NMB   | DAM7W2SOL3NMBK52          | 340100101B DDM24W7P1AONNMB  | DDM24W7P1AONNMBK52        | 340100101B DCM17W5P1A9NNMB   | DCM17W5P1A9NNMBK52        |
| 340100101B DAM11W1SOL3NMB  | DAM11W1SOL3NMBK52         | 340100101B DDM36W4P1AONNMB  | DDM36W4P1AONNMBK52        | 340100101B DCM21WA4P1A9NNMB  | DCM21WA4P1A9NNMBK52       |
| 340100101B DBM9W4SOL3NMB   | DBM9W4SOL3NMBK52          | 340100101B DDM43W2P1AONNMB  | DDM43W2P1AONNMBK52        | 340100101B DCM25W3P1A9NNMB   | DCM25W3P1A9NNMBK52        |
| 340100101B DBM13W3SOL3NMB  | DBM13W3SOL3NMBK52         | 340100101B DDM47W1P1AONNMB  | DDM47W1P1AONNMBK52        | 340100101B DCM27W2P1A9NNMB   | DCM27W2P1A9NNMBK52        |
| 340100101B DBM17W2SOL3NMB  | DBM17W2SOL3NMBK52         | 340100101B DEM5W1S1A7NNMB   | DEM5W1S1A7NNMBK52         | 340100101B DDM24W7P1A9NNMB   | DDM24W7P1A9NNMBK52        |
| 340100101B DBM21W1SOL3NMB  | DBM21W1SOL3NMBK52         | 340100101B DAM7W2S1A7NNMB   | DAM7W2S1A7NNMBK52         | 340100101B DDM36W4P1A9NNMB   | DDM36W4P1A9NNMBK52        |
| 340100101B DCM13W6SOL3NMB  | DCM13W6SOL3NMBK52         | 340100101B DAM11W1S1A7NNMB  | DAM11W1S1A7NNMBK52        | 340100101B DDM43W2P1A9NNMB   | DDM43W2P1A9NNMBK52        |
| 340100101B DCM17W5SOL3NMB  | DCM17W5SOL3NMBK52         | 340100101B DBM9W4S1A7NNMB   | DBM9W4S1A7NNMBK52         | 340100101B DDM47W1P1A9NNMB   | DDM47W1P1A9NNMBK52        |
| 340100101B DCM21WA4SOL3NMB | DCM21WA4SOL3NMBK52        | 340100101B DBM13W3S1A7NNMB  | DBM13W3S1A7NNMBK52        | 340100101B DEM5W1SF179ANMB   | DEM5W1SF179ANMBK52        |
| 340100101B DCM25W3SOL3NMB  | DCM25W3SOL3NMBK52         | 340100101B DBM17W2S1A7NNMB  | DBM17W2S1A7NNMBK52        | 340100101B DAM7W2SF179ANMB   | DAM7W2SF179ANMBK52        |
| 340100101B DCM27W2SOL3NMB  | DCM27W2SOL3NMBK52         | 340100101B DBM21W1S1A7NNMB  | DBM21W1S1A7NNMBK52        | 340100101B DAM11W1SF179ANMB  | DAM11W1SF179ANMBK52       |
| 340100101B DDM24W7SOL3NMB  | DDM24W7SOL3NMBK52         | 340100101B DCM13W6S1A7NNMB  | DCM13W6S1A7NNMBK52        | 340100101B DBM9W4SF179ANMB   | DBM9W4SF179ANMBK52        |
| 340100101B DDM36W4SOL3NMB  | DDM36W4SOL3NMBK52         | 340100101B DCM17W5S1A7NNMB  | DCM17W5S1A7NNMBK52        | 340100101B DBM13W3SF179ANMB  | DBM13W3SF179ANMBK52       |
| 340100101B DDM43W2SOL3NMB  | DDM43W2SOL3NMBK52         | 340100101B DCM21WA4S1A7NNMB | DCM21WA4S1A7NNMBK52       | 340100101B DBM17W2SF179ANMB  | DBM17W2SF179ANMBK52       |
| 340100101B DDM47W1SOL3NMB  | DDM47W1SOL3NMBK52         | 340100101B DCM25W3S1A7NNMB  | DCM25W3S1A7NNMBK52        | 340100101B DBM21W1SF179ANMB  | DBM21W1SF179ANMBK52       |
| 340100101B DEM5W1POL3NMB   | DEM5W1POL3NMBK52          | 340100101B DCM27W2S1A7NNMB  | DCM27W2S1A7NNMBK52        | 340100101B DCM13W6SF179ANMB  | DCM13W6SF179ANMBK52       |
| 340100101B DAM3W3POL3NMB   | DAM3W3POL3NMBK52          | 340100101B DDM24W7S1A7NNMB  | DDM24W7S1A7NNMBK52        | 340100101B DCM17W5SF179ANMB  | DCM17W5SF179ANMBK52       |
| 340100101B DAM7W2POL3NMB   | DAM7W2POL3NMBK52          | 340100101B DDM36W4S1A7NNMB  | DDM36W4S1A7NNMBK52        | 340100101B DCM21WA4SF179ANMB | DCM21WA4SF179ANMBK52      |
| 340100101B DAM11W1POL3NMB  | DAM11W1POL3NMBK52         | 340100101B DDM43W2S1A7NNMB  | DDM43W2S1A7NNMBK52        | 340100101B DCM25W3SF179ANMB  | DCM25W3SF179ANMBK52       |
| 340100101B DBM9W4POL3NMB   | DBM9W4POL3NMBK52          | 340100101B DDM47W1S1A7NNMB  | DDM47W1S1A7NNMBK52        | 340100101B DCM27W2SF179ANMB  | DCM27W2SF179ANMBK52       |
| 340100101B DBM13W3POL3NMB  | DBM13W3POL3NMBK52         | 340100101B DEM5W1P1A7NNMB   | DEM5W1P1A7NNMBK52         | 340100101B DDM24W7SF179ANMB  | DDM24W7SF179ANMBK52       |

## ESA/SCC Cross Reference

| ESA-SCC<br>Part Number      | ITT Cannon<br>Part Number | ESA-SCC<br>Part Number | ITT Cannon<br>Part Number |
|-----------------------------|---------------------------|------------------------|---------------------------|
| 340100101B DDM36W4SF179ANMB | DDM36W4SF179ANMBK52       | 340100415B             | DM115740-13               |
| 340100101B DDM43W2SF179ANMB | DDM43W2SF179ANMBK52       | 340100419B             | DM115740-12               |
| 340100101B DDM47W1SF179ANMB | DDM47W1SF179ANMBK52       | 340100412B             | DM115742-15               |
| 340100101B DEM5W1PF179ANMB  | DEM5W1PF179ANMBK52        | 340100416B             | DM115742-14               |
| 340100101B DAM7W2PF179ANMB  | DAM7W2PF179ANMBK52        | 340100420B             | DM115742-13               |
| 340100101B DAM11W1PF179ANMB | DAM11W1PF179ANMBK52       | 340100413B             | DM115741-7                |
| 340100101B DBM9W4PF179ANMB  | DBM9W4PF179ANMBK52        | 340100417B             | DM115741-8                |
| 340100101B DBM13W3PF179ANMB | DBM13W3PF179ANMBK52       | 340100414B             | DM115743-20               |
| 340100101B DBM17W2PF179ANMB | DBM17W2PF179ANMBK52       | 340100418B             | DM115743-22               |
| 340100101B DBM21W1PF179ANMB | DBM21W1PF179ANMBK52       | 340102207B             | DE-59-20                  |
| 340100101B DCM13W6PF179ANMB | DCM13W6PF179ANMBK52       | 340102208B             | DE-60-20                  |
| 340100101B DCM17W5PF179ANMB | DCM17W5PF179ANMBK52       | 340102209B             | DA-59-20                  |
| 340100101B DCM21W4PF179ANMB | DCM21W4PF179ANMBK52       | 340102210B             | DA-60-20                  |
| 340100101B DCM25W3PF179ANMB | DCM25W3PF179ANMBK52       | 340102211B             | DB-59-20                  |
| 340100101B DCM27W2PF179ANMB | DCM27W2PF179ANMBK52       | 340102212B             | DB-60-20                  |
| 340100101B DDM24W7PF179ANMB | DDM24W7PF179ANMBK52       | 340102213B             | DC-59-20                  |
| 340100101B DDM36W4PF179ANMB | DDM36W4PF179ANMBK52       | 340102214B             | DC-60-20                  |
| 340100101B DDM43W2PF179ANMB | DDM43W2PF179ANMBK52       | 340102215B             | DD-59-20                  |
| 340100101B DDM47W1PF179ANMB | DDM47W1PF179ANMBK52       | 340102216B             | DD-60-20                  |
| 340100101B DEM9SNMB         | DEM9SNMBK52               | 340102201B             | D20418-52                 |
| 340100101B DAM15SNMB        | DAM15SNMBK52              | 340102206B             | D115418-70                |
| 340100101B DBM25SNMB        | DBM25SNMBK52              | 340102258B             | D20418-101                |
| 340100101B DCM37SNMB        | DCM37SNMBK52              | 340102202B             | D20419-74                 |
| 340100101B DDM50SNMB        | DDM50SNMBK52              | 340102203B             | D20419-48                 |
| 340100101B DEM9PNMB         | DEM9PNMBK52               | 340102204B             | D20420-67                 |
| 340100101B DAM15PNMB        | DAM15PNMBK52              | 340102205B             | D20420-49                 |
| 340100101B DBM25PNMB        | DBM25PNMBK52              | 340102244B             | D20419-73                 |
| 340100101B DCM37PNMB        | DCM37PNMBK52              | 340102245B             | D20419-84                 |
| 340100101B DDM50PNMB        | DDM50PNMBK52              | 340102246B             | D20420-63                 |
| 340100101B DEM9SOL3NMB      | DEM9SOL3NMBK52            | 340102247B             | D20420-88                 |
| 340100101B DAM15SOL3NMB     | DAM15SOL3NMBK52           | 340102225B             | DA19678-167               |
| 340100101B DBM25SOL3NMB     | DBM25SOL3NMBK52           | 340102226B             | DB19678-168               |
| 340100101B DCM37SOL3NMB     | DCM37SOL3NMBK52           | 340102227B             | DC19678-138               |
| 340100101B DDM50SOL3NMB     | DDM50SOL3NMBK52           | 340102228B             | DD19678-161               |
| 340100101B DEM9POL3NMB      | DEM9POL3NMBK52            | 340102239B             | DE19977-47                |
| 340100101B DAM15POL3NMB     | DAM15POL3NMBK52           | 340102240B             | DA19977-40                |
| 340100101B DBM25POL3NMB     | DBM25POL3NMBK52           | 340102241B             | DB19977-43                |
| 340100101B DCM37POL3NMB     | DCM37POL3NMBK52           | 340102242B             | DC19977-45                |
| 340100101B DDM50POL3NMB     | DDM50POL3NMBK52           | 340102243B             | DD19977-44                |
| 340100101B DEM9S1AONNMB     | DEM9S1AONNMBK52           | 340102234B             | DE24657-16                |
| 340100101B DAM15S1AONNMB    | DAM15S1AONNMBK52          | 340102235B             | DA24658-15                |
| 340100101B DBM25S1AONNMB    | DBM25S1AONNMBK52          | 340102236B             | DB24659-15                |
| 340100101B DCM37S1AONNMB    | DCM37S1AONNMBK52          | 340102237B             | DC24660-16                |
| 340100101B DDM50S1AONNMB    | DDM50S1AONNMBK52          | 340102238B             | DD24661-13                |
| 340100101B DEM9P1AONNMB     | DEM9P1AONNMBK52           | 340102229B             | DE115386-101A             |
| 340100101B DAM15P1AONNMB    | DAM15P1AONNMBK52          | 340102230B             | DA115386-104A             |
| 340100101B DBM25P1AONNMB    | DBM25P1AONNMBK52          | 340102231B             | DB115386-102A             |
| 340100101B DCM37P1AONNMB    | DCM37P1AONNMBK52          | 340102232B             | DC115386-100A             |
| 340100101B DDM50P1AONNMB    | DDM50P1AONNMBK52          | 340102233B             | DD115386-103A             |
| 340100101B DEM9S1A7NNMB     | DEM9S1A7NNMBK52           | 340100501B             | O30-8882-002              |
| 340100101B DAM15S1A7NNMB    | DAM15S1A7NNMBK52          | 340100502B             | O31-8944-000              |
| 340100101B DBM25S1A7NNMB    | DBM25S1A7NNMBK52          | 340100503B             | O30-8848-020              |
| 340100101B DCM37S1A7NNMB    | DCM37S1A7NNMBK52          | 340100504B             | O31-8787-020              |
| 340100101B DDM50S1A7NNMB    | DDM50S1A7NNMBK52          | 340100505B             | 330-8782-001              |
| 340100101B DEM9P1A7NNMB     | DEM9P1A7NNMBK52           | 340100506B             | O31-8843-001              |
| 340100101B DAM15P1A7NNMB    | DAM15P1A7NNMBK52          | 340100507B             | 330-8944-000              |
| 340100101B DBM25P1A7NNMB    | DBM25P1A7NNMBK52          | 340100508B             | O31-8902-000              |
| 340100101B DCM37P1A7NNMB    | DCM37P1A7NNMBK52          |                        |                           |
| 340100101B DDM50P1A7NNMB    | DDM50P1A7NNMBK52          |                        |                           |
| 340100101B DEM9S1A9NNMB     | DEM9S1A9NNMBK52           |                        |                           |

## Panel Mounting

Figure 1A

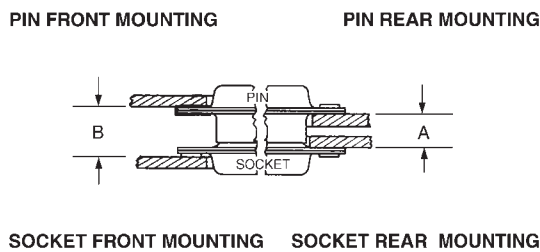


Figure 1B

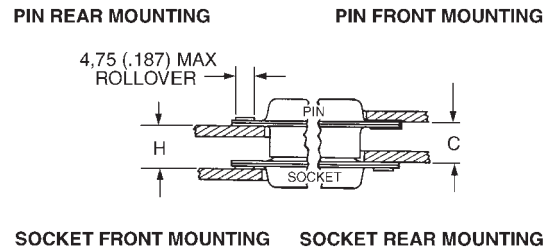


Figure 2


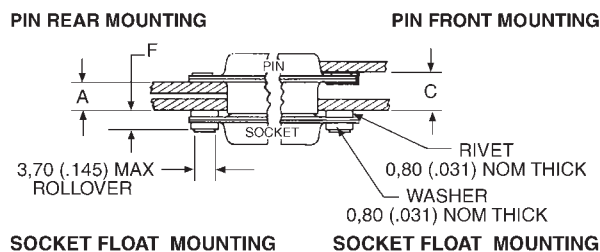


Figure 3

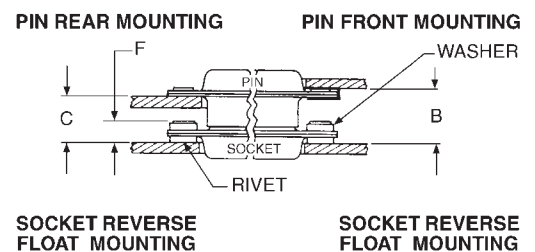

| Figure Number | Combination of Mated Connectors |                      |                     | A<br>+ 0,76 (.030) | B<br>+ 0,76 (.030) | C<br>+ 0,76 (.030) | F<br>± 0,25 (.010) | H<br>+ 0,76 (.030) |
|---------------|---------------------------------|----------------------|---------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
|               | Size                            | Pin (See Note Below) | Socket              |                    |                    |                    |                    |                    |
| 1A, 1B        | A, E                            | Standard             | Standard            | 6,35 (.250)        | 8,63 (.340)        | 7,49 (.295)        | —                  | 7,49 (.295)        |
| 1A, 1B        | B, C, D                         | Standard             | Standard            | 6,04 (.238)        | 8,71 (.343)        | 7,56 (.298)        | —                  | 7,18 (.283)        |
| 2             | A, E                            | Standard             | Float Mount         | 5,53 (.218)        | —                  | 6,68 (.263)        | 3,04 (.120)        | —                  |
| 2             | B, C, D                         | Standard             | Float Mount         | 5,23 (.206)        | —                  | 6,75 (.266)        | 3,04 (.120)        | —                  |
| 2             | A, E                            | Float Mount          | Standard            | 5,53 (.218)        | —                  | 6,68 (.263)        | 3,04 (.120)        | —                  |
| 2             | B, C, D                         | Float Mount          | Standard            | 5,23 (.206)        | —                  | 6,37 (.251)        | 3,30 (.130)        | —                  |
| 3             | A, E                            | Standard             | Reverse Float Mount | —                  | 9,09 (.358)        | 7,95 (.313)        | 3,04 (.120)        | —                  |
| 3             | B, C, D                         | Standard             | Reverse Float Mount | —                  | 9,16 (.361)        | 7,64 (.301)        | 3,04 (.120)        | —                  |
| 3             | A, E                            | Reverse Float Mount  | Standard            | —                  | 9,09 (.358)        | 7,95 (.313)        | 3,04 (.120)        | —                  |
| 3             | B, C, D                         | Reverse Float Mount  | Standard            | —                  | 9,01 (.355)        | 7,87 (.310)        | 3,30 (.130)        | —                  |



Notes:

1. A, B, C and H are dimensions between panels and represent the recommended limit to be used in the design of the connector mounting method.
2. It is recommended that only one assembly, either pin or socket, be float mounted.
3. Standard pin assemblies contained 0,38 (.015) thick front shells on E and A sizes; 0,61 (.024) thick front shells on B, C, and D sizes.
4. Standard connectors accommodate a #4 screw. Float mount connectors accommodate a #2 screw.

## Panel Cutouts


Standard Cutout

Rear Mounting Cutout (Optional)

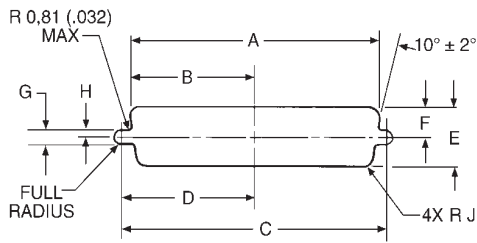


Front Panel Mounting


Rear Panel Mounting




Standard Shell



Dual Float Mount Shell



Standard Shell



Dual Float Mount Shell

### Standard Shell



| Shell Size | Mounting Method | A<br>± 0,13 (.005) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,13 (.005) | F<br>± 0,13 (.005) | G<br>± 0,05 (.002) | H<br>± 0,05 (.002) | J<br>± 0,05 (.002) |
|------------|-----------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| DE         | Front           | 22,19 (.874)       | 11,09 (.437)       | 24,99 (.984)       | 12,49 (.492)       | 13,03 (.513)       | 6,52 (.257)        | 3,04 (.120)        | 1,52 (.060)        | 2,10 (.083)        |
|            | Rear            | 20,47 (.806)       | 10,23 (.403)       | 24,99 (.984)       | 12,49 (.492)       | 11,40 (.449)       | 5,71 (.225)        | 3,04 (.120)        | 1,52 (.060)        | 3,35 (.132)        |
| DA         | Front           | 30,53 (1.202)      | 15,26 (.601)       | 33,32 (1.312)      | 16,66 (.656)       | 13,03 (.513)       | 6,52 (.257)        | 3,04 (.120)        | 1,52 (.060)        | 2,10 (.083)        |
|            | Rear            | 28,80 (1.134)      | 14,40 (.567)       | 33,32 (1.312)      | 16,66 (.656)       | 11,40 (.449)       | 5,71 (.225)        | 3,04 (.120)        | 1,52 (.060)        | 3,35 (.132)        |
| DB         | Front           | 44,27 (1.743)      | 22,14 (.872)       | 47,04 (1.852)      | 23,52 (.926)       | 13,03 (.513)       | 6,52 (.257)        | 3,04 (.120)        | 1,52 (.060)        | 2,10 (.083)        |
|            | Rear            | 42,51 (1.674)      | 21,25 (.837)       | 47,04 (1.852)      | 23,52 (.926)       | 11,40 (.449)       | 5,71 (.225)        | 3,04 (.120)        | 1,52 (.060)        | 3,35 (.132)        |
| DC         | Front           | 60,73 (2.391)      | 30,37 (1.196)      | 63,50 (2.500)      | 31,75 (1.250)      | 13,03 (.513)       | 6,52 (.257)        | 3,04 (.120)        | 1,52 (.060)        | 2,10 (.083)        |
|            | Rear            | 59,08 (2.326)      | 29,54 (1.163)      | 63,50 (2.500)      | 31,75 (1.250)      | 11,40 (.449)       | 5,71 (.225)        | 3,04 (.120)        | 1,52 (.060)        | 3,35 (.132)        |
| DD         | Front           | 58,34 (2.297)      | 29,18 (1.149)      | 61,11 (2.406)      | 30,55 (1.203)      | 15,82 (.623)       | 7,92 (.312)        | 3,04 (.120)        | 1,52 (.060)        | 2,10 (.083)        |
|            | Rear            | 56,33 (2.218)      | 28,16 (1.109)      | 61,11 (2.406)      | 30,55 (1.203)      | 14,09 (.555)       | 7,06 (.278)        | 3,04 (.120)        | 1,52 (.060)        | 3,35 (.132)        |


### Dual Float Mount Shell

| Shell Size | Mounting Method | A<br>± 0,13 (.005) | B<br>± 0,13 (.005) | C<br>± 0,13 (.005) | D<br>± 0,13 (.005) | E<br>± 0,13 (.005) | F<br>± 0,13 (.005) | G<br>± 0,05 (.002) | H<br>± 0,05 (.002) | J<br>± 0,05 (.002) |
|------------|-----------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| DE         | Front           | 23,01 (.906)       | 11,50 (.453)       | 24,99 (.984)       | 12,49 (.492)       | 13,84 (.545)       | 6,93 (.273)        | 2,23 (.088)        | 1,11 (.044)        | 2,10 (.083)        |
|            | Rear            | 21,28 (.838)       | 10,64 (.419)       | 24,99 (.984)       | 12,49 (.492)       | 12,21 (.481)       | 6,12 (.241)        | 2,23 (.088)        | 1,11 (.044)        | 3,35 (.132)        |
| DA         | Front           | 31,34 (1.234)      | 15,67 (.617)       | 33,32 (1.312)      | 16,66 (.656)       | 13,84 (.545)       | 6,93 (.273)        | 2,23 (.088)        | 1,11 (.044)        | 2,10 (.083)        |
|            | Rear            | 29,61 (1.166)      | 14,80 (.583)       | 33,32 (1.312)      | 16,66 (.656)       | 12,21 (.481)       | 6,12 (.241)        | 2,23 (.088)        | 1,11 (.044)        | 3,35 (.132)        |
| DB         | Front           | 45,08 (1.775)      | 22,55 (.888)       | 47,04 (1.852)      | 23,52 (.926)       | 13,84 (.545)       | 6,93 (.273)        | 2,23 (.088)        | 1,11 (.044)        | 2,10 (.083)        |
|            | Rear            | 43,33 (1.706)      | 21,66 (.853)       | 47,04 (1.852)      | 23,52 (.926)       | 12,21 (.481)       | 6,12 (.241)        | 2,23 (.088)        | 1,11 (.044)        | 3,35 (.132)        |
| DC         | Front           | 61,54 (2.423)      | 30,78 (1.212)      | 63,50 (2.500)      | 31,75 (1.250)      | 13,84 (.545)       | 6,93 (.273)        | 2,23 (.088)        | 1,11 (.044)        | 2,10 (.083)        |
|            | Rear            | 59,79 (2.354)      | 29,89 (1.177)      | 63,50 (2.500)      | 31,75 (1.250)      | 12,21 (.481)       | 6,12 (.241)        | 2,23 (.088)        | 1,11 (.044)        | 3,35 (.132)        |
| DD         | Front           | 59,15 (2.329)      | 29,59 (1.165)      | 61,11 (2.406)      | 30,55 (1.203)      | 16,63 (.655)       | 8,33 (.328)        | 2,23 (.088)        | 1,11 (.044)        | 2,10 (.083)        |
|            | Rear            | 57,15 (2.250)      | 28,57 (1.125)      | 61,11 (2.406)      | 30,55 (1.203)      | 14,90 (.587)       | 7,46 (.294)        | 2,23 (.088)        | 1,11 (.044)        | 3,35 (.132)        |


## Plug Contact Cavity Arrangements

### Face View Pin Insert

|                         |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|-------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                         |  |  |  |  |  |  |  |
| Shell Size              | E                                                                                 | E                                                                                 | E                                                                                 | A                                                                                  | A                                                                                   | A                                                                                   | A                                                                                   |
| Contact Arrangement     | 2W2                                                                               | 2WK2                                                                              | 5W1                                                                               | 3W3                                                                                | 3WK3                                                                                | 7W2                                                                                 | 11W1                                                                                |
| No. of Size 20 Cavities | 0#20                                                                              | 0#20                                                                              | 4#20                                                                              | 0#20                                                                               | 0#20                                                                                | 5#20                                                                                | 10#20                                                                               |
| No. of Size 8 Cavities  | 2#8                                                                               | 2#8                                                                               | 1#8                                                                               | 3#8                                                                                | 3#8                                                                                 | 2#8                                                                                 | 1#8                                                                                 |

|                         |                                                                                   |                                                                                   |                                                                                    |
|-------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|                         |  |  |  |
| Shell Size              | B                                                                                 | B                                                                                 | B                                                                                  |
| Contact Arrangement     | 5W54                                                                              | 9W4                                                                               | 13W3                                                                               |
| No. of Size 20 Cavities | 0#20                                                                              | 5#20                                                                              | 10#20                                                                              |
| No. of Size 8 Cavities  | 5#8                                                                               | 4#8                                                                               | 3#8                                                                                |

|                         |                                                                                   |                                                                                   |
|-------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|                         |  |  |
| Shell Size              | B                                                                                 | B                                                                                 |
| Contact Arrangement     | 17W2                                                                              | 21W1                                                                              |
| No. of Size 20 Cavities | 15#20                                                                             | 20#20                                                                             |
| No. of Size 8 Cavities  | 2#8                                                                               | 1#8                                                                               |

|                         |                                                                                     |                                                                                      |                                                                                       |
|-------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                         |  |  |  |
| Shell Size              | C                                                                                   | C                                                                                    | C                                                                                     |
| Contact Arrangement     | 8W8                                                                                 | 13W6                                                                                 | 17W5                                                                                  |
| No. of Size 20 Cavities | 0#20                                                                                | 7#20                                                                                 | 12#20                                                                                 |
| No. of Size 8 Cavities  | 8#8                                                                                 | 6#8                                                                                  | 5#8                                                                                   |

|                         |                                                                                     |                                                                                      |                                                                                       |
|-------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                         |  |  |  |
| Shell Size              | C                                                                                   | C                                                                                    | C                                                                                     |
| Contact Arrangement     | 21WA4                                                                               | 25W3                                                                                 | 27W2                                                                                  |
| No. of Size 20 Cavities | 17#20                                                                               | 22#20                                                                                | 25#20                                                                                 |
| No. of Size 8 Cavities  | 4#8                                                                                 | 3#8                                                                                  | 2#8                                                                                   |

|                         |                                                                                     |                                                                                      |
|-------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|                         |  |  |
| Shell Size              | D                                                                                   | D                                                                                    |
| Contact Arrangement     | 24W7                                                                                | 36W4                                                                                 |
| No. of Size 20 Cavities | 17#20                                                                               | 32#20                                                                                |
| No. of Size 8 Cavities  | 7#8                                                                                 | 4#8                                                                                  |

|                         |                                                                                     |                                                                                      |
|-------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|                         |  |  |
| Shell Size              | D                                                                                   | D                                                                                    |
| Contact Arrangement     | 43W2                                                                                | 47W1                                                                                 |
| No. of Size 20 Cavities | 41#20                                                                               | 46#20                                                                                |
| No. of Size 8 Cavities  | 2#8                                                                                 | 1#8                                                                                  |

Dimensions shown in mm  
Specifications and dimensions subject to change



[www.ittcannon.com](http://www.ittcannon.com)





## Receptacle Contact Cavity Arrangements



### Face View Socket Insert


|                         |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|-------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                         |  |  |  |  |  |  |  |
| Shell Size              | E                                                                                 | E                                                                                 | E                                                                                 | A                                                                                 | A                                                                                  | A                                                                                   | A                                                                                   |
| Contact Arrangement     | 2W2                                                                               | 2WK2                                                                              | 5W1                                                                               | 3W3                                                                               | 3WK3                                                                               | 7W2                                                                                 | 11W1                                                                                |
| No. of Size 20 Cavities | 0#20                                                                              | 0#20                                                                              | 4#20                                                                              | 0#20                                                                              | 0#20                                                                               | 5#20                                                                                | 10#20                                                                               |
| No. of Size 8 Cavities  | 2#8                                                                               | 2#8                                                                               | 1#8                                                                               | 3#8                                                                               | 3#8                                                                                | 2#8                                                                                 | 1#8                                                                                 |


|                         |                                                                                   |                                                                                   |                                                                                    |
|-------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|                         |  |  |  |
| Shell Size              | B                                                                                 | B                                                                                 | B                                                                                  |
| Contact Arrangement     | 5W5                                                                               | 9W4                                                                               | 13W3                                                                               |
| No. of Size 20 Cavities | 0#20                                                                              | 5#20                                                                              | 10#20                                                                              |
| No. of Size 8 Cavities  | 5#8                                                                               | 4#8                                                                               | 3#8                                                                                |

|                         |                                                                                   |                                                                                   |
|-------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|                         |  |  |
| Shell Size              | B                                                                                 | B                                                                                 |
| Contact Arrangement     | 17W2                                                                              | 21W1                                                                              |
| No. of Size 20 Cavities | 15#20                                                                             | 20#20                                                                             |
| No. of Size 8 Cavities  | 2#8                                                                               | 1#8                                                                               |

|                         |                                                                                    |                                                                                     |                                                                                      |
|-------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|                         |  |  |  |
| Shell Size              | C                                                                                  | C                                                                                   | C                                                                                    |
| Contact Arrangement     | 8W8                                                                                | 13W6                                                                                | 17W5                                                                                 |
| No. of Size 20 Cavities | 0#20                                                                               | 7#20                                                                                | 12#20                                                                                |
| No. of Size 8 Cavities  | 8#8                                                                                | 6#8                                                                                 | 5#8                                                                                  |

|                         |                                                                                     |                                                                                      |                                                                                       |
|-------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                         |  |  |  |
| Shell Size              | C                                                                                   | C                                                                                    | C                                                                                     |
| Contact Arrangement     | 21WA4                                                                               | 25W3                                                                                 | 27W2                                                                                  |
| No. of Size 20 Cavities | 17#20                                                                               | 22#20                                                                                | 25#20                                                                                 |
| No. of Size 8 Cavities  | 4#8                                                                                 | 3#8                                                                                  | 2#8                                                                                   |


|                         |                                                                                     |                                                                                     |
|-------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                         |  |  |
| Shell Size              | D                                                                                   | D                                                                                   |
| Contact Arrangement     | 24W7                                                                                | 36W4                                                                                |
| No. of Size 20 Cavities | 17#20                                                                               | 32#20                                                                               |
| No. of Size 8 Cavities  | 7#8                                                                                 | 4#8                                                                                 |

|                         |                                                                                     |                                                                                     |
|-------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                         |  |  |
| Shell Size              | D                                                                                   | D                                                                                   |
| Contact Arrangement     | 43W2                                                                                | 47W1                                                                                |
| No. of Size 20 Cavities | 41#20                                                                               | 46#20                                                                               |
| No. of Size 8 Cavities  | 2#8                                                                                 | 1#8                                                                                 |

Pushfit/Boardlock — Standard

Straight (Z)


90° (C)

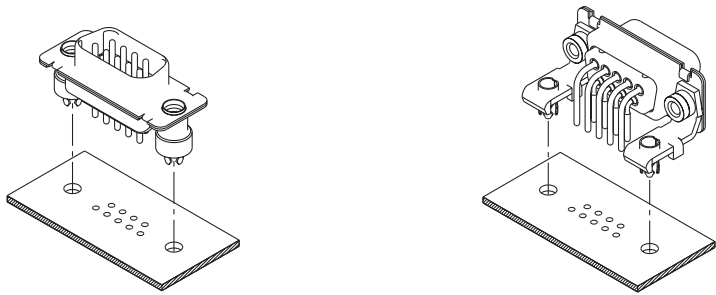

Pushfit/Boardlock — European

Straight (-146) 3.0 mm dia  
Straight (-161) 3.2 mm dia.


90° (-146) 3.0 mm dia.  
90° (-162) 3.2 mm dia.

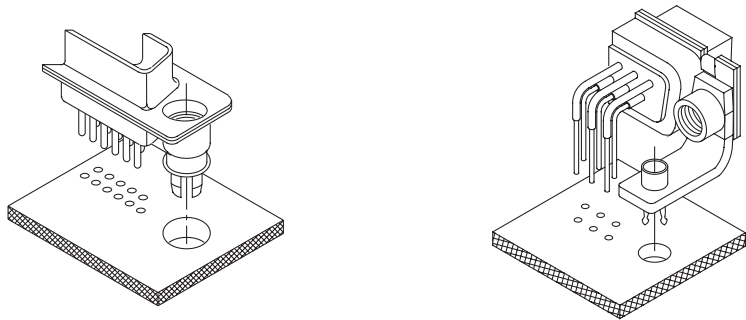

Alternate 50 Ohm Coaxial Configuration

Straight (X)


90° (X)

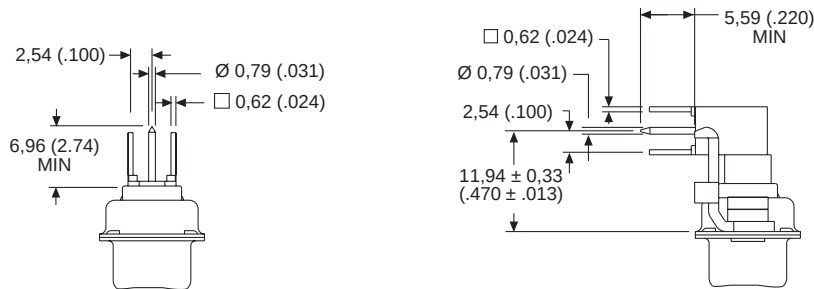




## Hardware Views (Standard)


Through Hole (Eyelet)



Tab Shells (K)




Clinch Nut (E)



Dimensions — Plug

| Shell Size | K<br>± 0,317 (.0125) | K<br>± 0,25 (.010) |
|------------|----------------------|--------------------|
| DE         | 1,206 (.0475)        | —                  |
| DA         | 1,206 (.0475)        | —                  |
| DB         | —                    | 1,52 (.060)        |
| DC         | —                    | 1,52 (.060)        |
| DD         | —                    | 1,52 (.060)        |

Dual Float Mount (Y)

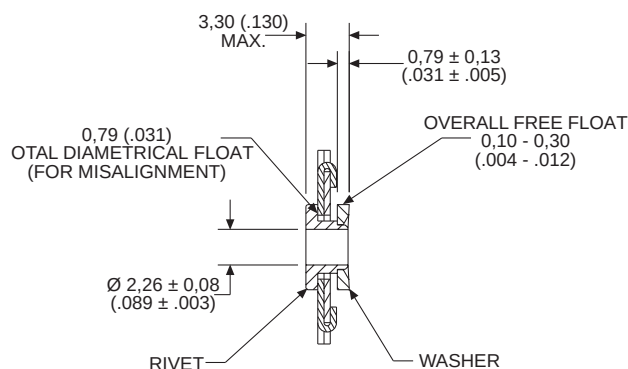


Dimensions — Receptacle

| Shell Size | K<br>± 0,318 (.0125) |
|------------|----------------------|
| DE         | 1,206 (.0475)        |
| DA         | 1,206 (.0475)        |
| DB         | 1,206 (.0475)        |
| DC         | 1,206 (.0475)        |
| DD         | 1,206 (.0475)        |


## Alternate Bracket Configuration

Supplied with connectors without boardlocks.

Standard Footprint (P)



European Footprint (P)




Dimensions


| Shell Size     | R<br>± 0,25 (.010) | S<br>± 0,25 (.010) |
|----------------|--------------------|--------------------|
| DE, DA, DB, DC | 11,61 (.457)       | 12,78 (.503)       |
| DD             | 12,78 (.503)       | 13,95 (.549)       |

## Hardware Views (European)


Through Hole




Clinch Nut (X/E)




Plastic Bracket with Bushing (1A5N)




Plastic Bracket with Captive Nut (1ATN/1AWN) (M3/4-40)  
Above with grounding strap (1AUN/1AVN) (M3/4-40)




Plastic Bracket with Post (1APN/1A6N)(M3/4-40)

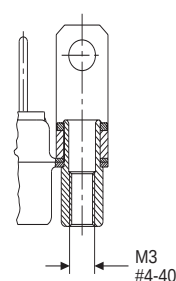


Metal Bracket with Bushing (1AFN)




Metal Bracket with Captive Nut (1A9N/1A7N) (M3/4-40)




Metal Bracket with Post (1AHN/1A8N) (M3/4-40)



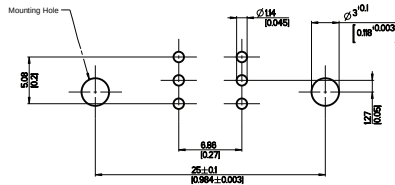


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities


**E**  
2W2/2WK2  
0 #20  
2 #8



**E**  
5W1  
4 #20  
1 #8




**A**  
3W3/3WK3  
0 #20  
3 #8




Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities


**A**  
7W2  
5 #20  
2 #8

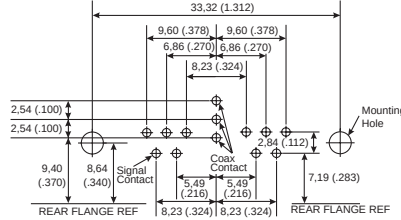

**A**  
11W1  
10 #20  
1 #8

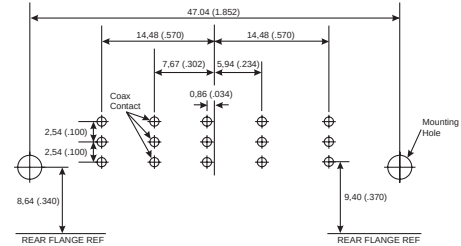


**B**  
5W5  
0 #20  
5 #8

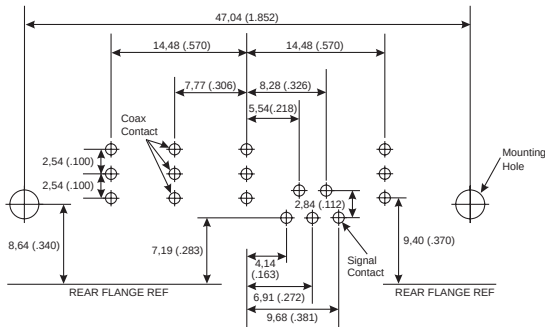


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

**B**  
9W4  
5 #20  
4 #8

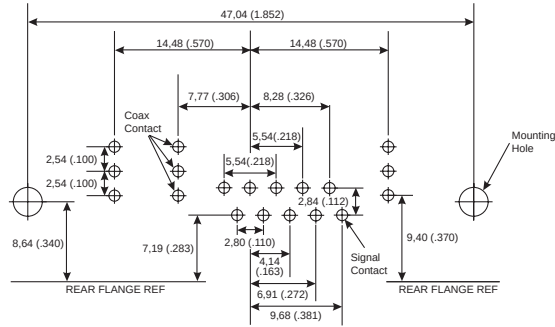


**B**  
13W3  
10 #20  
3 #8

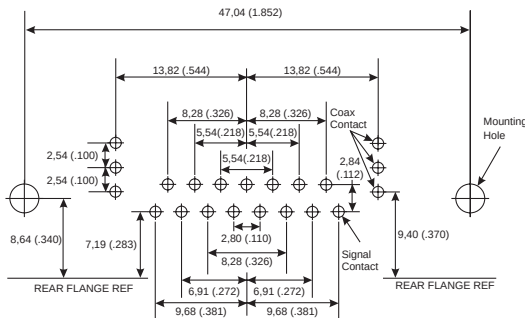

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

**B**  
17W2  
15 #20  
2 #8

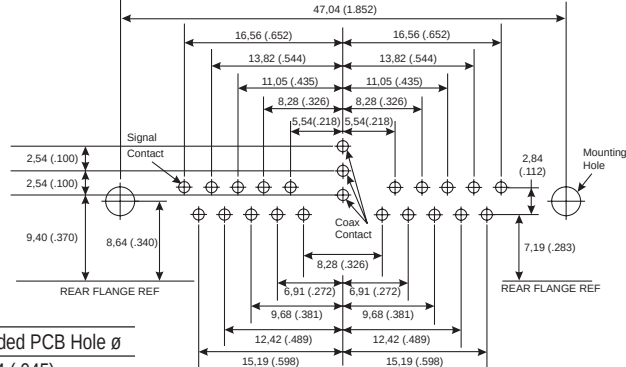


**B**  
21W1  
20 #20  
1 #8

|                     |                        |
|---------------------|------------------------|
| Signal Contact Ø    | Recommended PCB Hole Ø |
| 0,76 (.030)         | 1,14 (.045)            |
| Mounting Type       | Recommended PCB Hole Ø |
| Without Boardlock   | 3,05 (.120)            |
| With Boardlock      | 3,10 (.122)            |
| Size 8 Contact Type | Recommended PCB Hole Ø |
| Coaxial (C or X)    | 1,14 (.045)            |


Dimensions shown in mm  
Specifications and dimensions subject to change

www.ittcannon.com

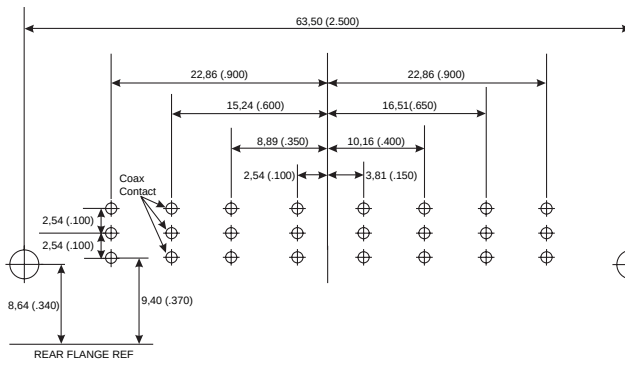


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
8W8  
0 #20  
8 #8

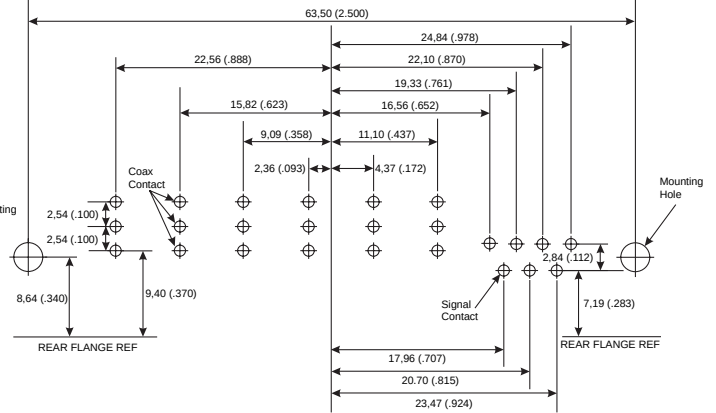


C  
13W6  
7 #20  
6 #8

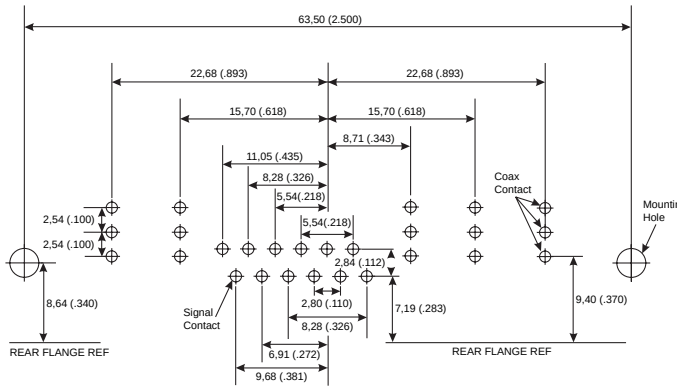


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
17W5  
12 #20  
5 #8

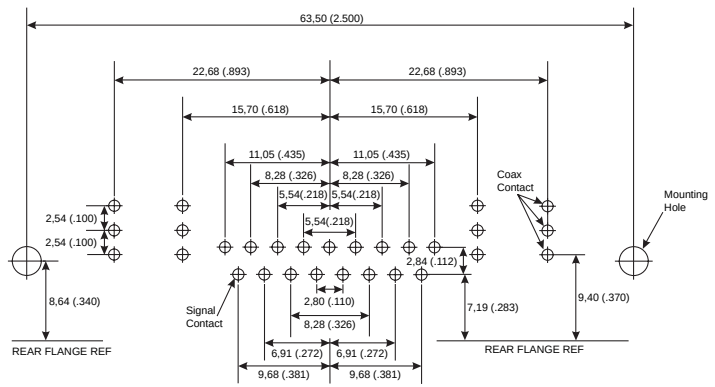


C  
21WA4  
17 #20  
4 #8

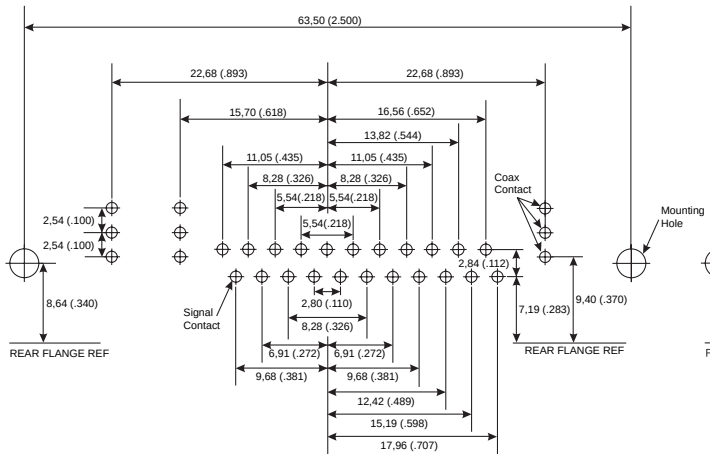

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
25W3  
22 #20  
3 #8

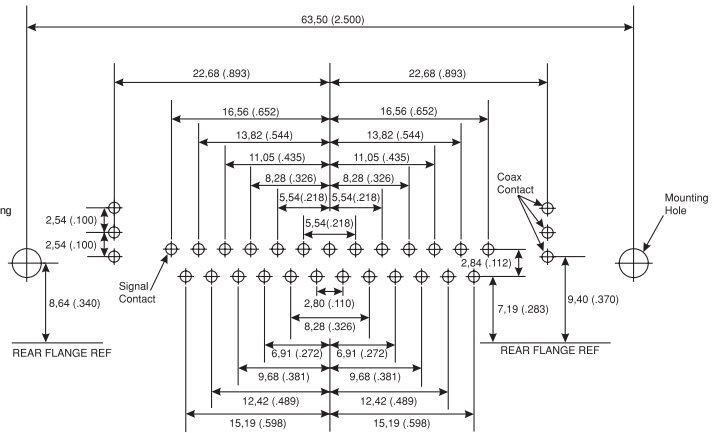


C  
27W2  
25 #20  
2 #8

|                              |                                    |
|------------------------------|------------------------------------|
| Signal Contact $\varnothing$ | Recommended PCB Hole $\varnothing$ |
| 0,76 (.030)                  | 1,14 (.045)                        |
| Mounting Type                | Recommended PCB Hole $\varnothing$ |
| Without Boardlock            | 3,05 (.120)                        |
| With Boardlock               | 3,10 (.122)                        |
| Size 8 Contact Type          | Recommended PCB Hole $\varnothing$ |
| Coaxial (C or X)             | 1,14 (.045)                        |

Dimensions shown in mm  
Specifications and dimensions subject to change


[www.ittcannon.com](http://www.ittcannon.com)



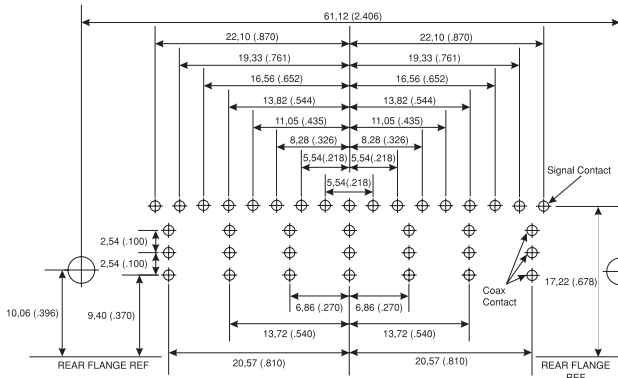


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

D  
24W7  
17 #20  
7 #8

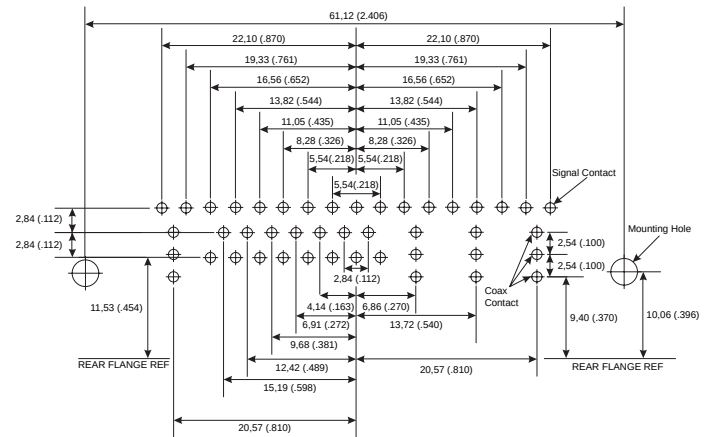


D  
36W4  
32 #20  
4 #8

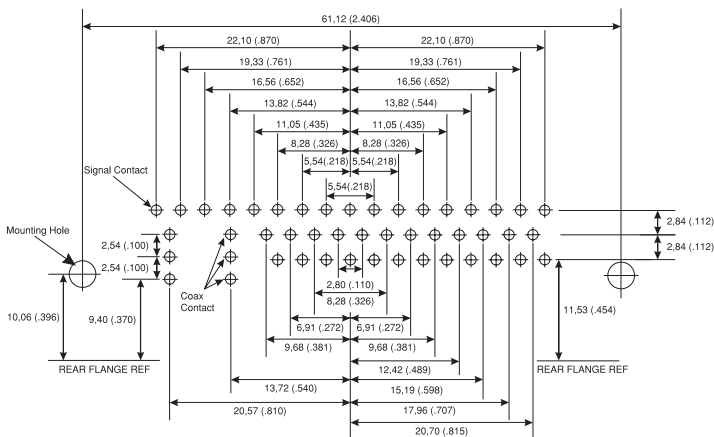

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

D  
43W2  
41 #20  
2 #20

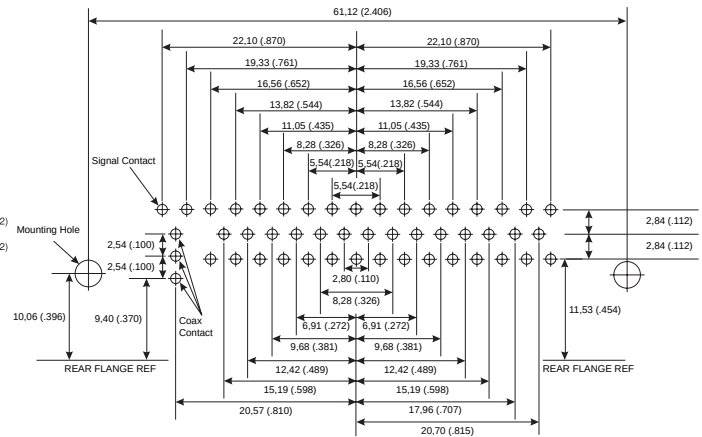


D  
47W1  
46 #20  
1 #20

|                              |                                    |
|------------------------------|------------------------------------|
| Signal Contact $\varnothing$ | Recommended PCB Hole $\varnothing$ |
| 0,76 (.030)                  | 1,14 (.045)                        |
| Mounting Type                | Recommended PCB Hole $\varnothing$ |
| Without Boardlock            | 3,05 (.120)                        |
| With Boardlock               | 3,10 (.122)                        |
| Size 8 Contact Type          | Recommended PCB Hole $\varnothing$ |
| Coaxial (C or X)             | 1,14 (.045)                        |




Dimensions shown in mm  
Specifications and dimensions subject to change


[www.ittcannon.com](http://www.ittcannon.com)

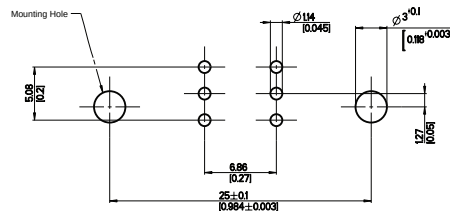


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

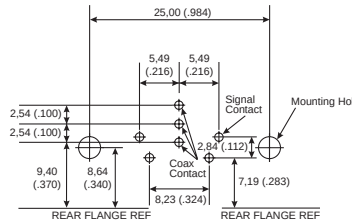


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

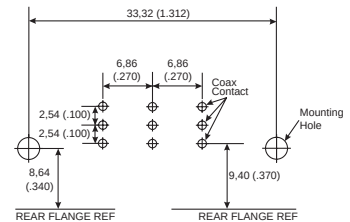


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities




Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

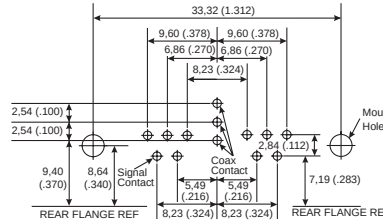


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

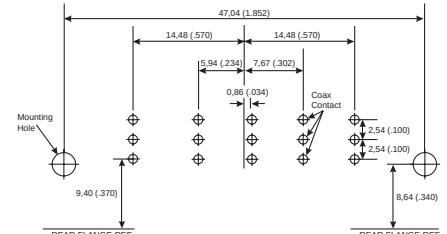


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

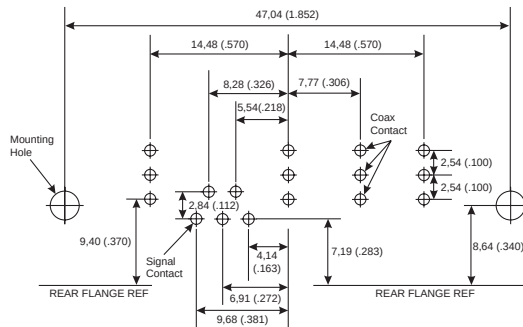


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

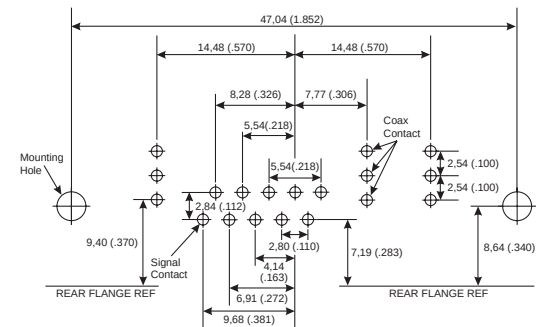

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

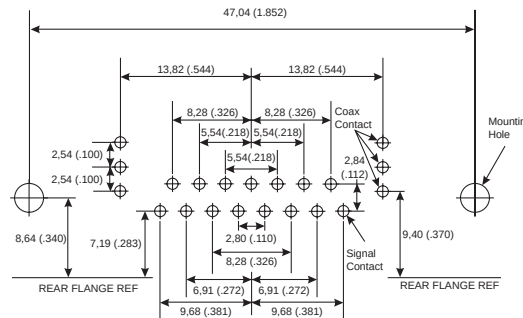


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

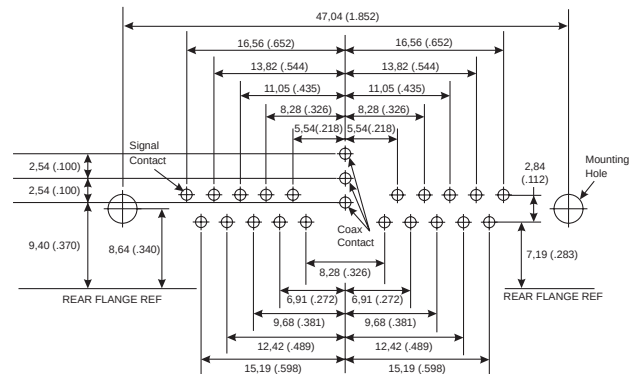

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities


|                     |                        |
|---------------------|------------------------|
| Signal Contact Ø    | Recommended PCB Hole Ø |
| 0,76 (.030)         | 1,14 (.045)            |
| Mounting Type       | Recommended PCB Hole Ø |
| Without Boardlock   | 3,05 (.120)            |
| With Boardlock      | 3,10 (.122)            |
| Size 8 Contact Type | Recommended PCB Hole Ø |
| Coaxial (C or X)    | 1,14 (.045)            |

Dimensions shown in mm  
Specifications and dimensions subject to change

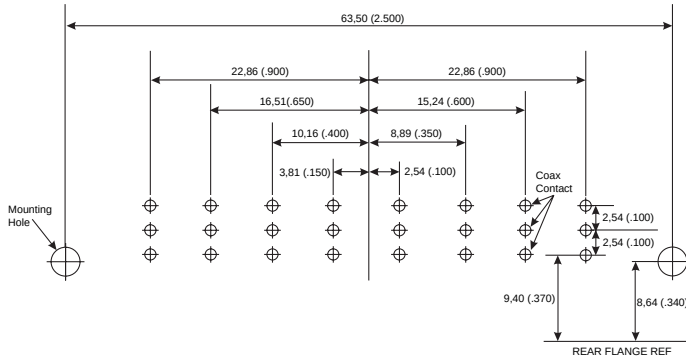


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
8W8  
0 #20  
8 #8

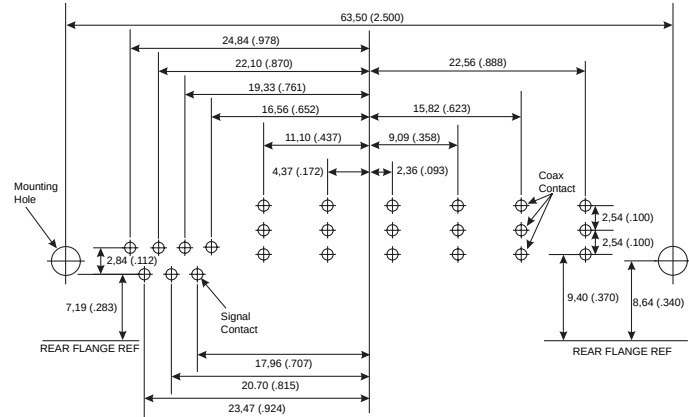


C  
13W6  
7 #20  
6 #8

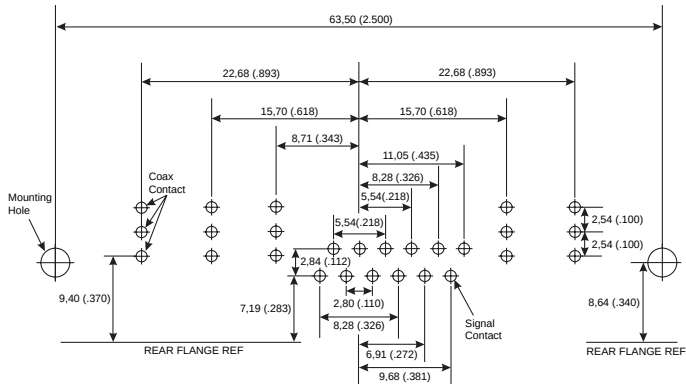


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
17W5  
12 #20  
5 #8

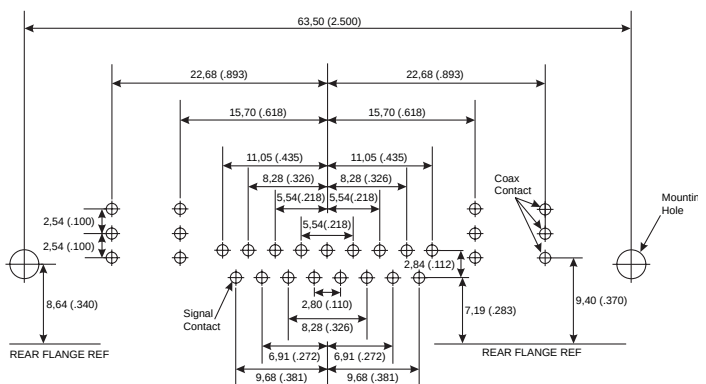


C  
21WA4  
17 #20  
4 #8

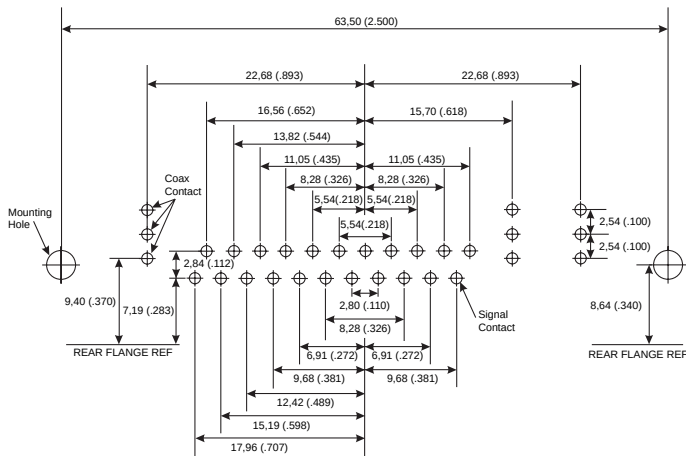

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
25W3  
22 #20  
3 #8

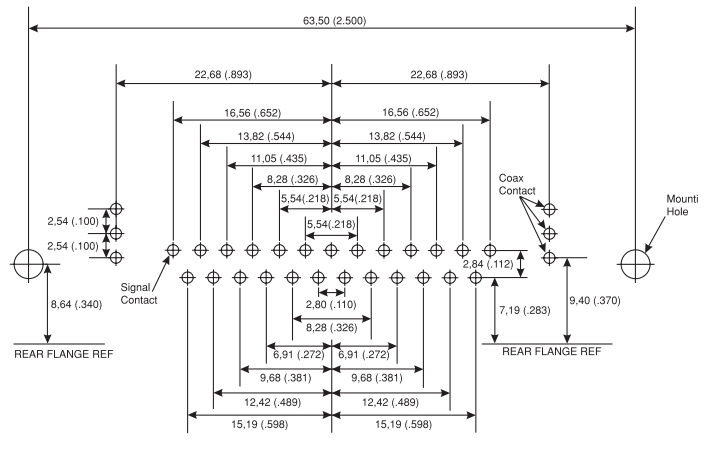

C  
27W2  
25 #20  
2 #8


| Signal Contact $\varnothing$ | Recommended PCB Hole $\varnothing$ |
|------------------------------|------------------------------------|
| 0,76 (.030)                  | 1,14 (.045)                        |
| Mounting Type                | Recommended PCB Hole $\varnothing$ |
| Without Boardlock            | 3,05 (.120)                        |
| With Boardlock               | 3,10 (.122)                        |
| Size 8 Contact Type          | Recommended PCB Hole $\varnothing$ |
| Coaxial (C or X)             | 1,14 (.045)                        |



Dimensions shown in mm  
Specifications and dimensions subject to change


www.ittcannon.com



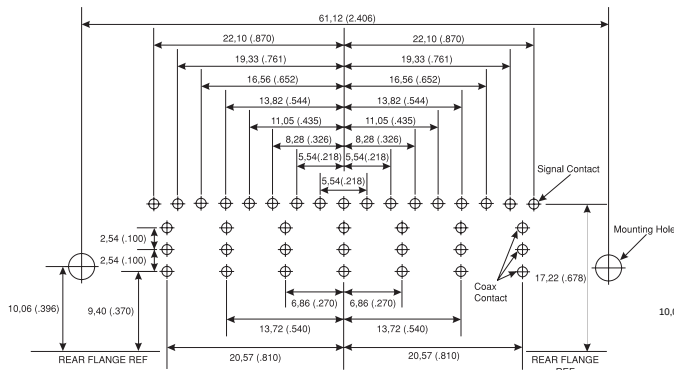


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

D  
24W7  
17 #20  
7 #8

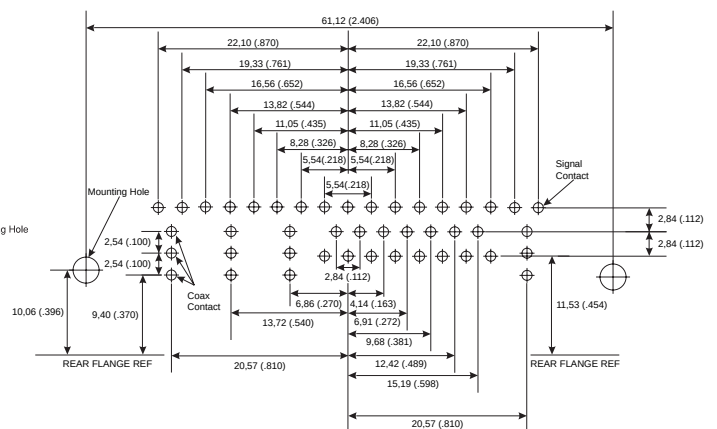


D  
36W4  
32 #20  
4 #8

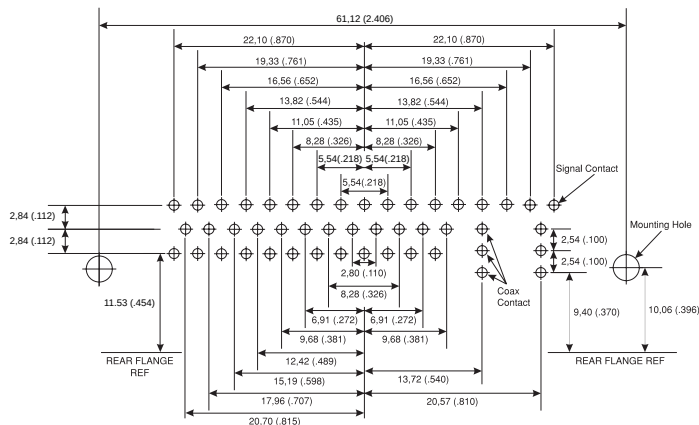

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

D  
43W2  
41 #20  
2 #8

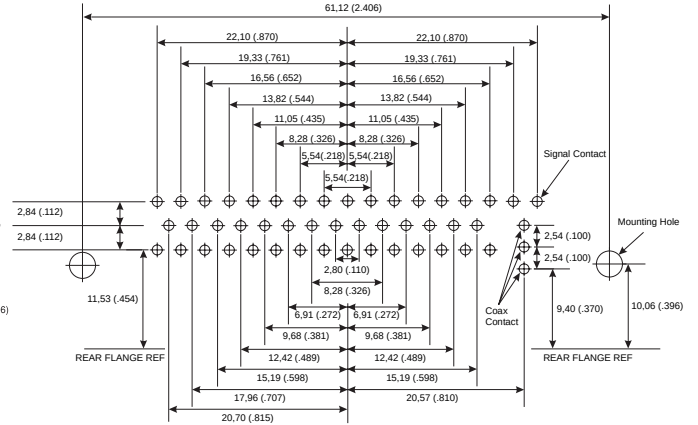


D  
47W1  
46 #20  
1 #8

|                              |                                    |
|------------------------------|------------------------------------|
| Signal Contact $\varnothing$ | Recommended PCB Hole $\varnothing$ |
| 0,76 (.030)                  | 1,14 (.045)                        |
| Mounting Type                | Recommended PCB Hole $\varnothing$ |
| Without Boardlock            | 3,05 (.120)                        |
| With Boardlock               | 3,10 (.122)                        |
| Size 8 Contact Type          | Recommended PCB Hole $\varnothing$ |
| Coaxial (C or X)             | 1,14 (.045)                        |

Dimensions shown in mm  
Specifications and dimensions subject to change


[www.ittcannon.com](http://www.ittcannon.com)



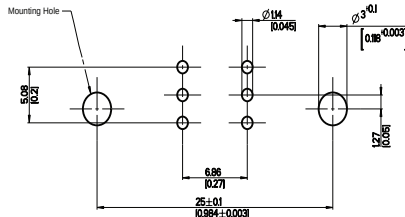


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities


E  
2W2/2WK2  
0 #20  
2 #8



E  
5W1  
4 #20  
1 #8

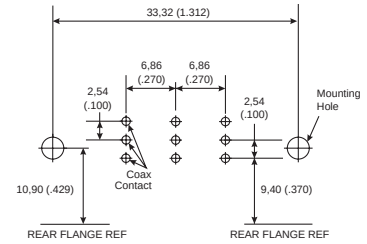


A  
3W3/3WK3  
0 #20  
3 #8




Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities


A  
7W2  
5 #20  
2 #8



A  
11W1  
10 #20  
1 #8

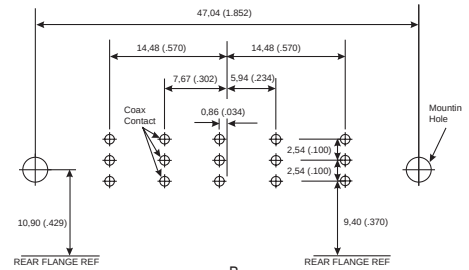


B  
5W5  
0 #20  
5 #8

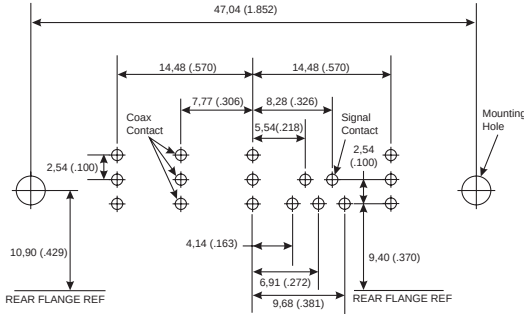


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

B  
9W4  
5 #20  
4 #8

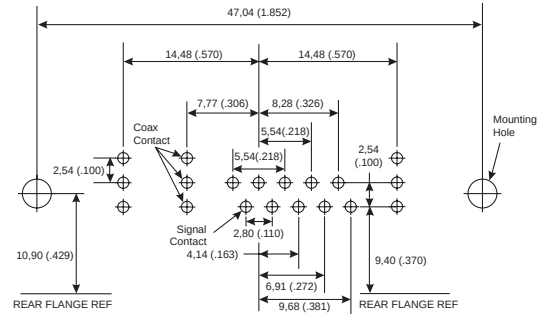


B  
13W3  
10 #20  
3 #8

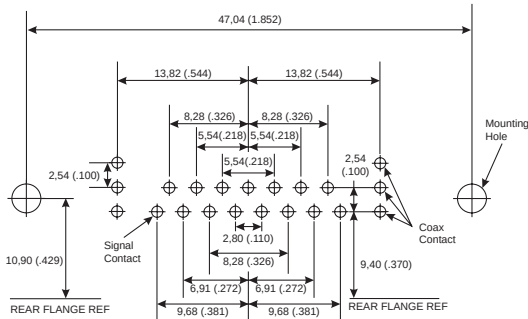

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

B  
17W2  
15 #20  
2 #8

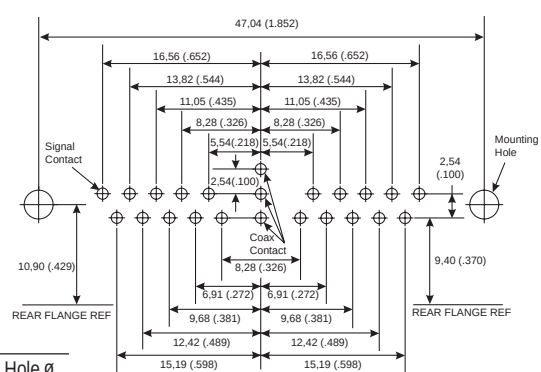


B  
21W1  
20 #20  
1 #8

|                              |                                    |
|------------------------------|------------------------------------|
| Signal Contact $\varnothing$ | Recommended PCB Hole $\varnothing$ |
| 0,60 (.024)                  | 1,00 (.039)                        |
| Mounting Type                | Recommended PCB Hole $\varnothing$ |
| Without Boardlock            | 3,05 (.120)                        |
| With Boardlock               | 3,10 (.122)                        |
| Size 8 Contact Type          | Recommended PCB Hole $\varnothing$ |
| Coaxial (C or X)             | 1,14 (.045)                        |




Dimensions shown in mm  
Specifications and dimensions subject to change

www.ittcannon.com

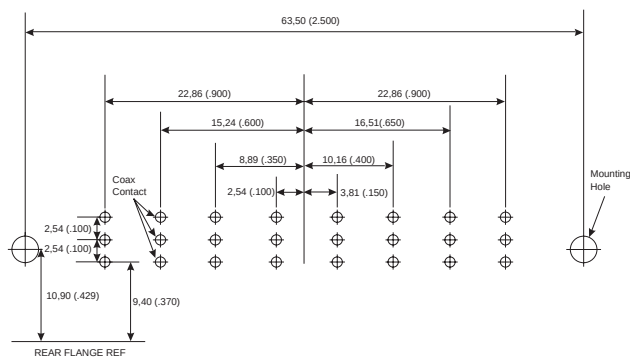


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
8W8  
0 #20  
8 #8

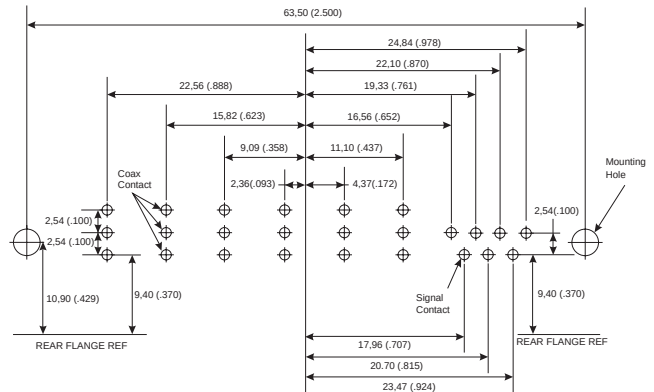


C  
13W6  
7 #20  
6 #8

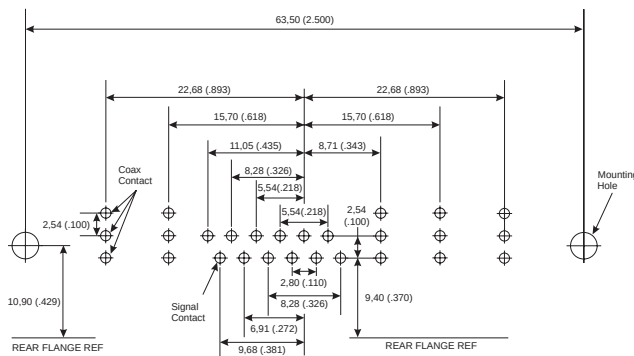


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
17W5  
12 #20  
5 #8

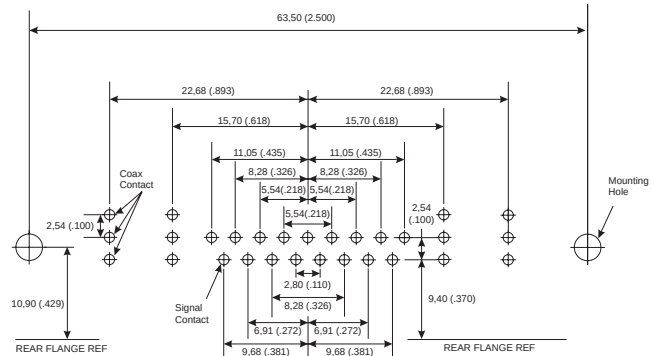


C  
21WA4  
17 #20  
4 #8

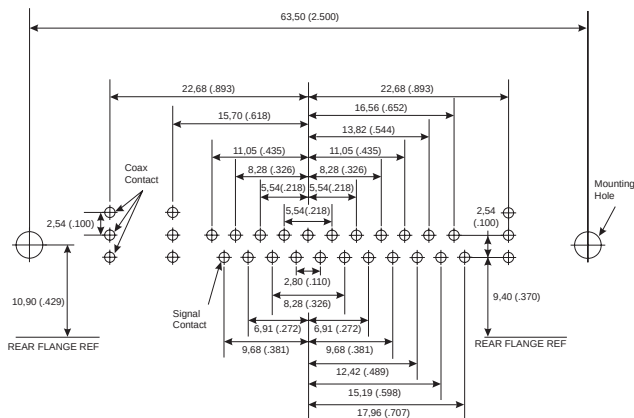

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
25W3  
22 #20  
3 #8

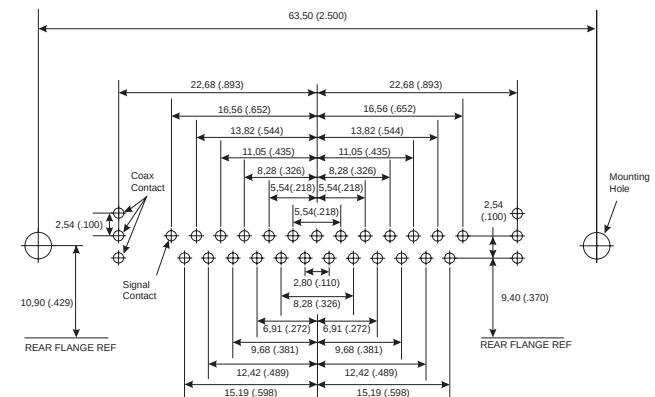


C  
27W2  
25 #20  
2 #8

|                     |                        |
|---------------------|------------------------|
| Signal Contact Ø    | Recommended PCB Hole Ø |
| 0,60 (.024)         | 1,00 (.039)            |
| Mounting Type       | Recommended PCB Hole Ø |
| Without Boardlock   | 3,05 (.120)            |
| With Boardlock      | 3,10 (.122)            |
| Size 8 Contact Type | Recommended PCB Hole Ø |

Dimensions shown in mm  
Specifications and dimensions subject to change


[www.ittcannon.com](http://www.ittcannon.com)



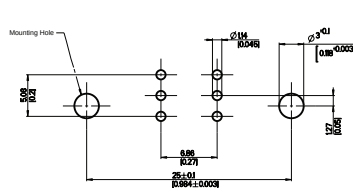


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities


E  
2W2/2WK2  
0 #20  
2 #8



E  
5W1  
4 #20  
1 #8

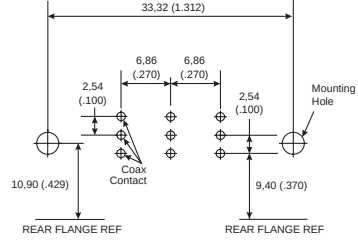


A  
3W3/3WK3  
0 #20  
3 #8




Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities


A  
7W2  
5 #20  
2 #8



A  
11W1  
10 #20  
1 #8

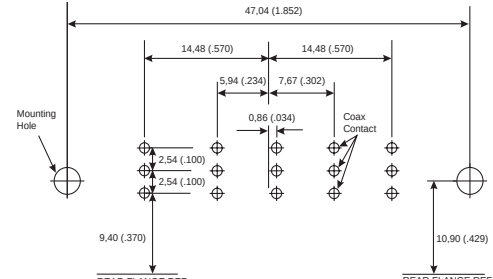


B  
5W5  
0 #20  
5 #8

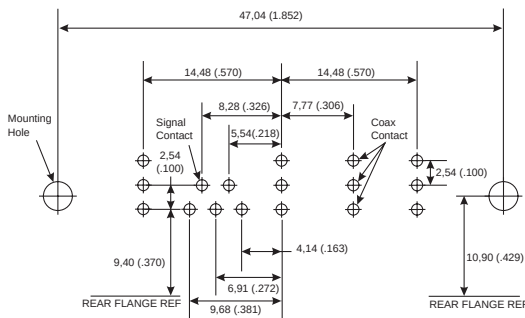


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

B  
9W4  
5 #20  
4 #8

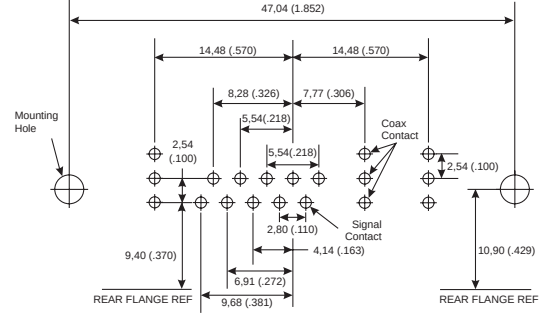


B  
13W3  
10 #20  
3 #8

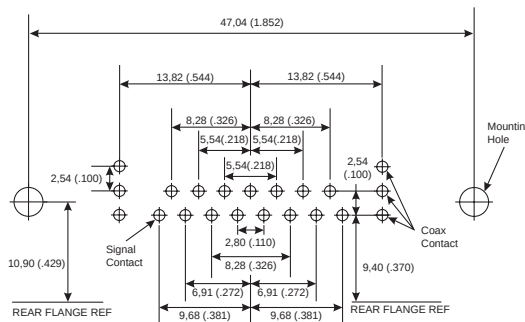

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities


B  
17W2  
15 #20  
2 #8

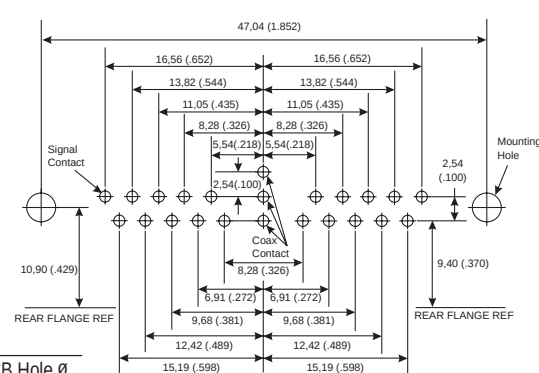

B  
21W1  
20 #20  
1 #8


|                     |                        |
|---------------------|------------------------|
| Signal Contact Ø    | Recommended PCB Hole Ø |
| 0,60 (.024)         | 1,00 (.039)            |
| Mounting Type       | Recommended PCB Hole Ø |
| Without Boardlock   | 3,05 (.120)            |
| With Boardlock      | 3,10 (.122)            |
| Size 8 Contact Type | Recommended PCB Hole Ø |
| Coaxial (C or X)    | 1,14 (.045)            |



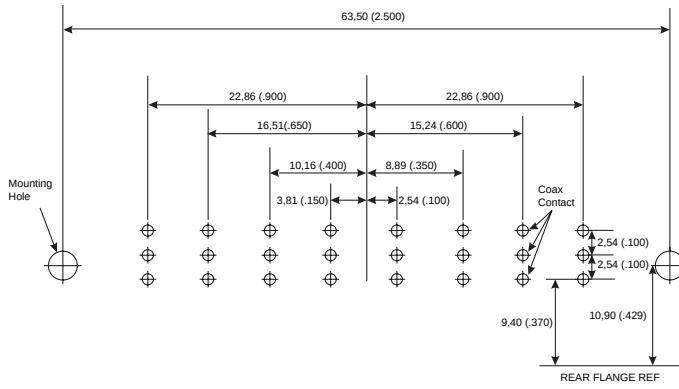


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
8W8  
0 #20  
8 #8

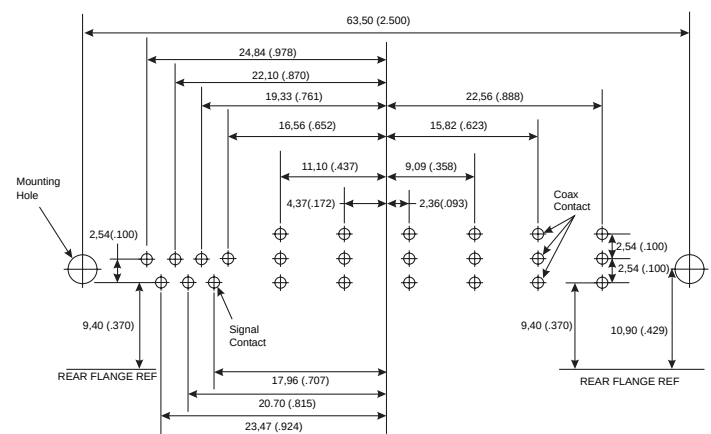


C  
13W6  
7 #20  
6 #8

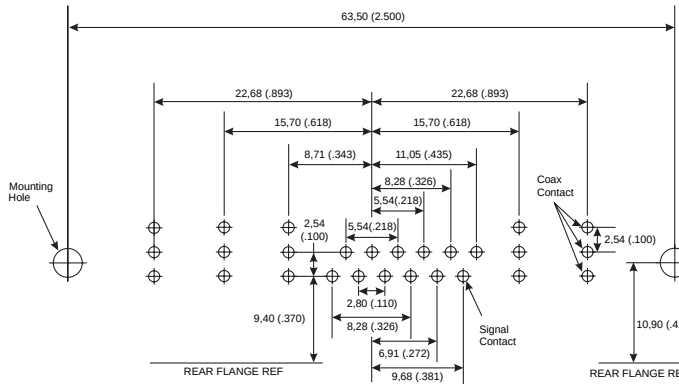


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
17W5  
12 #20  
5 #8

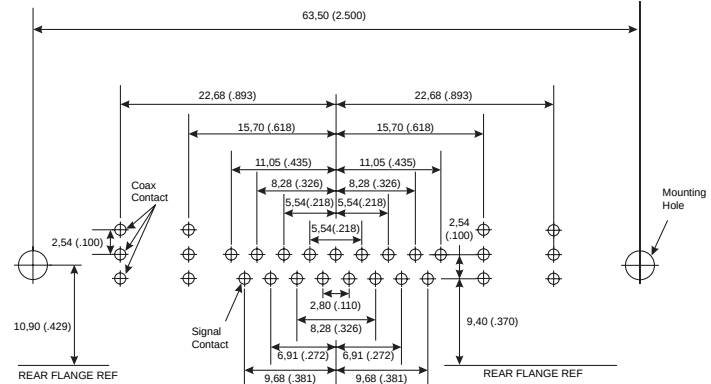


C  
21WA4  
17 #20  
4 #8

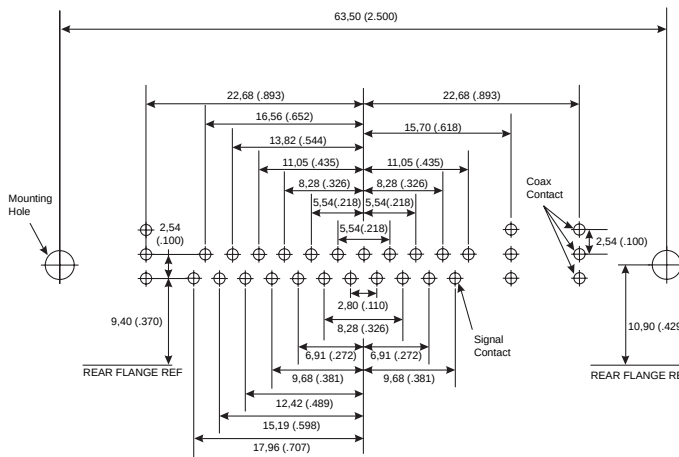


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
25W3  
22 #20  
3 #8

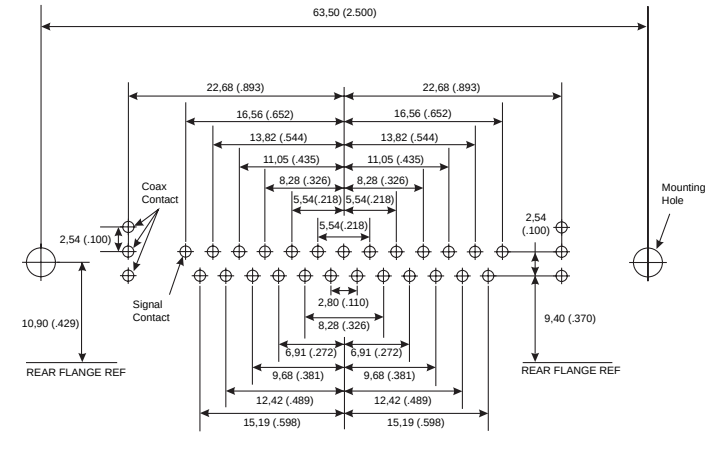


C  
27W2  
25 #20  
2 #8

|                     |                        |
|---------------------|------------------------|
| Signal Contact Ø    | Recommended PCB Hole Ø |
| 0,60 (.024)         | 1,00 (.039)            |
| Mounting Type       | Recommended PCB Hole Ø |
| Without Boardlock   | 3,05 (.120)            |
| With Boardlock      | 3,10 (.122)            |
| Size 8 Contact Type | Recommended PCB Hole Ø |
| Coaxial (C or X)    | 1,14 (.045)            |

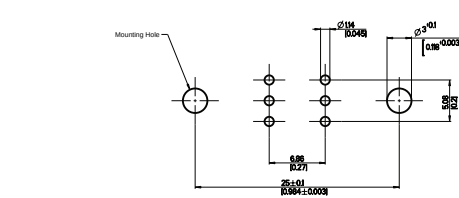


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities


E  
2W2/2WK2  
0 #20  
2 #8



E  
5W1  
4 #20  
1 #8




A  
3W3/3WK3  
0 #20  
3 #8




Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities


A  
7W2  
5 #20  
2 #8

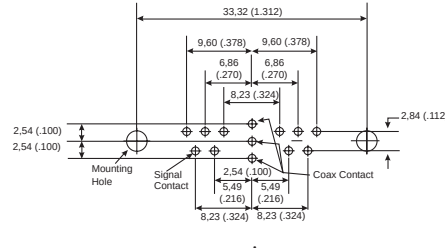

A  
11W1  
10 #20  
1 #8

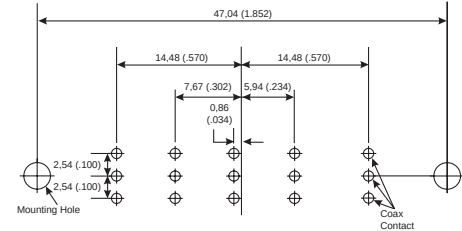


B  
5W5  
0 #20  
5 #8

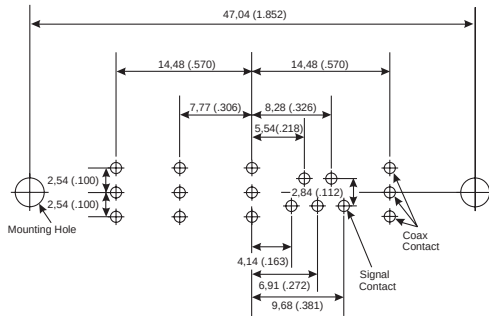


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

B  
9W4  
5 #20  
4 #8

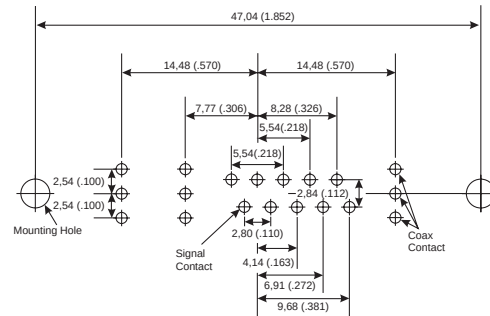


B  
13W3  
10 #20  
3 #8

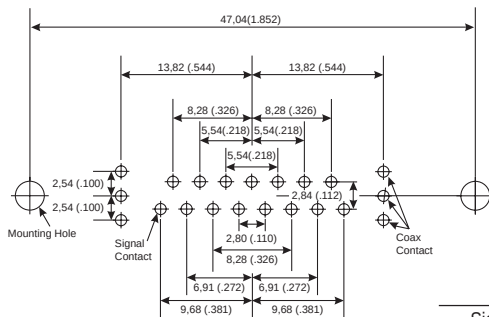


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

B  
17W2  
15 #20  
2 #8

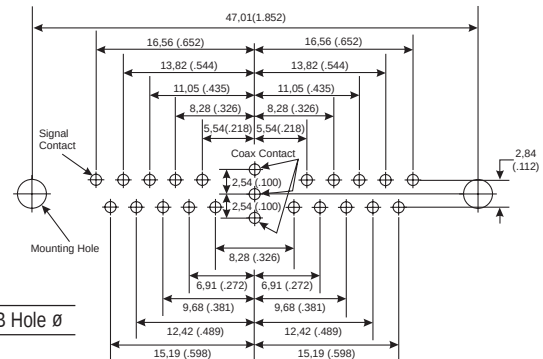


B  
21W1  
20 #20  
1 #8

|                     |                        |
|---------------------|------------------------|
| Signal Contact Ø    | Recommended PCB Hole Ø |
| 0,60 (.024)         | 1,00 (.039)            |
| 0,76 (.030)         | 1,14 (.045)            |
| Mounting Type       | Recommended PCB Hole Ø |
| Without Boardlock   | 3,05 (.120)            |
| With Boardlock      | 3,10 (.122)            |
| Size 8 Contact Type | Recommended PCB Hole Ø |
| Coaxial (C or X)    | 1,14 (.045)            |

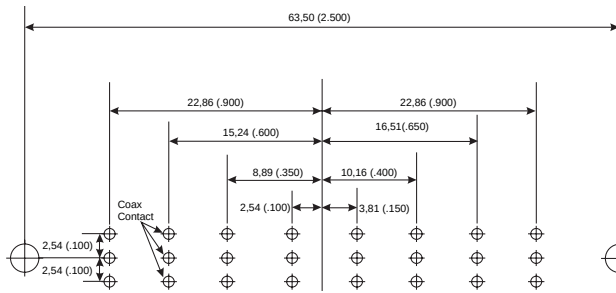


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
8W8  
0 #20  
8 #8

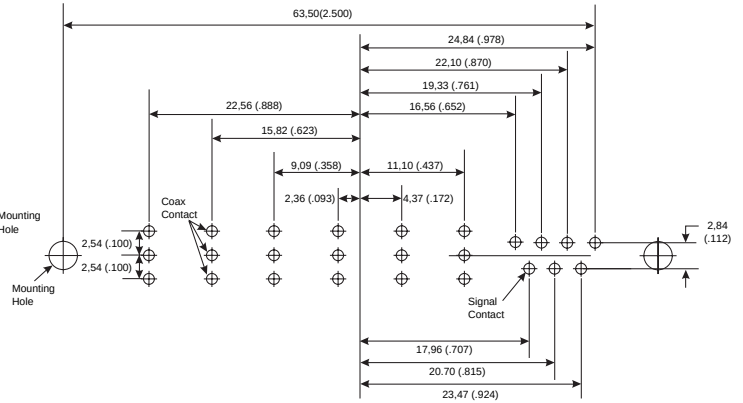


C  
13W6  
7 #20  
6 #8

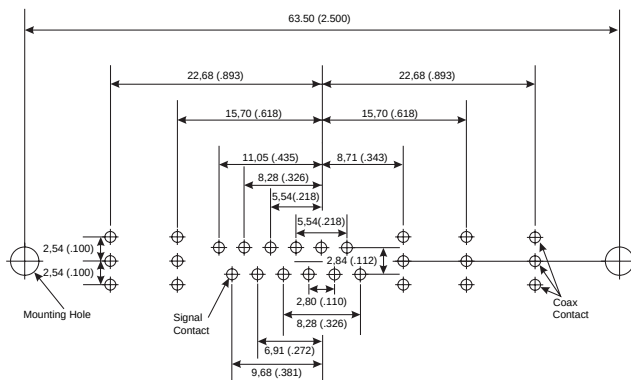


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
17W5  
12 #20  
5 #8

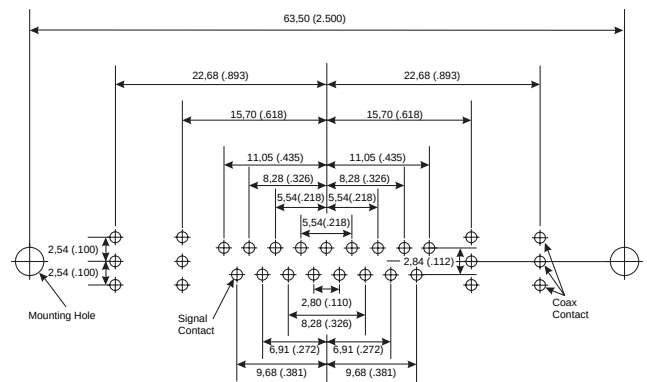


C  
21WA4  
17 #20  
4 #8

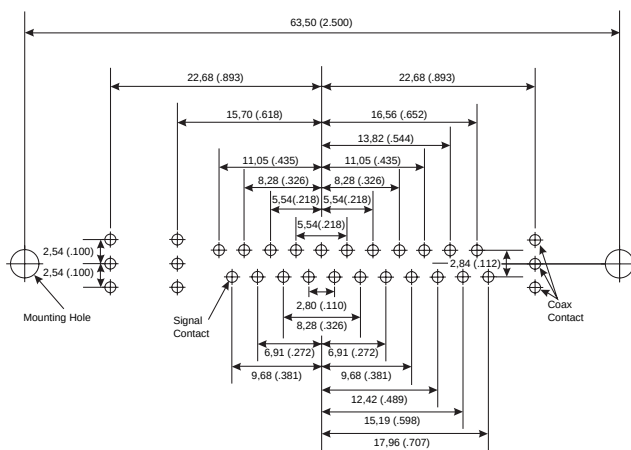

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
25W3  
22 #20  
3 #8

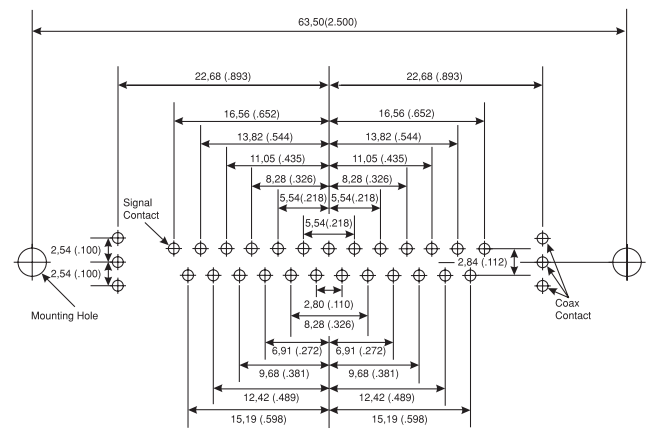

C  
27W2  
25 #20  
2 #8


| Signal Contact $\varnothing$ | Recommended PCB Hole $\varnothing$ |
|------------------------------|------------------------------------|
| 0,60 (.024)                  | 1,00 (.039)                        |
| 0,76 (.030)                  | 1,14 (.045)                        |
| Mounting Type                | Recommended PCB Hole $\varnothing$ |
| Without Boardlock            | 3,05 (.120)                        |
| With Boardlock               | 3,10 (.122)                        |
| Size 8 Contact Type          | Recommended PCB Hole $\varnothing$ |
| Coaxial (C or X)             | 1,14 (.045)                        |

Dimensions shown in mm  
Specifications and dimensions subject to change

[www.ittcannon.com](http://www.ittcannon.com)






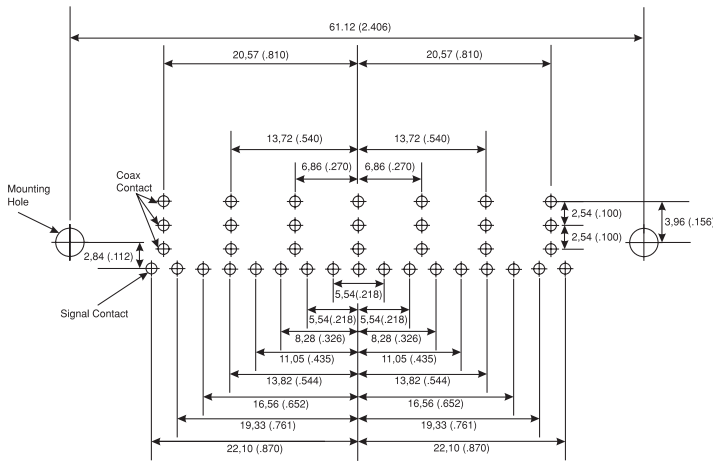


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

D  
24W7  
17 #20  
7 #8

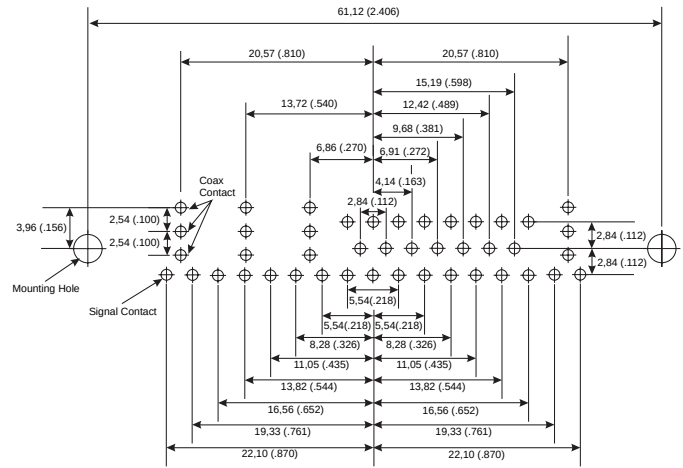


D  
36W4  
32 #20  
4 #8

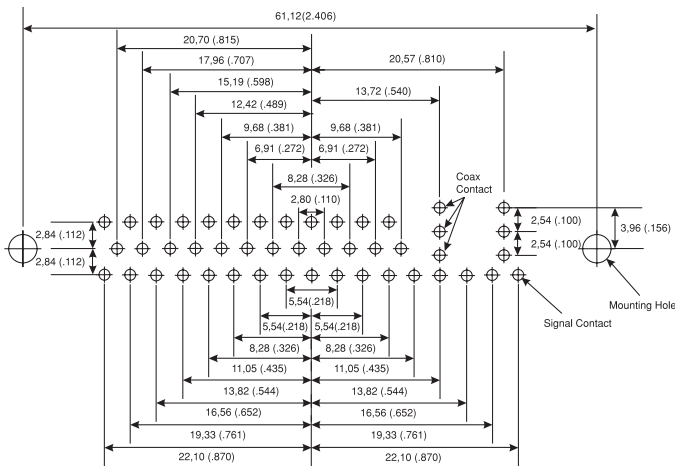


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

D  
43W2  
41 #20  
2 #8

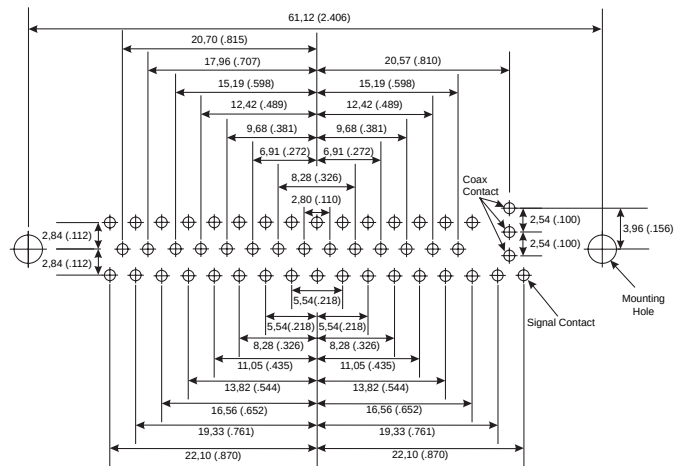


D  
47W1  
46 #20  
1 #8

| Signal Contact $\varnothing$ | Recommended PCB Hole $\varnothing$ |
|------------------------------|------------------------------------|
| 0,60 (.024)                  | 1,00 (.039)                        |
| 0,76 (.030)                  | 1,14 (.045)                        |
| Mounting Type                | Recommended PCB Hole $\varnothing$ |
| Without Boardlock            | 3,05 (.120)                        |
| With Boardlock               | 3,10 (.122)                        |
| Size 8 Contact Type          | Recommended PCB Hole $\varnothing$ |
| Coaxial (C or X)             | 1,14 (.045)                        |




Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities


E  
2W2/2WK2  
0 #20  
2 #8



E  
5W1  
4 #20  
1 #8




A  
3W3/3WK3  
0 #20  
3 #8




Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities


A  
7W2  
5 #20  
2 #8

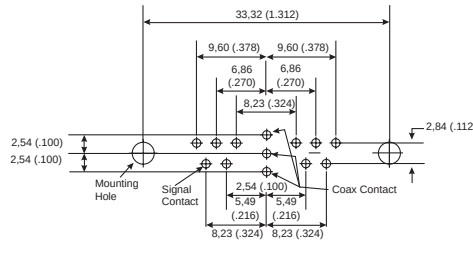

A  
11W1  
10 #20  
1 #8

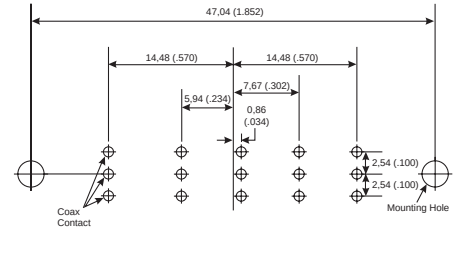


B  
5W5  
0 #20  
5 #8

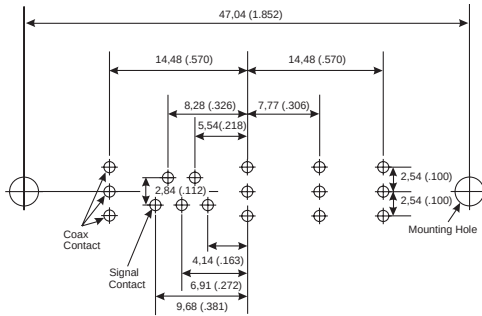


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

B  
9W4  
5 #20  
4 #8

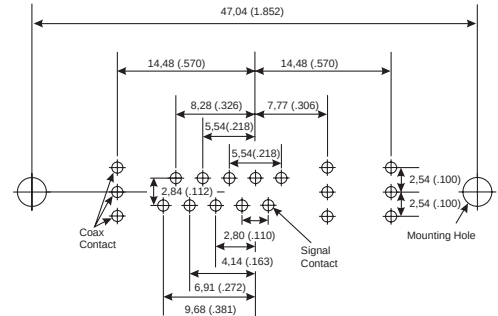


B  
13W3  
10 #20  
3 #8

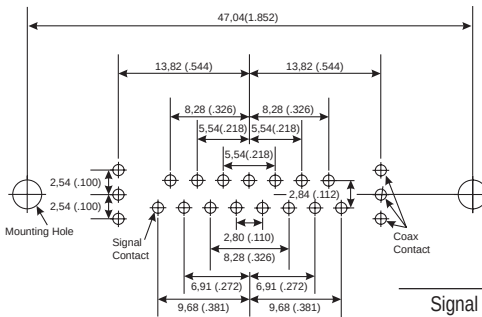

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

B  
17W2  
15 #20  
2 #8

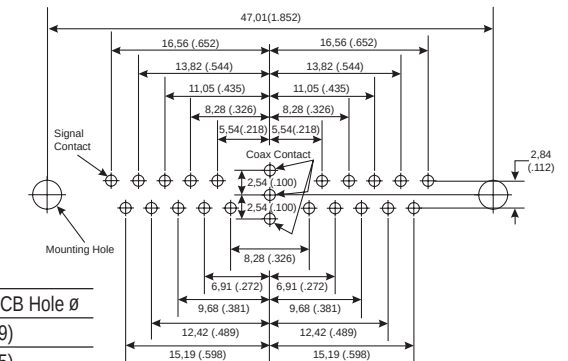


B  
21W1  
20 #20  
1 #8

| Signal Contact $\varnothing$ | Recommended PCB Hole $\varnothing$ |
|------------------------------|------------------------------------|
| 0,60 (.024)                  | 1,00 (.039)                        |
| 0,76 (.030)                  | 1,14 (.045)                        |
| Mounting Type                | Recommended PCB Hole $\varnothing$ |
| Without Boardlock            | 3,05 (.120)                        |
| With Boardlock               | 3,10 (.122)                        |
| Size 8 Contact Type          | Recommended PCB Hole $\varnothing$ |
| Coaxial (C or X)             | 1,14 (.045)                        |

Dimensions shown in mm  
Specifications and dimensions subject to change


[www.ittcannon.com](http://www.ittcannon.com)



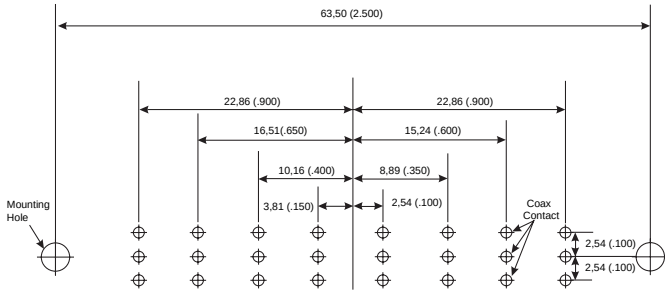


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
8W8  
0 #20  
8 #8

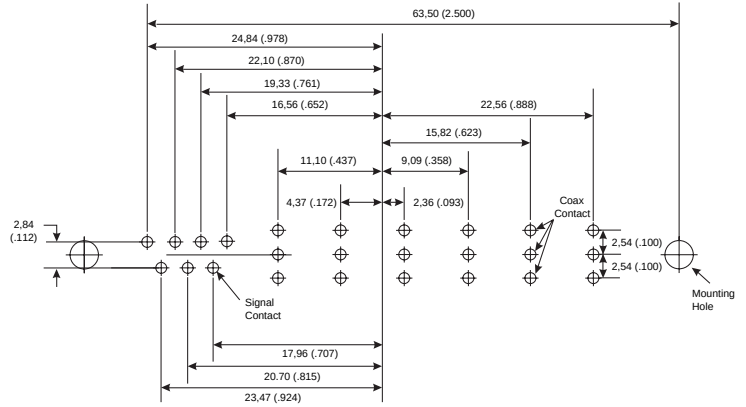


C  
13W6  
7 #20  
6 #8

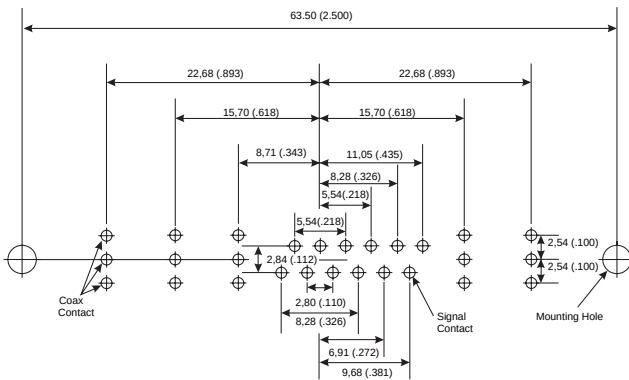


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
17W5  
12 #20  
5 #8

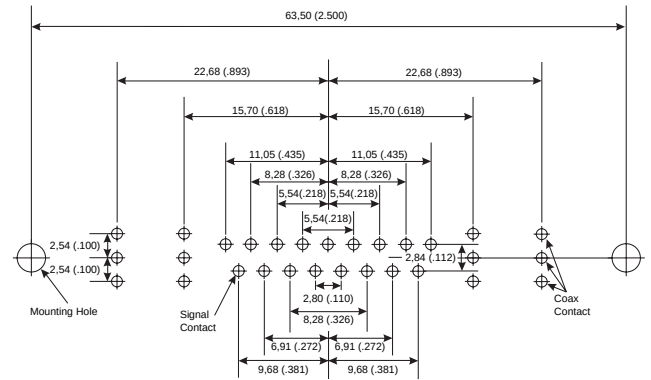


C  
21WA4  
17 #20  
4 #8

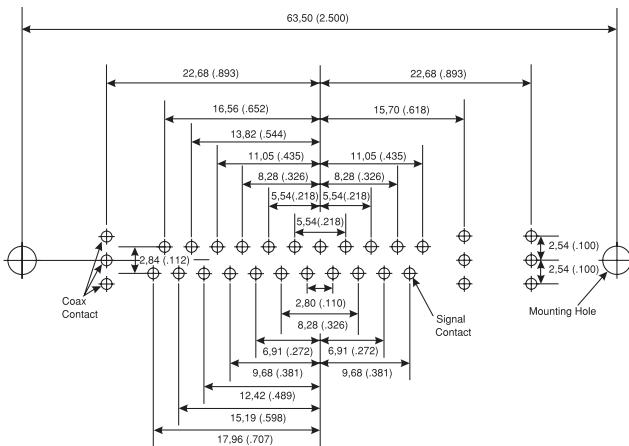

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
25W3  
22 #20  
3 #8

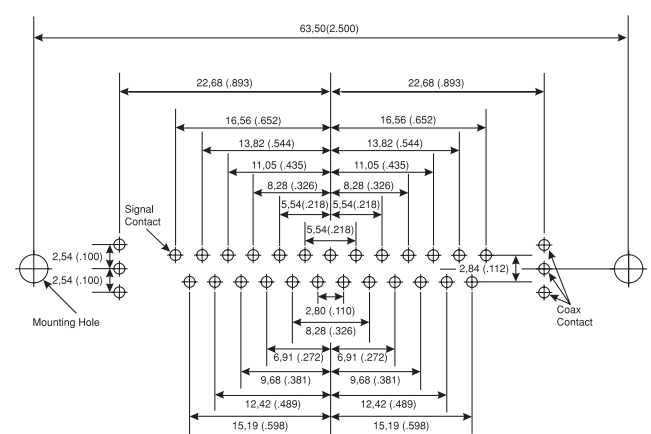


C  
27W2  
25 #20  
2 #8

| Signal Contact $\varnothing$ | Recommended PCB Hole $\varnothing$ |
|------------------------------|------------------------------------|
| 0,60 (.024)                  | 1,00 (.039)                        |
| 0,76 (.030)                  | 1,14 (.045)                        |
| Mounting Type                | Recommended PCB Hole $\varnothing$ |
| Without Boardlock            | 3,05 (.120)                        |
| With Boardlock               | 3,10 (.122)                        |
| Size 8 Contact Type          | Recommended PCB Hole $\varnothing$ |




Dimensions shown in mm  
Specifications and dimensions subject to change

[www.ittcannon.com](http://www.ittcannon.com)

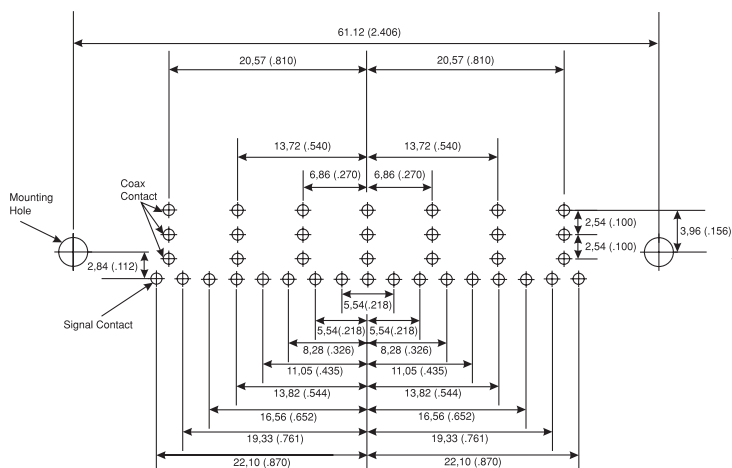


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

D  
24W7  
17 #20  
7 #8

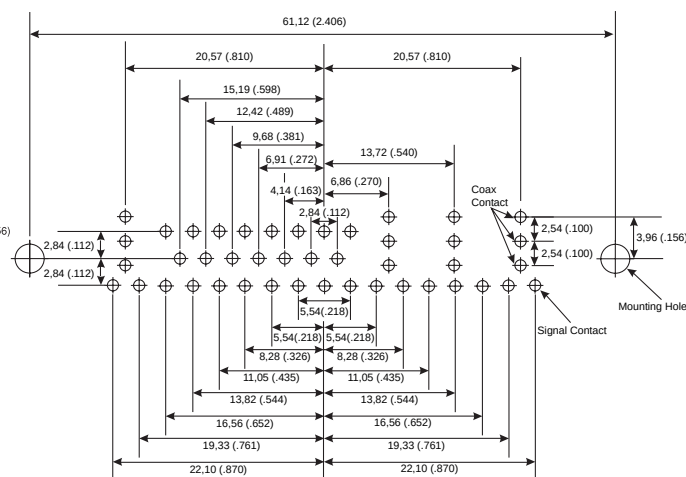


D  
36W4  
32 #20  
4 #8

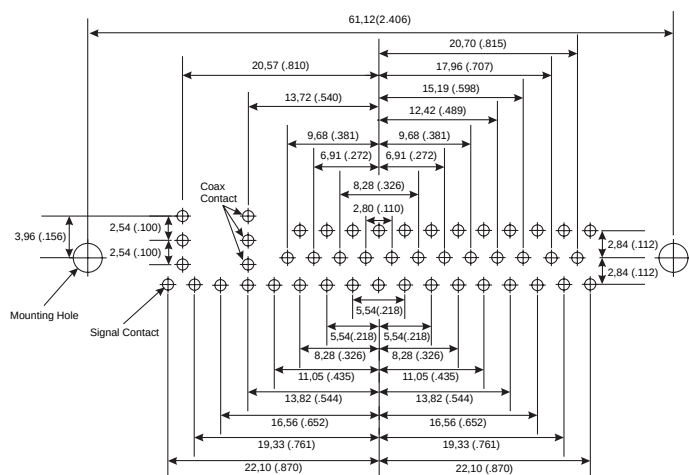


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

D  
43W2  
41 #20  
2 #8

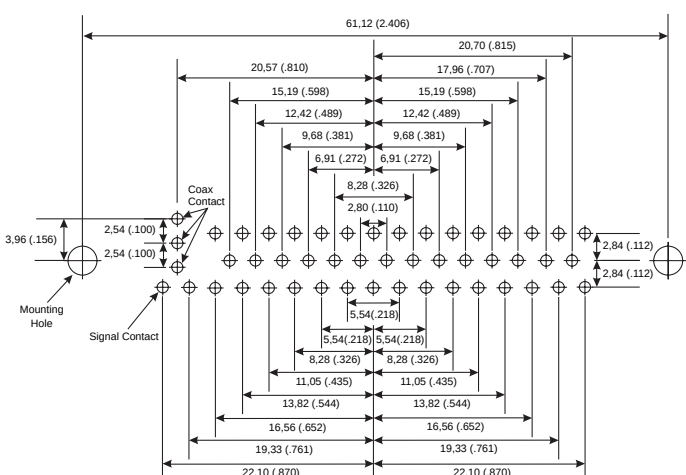


D  
47W1  
46 #20  
1 #8

| Signal Contact $\varnothing$ | Recommended PCB Hole $\varnothing$ |
|------------------------------|------------------------------------|
| 0,60 (.024)                  | 1,00 (.039)                        |
| 0,76 (.030)                  | 1,14 (.045)                        |
| Mounting Type                | Recommended PCB Hole $\varnothing$ |
| Without Boardlock            | 3,05 (.120)                        |
| With Boardlock               | 3,10 (.122)                        |
| Size 8 Contact Type          | Recommended PCB Hole $\varnothing$ |
| Coaxial (C or X)             | 1,14 (.045)                        |

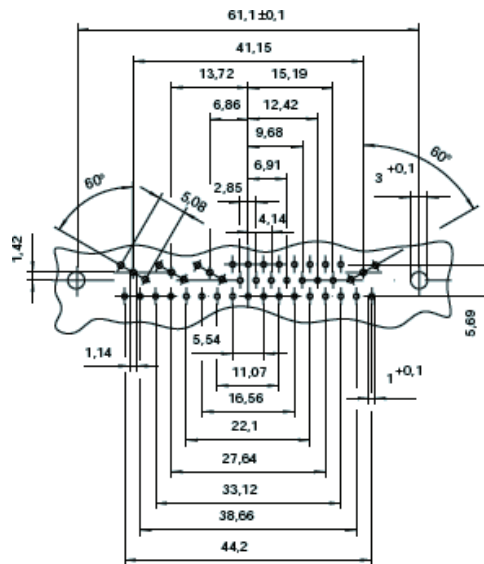


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

D  
36C4/36X4  
32#20  
4#8

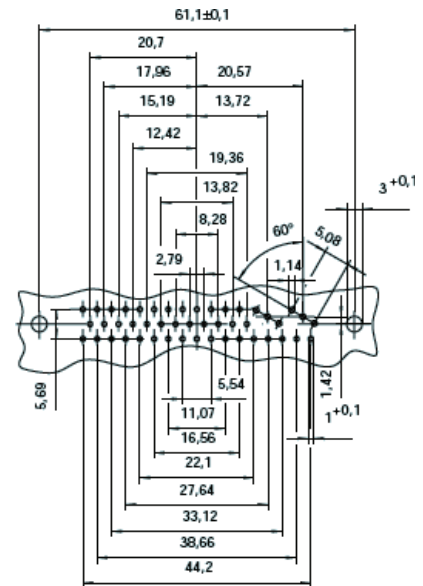


D  
43C2/43X2  
41#20  
2#8

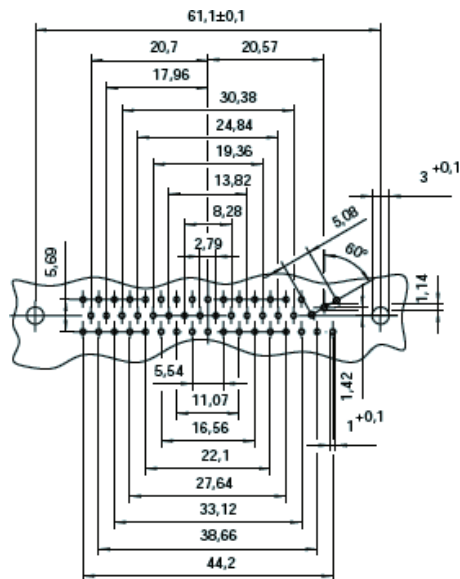


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

D  
47C1/47X1  
46#20  
1#8

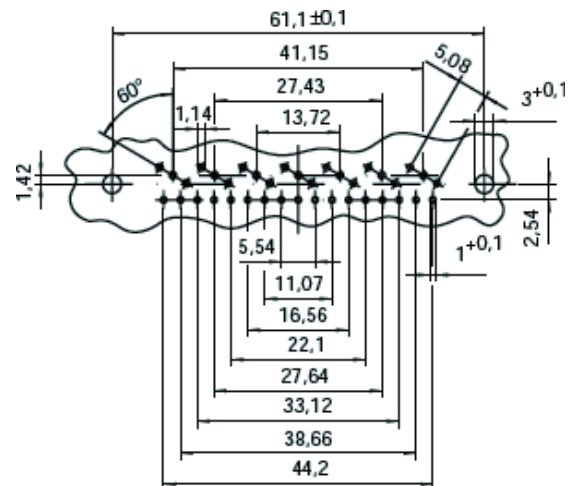


D  
24C7/24X7  
17#20  
7#8

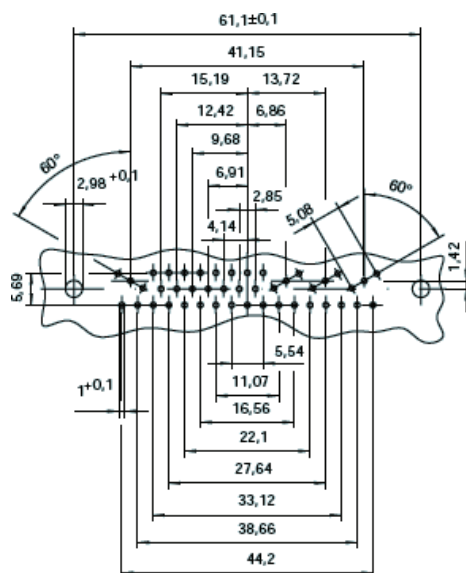


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

D  
36C4/36X4  
32#20  
4#8

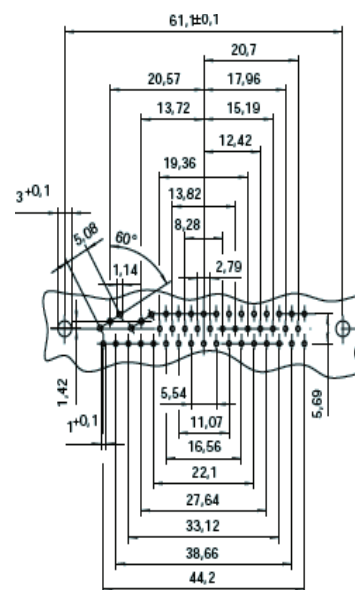


D  
43C2/43X2  
41#20  
2#8

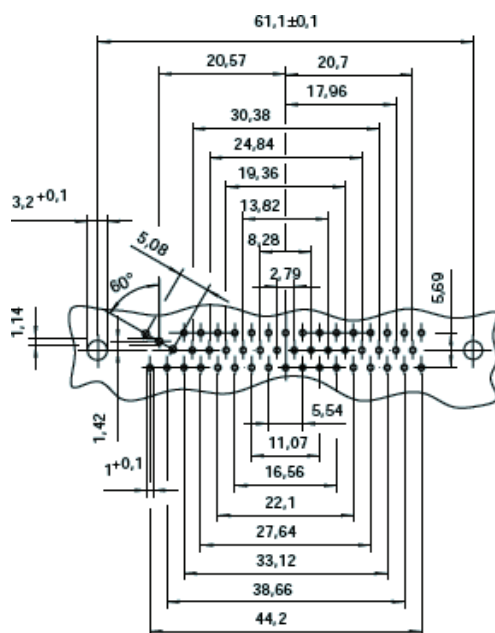


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
47C1/47X1  
46#20  
1#8

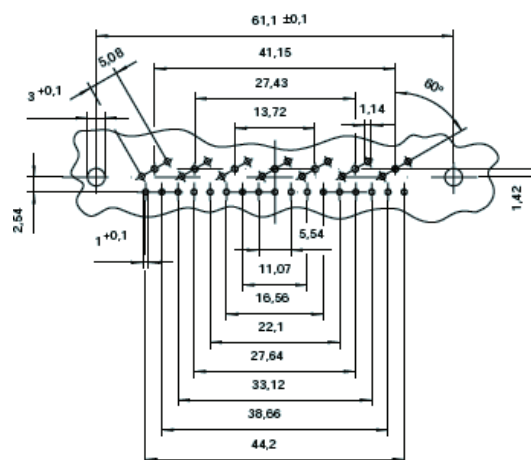


D  
24C7/24X7  
17#20  
7#8

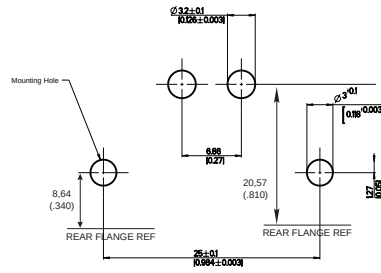


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities


E  
2W2/2WK2  
0 #20  
2 #8



E  
5W1  
4 #20  
1 #8




A  
3W3/3WK3  
0 #20  
3 #8




Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities


A  
7W2  
5 #20  
2 #8

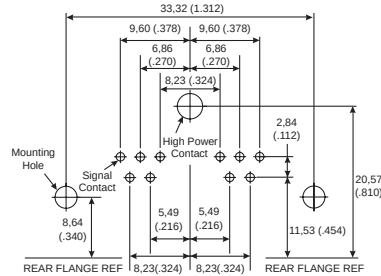

A  
11W1  
10 #20  
1 #8

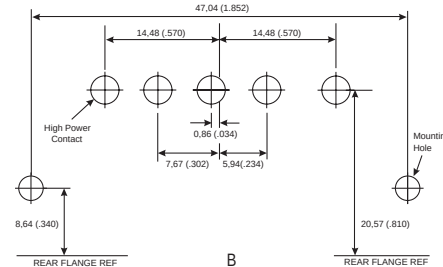


B  
5W5  
0 #20  
5 #8

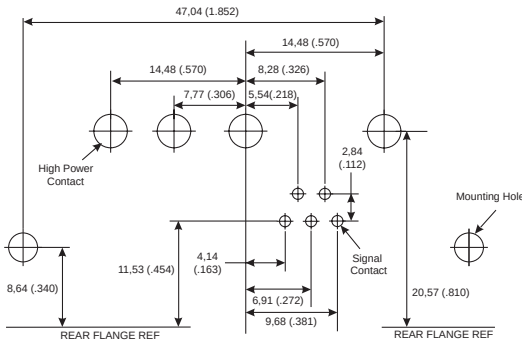


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

B  
9W4  
5 #20  
4 #8

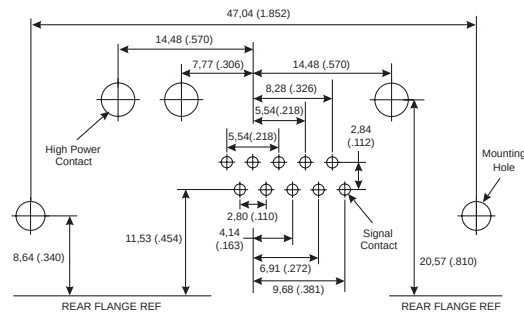


B  
13W3  
10 #20  
3 #8

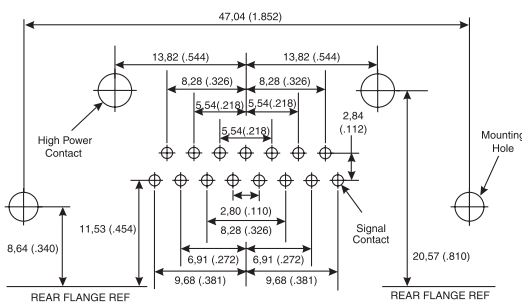

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

B  
17W2  
15 #20  
2 #8

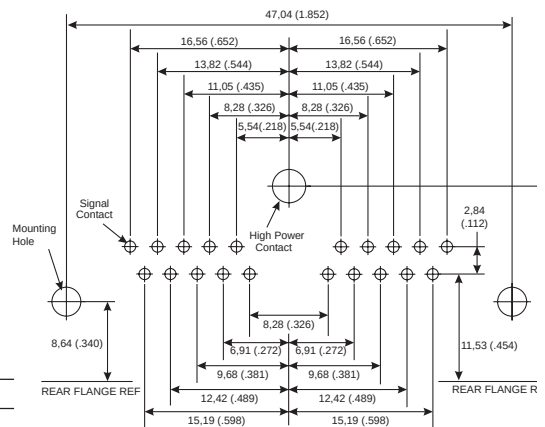

B  
21W1  
20 #20  
1 #8


|                     |                        |
|---------------------|------------------------|
| Signal Contact Ø    | Recommended PCB Hole Ø |
| 0,76 (.030)         | 1,14 (.045)            |
| Mounting Type       | Recommended PCB Hole Ø |
| Without Boardlock   | 3,05 (.120)            |
| With Boardlock      | 3,10 (.122)            |
| Size 8 Contact Type | Recommended PCB Hole Ø |
| High Power (H)      | 3,56 (.140)            |



Dimensions shown in mm  
Specifications and dimensions subject to change


www.ittcannon.com



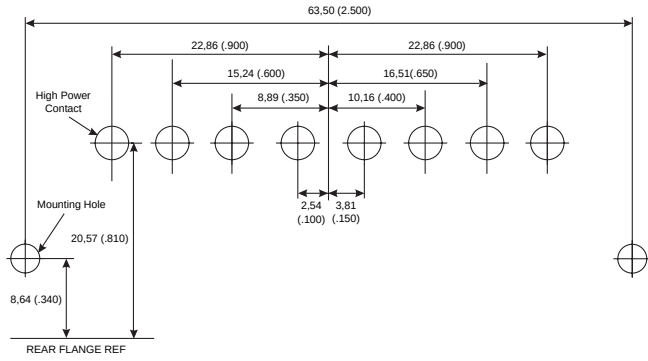


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
8W8  
0 #20  
8 #8

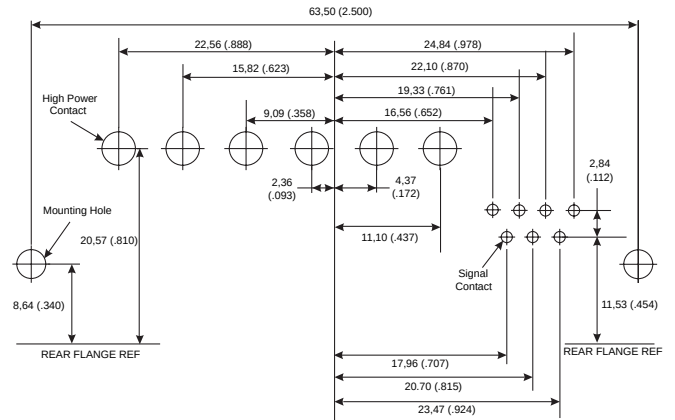


C  
13W6  
7 #20  
6 #8

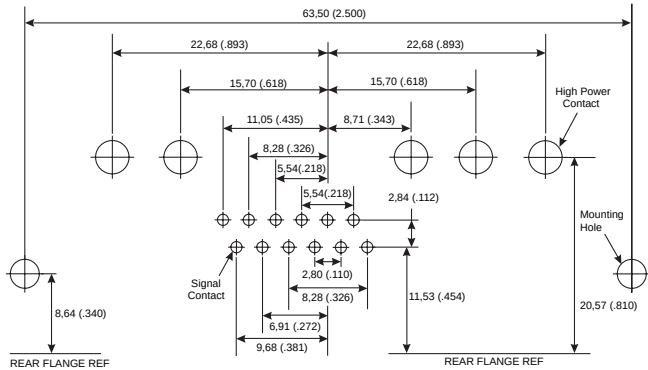


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
17W5  
12 #20  
5 #8

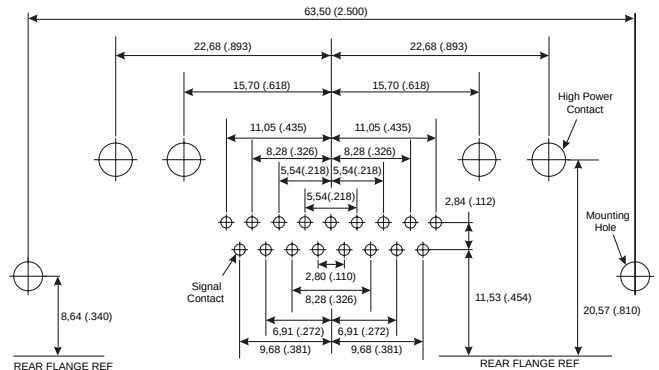


C  
21WA4  
17 #20  
4 #8

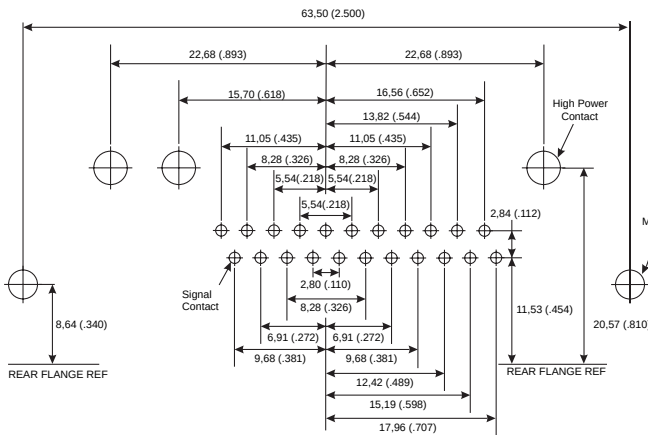

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
25W3  
22 #20  
3 #8

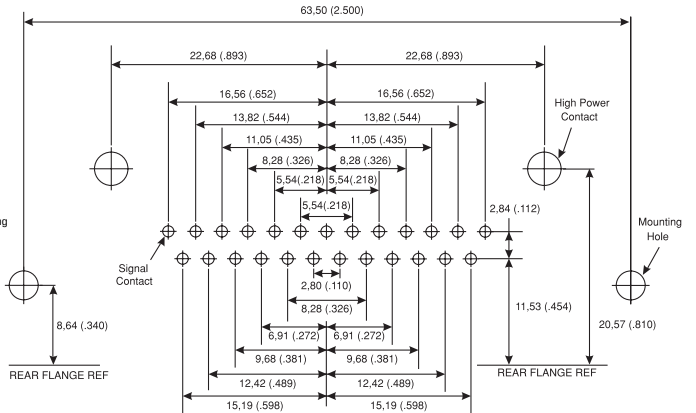

C  
27W2  
25 #20  
2 #8

|                              |                                    |
|------------------------------|------------------------------------|
| Signal Contact $\varnothing$ | Recommended PCB Hole $\varnothing$ |
| 0,76 (.030)                  | 1,14 (.045)                        |
| Mounting Type                | Recommended PCB Hole $\varnothing$ |
| Without Boardlock            | 3,05 (.120)                        |
| With Boardlock               | 3,10 (.122)                        |
| Size 8 Contact Type          | Recommended PCB Hole $\varnothing$ |
| High Power (H)               | 3,56 (.140)                        |


Dimensions shown in mm  
Specifications and dimensions subject to change

[www.ittcannon.com](http://www.ittcannon.com)




# PCB Hole Pattern - US

# High Power 90° Plug

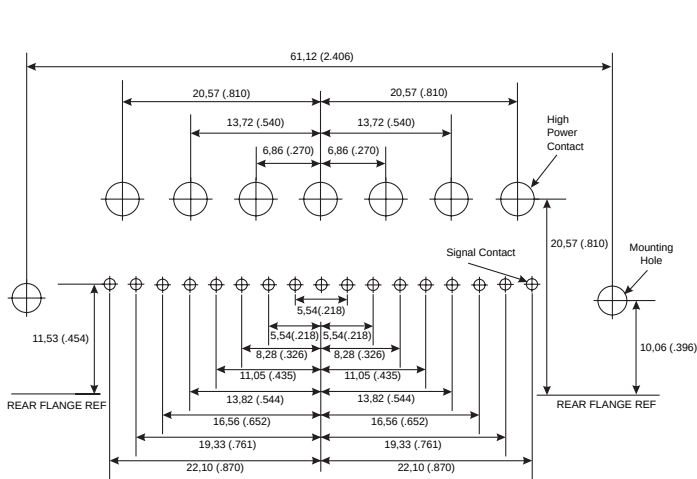


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

D  
24W7  
17 #20  
7 #8

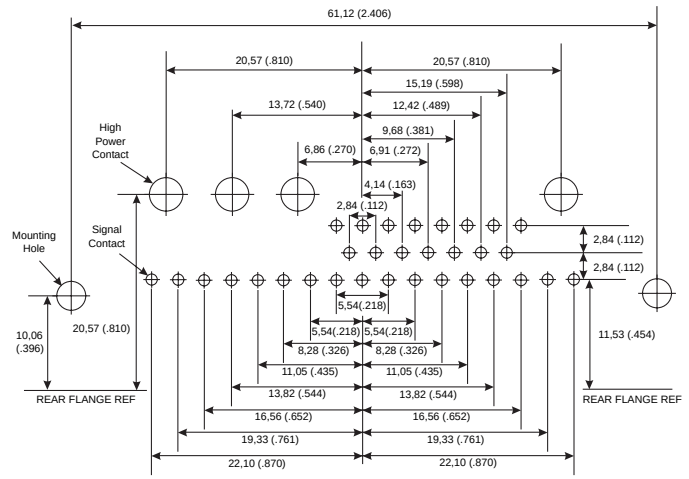


D  
36W4  
32 #20  
4 #8

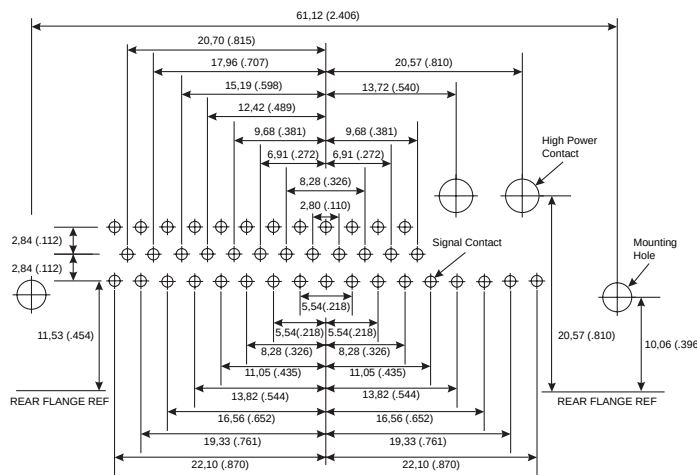

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

D  
43W2  
41 #20  
2 #8

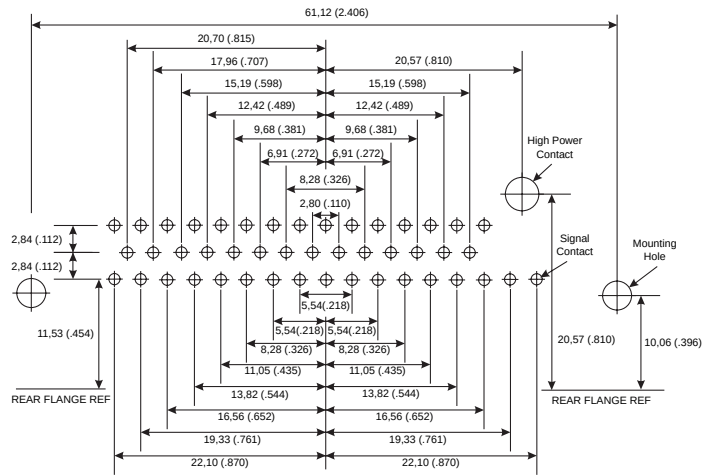


D  
47W1  
46 #20  
1 #8

|                              |                                    |
|------------------------------|------------------------------------|
| Signal Contact $\varnothing$ | Recommended PCB Hole $\varnothing$ |
| 0,76 (.030)                  | 1,14 (.045)                        |
| Mounting Type                | Recommended PCB Hole $\varnothing$ |
| Without Boardlock            | 3,05 (.120)                        |
| With Boardlock               | 3,10 (.122)                        |
| Size 8 Contact Type          | Recommended PCB Hole $\varnothing$ |
| High Power (H)               | 3,56 (.140)                        |




Dimensions shown in mm  
Specifications and dimensions subject to change  
[www.ittcannon.com](http://www.ittcannon.com)


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

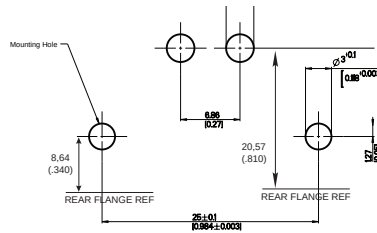

E  
2W2/2WK2  
0 #20  
2 #8




E  
5W1  
4 #20  
1 #8




A  
3W3/3WK3  
0 #20  
3 #8


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities



A  
7W2  
5 #20  
2 #8




A  
11W1  
10 #20  
1 #8

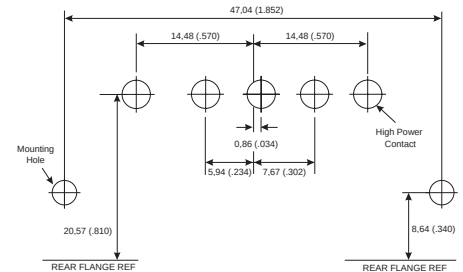


B  
5W5  
0 #20  
5 #8

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

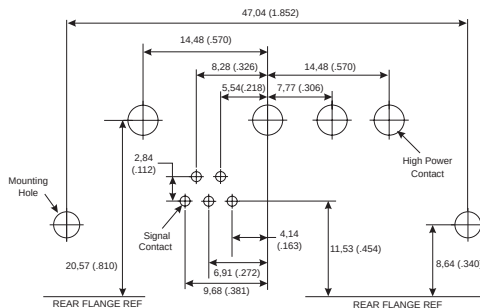


B  
9W4  
5 #20  
4 #8

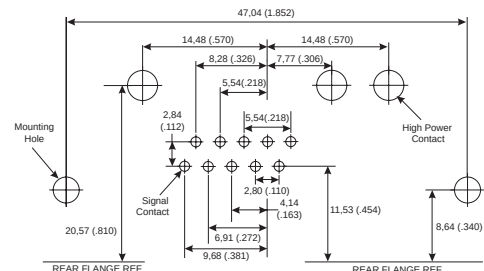


B  
13W3  
10 #20  
3 #8

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

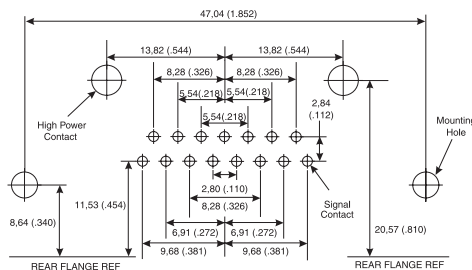

B  
17W2  
15 #20  
2 #8

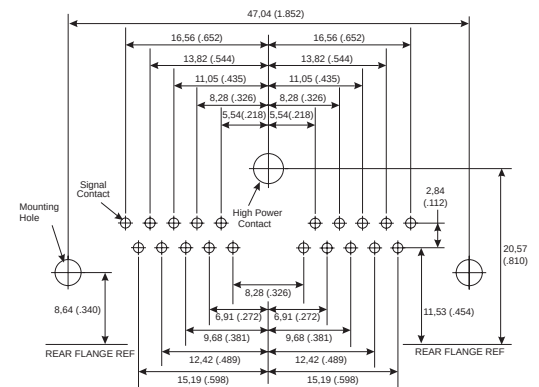


B  
21W1  
20 #20  
1 #8

|                     |                        |
|---------------------|------------------------|
| Signal Contact Ø    | Recommended PCB Hole Ø |
| 0,76 (.030)         | 1,14 (.045)            |
| Mounting Type       | Recommended PCB Hole Ø |
| Without Boardlock   | 3,05 (.120)            |
| With Boardlock      | 3,10 (.122)            |
| Size 8 Contact Type | Recommended PCB Hole Ø |
| High Power (H)      | 3,56 (.140)            |

Dimensions shown in mm  
Specifications and dimensions subject to change


[www.ittcannon.com](http://www.ittcannon.com)



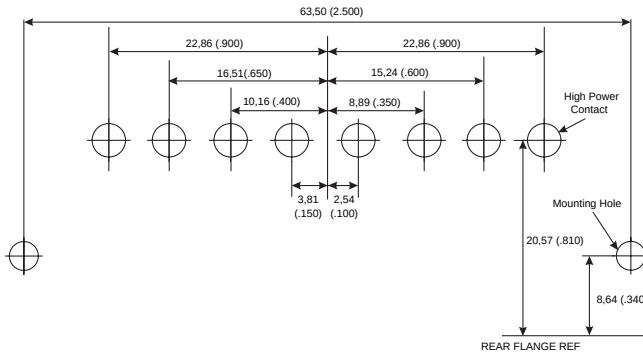


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
8W8  
0 #20  
8 #8

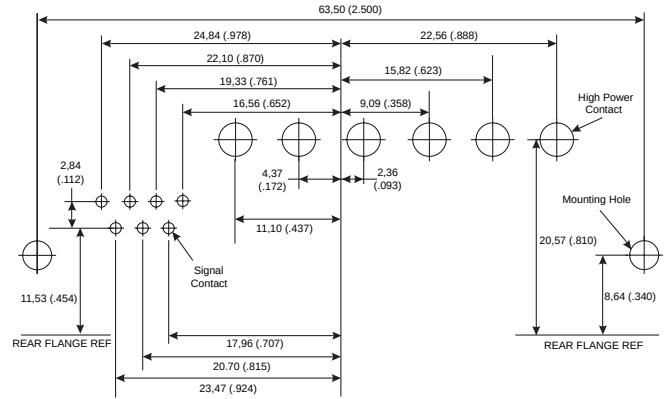


C  
13W6  
7 #20  
6 #8

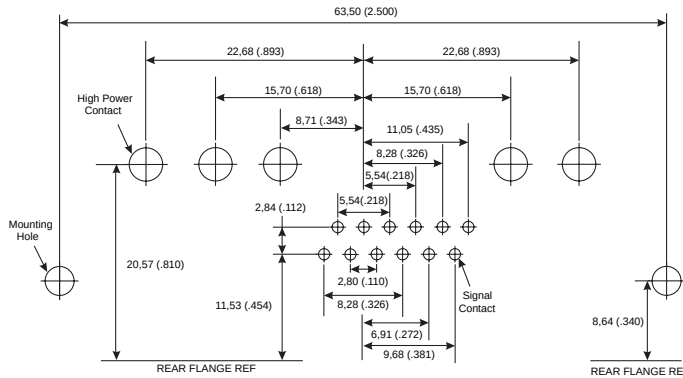


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
17W5  
12 #20  
5 #8

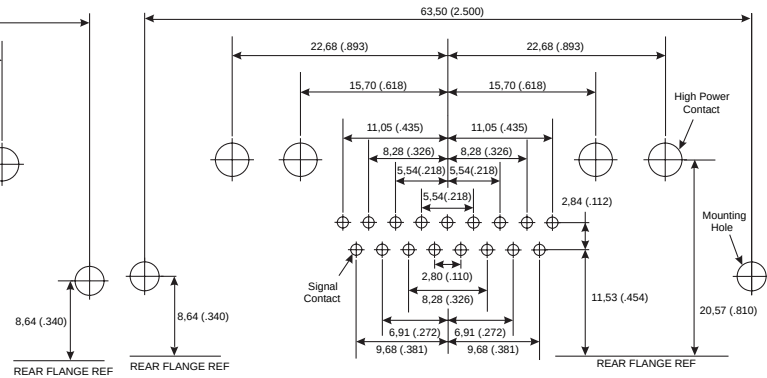


C  
21WA4  
17 #20  
4 #8

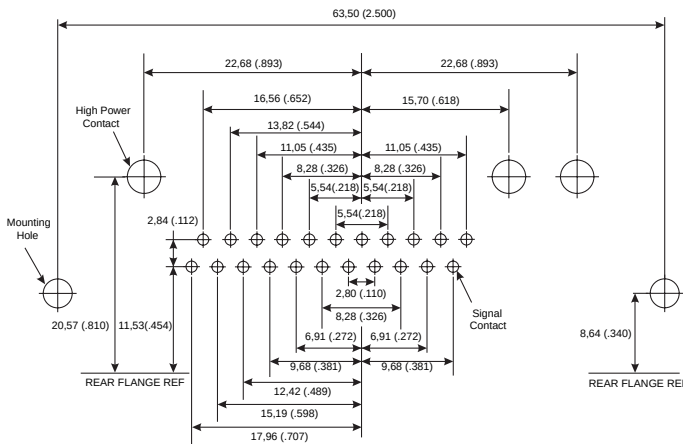

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
25W3  
22 #20  
3 #8

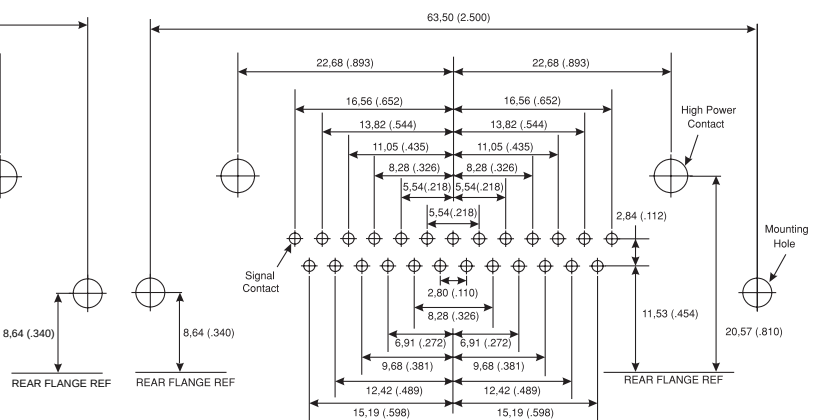


C  
27W2  
25 #20  
2 #8

|                              |                                    |
|------------------------------|------------------------------------|
| Signal Contact $\varnothing$ | Recommended PCB Hole $\varnothing$ |
| 0,76 (.030)                  | 1,14 (.045)                        |
| Mounting Type                | Recommended PCB Hole $\varnothing$ |
| Without Boardlock            | 3,05 (.120)                        |
| With Boardlock               | 3,10 (.122)                        |
| Size 8 Contact Type          | Recommended PCB Hole $\varnothing$ |
| High Power (H)               | 3,56 (.140)                        |



Dimensions shown in mm  
Specifications and dimensions subject to change


[www.ittcannon.com](http://www.ittcannon.com)

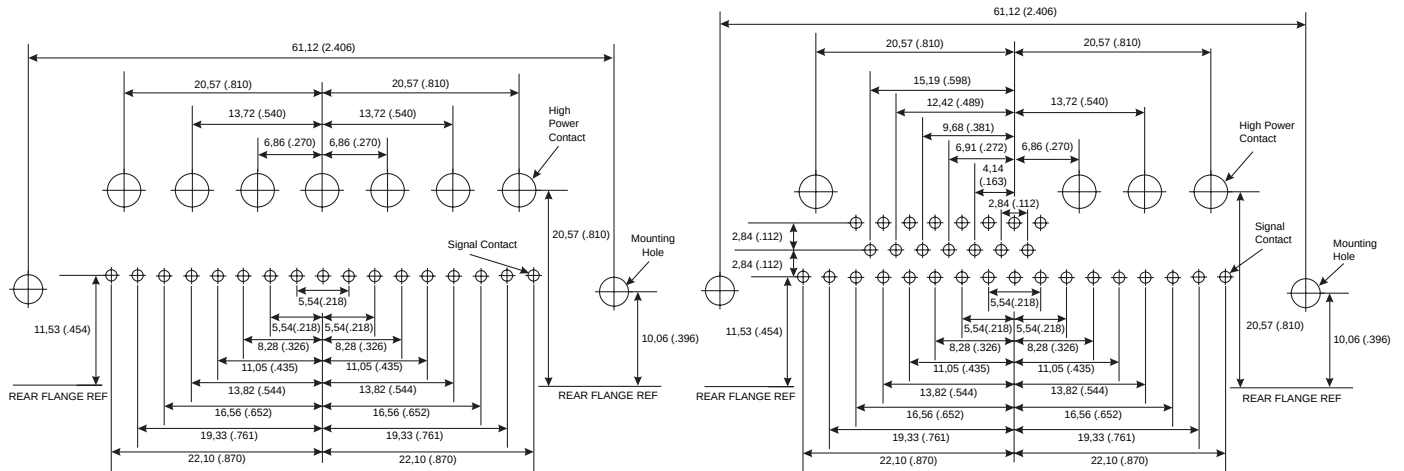

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

D  
24W7  
17 #20  
7 #8

D  
36W4  
32 #20  
4 #8



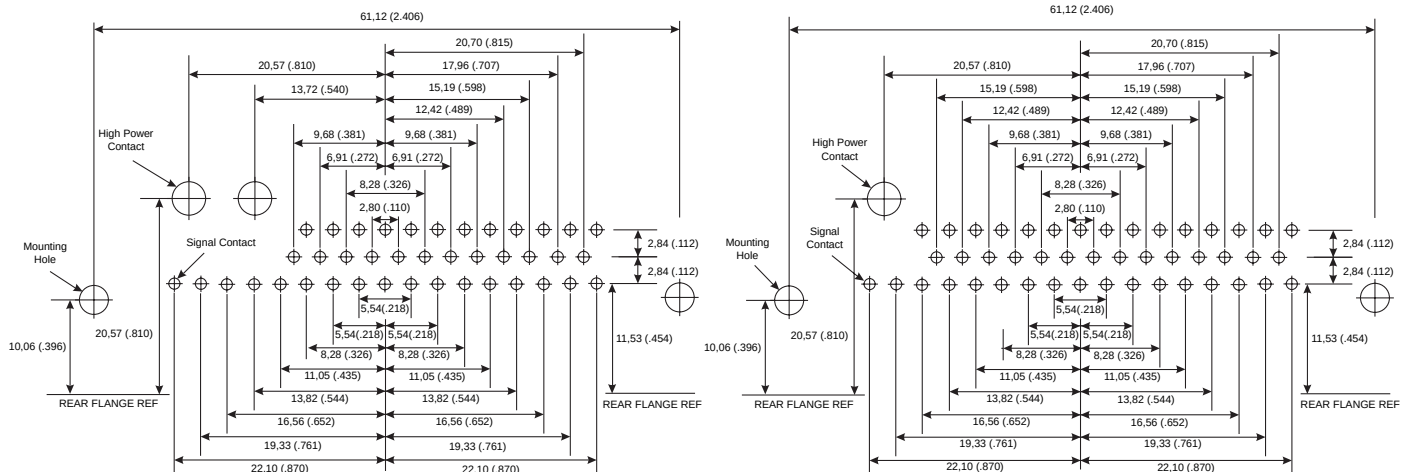


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

D  
43W2  
41 #20  
2 #8

D  
47W1  
46 #20  
1 #8

|                              |                                    |
|------------------------------|------------------------------------|
| Signal Contact $\varnothing$ | Recommended PCB Hole $\varnothing$ |
| 0,76 (.030)                  | 1,14 (.045)                        |
| Mounting Type                | Recommended PCB Hole $\varnothing$ |
| Without Boardlock            | 3,05 (.120)                        |
| With Boardlock               | 3,10 (.122)                        |
| Size 8 Contact Type          | Recommended PCB Hole $\varnothing$ |
| High Power (H)               | 3,56 (.140)                        |



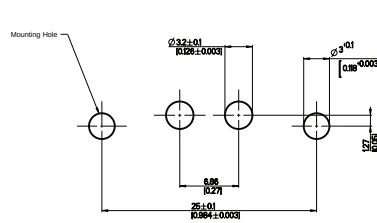


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

E  
2W2/2WK2  
0 #20  
2 #8

E  
5W1  
4 #20  
1 #8

A  
3W3/3WK3  
0 #20  
3 #8

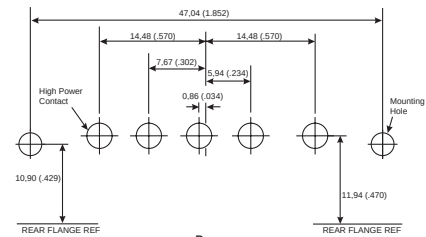



Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

A  
7W2  
5 #20  
2 #8

A  
11W1  
10 #20  
1 #8



B  
5W5  
0 #20  
5 #8

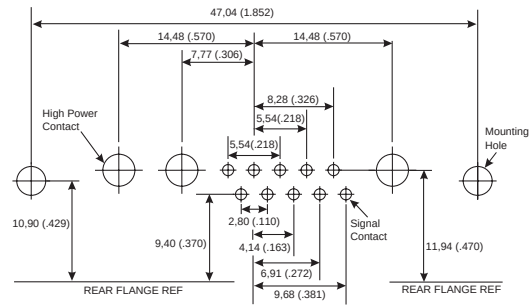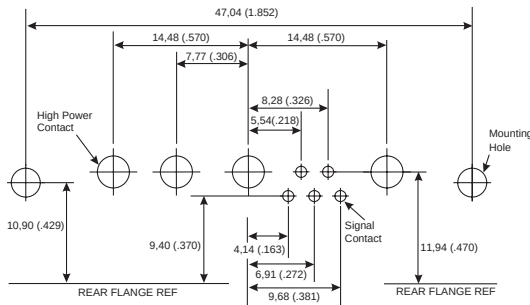

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

B  
9W4  
5 #20  
4 #8

B  
13W3  
10 #20  
3 #8

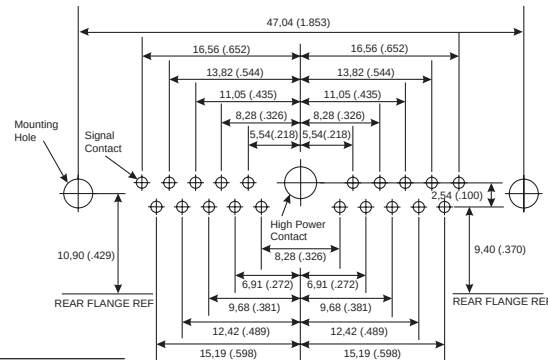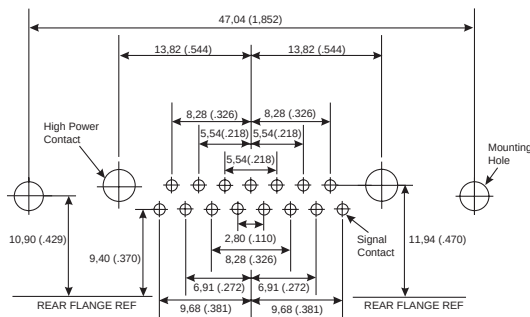

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities


B  
17W2  
15 #20  
2 #8

B  
21W1  
20 #20  
1 #8

|                     |                        |
|---------------------|------------------------|
| Signal Contact Ø    | Recommended PCB Hole Ø |
| 0,60 (.024)         | 1,00 (.039)            |
| Mounting Type       | Recommended PCB Hole Ø |
| Without Boardlock   | 3,05 (.120)            |
| With Boardlock      | 3,10 (.122)            |
| Size 8 Contact Type | Recommended PCB Hole Ø |
| High Power (P)      | 3,28 (.129)            |




Dimensions shown in mm  
Specifications and dimensions subject to change  
[www.ittcannon.com](http://www.ittcannon.com)

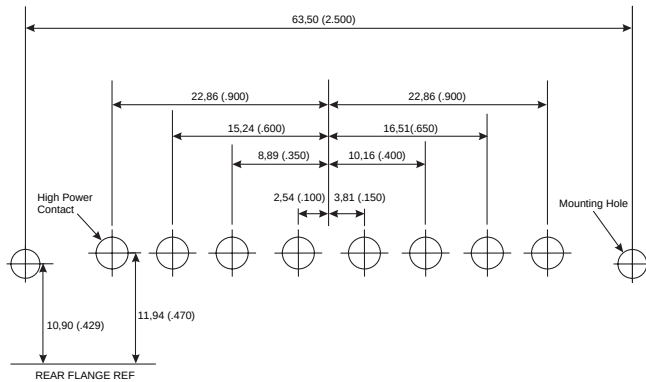


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
8W8  
0 #20  
8 #8

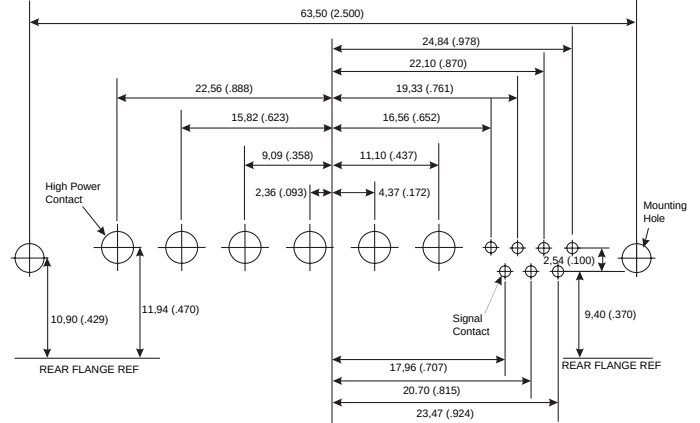


C  
13W6  
7 #20  
6 #8

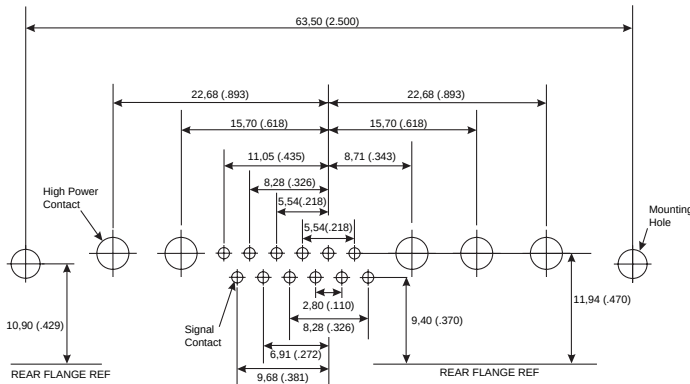


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
17W5  
12 #20  
5 #8

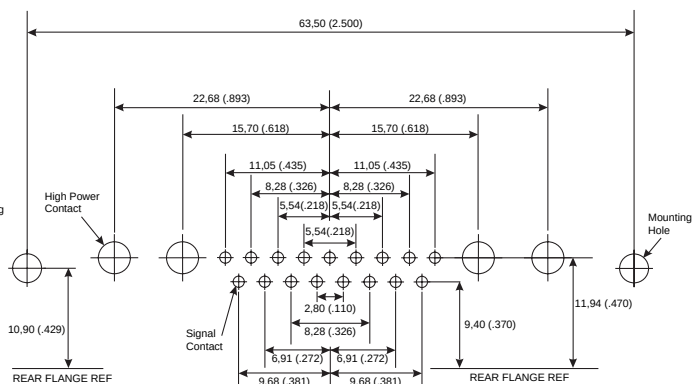


C  
21WA4  
17 #20  
4 #8

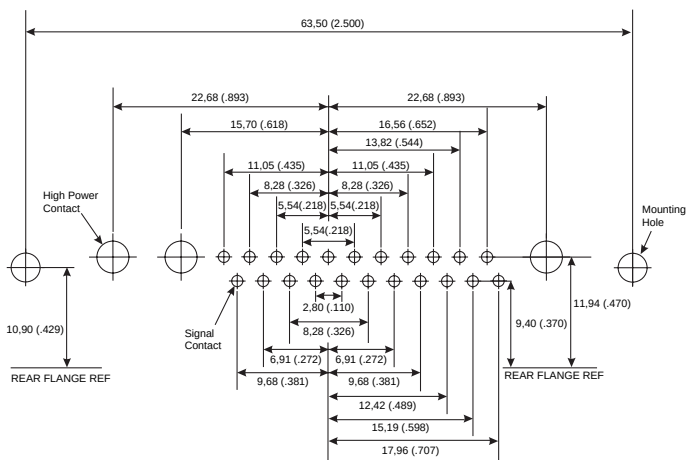

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
25W3  
22 #20  
3 #8

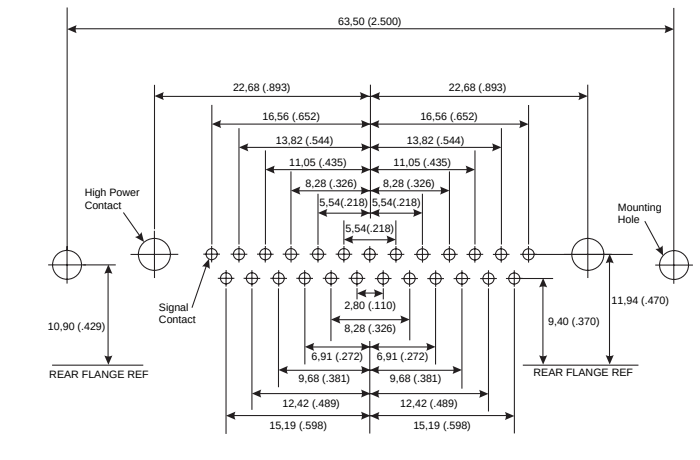

C  
27W2  
25 #20  
2 #8

|                              |                                    |
|------------------------------|------------------------------------|
| Signal Contact $\varnothing$ | Recommended PCB Hole $\varnothing$ |
| 0,60 (.024)                  | 1,00 (.039)                        |
| Mounting Type                | Recommended PCB Hole $\varnothing$ |
| Without Boardlock            | 3,05 (.120)                        |
| With Boardlock               | 3,10 (.122)                        |
| Size 8 Contact Type          | Recommended PCB Hole $\varnothing$ |
| High Power (P)               | 3,28 (.129)                        |


Dimensions shown in mm  
Specifications and dimensions subject to change

[www.ittcannon.com](http://www.ittcannon.com)







Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

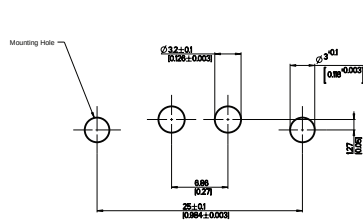

E  
2W2/2WK2  
0 #20  
2 #8




E  
5W1  
4 #20  
1 #8




A  
3W3/3WK3  
0 #20  
3 #8


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities



A  
7W2  
5 #20  
2 #8




A  
11W1  
10 #20  
1 #8

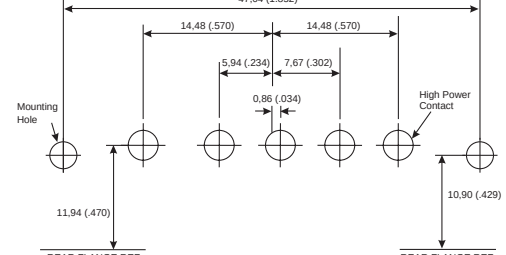


B  
5W5  
0 #20  
5 #8

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

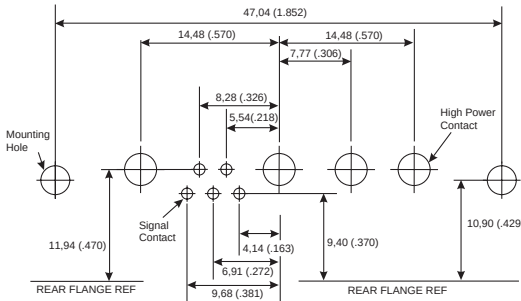


B  
9W4  
5 #20  
4 #8

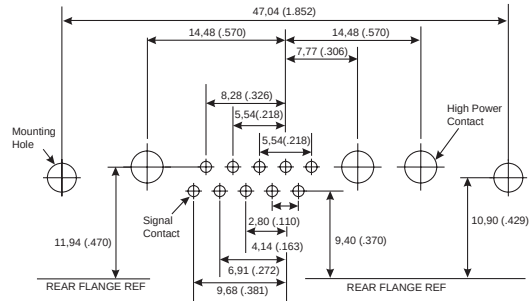


B  
13W3  
10 #20  
3 #8

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

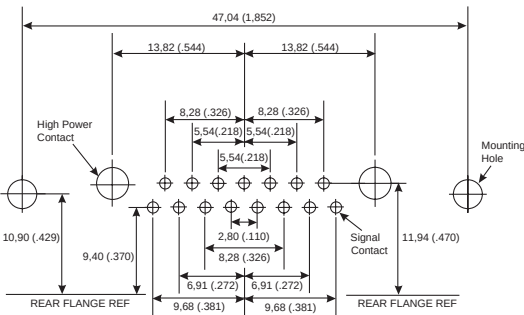

B  
17W2  
15 #20  
2 #8

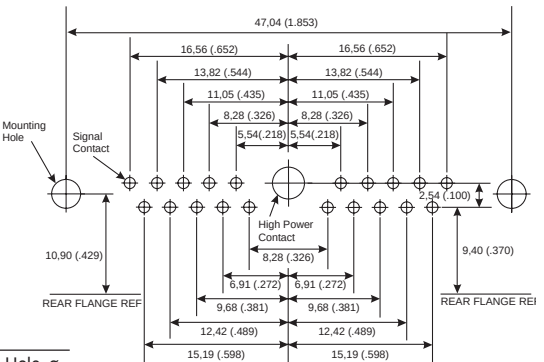


B  
21W1  
20 #20  
1 #8

|                     |                        |
|---------------------|------------------------|
| Signal Contact Ø    | Recommended PCB Hole Ø |
| 0.60 (.024)         | 1.00 (.039)            |
| Mounting Type       | Recommended PCB Hole Ø |
| Without Boardlock   | 3.05 (.120)            |
| With Boardlock      | 3.10 (.122)            |
| Size 8 Contact Type | Recommended PCB Hole Ø |
| High Power (P)      | 3.28 (.129)            |




Dimensions shown in mm  
Specifications and dimensions subject to change

[www.ittcannon.com](http://www.ittcannon.com)

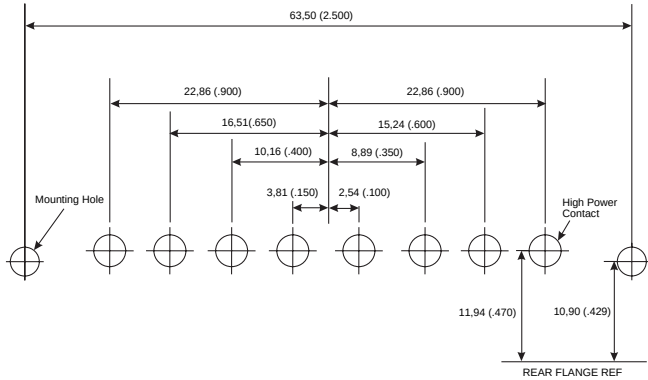


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
8W8  
0 #20  
8 #8

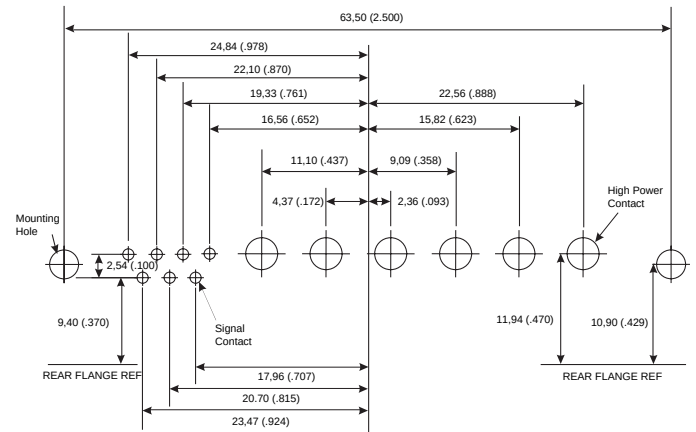


C  
13W6  
7 #20  
6 #8

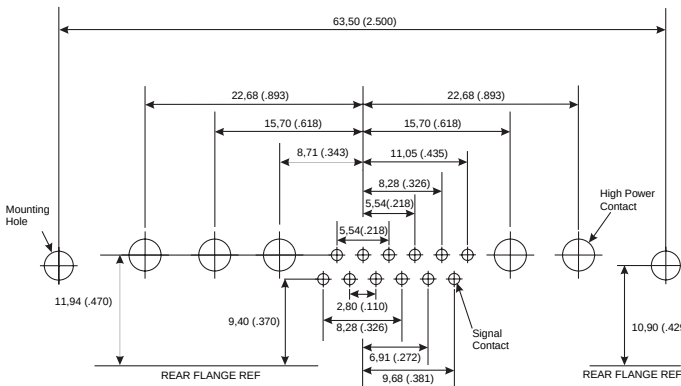


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
17W5  
12 #20  
5 #8

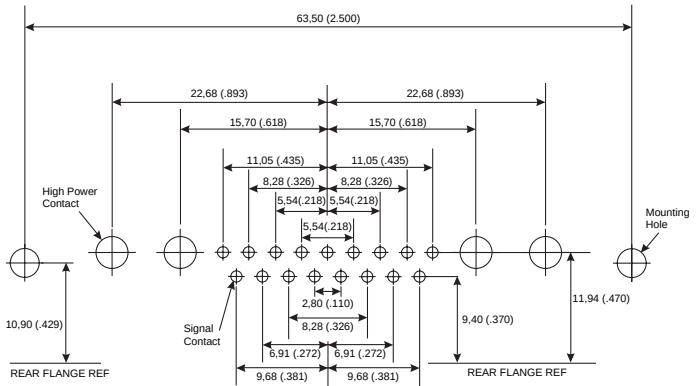


C  
21WA4  
17 #20  
4 #8

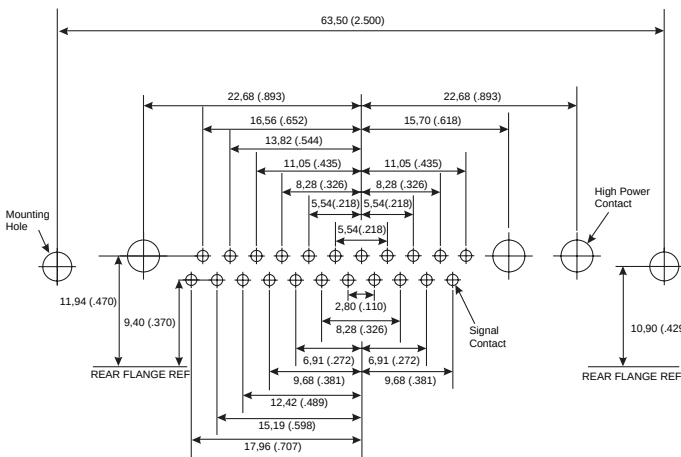

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
25W3  
22 #20  
3 #8

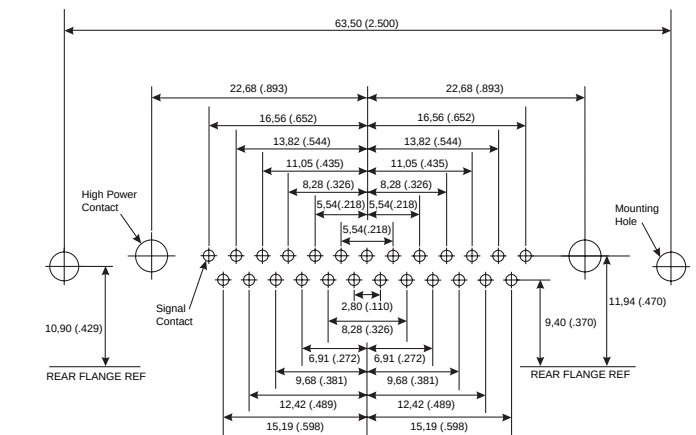

C  
27W2  
25 #20  
2 #8




|                              |                                    |
|------------------------------|------------------------------------|
| Signal Contact $\varnothing$ | Recommended PCB Hole $\varnothing$ |
| 0,60 (.024)                  | 1,00 (.039)                        |
| Mounting Type                | Recommended PCB Hole $\varnothing$ |
| Without Boardlock            | 3,05 (.120)                        |
| With Boardlock               | 3,10 (.122)                        |
| Size 8 Contact Type          | Recommended PCB Hole $\varnothing$ |
| High Power (P)               | 3,28 (.129)                        |

Dimensions shown in mm  
Specifications and dimensions subject to change




[www.ittcannon.com](http://www.ittcannon.com)





Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

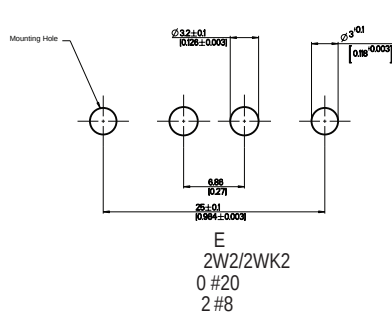



Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

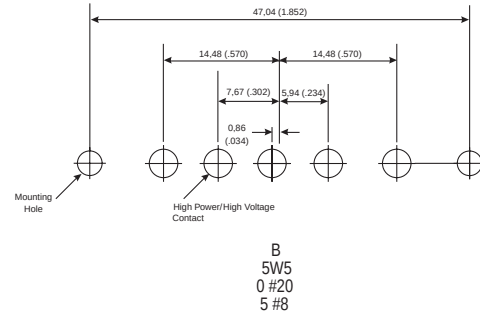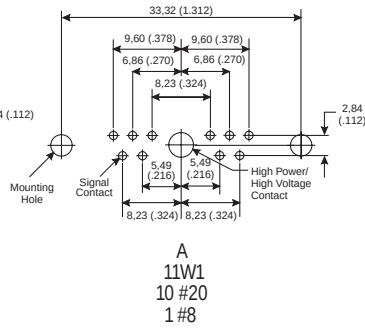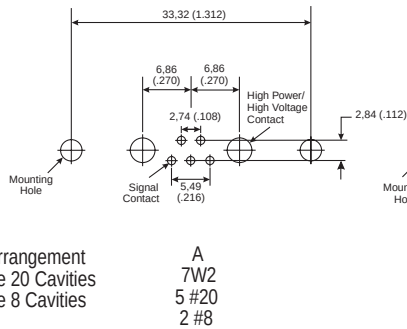

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

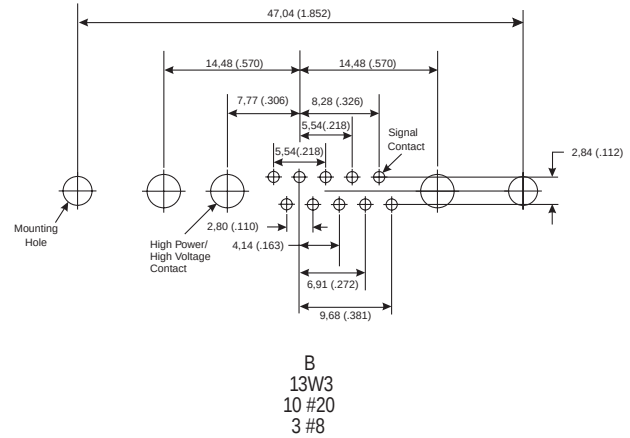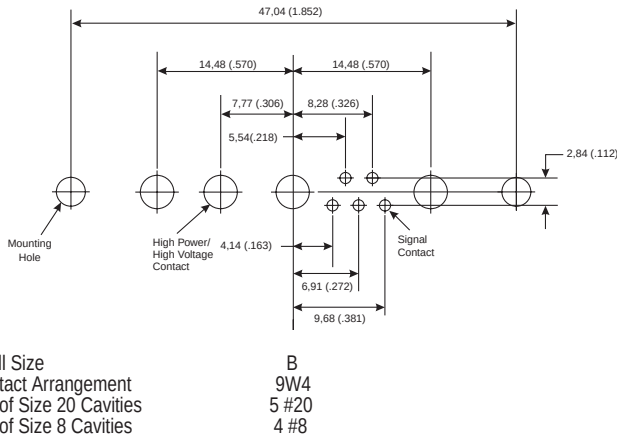

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

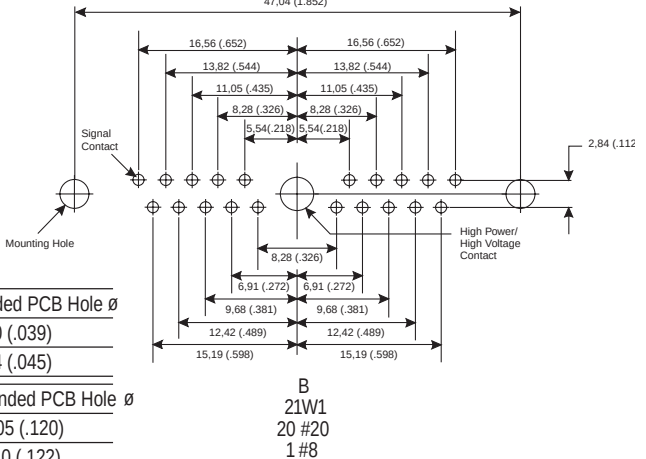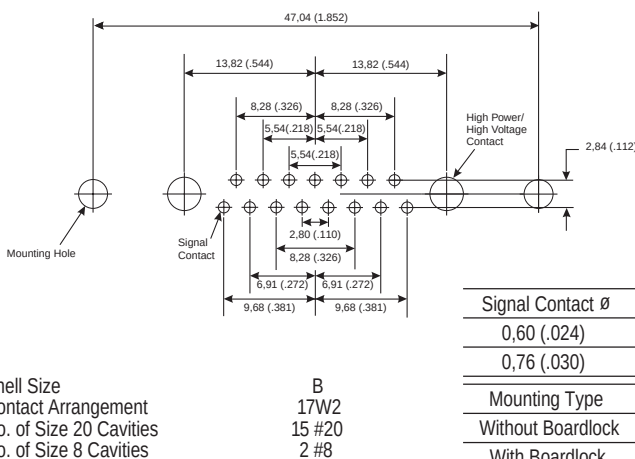

| Signal Contact Ø | Recommended PCB Hole Ø |
|------------------|------------------------|
| 0,60 (.024)      | 1,00 (.039)            |
| 0,76 (.030)      | 1,14 (.045)            |

| Mounting Type     | Recommended PCB Hole Ø |
|-------------------|------------------------|
| Without Boardlock | 3,05 (.120)            |
| With Boardlock    | 3,10 (.122)            |


  

| Size 8 Contact Type | Recommended PCB Hole Ø |
|---------------------|------------------------|
| High Power (H)      | 3,56 (.140)            |
| High Voltage (V)    | 1,96 (.077)            |




Dimensions shown in mm  
Specifications and dimensions subject to change

www.ittcannon.com

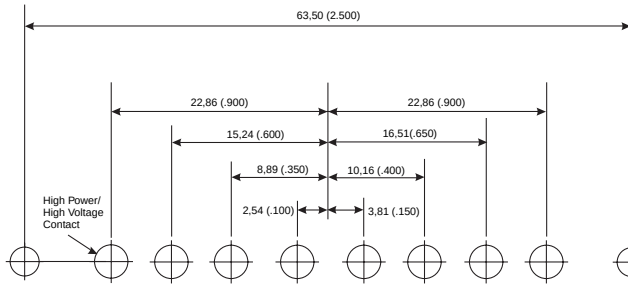


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
8W8  
0 #20  
8 #8

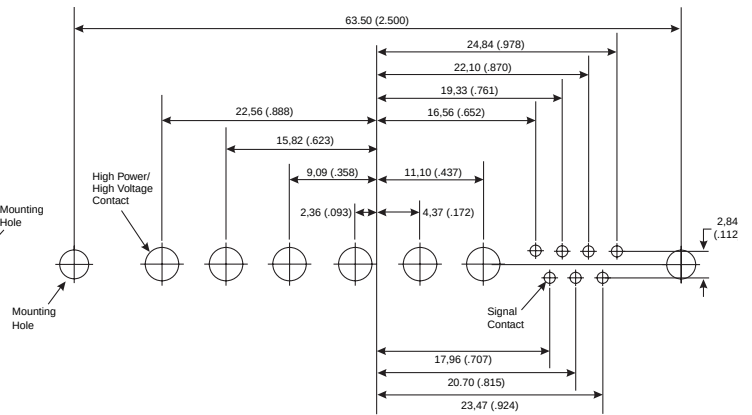


C  
13W6  
7 #20  
6 #8

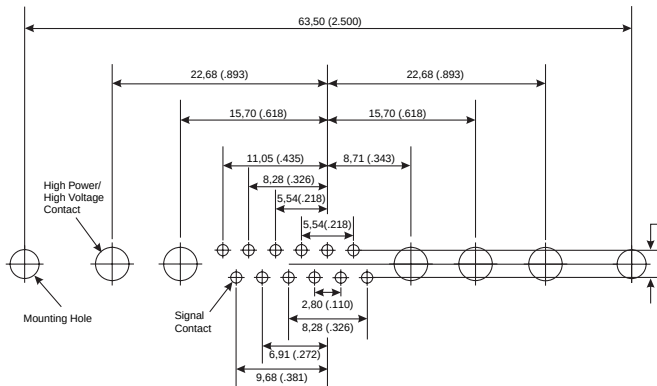


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
17W5  
12 #20  
5 #8

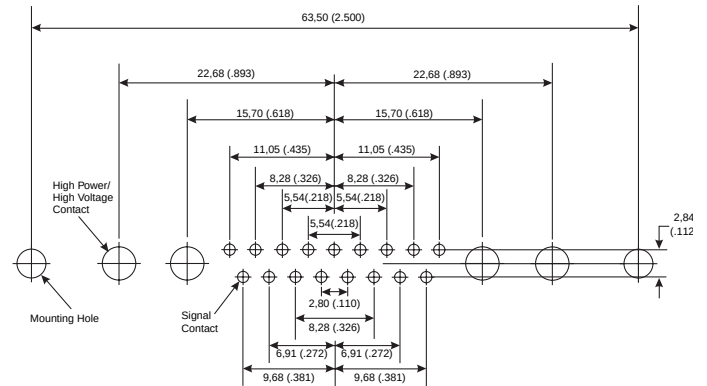


C  
21WA4  
17 #20  
4 #8

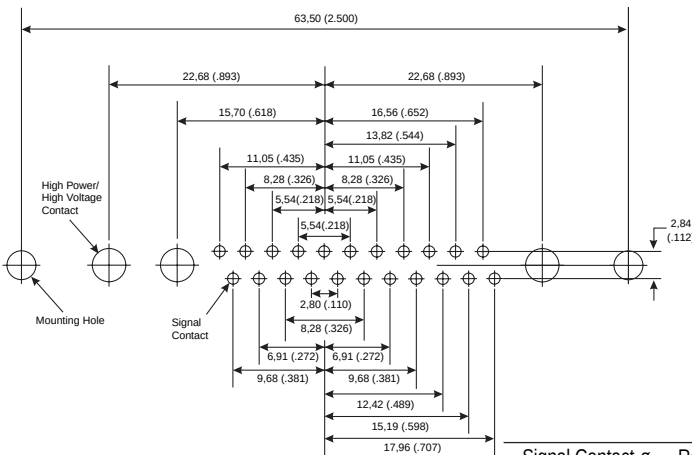

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
25W3  
22 #20  
3 #8

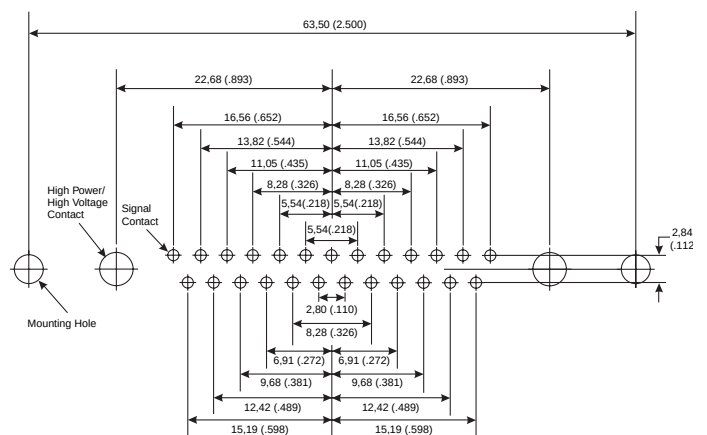


C  
27W2  
25 #20  
2 #8

| Signal Contact $\varnothing$ | Recommended PCB Hole $\varnothing$ |
|------------------------------|------------------------------------|
| 0,60 (.024)                  | 1,00 (.039)                        |
| 0,76 (.030)                  | 1,14 (.045)                        |
| Mounting Type                | Recommended PCB Hole $\varnothing$ |
| Without Boardlock            | 3,05 (.120)                        |
| With Boardlock               | 3,10 (.122)                        |
| Size 8 Contact Type          | Recommended PCB Hole $\varnothing$ |
| High Power (H)               | 3,56 (.140)                        |
| High Voltage (V)             | 1,96 (.077)                        |


Dimensions shown in mm  
Specifications and dimensions subject to change

[www.ittcannon.com](http://www.ittcannon.com)

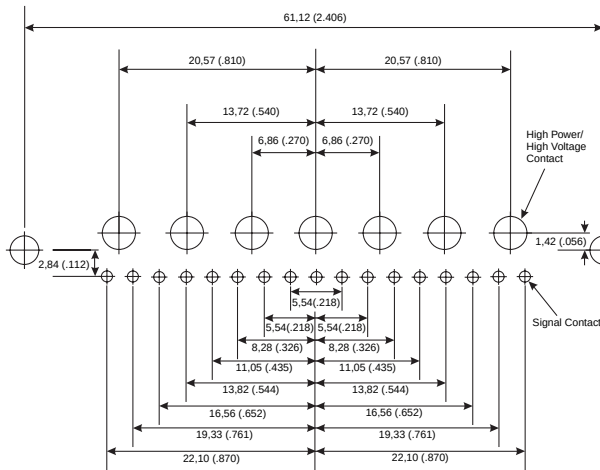


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

D  
24W7  
17 #20  
7 #8

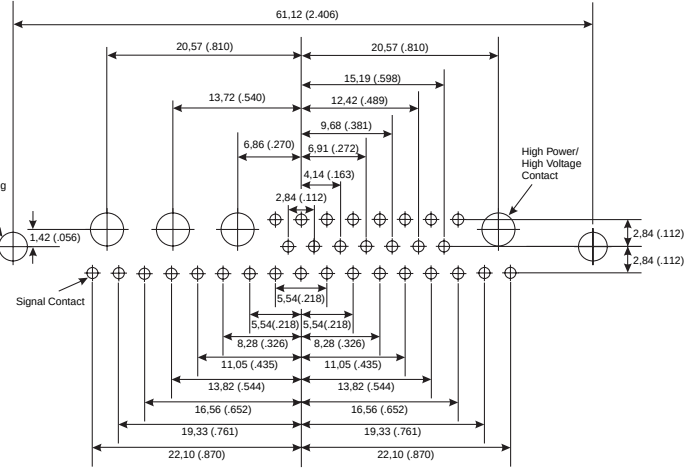


D  
36W4  
32 #20  
4 #8

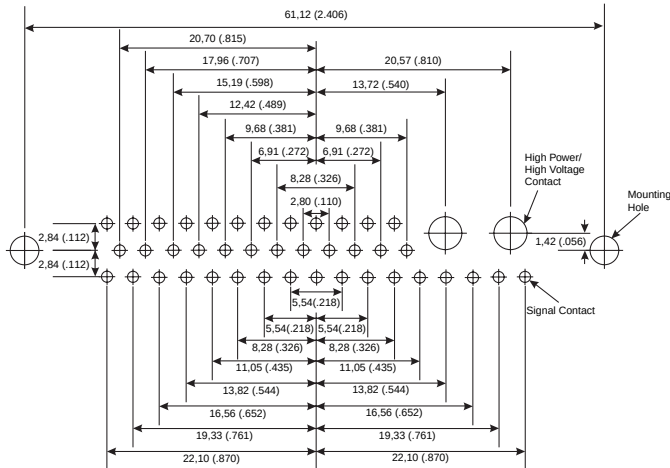


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

D  
43W2  
41 #20  
2 #8

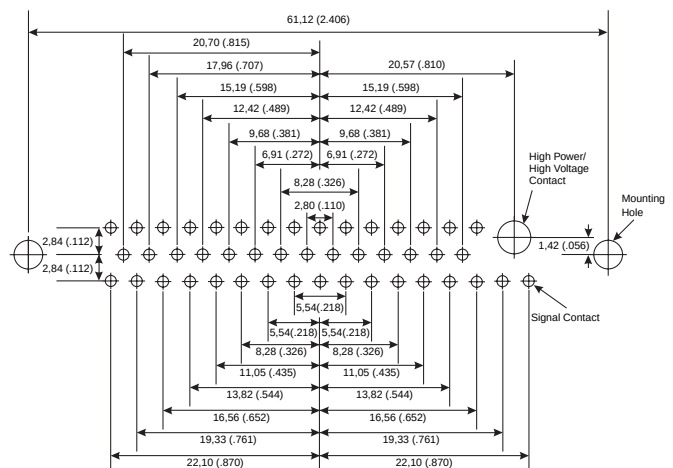

D  
47W1  
46 #20  
1 #8



| Signal Contact Ø    | Recommended PCB Hole Ø |
|---------------------|------------------------|
| 0,60 (.024)         | 1,00 (.039)            |
| 0,76 (.030)         | 1,14 (.045)            |
| Mounting Type       | Recommended PCB Hole Ø |
| Without Boardlock   | 3,05 (.120)            |
| With Boardlock      | 3,10 (.122)            |
| Size 8 Contact Type | Recommended PCB Hole Ø |
| High Power (H)      | 3,56 (.140)            |
| High Voltage (V)    | 1,96 (.077)            |

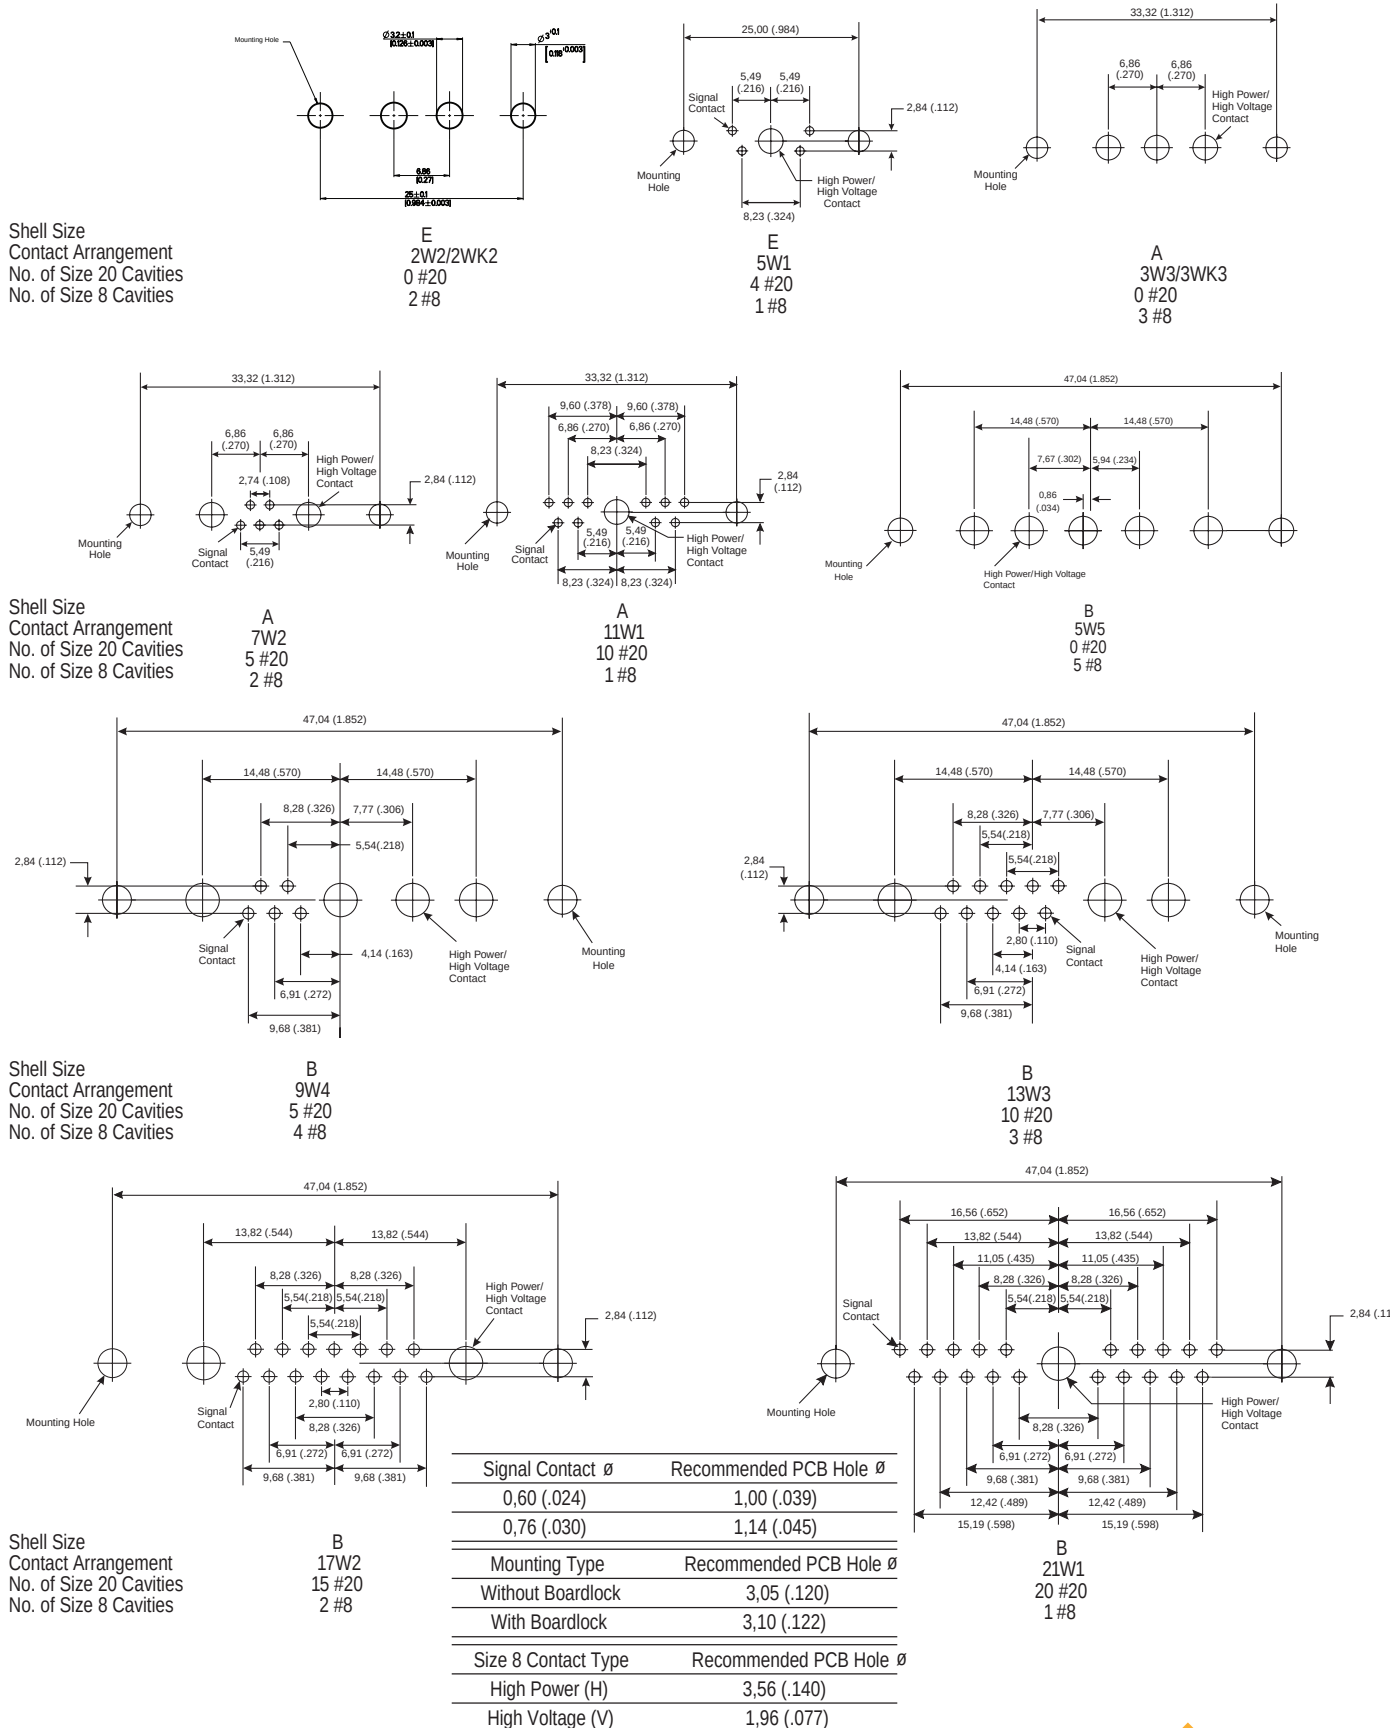

Dimensions shown in mm  
 Specifications and dimensions subject to change

[www.ittcannon.com](http://www.ittcannon.com)




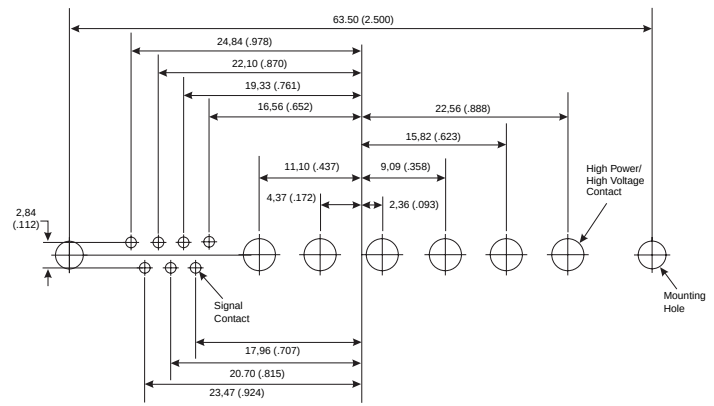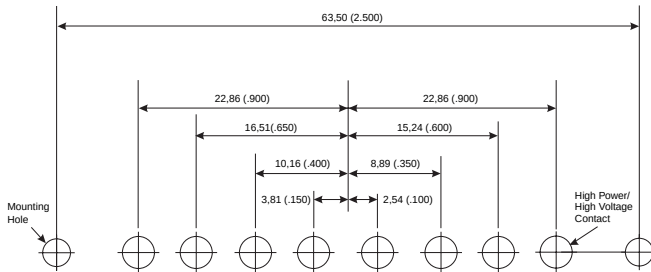

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities


C  
8W8  
0 #20  
8 #8

C  
13W6  
7 #20  
6 #8

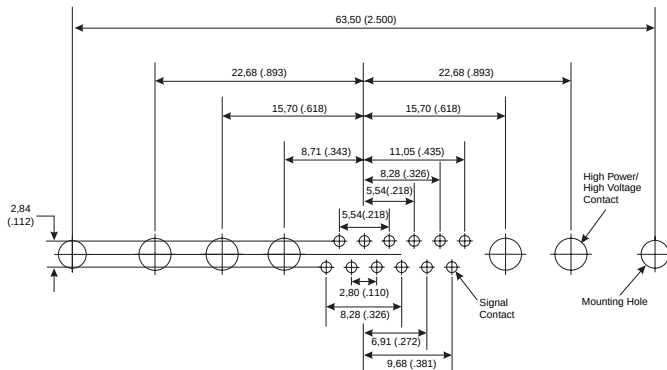


Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
17W5  
12 #20  
5 #8

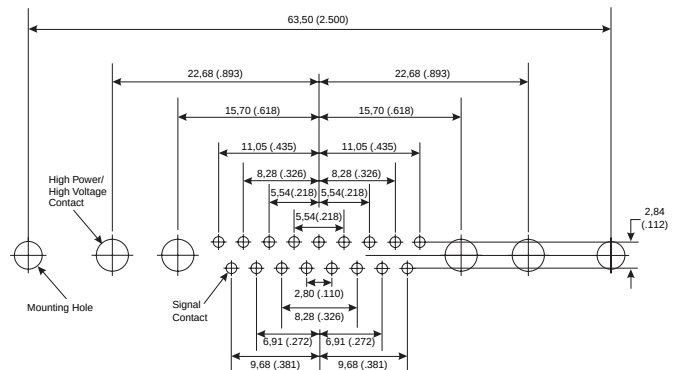


C  
21WA4  
17 #20  
4 #8

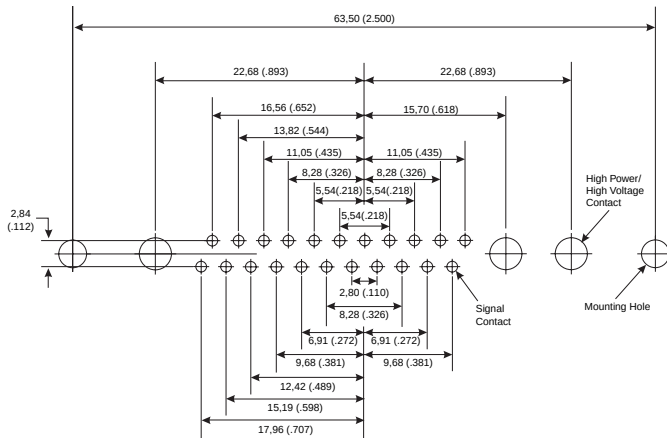

Shell Size  
Contact Arrangement  
No. of Size 20 Cavities  
No. of Size 8 Cavities

C  
25W3  
22 #20  
3 #8

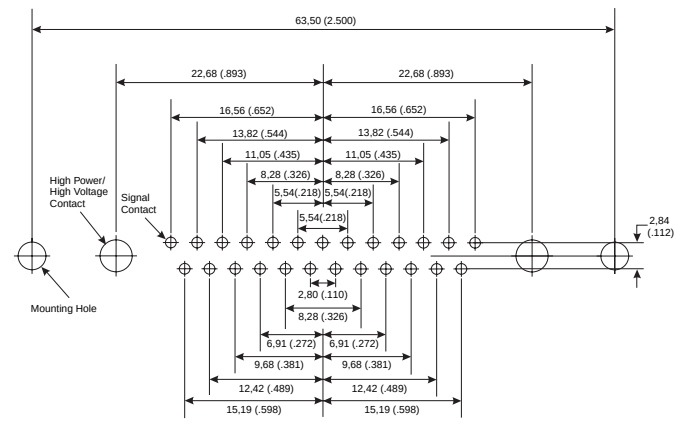

C  
27W2  
25 #20  
2 #8

| Signal Contact $\varnothing$ | Recommended PCB Hole $\varnothing$ |
|------------------------------|------------------------------------|
| 0.60 (.024)                  | 1.00 (.039)                        |
| 0.76 (.030)                  | 1.14 (.045)                        |
| Mounting Type                | Recommended PCB Hole $\varnothing$ |
| Without Boardlock            | 3.05 (.120)                        |
| With Boardlock               | 3.10 (.122)                        |
| Size 8 Contact Type          | Recommended PCB Hole $\varnothing$ |
| High Power (H)               | 3.56 (.140)                        |
| High Voltage (V)             | 1.96 (.077)                        |





**Automatic/Semi-Automatic Tooling**

ITT Cannon can provide automatic and semi-automatic tooling for automated stripping and crimping of contacts for insertion. Please contact your local ITT Cannon representative for more information.

ABT-607




Products: D\*A, MDSM, 75 Ohm Crimp Coax

ABT-620 UCCS




Products: D\*A, MDSM

CBT-646



Products: D\*MA


HACS-2-DA

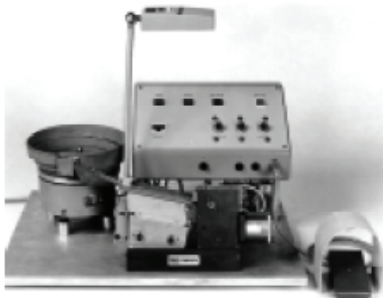

CCT-DA




CBT-565




M22520-2-01




ACT2500/3500



4510



CIET-20-HDL



CET-20-D



---

## Obsolete Products

---

### General Application Connectors ♦

|     |                                                                                                       |      |                                                                                               |                 |                                                                                              |
|-----|-------------------------------------------------------------------------------------------------------|------|-----------------------------------------------------------------------------------------------|-----------------|----------------------------------------------------------------------------------------------|
| D*C | <i>Burgun D</i> with snap-in, rear release machined or stamped crimp contacts. Refer to D*U products. | D*PF | Straight and 90° PCB applications, UL 94V-0 rated. Refer to D* products.                      | D*11148 D*(SMT) | SMT – Surface Mount D, no replacement, only through holes available. Refer to ZED* products. |
| D*P | 90° connectors for I/O applications, UL 94V-0 rated. Refer to D*U products                            | AD*  | Part number change only. Refer to ZD* products. Replace "A" with "Z" for current part number. | D*P1            | Machined pressfit replaced by stamped pressfit. Refer to D*NG products.                      |
|     |                                                                                                       |      |                                                                                               | D*TC            | Part number change only. Refer to D* products.                                               |

---

## Available Products Not Listed Within This Publication

---

### General Application Connectors ♦

|      |                                                                                                                           |
|------|---------------------------------------------------------------------------------------------------------------------------|
| D*U  | <i>Burgun D</i> with snap-in, rear release machined or stamped crimp contacts, UL 94V-0 rated.                            |
| D*SF | <i>Speedy D</i> for IDC ribbon cable, UL 94V-0 rated, accomodates Sizes 28-26 AWG cable on 1,27 (.050) conductor spacing. |

|      |                                                                                                  |
|------|--------------------------------------------------------------------------------------------------|
| D*MA | Military specification quality removable crimp style contacts for high performance applications. |
| ZD*  | Low cost, stamped contacts, high density 90° PCB connectors.                                     |
| D*M  | Standard 9, 15, 25, 37 and 50 position layouts machined contacts.                                |

### Special Application Connectors ♦ ♦

|     |                                                                                                                    |
|-----|--------------------------------------------------------------------------------------------------------------------|
| GD* | <i>Grommet D</i> environmentally sealed, crimp, snap-in, rear release contacts.                                    |
| D*D | Environmentally sealed, cast aluminium shell. Product not intermatable with M24308 type D Subminiature connectors. |

♦ Commercial Applications Only

♦ ♦ Military or Commercial Applications

---

 Consult factory for details.

## 1. MATERIAL CONTENT AND PHYSICAL FORM

Electrical connectors do not usually contain hazardous materials. They contain conducting and non-conducting materials and can be divided into two groups.

a) Printed circuit types and low cost audio types which employ all plastic insulators and casings.

b) Rugged, Fire Barrier and High Reliability types with metal casings and either natural rubber, synthetic rubber, plastic or glass insulating materials. Contact materials vary with type of connector and also application and are usually manufactured from either: Copper, copper alloys, nickel, alumel, chromel or steel. In special applications, other alloys may be specified.

## 2. FIRE CHARACTERISTICS AND ELECTRIC SHOCK HAZARD

**There is no fire hazard when the connector is correctly wired and used within the specified parameters. Incorrect wiring or assembly of the connector or careless use of metal tools or conductive fluids, or transit damage to any of the component parts may cause electric shock or burns. Live circuits must not be broken by separating mated connectors as this may cause arcing, ionization and burning.** Heat dissipation is greater at maximum resistance in a circuit. Hot spots may occur when resistance is raised locally by damage, e.g. cracked or deformed contacts, broken strands of wire. Local overheating may also result from the use of the incorrect application tools or from poor quality soldering or slack screw terminals. Overheating may occur if the ratings in the product Data Sheet/Catalog are exceeded and can cause breakdown of insulation and hence electric shock. If heating is allowed to continue it intensifies by further increasing the local resistance through loss of temper of spring contacts, formation of oxide film on contacts and wires and leakage currents through carbonization of insulation and tracking paths. Fire can then result in the presence of combustible materials and this may release noxious fumes. Overheating may not be visually apparent. Burns may result from touching overheated components.

## 3. HANDLING

Care must be taken to avoid damage to any component parts of electrical connectors during installation and use. Although there are normally no sharp edges, care must be taken when handling certain components to avoid injury to fingers. Electrical connectors may be damaged in transit to the customers, and damage may result in creation of hazards. Products should therefore be examined prior to installation/use and rejected if found to be damaged.

## 4. DISPOSAL

Incineration of certain materials may release noxious or even toxic fumes.

## 5. APPLICATION

Connectors with exposed contacts should not be selected for use on the current supply side of an electrical circuit, because an electric shock could result from touching exposed contacts on an unmated connector. Voltages in excess of 30 V ac or 42.5 V dc are potentially hazardous and care should be taken to ensure that such voltages cannot be transmitted in any way to exposed metal parts of the connector body. The connector and wiring should be checked, before making live, to have no damage to metal parts or insulators, no solder blobs, loose strands, conducting lubricants, swarf, or any other undesired conducting particles. Circuit resistance and continuity check should be made to make certain that there are no high resistance joints or spurious conducting paths. Always use the correct application tools as specified in the Data Sheet/Catalog. Do not permit untrained personnel to wire, assemble or tamper with connectors. For operation voltage please see appropriate national regulations.

## IMPORTANT GENERAL INFORMATION

**(i) Air and creepage paths/Operating voltage.** The admissible operating voltages depend on the individual applications and the valid national and other applicable safety regulations.

For this reason the air and creepage path data are only reference values. Observe reduction of air and creepage paths due to PC board and/or harnessing.

### (ii) Temperature

All information given are temperature limits. The operation temperature depends on the individual application.

### (iii) Other important information

Cannon continuously endeavors to improve their products. Therefore, Cannon products may deviate from the description, technical data and shape as shown in this catalog and data sheets.

ITT Interconnect Solutions, a Division of ITT Corporation manufactures the highest quality products available in the marketplace; however these products are intended to be used in accordance with the specifications in this publication. Any use or application that deviates from the stated operating specifications is not recommended and may be unsafe. No information and data contained in this publication shall be construed to create any liability on the part of Cannon. Any new issue of this publication shall automatically invalidate and supersede any and all previous issues.

## Product Warranty

A limited warranty applies to Cannon products. In general, except for obligations assumed by Cannon under this warranty, Cannon shall not be liable for any loss, damage, cost of repairs, incidental or consequential damages of any kind, whether or not based on express or implied warranty, contract, negligence or strict liability arising in connection with the design, manufacture, sale, use or repair of the products. Product availability, prices and delivery dates are exclusively subject to our respective order confirmation form; the same applies to orders based on development samples delivered. Please refer to [www.ittcannon.com](http://www.ittcannon.com) (General Terms of Sale) for the complete text of Cannon's applicable Terms and Conditions, including Warranty.

This publication is not to be construed as an offer. It is intended merely as an invitation to make an offer. By this publication, Cannon does not assume responsibility or any liability for any patent infringements or other rights of third parties which may result from its use.

Reprinting this publication is generally permitted, indicating the source. However, Cannon's prior consent must be obtained in all cases. "Engineered for life" is a registered trademark of ITT Corporation ©2006. All other trademarks or registered trademarks are property of their respective owners. All data subject to change without notice.

*Commodities in this catalog may be controlled for export by the International Traffic in Arms Regulations (ITAR) and Export Administration Regulations (EAR) when specifically designed modified, or configured for articles controlled by the United States Government.*



## Circular/Filter/Hermetic Connectors

As a world leader in circular, filter, and hermetic connectors, ITT can leverage its design and manufacturing expertise to fit virtually any application. Our expertise includes fast positive mating for a wide range of military applications, as well as numerous sizes and contact configurations for various harsh environments. ITT can meet numerous specs, including NATO and MIL standards.


[www.ittcannon.com/circulars](http://www.ittcannon.com/circulars) • [www.ittcannon.com/filter](http://www.ittcannon.com/filter) • [www.ittcannon.com/hermetics](http://www.ittcannon.com/hermetics)



## D-Subminiature Connectors

Cannon invented D-sub connectors in 1952. Our family of D-Subs now includes combinations of signal, power and RF, as well as severe service sealed connectors. Cannon D-Subs are available with an extensive line of backshells and accessories and are one of the most economical shielded connector solutions available. ITT D-Sub connectors are qualified to the MIL-DTL-24308 specification.

[www.ittcannon.com/dsubs](http://www.ittcannon.com/dsubs)

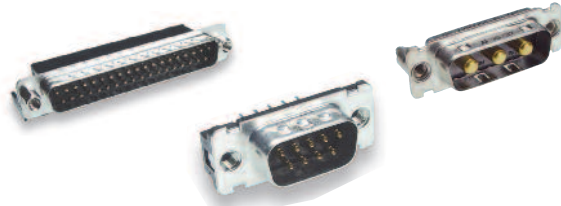

## Fiber Optic Connectors and Cable Assemblies

Cannon fiber optic solutions provide an excellent performance/cost value. Performance may be tailored to the end system, with our use of superior materials and bonding agents providing highly effective solutions. Our wide variety of products includes fiber optic hybrid contacts, multi-channel, rack and panel, and hi-rel assemblies, including MIL and ARINC standard solutions.

[www.ittcannon.com/fiberoptics](http://www.ittcannon.com/fiberoptics)



## Microminiature Connectors

Developed first by Cannon in the 1960's, Interconnect Solutions microminiature connectors offer high performance and reliability with exceptional versatility. Available in rectangular, circular, and strip configurations for countless applications, many of our connectors meet or exceed applicable requirements of the MIL-DTL-83513 specification.

[www.ittcannon.com/micro](http://www.ittcannon.com/micro)



## Rack and Panel Connectors

Initially pioneered by Cannon during the 1930s, Interconnect Solutions is the world leader in rack and panel connectors, offering unmatched variety of shell configurations and insert arrangements, materials, plating, and contact options. Many of our standard and custom designs meet the stringent requirements of ARINC 600, ARINC 404 (MIL-C-81659), and MIL-DTL-83733 standards.

[www.ittcannon.com/rackandpanel](http://www.ittcannon.com/rackandpanel)



## RF Connectors

ITT Interconnect Solutions has been providing interconnect products to the Microwave and RF industry since 1963 (formerly The Sealectro Corporation). The RF 50 & 75 Ohm product lines cover UHF band through Ku band requirements. These connectors and cable assemblies are available with a thread type, snap type, bayonet type or slide on coupling method. The frequencies range from DC to 18+ GHz.

[www.ittcannon.com/RF50](http://www.ittcannon.com/RF50) • [www.ittcannon.com/RF75](http://www.ittcannon.com/RF75)



ITT Interconnect Solutions is an international manufacturer and supplier of connectors including circular, rectangular, fiber optic, RF, power and high voltage, audio, PMCIA, Compact Flash Card, enclosures, cable assemblies, and application specific custom solutions. The Interconnect Solutions portfolio includes the brands Cannon, VEAM, and BIW. As a worldwide leader in connector technology for nearly a century, ITT offers one of the broadest product offerings, six sigma manufacturing capability, Value Based Product Development with exceptional engineering capability, and an extensive sales, distribution, and customer support network.





## **Customer Support Locations**

### *CHINA*

Tuopandun Industrial Area, Jinda Cheng,  
Xiner Village, Shajing Town,  
Baoan District, Shenzhen City,  
Guangdong, China 518125  
Phone: +86.755.2726.7238  
Fax: +86.755.2726.7515

### *GERMANY*

Cannonstrasse 1  
Weinstadt, 71384  
phone: +49.7151.699.0  
fax: +49.7151.699.217

### *FRANCE*

15, Boulevard Robert Thiboust  
Serris, France 77700  
phone: +33.1.60.04.93.93  
fax: +33.1.60.04.93.90

### *HONG KONG*

Units 2405-6, 24/F, ING Tower  
308 Des Voeux Road  
Central  
Hong Kong  
phone: +852.2732.2720  
fax: +852.2732.2919

### *ITALY*

Corso Europa 41/43  
Lainate (MI),  
Italy 20020  
phone: +39.02938721  
fax: +39.0293872300

### *JAPAN*

11-3, 5 Chome, Hibarigaoka, Zama-shi  
Kanagawa, Japan 228-0003  
phone: +81.462.57.2010  
fax: + 81.462.57.1680

### *UK*

Jays Close, Viabes Estate  
Basingstoke, RG22 4BA  
phone: +44.1256.311200  
fax: +44.1256.323356

### *USA*

666 East Dyer Road  
Santa Ana, CA 92705  
toll free: 1.800.854.3028  
phone: 1.714.557.4700  
fax: 1.714.628.2142