

TOSHIBA SOLID STATE AC RELAY

TSS12G48S, TSS12J48S

- OPTICALLY ISOLATED, ZERO VOLTAGE TURN-ON, ZERO CURRENT TURN-OFF, NORMALLY OPEN SSR.

Unit in mm

COMPUTOR PERIPHERALS
MACHINE TOOL CONTROLS
PROCESS CONTROL SYSTEMS
TRAFFIC CONTROL SYSTEMS


- R. M. S On-State Current : $I_T(\text{RMS}) = 12\text{A}$
- Non-Repetitive Peak Off-State Voltage : $V_{\text{DSM}} = 400, 600\text{V}$
- TTL Compatible
- Including Snubber Network
- Isolation Voltage ($t = 1\text{min.}$) : 2500V AC (Input to Output)
: 1500V AC (Input / Output to Base)

MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)
INPUT (CONTROL)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Control Input Voltage (DC) (Note 1)	$V_F(\text{IN})$	5.5	V
Control Input Current (DC)	$I_F(\text{IN})$	30	mA

OUTPUT (LOAD)

Non-Repetitive Peak		TSS12G48S	V _{DSM}	400	V
Off-State Voltage		TSS12J48S		600	
Nominal AC Line		TSS12G48S	V _{AC}	120	V
Voltage		TSS12J48S		240	
R. M. S On-State Current			I _{T(RMS)}	12	A
Peak One Cycle Surge On-State Current (Non-Repetitive)			I _{TSM}	120 (50Hz)	A
				132 (60Hz)	
Operating Frequency Range			f	45~65	Hz
Isolation	Input to Ouoput		BV _S / AC	2500	V
Voltate (t=1min.)	Input / Output to Base			1500	
Operating Temperature Range			T _{opr}	-20~80	°C
Storate Temperature Range			T _{stg}	-30~80	°C
Screw Torque (M3)				0.6	N·m

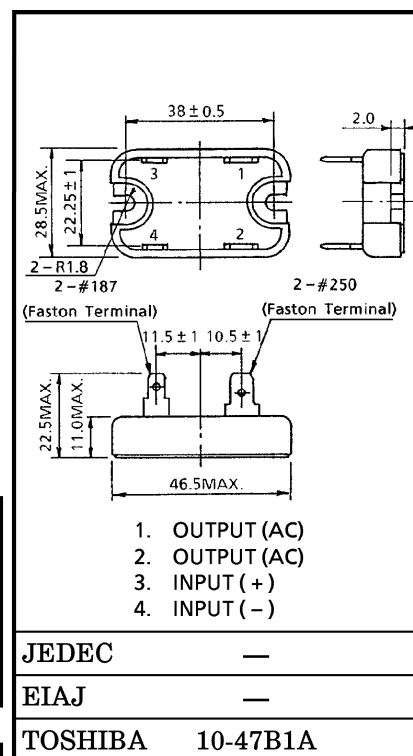

Note 1 : Driving input rating : Insert an external resistance into SSR when the power supply over 5.5V is used.

2 : Don't dip the SSR body into the organic solvent like Trichloroethylene, when washing the flux on the terminal.

3 : For installation of SSR, use spring-washers, etc., to prevent screws from loosening.

ELECTRICAL CHARACTERISTICS (Ta = 25°C)
INPUT (CONTROL)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Pick Up Voltage	V_{FT}	$V_{AC}=100V_{rms}$	—	—	4.0	V
Drop Out Voltage	V_{FD}	Resistive Load	0.5	—	—	V
Input Resistance	$R_{(IN)}$		—	160	—	Ω

OUTPUT (LOAD)

Off-State Leakage Current	TSS12G48S	I_{OL}	$V_{AC}=100V_{rms}, f=50Hz$	—	—	3.0	mA
	TSS12J48S		$V_{AC}=200V_{rms}, f=50Hz$	—	—	6.0	
Peak On-State Voltage	V_{TM}	$I_T(RMS)=12A$		—	—	1.5	V
dv / dt (Off-State)	dv / dt	$V_{DSM}=0.7\times Rated$		50	—	—	V / μs
Turn-On Time	t_{on}	$V_{AC}=100V_{rms}$		—	—	1 / 2	Cycle
Turn-Off Time	t_{off}	Resistive Load (Fig. 1)		—	—	1 / 2	Cycle
Isolation Resistance	R_s	$V=500V, RH=40\sim60\%$		10^{10}	—	—	Ω
Thermal Resistance	$R_{th(j-c)}$	AC		—	—	4.8	$^{\circ}C / W$

EQUIVALENT CIRCUIT





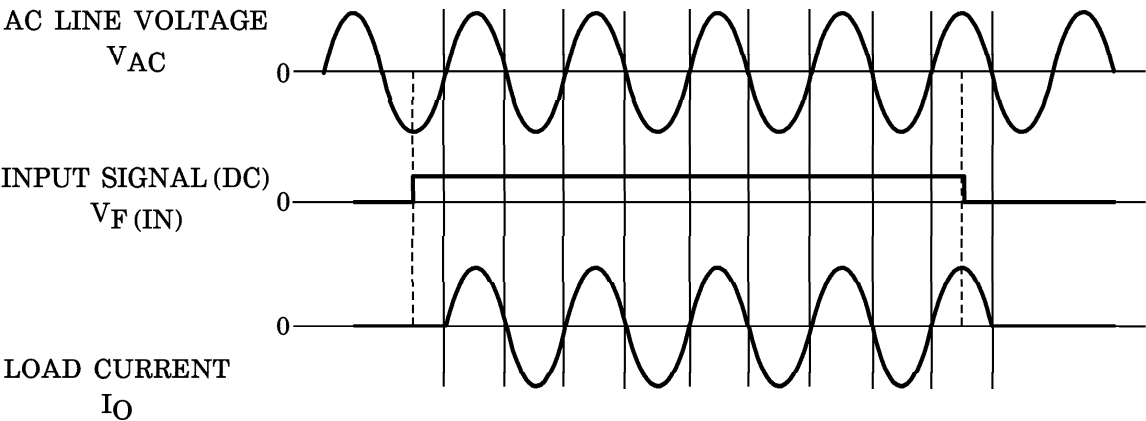


Fig.1. ZERO VOLTAGE SWITCHING WAVEFORM

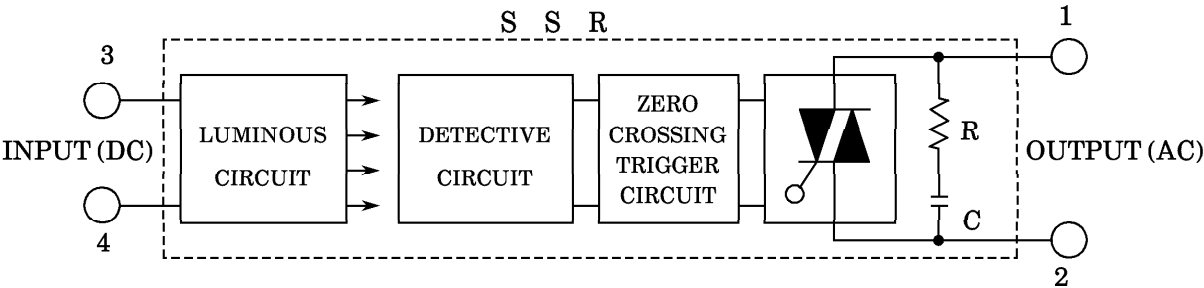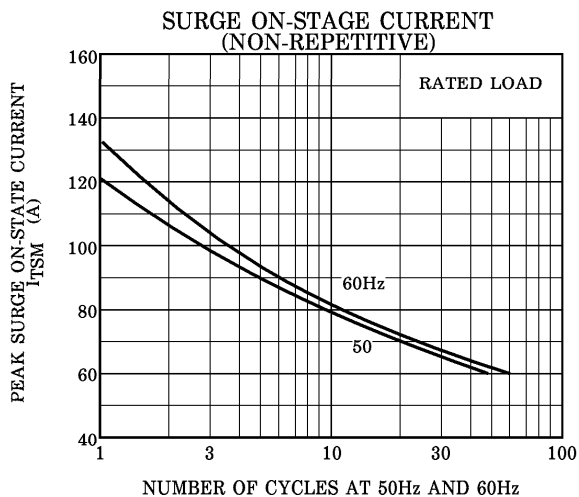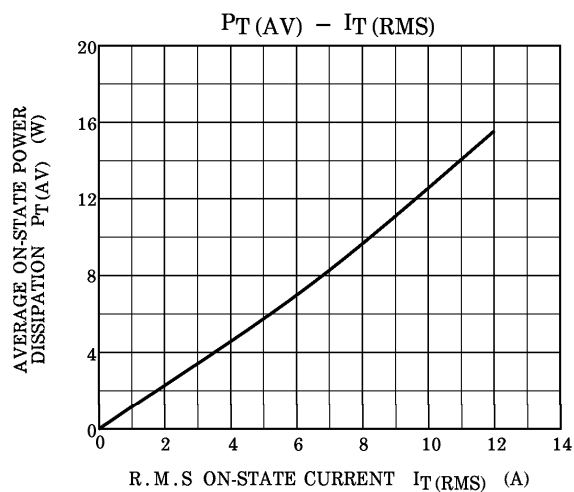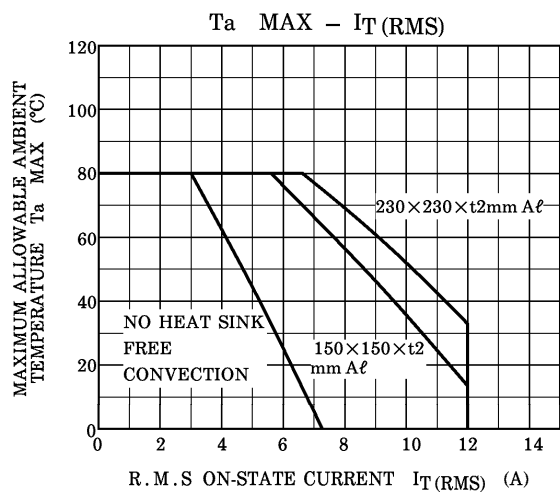

RESTRICTIONS ON PRODUCT USE

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.