

ADJUSTABLE HIGH PRECISION SHUNT REGULATOR

■GENERAL DESCRIPTION

The **NJM1431A** is a precision shunt regulator. Compared to the conventional 431, The **NJM1431A** offers higher voltage accuracy and small package availability to support a wide range of applications.

■PACKAGE OUTLINE



NJM1431AL1



NJM1431AU




NJM1431AF


■FEATURES

- Operating Voltage V_{REF} to 36V
- Precision Voltage Reference $2.465V \pm 1\%$
- $2.9mm \times 1.5mm$ to MTP (SOT23) package
- Adjustable Output Voltage For
External Resistance two Parts.
- Bipolar Technology
- Package Outline TO-92, SOT-89 (3pin), MTP5


■BLOCK DIAGRAM

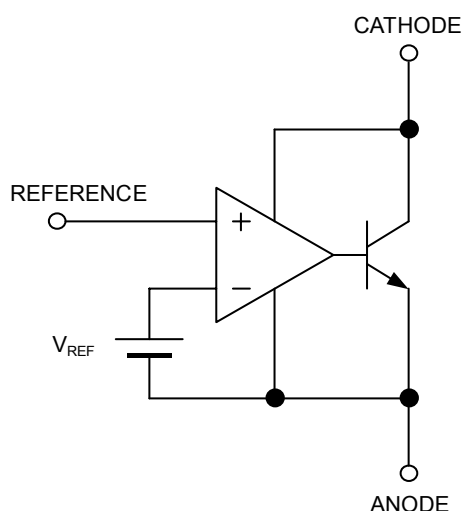

■PIN CONFIGURATION




NJM1431AL1



NJM1431AU

1. REFERENCE
2. ANODE
3. CATHODE

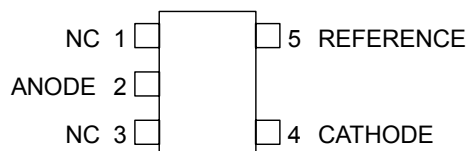

NJM1431AF

NJM1431A

■ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	MAXIMUM RATINGS	UNIT
Cathode Voltage	V_{KA}	+37	V
Continuous Cathode Current	I_K	-100 ~ 150	mA
Reference Input Current	I_{REF}	-0.05 ~ 10	mA
Power Dissipation	P_D	(TO-92) 500 (SOT-89) 350 (MTP5) 200	mW
Operating Temperature Range	T_{OPR}	-40 ~ +85	°C
Storage Temperature Range	T_{STG}	-40 ~ +150	°C

■RECOMMENDED OPERATING CONDITIONS (Ta=25°C)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Cathode Voltage	V_{KA}	V_{REF}	—	36	V
Cathode Current	I_K	1	—	100	mA

■ELECTRICAL CHARACTERISTICS ($I_K=10mA$, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reference Voltage	V_{REF}	$V_{KA}=V_{REF}$ (*1)	2.440	2.465	2.490	V
Reference Voltage Change vs. Cathode Voltage Change	$\Delta V_{REF}/\Delta V_{KA}$	$ V_{REF} \leq V_{KA} \leq 10V$ (*2)	—	± 1.4	± 2.7	mV/V
		$10V \leq V_{KA} \leq 36V$ (*2)	—	± 1.0	± 2.0	mV/V
Reference Input Current	I_{REF}	$R1=10k\Omega$, $R2=\infty$ (*2)	—	2	4	μA
Minimum Input Current	I_{MIN}	$V_{KA}=V_{REF}$, $\Delta V_{REF}=1\%$ (*1)	—	0.4	1.0	mA
Cathode Current (Off Cond.)	I_{OFF}	$V_{KA}=36V$, $V_{REF}=0V$ (*3)	—	0.1	1.0	μA
Dynamic Impedance	$ Z_{KA} $	$V_{KA}=V_{REF}$, $f \leq 1kHz$ $1mA \leq I_K \leq 100mA$ (*1)	—	0.2	0.5	Ω

■TEMPERATURE CHARACTERISTICS ($I_K=10mA$, Ta= -40°C ~ 85°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reference Voltage Change	ΔV_{REF}	$V_{KA}=V_{REF}$ (*1)	—	8	17	mV
Reference Input Current Change	ΔI_{REF}	$R1=10k\Omega$, $R2=\infty$ (*2)	—	0.4	1.2	μA

The “Dynamic Impedance”, “Reference Voltage Change” and “Reference Input Current Change” is tested to using some samples of the first five lots. These “TEMPERATURE CHARACTERISTICS” are not guaranteed.

$|V_{REF}|$...Reference voltage includes error.

(*1): Test Circuit (Fig.1)

(*2): Test Circuit (Fig.2)

(*3): Test Circuit (Fig.3)

■TEST CIRCUIT

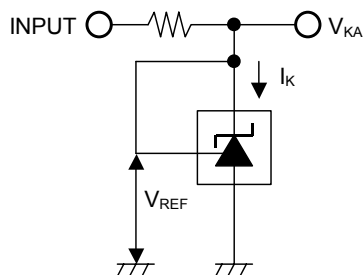


Fig.1 $V_{KA}=V_{REF}$ to test circuit

$$V_O = V_{KA} = V_{REF}$$

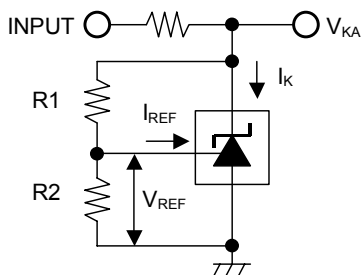


Fig.2 $V_{KA}>V_{REF}$ to test circuit

$$V_O = V_{KA} = V_{REF} \left(1 + \frac{R1}{R2} \right) + I_{REF} \times R1$$







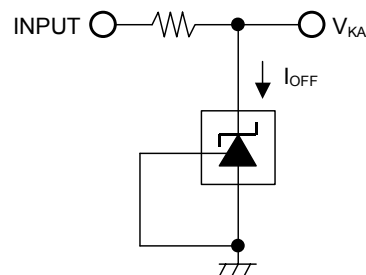


Fig.3 I_{OFF} to test circuit

■POWER DISSIPATION VS. AMBIENT TEMPERATURE

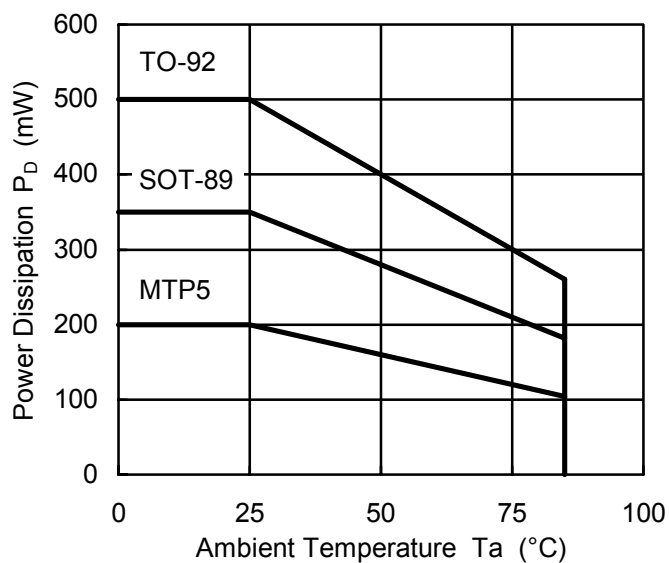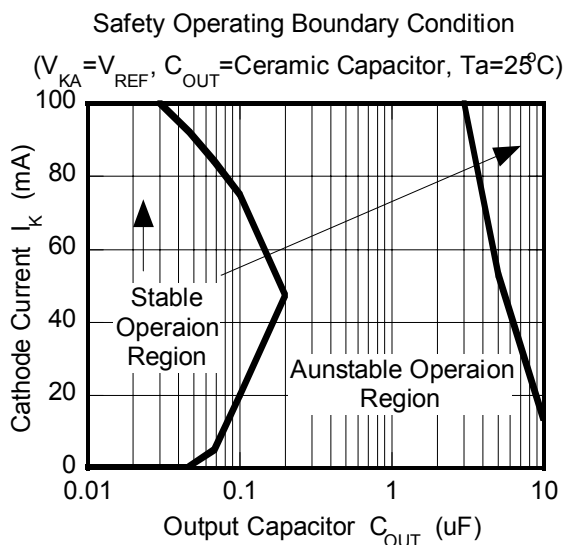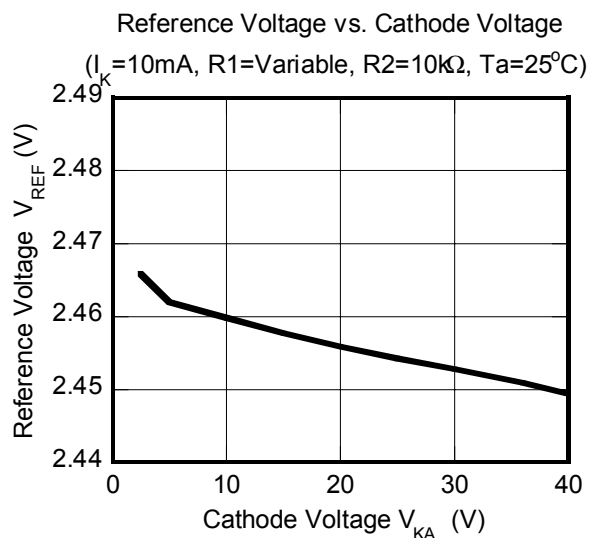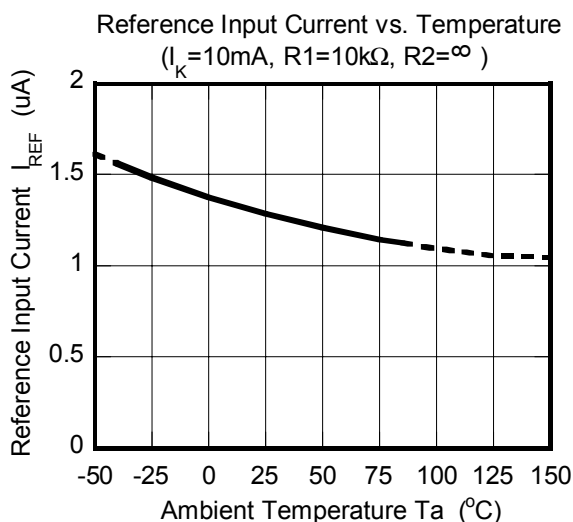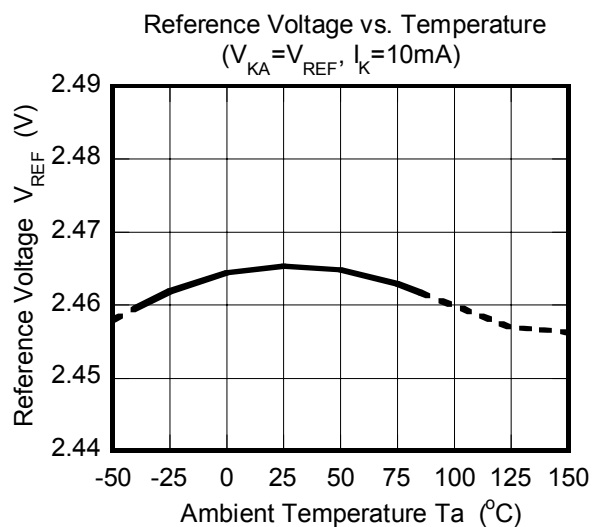


■ TYPICAL CHARACTERISTICS

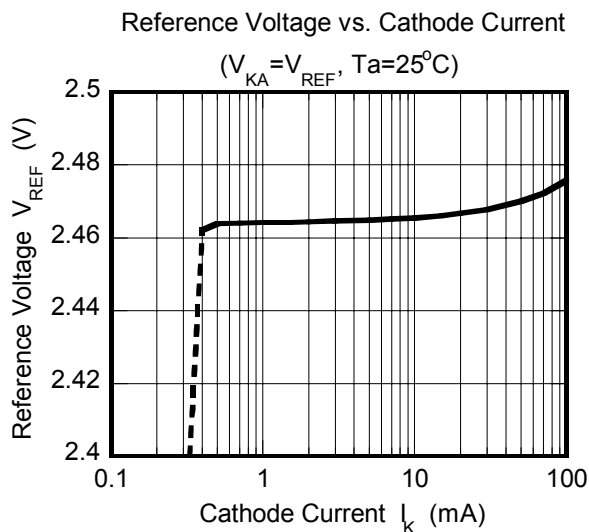

Note) Oscillation might occur while operating within the range of safety curve.

So that, it is necessary to make ample margins by taking considerations of fluctuation of the device.

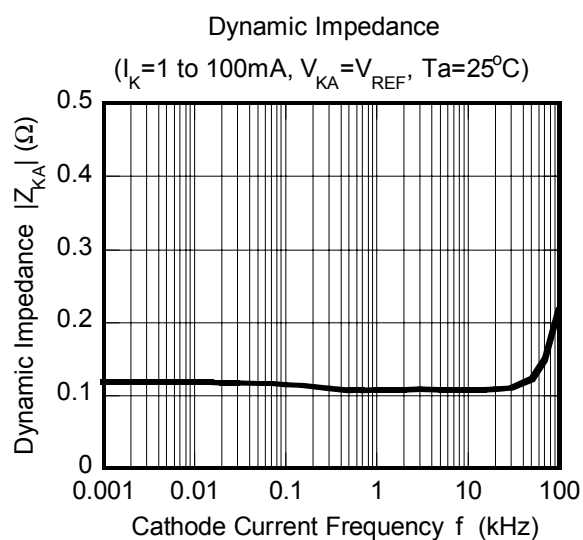

MEMO

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.