



LC877B00A

8-Bit Single Chip Microcontroller

Under-Development

LC877BC8A

8 bit Single Chip Microcontroller incorporating 128KB flash memory and 4096 byte RAM on chip

LC877BB2A

8 bit Single Chip Microcontroller incorporating 112KB flash memory and 4096 byte RAM on chip

LC877B96A

8 bit Single Chip Microcontroller incorporating 96KB flash memory and 4096 byte RAM on chip

LC877B80A

8 bit Single Chip Microcontroller incorporating 80KB flash memory and 4096 byte RAM on chip

LC877B78A

8 bit Single Chip Microcontroller incorporating 80KB flash memory and 2048 byte RAM on chip

LC877B72A

8 bit Single Chip Microcontroller incorporating 72KB flash memory and 2048 byte RAM on chip

LC877B64A

8 bit Single Chip Microcontroller incorporating 64KB flash memory and 2048 byte RAM on chip

LC877B56A

8 bit Single Chip Microcontroller incorporating 56KB flash memory and 2048 byte RAM on chip

LC877B48A

8 bit Single Chip Microcontroller incorporating 48KB flash memory and 1536 byte RAM on chip

LC877B40A

8 bit Single Chip Microcontroller incorporating 40KB flash memory and 1536 byte RAM on chip

LC877B32A

8 bit Single Chip Microcontroller incorporating 32KB flash memory and 1536 byte RAM on chip

LC877B24A

8 bit Single Chip Microcontroller incorporating 24KB flash memory and 1536 byte RAM on chip

- Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.
- SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

Overview

The LC877B00 series are an 8-bit single chip microcontroller with the following on-chip functional blocks :

- CPU: operable at a minimum bus cycle time of 83.3 ns Target speed
- 128K-24K bytes ROM
- On-chip RAM: 4096-1536 bytes
- LCD controller / driver
- two high performance 16 bit timer/counters (can be divided into 8 bit units)
- 16 bit timer / PWM (can be divided into two 8 bit timers)
- Four 8-bit timer with prescalers
- Timer for use as date / time clock
- Synchronous serial I/O port (with automatic block transmit / receive function)
- Asynchronous / synchronous serial I/O port
- 15-channel $\times$ 8-bit AD converter
- High-speed clock counter
- System clock divider
- Small signal detector
- 20-source 10-vectored interrupt system

All of the above functions are fabricated on a single chip.

Features

(1) ROM

-131072 $\times$ 8bits	(LC877BC8A)
-114688 $\times$ 8bits	(LC877BB2A)
-98304 $\times$ 8bits	(LC877B96A)
-81920 $\times$ 8bits	(LC877B80A/78A)
-73728 $\times$ 8bits	(LC877B72A)
-65536 $\times$ 8bits	(LC877B64A)
-57344 $\times$ 8bits	(LC877B56A)
-49152 $\times$ 8bits	(LC877B48A)
-40960 $\times$ 8bits	(LC877B40A)
-32768 $\times$ 8bits	(LC877B32A)
-24576 $\times$ 8bits	(LC877B24A)

(2) Random Access Memory (RAM):

-4096 $\times$ 9 bits	(LC877BC8A/B2A/96A/80A)
-2048 $\times$ 9 bits	(LC877B78A/72A/64A/56A)
-1536 $\times$ 9 bits	(LC877B48A/40A/32A/24A)

(3) Minimum Bus Cycle Time: 83.3 ns (12 MHz) Target speed

Note: The bus cycle time indicates ROM read time.

(4) Minimum Instruction Cycle Time (tCYC) : 249.9 ns (12MHz) Target speed

(5) Ports

- Input/output ports
 - Data direction programmable for each bit individually : 26 (P1n, P30-P35, P70-P73, P8n)
 - Data direction programmable in nibble units : 8 (P0n)
 - (When N-channel open drain output is selected, data can be input in bit units.)
- Input ports : 2 (XT1,XT2)
- LCD ports
 - Segment output : 48 (S00-S47)
 - Common output : 4 (COM0-COM3)
 - Bias terminals for LCD driver 3 (V1-V3)
- Other functions
 - Input/output ports : 48(PAn,PBn,PCn,PDn,PEn,PFn)
 - Input ports : 7 (PLn)
- Oscillator pins : 2 (CF1,CF2)
- Reset pin : 1 (RES)
- Power supply : 6 (VSS1-3,VDD1-3)

(6) LCD controller

- Seven display modes are available (static, 1/2, 1/3, 1/4 duty×1/2, 1/3 bias)
- Segment output and common output can be switched to general purpose input/output ports.

(7) Small signal detection (MIC signals etc)

- Counts pulses with the level which is greater than a preset value
- 2 bit counter

(8) Timers

- Timer 0: 16 bit timer / counter with capture register
 - Mode 0: 2 channel 8-bit timer with programmable 8 bit prescaler and 8 bit capture register
 - Mode 1: 8 bit timer with 8 bit programmable prescaler and 8 bit capture register + 8 bit Counter with 8-bit capture register
 - Mode 2: 16 bit timer with 8 bit programmable prescaler and 16 bit capture register
 - Mode 3: 16 bit counter with 16 bit capture register
- Timer 1: PWM / 16 bit timer/ counter with toggle output function
 - Mode 0: 8-bit timer with 8-bit prescaler (and toggle output) + 8-bit timer / counter with 8-bit prescaler (and toggle output)
 - Mode 1: 2 channel 8-bit PWM with 8-bit prescaler
 - Mode 2: 16-bit timer / counter with 8-bit prescaler (and toggle output) (Toggle output also possible using the lower order 8 bits)
 - Mode 3: 16-bit timer with 8-bit prescaler (and toggle output) (The lower order 8 bits can be used as PWM output)
- Timer 4: 8-bit timer with 6-bit prescaler
- Timer 5: 8-bit timer with 6-bit prescaler
- Timer 6: 8-bit timer with 6-bit prescaler (and toggle output)
- Timer 7: 8-bit timer with 6-bit prescaler (and toggle output)
- Base Timer
 - 1) The clock signal can be selected from any of the following :
 - Sub-clock (32.768kHz crystal oscillator), system clock, and prescaler output from timer 0
 - 2) Interrupts of five different time intervals are possible.

(9) High-speed clock counter

- Countable up to 20 MHz clock (when using 10MHz main clock)
- Real time output

(10) Serial-interface

- SIO 0: 8 bit synchronous serial interface
 - 1) LSB first / MSB first is selectable
 - 2) Internal 8 bit baud-rate generator (fastest clock period 4 / 3 Tcyc)
 - 3) Consecutive automatic data communication (1-256 bits)
- SIO 1: 8 bit asynchronous / synchronous serial interface
 - Mode 0: Synchronous 8 bit serial IO (2-wire or 3-wire, transmit clock 2–512 Tcyc)
 - Mode 1: Asynchronous serial IO (half duplex, 8 data bits, 1 stop bit, baud rate 8–2048Tcyc)
 - Mode 2: Bus mode 1 (start bit, 8 data bits, transmit clock 2–512 Tcyc)
 - Mode 3: Bus mode 2 (start detection, 8 data bits, stop detection)

(11) AD converter

- 8 bits × 15 channels

(12) Remote control receiver circuit (connected to P73 / INT3 / T0IN terminal)

- Noise rejection function (noise rejection filter's time constant can be selected from 1 / 32 / 128 Tcyc)

(13) Watchdog timer

- The watching time period is determined by an external RC.
- Watchdog timer can produce interrupt or system reset

(14) Interrupts: 20 sources, 10 vectors

- 1) Three priority (low, high and highest) multiple interrupts are supported. During interrupt handling, an equal or lower priority interrupt request is postponed.
- 2) If interrupt requests to two or more vector addresses occur at once, the higher priority interrupt takes precedence. In the case of equal priority levels, the vector with the lowest address takes precedence.

No.	Vector	Selectable Level	Interrupt signal
1	00003H	X or L	INT0
2	0000BH	X or L	INT1
3	00013H	H or L	INT2/T0L/INT4
4	0001BH	H or L	INT3/Base timer/INT5
5	00023H	H or L	T0H
6	0002BH	H or L	T1L/T1H
7	00033H	H or L	SIO0
8	0003BH	H or L	SIO1
9	00043H	H or L	ADC/MIC/T6/T7
10	0004BH	H or L	Port 0/T4/T5

- Priority Level: X>H>L

- For equal priority levels, vector with lowest address takes precedence.

(15) Subroutine stack levels: 2048 levels max. (LC877BC8A/B2A/96A/80A)

1024 levels max. (LC877B78A/72A/64A/56A)

768 levels max. (LC877B48A/40A/32A/24A)

Stack is located in RAM.

(16) Multiplication and division

- 16 bit $\times$ 8 bit (executed in 5 cycles)
- 24 bit $\times$ 16 bit (12 cycles)
- 16 bit $\div$ 8 bit (8 cycles)
- 24 bit $\div$ 16 bit (12 cycles)

(17) Oscillation circuits

- On-chip RC oscillation for system clock use.
- CF oscillation for system clock use. (Rf built in, Rd external)
- Crystal oscillation low speed system clock use. (Rf built in, Rd external)
- On-chip frequency variable RC oscillation circuit for system clock use.

(18) System clock divider

- Low power consumption operation is available
- Minimum instruction cycle time (300ns, 600ns, 1.2 μ s, 2.4 μ s, 4.8 μ s, 9.6 μ s, 19.2 μ s, 38.4 μ s, 76.8 μ s can be switched by program (when using 10MHz main clock)

(19) Standby function

- HALT mode

HALT mode is used to reduce power consumption. During the HALT mode, program execution is stopped but peripheral circuits keep operating (some parts of serial transfer operation stop.)

- 1) Oscillation circuits are not stopped automatically.
- 2) Released by the system reset or interrupts.

-HOLD mode

HOLD mode is used to reduce power consumption. Program execution and peripheral circuits are stopped.

- 1) CF, RC, X'tal and multi-frequency RC oscillation circuits stop automatically.
- 2) Released by any of the following conditions.
 1. Low level input to the reset pin
 2. Specified level input to one of INT0, INT1, INT2, INT4, INT5
 3. Port 0 interrupt

-X'tal HOLD mode

X'tal HOLD mode is used to reduce power consumption. Program execution is stopped. All peripheral circuits except the base timer are stopped.

- 1) CF, RC and multi-frequency RC oscillation circuits stop automatically.
- 2) Crystal oscillator operation is kept in its state at HOLD mode inception.
- 3) Released by any of the following conditions
 1. Low level input to the reset pin
 2. Specified level input to one of INT0, INT1, INT2, INT4, INT5
 3. Port 0 interrupt
 4. Base-timer interrupt

(20) Package


- QIP100E
- TQFP100

(21) Development tools

- Evaluation chip: LC87EV690
- Emulator: EVA62S + ECB876600D + SUB877400 + POD100QFP or POD100SQFP (Type B)
: ICE-B877300 + SUB877400 + POD100QFP or POD100SQFP (Type B)
- Flash ROM version: LC87F7BC8A


Pin Assignment

SANYO: QIP100E

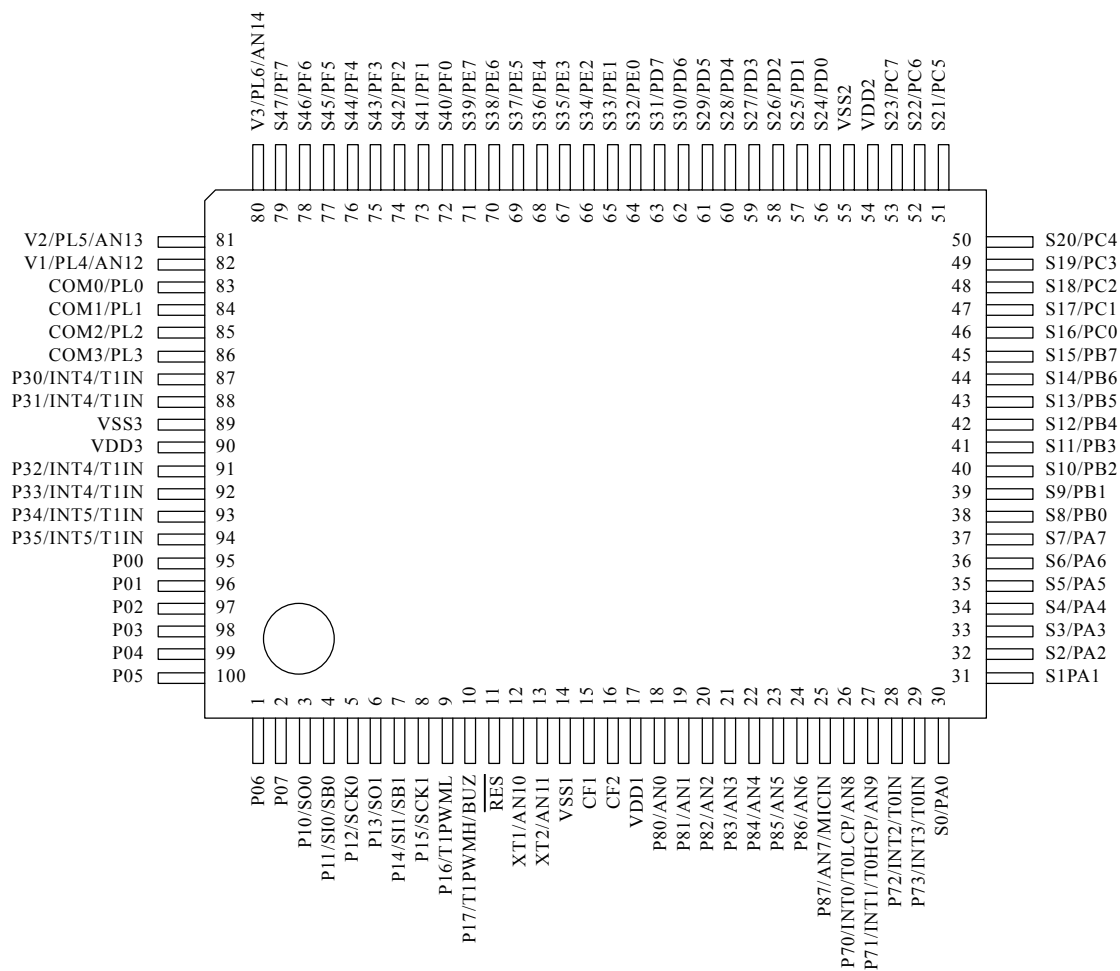


LC877BC8A/B2A/96A/80A/78A/72A/64A/56A/48A/40A/32A/24A

SANYO: TQFP100

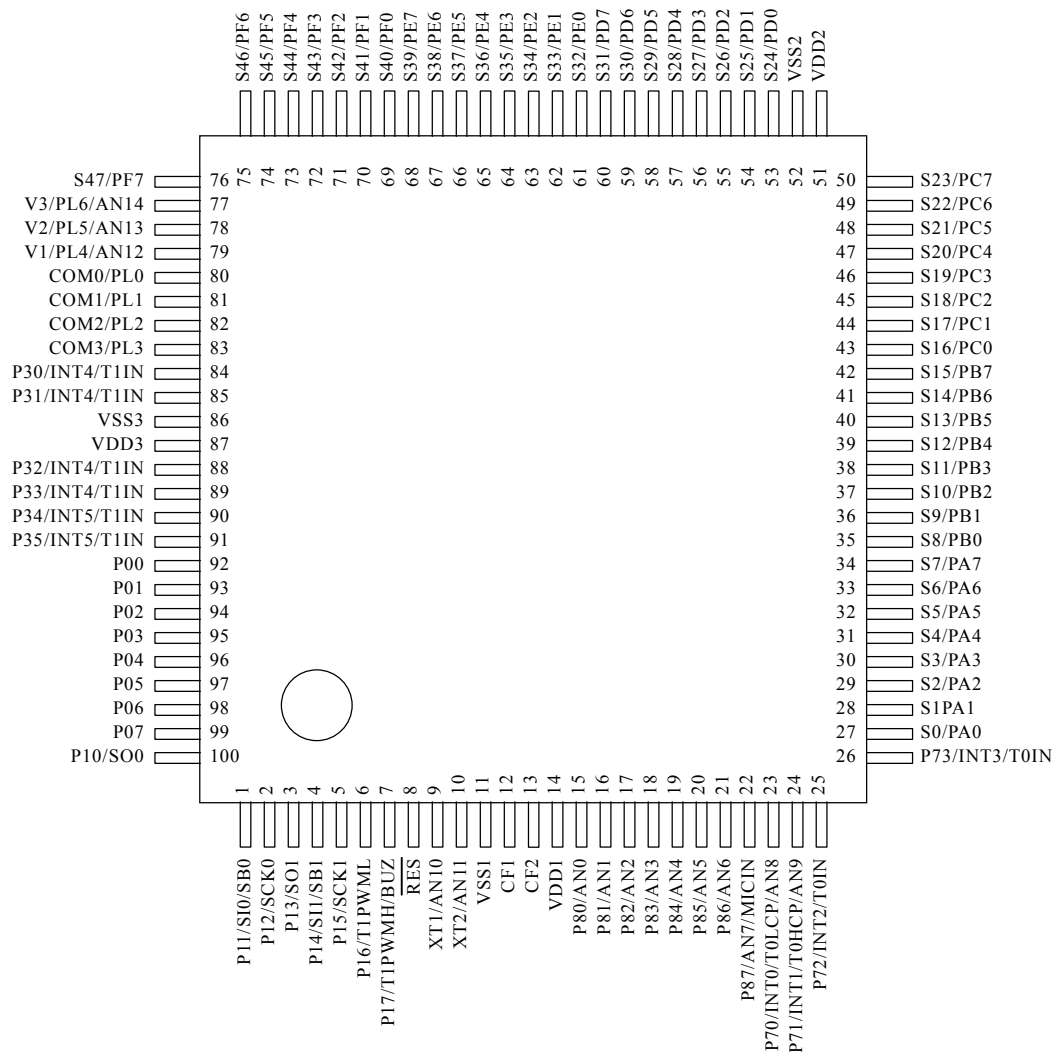

System Block Diagram

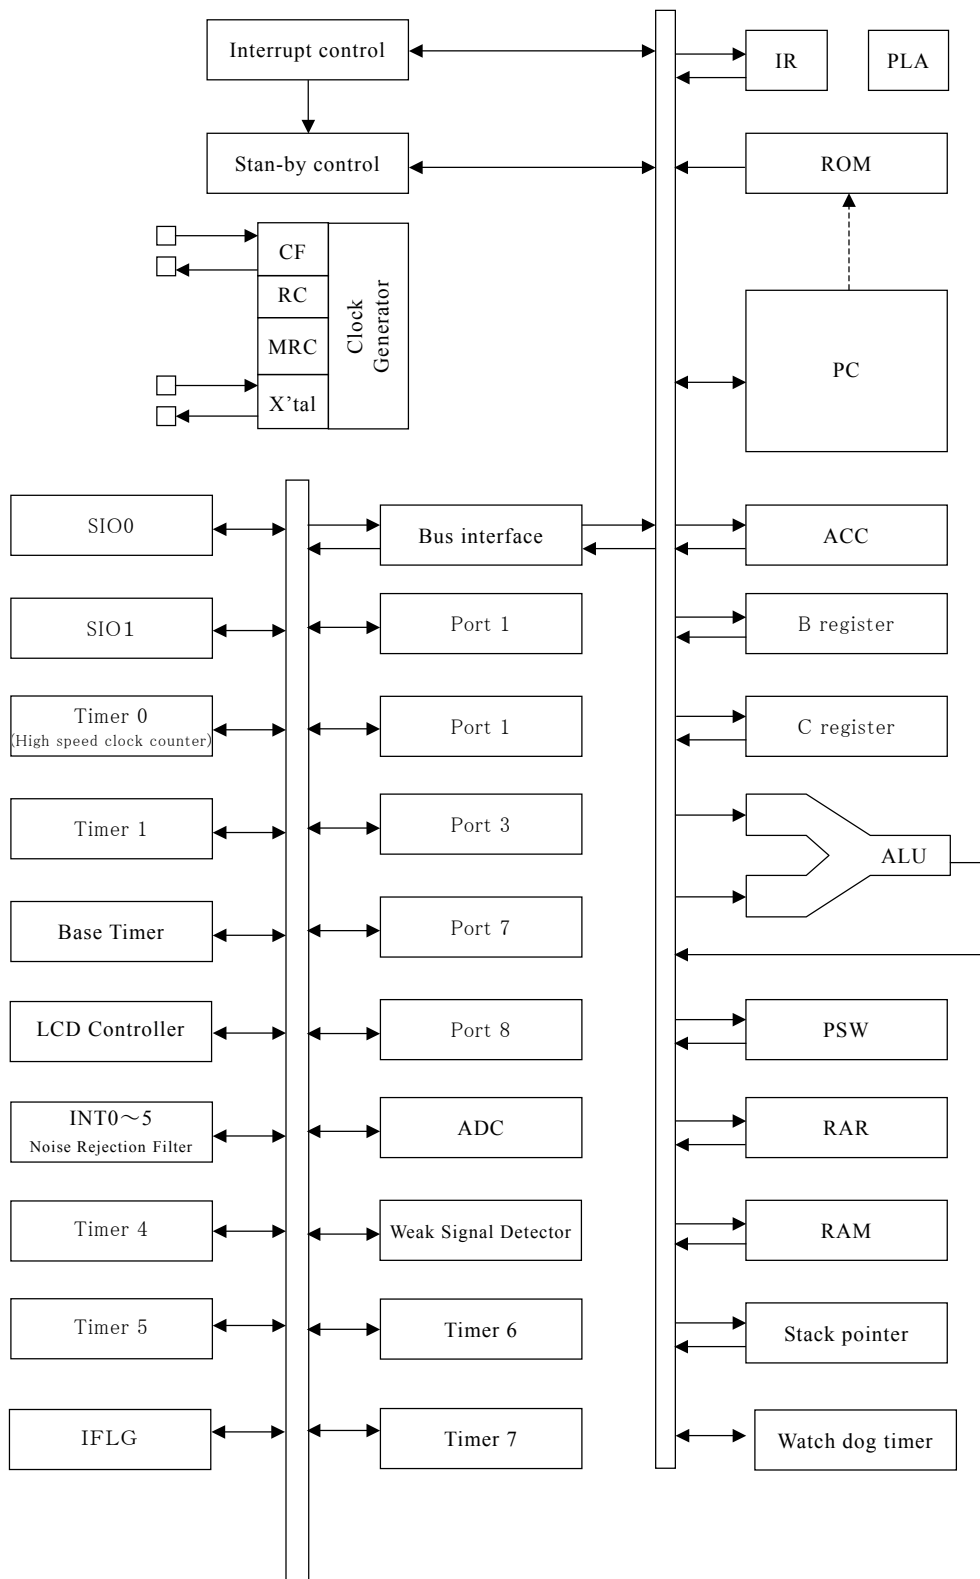

Pin Assignment

Pin name	I/O	Function	Option																														
VSS1,VSS2,VSS3	-	• Power supply (-)	No																														
VDD1,VDD2 VDD3	-	• Power supply (+)	No																														
PORT0 P00 to P07	I/O	• 8bit input/output port • Data direction programmable in nibble units • Use of pull-up resistor can be specified in nibble units • Input for HOLD release • Input for port 0 interrupt • Other functions P05: clock output (system clock / can selected from sub clock) P06: timer 6 toggle output P07: timer 7 toggle output	Yes																														
PORT1 P10 to P17	I/O	• 8bit input/output port • Data direction programmable for each bit • Use of pull-up resistor can be specified for each bit individually • Other pin functions P10 SIO0 data output P11 SIO0 data input or bus input/output P12 SIO0 clock input/output P13 SIO1 data output P14 SIO1 data input or bus input/output P15 SIO1 clock input/output P16: Timer 1 PWML output P17: Timer 1 PWMH output/Buzzer output	Yes																														
PORT3 P30 to P35	I/O	• 6bit Input/output port • Data direction can be specified for each bit • Use of pull-up resistor can be specified for each bit individually •Other functions P30~p33:INT4 input/HOLD release input/timer1 event input Timer0L capture input/Timer0H capture input P34~P35 :INT5 input/HOLD release input/timer 1 event input Timer0L capture input/Timer0H capture input • Interrupt detection selection <table><tr><td></td><td>Rising</td><td>Falling</td><td>Rising and falling</td><td>H level</td><td>L level</td></tr><tr><td>INT4</td><td>Yes</td><td>Yes</td><td>Yes</td><td>No</td><td>No</td></tr><tr><td>INT5</td><td>Yes</td><td>Yes</td><td>Yes</td><td>No</td><td>No</td></tr></table>		Rising	Falling	Rising and falling	H level	L level	INT4	Yes	Yes	Yes	No	No	INT5	Yes	Yes	Yes	No	No	Yes												
	Rising	Falling	Rising and falling	H level	L level																												
INT4	Yes	Yes	Yes	No	No																												
INT5	Yes	Yes	Yes	No	No																												
PORT7 P70 to P73	I/O	• 4bit Input/output port • Data direction can be specified for each bit • Use of pull-up resistor can be specified for each bit individually • Other functions P70: INT0 input/HOLD release input/Timer0L capture input/output for watchdog timer P71: INT1 input/HOLD release input/Timer0H capture input P72: INT2 input/HOLD release input/timer 0 event input/Timer0L capture input P73: INT3 input(noise rejection filter attached)/timer 0 event input/Timer0H capture input AD input port: AN8(P70), AN9(P71) • Interrupt detection selection <table><tr><td></td><td>Rising</td><td>Falling</td><td>Rising and falling</td><td>H level</td><td>L level</td></tr><tr><td>INT0</td><td>Yes</td><td>Yes</td><td>No</td><td>Yes</td><td>Yes</td></tr><tr><td>INT1</td><td>Yes</td><td>Yes</td><td>No</td><td>Yes</td><td>Yes</td></tr><tr><td>INT2</td><td>Yes</td><td>Yes</td><td>Yes</td><td>No</td><td>No</td></tr><tr><td>INT3</td><td>Yes</td><td>Yes</td><td>Yes</td><td>No</td><td>No</td></tr></table>		Rising	Falling	Rising and falling	H level	L level	INT0	Yes	Yes	No	Yes	Yes	INT1	Yes	Yes	No	Yes	Yes	INT2	Yes	Yes	Yes	No	No	INT3	Yes	Yes	Yes	No	No	No
	Rising	Falling	Rising and falling	H level	L level																												
INT0	Yes	Yes	No	Yes	Yes																												
INT1	Yes	Yes	No	Yes	Yes																												
INT2	Yes	Yes	Yes	No	No																												
INT3	Yes	Yes	Yes	No	No																												

Continued

LC877BC8A/B2A/96A/80A/78A/72A/64A/56A/48A/40A/32A/24A

Pin name	I/O	Function description	Option
PORT8 P80 to P87	I/O	• 8bit Input/output port • Input/output can be specified for each bit individually • Other functions: AD input port: AN0 to AN7 Small signal detector input port: MICIN(P87)	No
S0/PA0 to S7/PA7	I/O	• Segment output for LCD • Can be used as general purpose input/output port (PA)	No
S8/PB0 to S15/PB7	I/O	• Segment output for LCD • Can be used as general purpose input/output port (PB)	No
S16/PC0 to S23/PC7	I/O	• Segment output for LCD • Can be used as general purpose input/output port (PC)	No
S24 /PD0 to S31/PD7	I/O	• Segment output for LCD • Can be used as general purpose input/output port (PD)	No
S32/PE0 to S39/PE7	I/O	• Segment output for LCD • Can be used as general purpose input/output port (PE)	No
S40/PF0 to S47/PF7	I/O	• Segment output for LCD • Can be used as general purpose input/output port (PF)	No
COM0/PL0 to COM3/PL3	I/O	• Common output for LCD • Can be used as general purpose input port (PL)	No
V1/PL4 to V3/PL6	I/O	• LCD output bias power supply • Can be used as general purpose input port (PL) • Other functions: AD input ports: AN12 to AN14	No
$\overline{\text{RES}}$	I	Reset terminal	No
XT1	I	• Input for 32.768kHz crystal oscillation • Other functions: General purpose input port AD input port: AN10 • When not in use, connect to VDD1	No
XT2	I/O	• Output for 32.768kHz crystal oscillation • Other functions: General purpose input port AD input port: AN11 • When not in use, set to oscillation mode and leave open	No
CF1	I	Input terminal for ceramic oscillator	No
CF2	O	Output terminal for ceramic oscillator	No

Port Configuration

Port form and pull-up resistor options are shown in the following table.

Port status can be read even when port is set to output mode.

Terminal	Option applies to:	Options	Output Form	Pull-up resistor
P00 to P07	each bit	1	CMOS	Programmable (Note 1)
		2	Nch-open drain	None
P10 to P17	each bit	1	CMOS	Programmable
		2	Nch-open drain	Programmable
P30 to P35	each bit	1	CMOS	Programmable
		2	Nch-open drain	None
P70	—	None	Nch-open drain	Programmable
P71 to P73	—	None	CMOS	Programmable
P80 to P87	—	None	Nch-open drain	None
S0/PA0 to S47/PF7	—	None	CMOS	Programmable
COM0/PL0 to COM3/PL3	—	None	Input only	None
V1/PL4 to V3/PL6	—	None	Input only	None
XT1	—	None	Input only	None
XT2	—	None	Output for 32.768kHz crystal oscillation	None


Note 1 Attachment of Port0 programmable pull-up resistors is controllable in nibble units (P00-03, P04-07).

* Note 1: Connect as follows to reduce noise on VDD.

VSS1, VSS2 and VSS3 must be connected together and grounded.

*Note 2 : The power supply for the internal memory is VDD1 but it uses the VDD2 as the power supply for ports. When the VDD2 is not backed up, the port level does not become “H” even if the port latch is in the “H” level. Therefore, when the VDD2 is not backed up and the port latch is “H” level, the port level is unstable in the HOLD mode, and the back up time becomes shorter because the through current runs from VDD to GND in the input buffer.

If VDD2 is not backed up, output “L” by the program or pull the port to “L” by the external circuit in the HOLD mode so that the port level becomes “L” level and unnecessary current consumption is prevented.

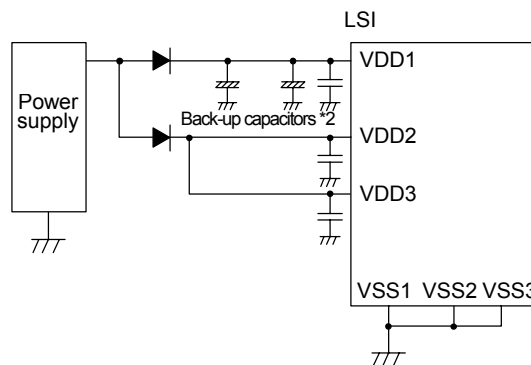

1. Absolute maximum ratings / Ta=25°C and VSS1=VSS2=VSS3=0V

Parameter		Symbol	Pins	Conditions		Limits			unit
					VDD	min.	typ.	max.	
Supply voltage		VDDMAX	VDD1,VDD2,VDD3	VDD1=VDD2=VDD3		-0.3	~	+6.5	V
Supply voltage for LCD		VLCD	V1/PL4, V2/PL5, V3/PL6	VDD1=VDD2=VDD3		-0.3		VDD	
Input voltage		VI	Port L XT1,XT2,CF1, $\overline{\text{RES}}$			-0.3	~	VDD+0.3	
Input/Output voltage		VI0(1)	• Port0, 1, 3, 7, 8 • Port A, B, C, D, E, F			-0.3	~	VDD+0.3	
High level output current	Peak output current	IOPH(1)	Port 0,1,3	• CMOS output selected • Current at each pin		-10			mA
		IOPH(2)	Port 71,72,73	Current at each pin		-3			
		IOPH(3)	Port A, B, C, D, E, F	Current at each pin		-5			
	Average output current (note 2)	IOMH(1)	Port 0,1,32,33,34,35	• CMOS output selected • Current at each pin		-7.5			
		IOMH(2)	Port 30,31	• CMOS output selected • Current at each pin		-5			
		IOMH(3)	Port 71,72,73	Current at each pin		-3			
		IOMH(4)	Port A,B,C,D,E,F	Current at each pin		-3			
	Total output current	$\Sigma\text{IOAH}(1)$	Port 0, 1, 32, 33, 34, 35	Total of all pins		-40			
		$\Sigma\text{IOAH}(2)$	Port 30, 31	Total of all pins		-10			
		$\Sigma\text{IOAH}(3)$	Port 7	Total of all pins		-5			
		$\Sigma\text{IOAH}(4)$	Port A, B, C	Total of all pins		-25			
		$\Sigma\text{IOAH}(5)$	Port D, E, F	Total of all pins		-25			
Low level output current	Peak output current	IOPL(1)	Port 0, 1, 32-35	Current at each pin				20	
		IOPL(2)	Port 30, 31	Current at each pin				30	
		IOPL(3)	Port 7,8	Current at each pin				10	
		IOPL(4)	Port A, B,C, D, E, F	Current at each pin				10	
	Average output current (note 2)	IOML(1)	Port 0,1,32-35	Current at each pin				15	
		IOML(2)	Port 30,31	Current at each pin				22.5	
		IOML(3)	Port 7,8	Current at each pin				7.5	
		IOML(4)	Port A,B,C,D,E,F	Current at each pin				7.5	
	Total output current	$\Sigma\text{IOAL}(1)$	Port 0, 1, 32, 33, 34, 35	Total of all pins				60	
		$\Sigma\text{IOAL}(2)$	Port 30, 31	Total of all pins				60	
		$\Sigma\text{IOAL}(3)$	Port 7,8	Total of all pins				20	
		$\Sigma\text{IOAL}(4)$	Port A,B,C	Total of all pins				40	
$\Sigma\text{IOAL}(5)$		Port D, E, F	Total of all pins				40		
Maximum power consumption		Pdmax	QIP100E	Ta = -20 to +70°C					mW
			TQFP100						
Operating temperature range		Topg				-30	~	+70	°C
Storage temperature range		Tstg				-55	~	+125	

(note 2) Average output current indicates average value for 100msec term.

2. Recommended operating range / Ta=-30°C to +70°C, VSS1=VSS2=VSS3=0V

Parameter	Symbol	Pins	Conditions	Limits				
				VDD[V]	min.	typ.	max.	unit
Operating supply voltage range (note3)	VDD(1)	VDD1=VDD2=VDD3	$0.245\mu s \leq t_{CYC} \leq 200\mu s$		2.8		5.5	V
	VDD(2)		$0.294\mu s \leq t_{CYC} \leq 200\mu s$		2.5		5.5	
	VDD(3)		$0.735\mu s \leq t_{CYC} \leq 200\mu s$		2.2		5.5	
Supply voltage range in Hold mode	VHD	VDD1	Keep RAM and register data in HOLD mode.		2.0		5.5	
Input high voltage	VIH(1)	• Port 0, 3, 8 • Port A,B,C,D,E,F,L	Output disable	2.2~5.5	0.3VDD+0.7		VDD	
	VIH(2)	• Port 1 • Port 71,72,73 • P70 port input/interrupt	Output disable	2.2~5.5	0.3VDD+0.7		VDD	
	VIH(3)	P87 small signal input	Output disable	2.2~5.5	0.75VDD		VDD	
	VIH(4)	Port 70 Watchdog timer	Output disable	2.2~5.5	0.9VDD		VDD	
	VIH(5)	XT1, XT2, CF1, $\overline{RES}$		2.2~5.5	0.75VDD		VDD	
Input low voltage	VIL(1)	• Port 0, 3, 8 • Port A,B,C,D,E,F,L	Output disable	4.0~5.5	VSS		0.15VDD+0.4	
	VIL(2)			2.2~4.0	VSS		0.2VDD	
	VIL(3)	• Port 1 • Port 71,72,73	Output disable	4.0~5.5	VSS		0.15VDD+0.4	
	VIL(4)	• P70 port input/interrupt		2.2~4.0	VSS		0.2VDD	
	VIL(5)	Port 87 small signal input	Output disable	2.2~5.5	VSS		0.2VDD	
	VIL(6)	Port 70 Watchdog timer	Output disable	2.2~5.5	VSS		0.8VDD-1.0	
	VIL(7)	XT1,XT2,CF1, $\overline{RES}$		2.8~5.5	VSS		0.25VDD	
Operation cycle time (note 4)	tCYC			2.8~5.5	0.245		200	μs
				2.5~5.5	0.367		200	
				2.2~5.5	1.47		200	
External system clock frequency	FEXCF(1)	CF1	• CF2 open	2.8~5.5	0.1		12	MHz
			• system clock divider :1/1	2.5~5.5	0.1		8	
			• external clock DUTY = 50 ± 5%	2.2~5.5	0.1		2	
			• CF2 open	2.8~5.5	0.2		24	
			• system clock divider :1/2	2.5~5.5	0.2		16	
				2.2~5.5	0.2		4	

(Note 3) More than 4.5V power supply, on-board writable

(Note 4) Oscillation frequency and Operation cycle time(Tcyc) rerationship:1/1divide-3/Fmcf, 1/2divide-6/Fmcf

Continued

LC877BC8A/B2A/96A/80A/78A/72A/64A/56A/48A/40A/32A/24A

Parameter	Symbol	Pins	Conditions	Limits				
				VDD[V]	min.	typ.	max.	unit
Oscillation frequency range (Note 5)	FmCF(1)	CF1, CF2	12MHz ceramic resonator oscillation Refer to figure 1	2.8~5.5		12		MHz
	FmCF(2)		8MHz ceramic resonator oscillation Refer to figure 1	2.5~5.5		8		
	FmCF(3)		4MHz ceramic resonator oscillation Refer to figure 1	2.2~5.5		4		
	FmRC		RC oscillation	2.2~5.5	0.88	1.0	1.22	
	FmMRC		Frequency variable RC oscillation source oscillation	2.2~5.5	44	18	56	
	FsX'tal	XT1, XT2	32.768kHz crystal resonator oscillation Refer to figure 2	2.2~5.5		32.768		kHz

(Note 5) The parts value of oscillation circuit is shown in table 1 and table 2.

3. Electrical characteristics / Ta=-30°C to +70°C, VSS1=VSS2=VSS3=0V

Parameter	Symbol	Pins	Conditions	Limits					unit
				VDD[V]	min.	typ.	max.		
High level input current	IIH(1)	• Port 0, 1, 3, 7, 8 • Port A, B, C, D, E, F, L	• Output disabled • Pull-up resistor OFF. • VIN=VDD (including OFF state leak current of the output Tr.)	2.2~5.5			1	μA	
	IIH(2)	$\overline{\text{RES}}$	VIN=VDD	2.2~5.5			1		
	IIH(3)	XT1,XT2	When configured as an input port. VIN=VDD	2.2~5.5			1		
	IIH(4)	CF1	VIN=VDD	2.2~5.5			15		
	IIH(5)	P87/AN7/MICIN small signal input	VIN=V _{BIS} +0.5V (V _{BIS} : Bias voltage)	4.5~5.5					
				3.0~5.5					
			2.2~5.5						
Low level input current	IIL(1)	• Port 0, 1, 3, 7, 8 • Port A, B, C, D, E, F, L	• Output disabled • Pull-up resistor OFF. • VIN=VSS (including OFF state leak current of the output Tr.)	2.2~5.5	-1				
	IIL(2)	$\overline{\text{RES}}$	VIN=VSS	2.2~5.5	-1				
	IIL(3)	XT1,XT2	When configured as an input port. VIN=VSS	2.2~5.5	-1				
	IIL(4)	CF1	VIN=VSS	2.2~5.5	-15				
	IIL(5)	P87/AN7/MICIN small signal input	VIN=V _{BIS} -0.5V (V _{BIS} : Bias voltage)	4.5~5.5	-15	-8.5	-4.2		
				3.0~5.5					
			2.2~5.5						
High level output voltage	VOH(1)	Port 0, 1, 3: CMOS output option	IOH=-1.0mA	4.5~5.5	VDD-1			V	
	VOH(2)		IOH=-0.4mA	3.0~5.5	VDD-0.4				
	VOH(3)		IOH=-0.2mA	2.2~5.5	VDD-0.4				
	VOH(4)	Port 7	IOH=-0.4mA	3.0~5.5	VDD-0.4				
	VOH(5)		IOH=-0.2mA	2.2~5.5	VDD-0.4				
	VOH(6)	Port A, B, C, D, E, F	IOH=-1.0mA	4.5~5.5	VDD-1				
	VOH(7)		IOH=-0.4mA	3.0~5.5	VDD-0.4				
	VOH(8)		IOH=-0.2mA	2.2~5.5	VDD-0.4				
Low level output voltage	VOL(1)	Port 0, 1, 3	IOL=10mA	4.5~5.5			1.5		
	VOL(2)		IOL=1.6mA	3.0~5.5			0.4		
	VOL(3)		IOL=1.0mA	2.2~5.5					
	VOL(4)	Port 30, 31	IOL=30mA	2.2~5.5			1.5		
	VOL(5)	Port 7, 8	IOL=1.6mA	2.2~5.5			0.4		
	VOL(6)		IOL=1.0mA	2.2~5.5			0.4		
	VOL(7)	Port A, B, C, D, E, F	IOL=1.6mA	2.2~5.5			1.5		
	VOL(8)		IOL=1.0mA	2.2~5.5			0.4		
LCD output voltage regulation	VODLS	S0-S47	I0=0mA VLCD, 2/3VLCD, 1/3VLCD level output Refer to figure 8	2.2~5.5	0		± 0.2		
	VODLC	COM0-COM3	I0=0mA VLCD, 2/3VLCD,1/2VLCD 1/3VLCD level output Refer to figure 8	2.2~5.5	0		± 0.2		

Continued

LC877BC8A/B2A/96A/80A/78A/72A/64A/56A/48A/40A/32A/24A

Parameter	Symbol	Pins	Conditions	VDD[V]	Limits			
					min.	typ.	max.	unit
LCD bias resistor	RLCD(1)	Resistance per one bias resistor	Refer to figure 8	2.2~5.5		60		kΩ
	RLCD(2)	• Resistance per one bias resistor • 1/2R mode	Refer to figure 8	2.2~5.5		30		
Resistance of pull-up MOS Tr.	Rpu	• Port 0, 1, 3, 7 • Port A, B, C, D, E, F	VOH=0.9VDD	4.5~5.5	15	35	80	kΩ
				2.2~5.5	25	35	150	
Hysterisis voltage	VHIS(1)	• Port 1, 7 • RES		2.2~5.5		0.1VDD		V
	VHIS(2)	Port 87 small signal input		2.2~5.5		0.1VDD		
Pin capacitance	CP	All pins	• All Other Terminals Connected To VSS. • F=1MHz • T _a =25°C	2.2~5.5		10		pF
Input sensitivity	Vsen	Port 87 small signal input		2.2~5.5	0.12VDD			Vpp

4. Serial input/output characteristics / Ta=-30°C to +70°C, VSS1=VSS2=VSS3=0V

Parameter		Symbol	Pins	Conditions	VDD[V]	Limits					
						min.	typ.	max.	unit		
Serial clock	Input clock	Cycle time	tSCK(1)	SCK0(P12)	Refer to figure 6	2.2–5.5	4/3			tCYC	
		Low level pulse width	tSCKL(1)				2/3				
			tSCKLA(1)				2/3				
		High level pulse width	tSCKH(1)				2/3				
			tSCKHA(1)				3				
		Cycle time	tSCK(2)	SCK1(P15)	Refer to figure 6	2.2–5.5	2				
		Low level pulse width	tSCKL(2)				1				
		High level pulse width	tSCKH(2)				1				
	Output clock	Cycle time	tSCK(3)	SCK0(P12)	• CMOS output • Refer to figure 6	2.2–5.5	4/3			tSCK	
		Low level pulse width	tSCKL(3)					1/2			
			tSCKLA(2)					3/4			
		High level pulse width	tSCKH(3)					1/2			
			tSCKHA(2)					2			
		Cycle time	tSCK(4)	SCK1(P15)	• CMOS output • Refer to figure 6	2.2–5.5	2				tCYC
		Low level pulse width	tSCKL(4)					1/2			tSCK
		High level pulse width	tSCKH(4)					1/2			
Serial input	Data set-up time	tsDI	SI0(P11), SI1(P14), SB0(P11), SB1(P14)	• Measured with respect to SI0CLK leading edge. • Refer to figure 6	4.5–5.5	0.03			μs		
					2.2–5.5	0.1					
	Data hold time	thDI			4.5–5.5	0.03					
					2.2–5.5	0.1					
Serial output	Output delay time	tdDO	SO0(P10), SO1(P13), SB0(P11), SB1(P14)	• When Port is open drain: Time delay from SIOCLK trailing edge to the SO data change • Refer to figure 6	4.5–5.5			1/3 tCYC +0.05			
					2.2–5.5			1/3 tCYC +0.25			

5. Pulse input conditions / Ta=-30°C to +70°C, VSS1=VSS2=VSS3=0V

Parameter	Symbol	Pins	Conditions	Limits				
				VDD[V]	min.	typ.	max.	unit
High/low level pulse width	tPIH(1) tPIL(1)	INT0(P70), INT1(P71), INT2(P72) INT4(P30~P33) INT5(P34~P35)	• Condition that interrupt is accepted • Condition that event input to timer 0 is accepted	2.2~5.5	1			tCYC
	tPIH(2) tPIL(2)	INT3(P73) (Noise rejection ratio is 1/1.)	• Condition that interrupt is accepted • Condition that event input to timer 0 is accepted	2.2~5.5	2			
	tPIH(3) tPIL(3)	INT3(P73) (Noise rejection ratio is 1/32.)	• Condition that interrupt is accepted • Condition that event input to timer 0 is accepted	2.2~5.5	64			
	tPIH(4) tPIL(4)	INT3(P73) (Noise rejection ratio is 1/128.)	• Condition that interrupt is accepted • Condition that event input to timer 0 is accepted	2.2~5.5	256			
	tPIL(5) tPIL(5)	MICIN(P87)	• Condition that signal is accepted to small signal detection counter.	2.2~5.5	1			
	tPIL(6)	RES	• Condition that reset is accepted	2.2~5.5	200			μs

6. AD converter characteristics / Ta=-30°C to +70°C, VSS1=VSS2=VSS3=0V

Parameter	Symbol	Pins	Conditions	Limits				
				VDD[V]	min.	typ.	max.	unit
Resolution	N	AN0(P80)		3.0~5.5		8		bit
Absolute precision	ET	-AN7(P87) AN8(P70)	(Note6)	3.0~5.5			±1.5	LSB
Conversion time	TCAD	AN9(P71) AN10(XT1) AN11(XT2) AN12(V1) AN13(V2) AN14(V3)	AD conversion time = 32 × tCYC (ADCR2=0) (Note 7)	4.0~5.5	15.62 (tCYC=0.488μs)		97.92 (tCYC=3.06μs)	μs
				3.0~5.5	23.52 (tCYC=0.735μs)		97.92 (tCYC=3.06μs)	
			AD conversion time = 64 × tCYC (ADCR2=1) (Note 7)	4.5~5.5	18.82 (tCYC=0.294μs)		97.92 (tCYC=1.53μs)	
				3.0~5.5	47.04 (tCYC=0.735μs)		97.92 (tCYC=1.53μs)	
				3.0~5.5	VSS		VDD	
				3.0~5.5			1	
Analog input voltage range	VAIN			3.0~5.5				V
Analog port input current	IAINH		VAIN=VDD	3.0~5.5				μA
	IAINL		VAIN=VSS	3.0~5.5	-1			

(Note 6) Absolute precision does not include quantizing error (±1/2 LSB).

(Note 7) Conversion time means time from executing AD conversion instruction to loading complete digital value to register.

7. Current consumption characteristics / Ta=-30°C to +70°C, VSS1=VSS2=VSS3=0V

Parameter	Symbol	Pins	Conditions	Limits				
				VDD[V]	min.	typ.	max	unit
Current consumption during normal operation (Note 8)	IDDOP(1)	VDD1=VDD2=VDD3	• FmCF=12MHz Ceramic resonator oscillation • FsX'tal=32.768kHz crystal oscillation • System clock: CF 12MHz oscillation • Frequency variable RC oscillation stopped • Internal RC oscillation stopped. • Divider : 1/1	4.5-5.5				mA
	IDDOP(2)			2.8-4.5				
	IDDOP(3)			4.5-5.5				
	IDDOP(4)			2.5-4.5				
	IDDOP(3)			4.5-5.5				
	IDDOP(4)			2.2-4.5				
	IDDOP(5)			4.5-5.5				
	IDDOP(6)			2.2-4.5				
	IDDOP(7)			4.5-5.5				
	IDDOP(8)			2.2-4.5				
	IDDOP(9)		• FmCF=0Hz (No oscillation) • FsX'tal=32.768kHz crystal oscillation • System clock: 1MHz with frequency variable RC oscillation • Divider :1/2	4.5-5.5				μA
	IDDOP(10)			2.2-4.5				

Continued

LC877BC8A/B2A/96A/80A/78A/72A/64A/56A/48A/40A/32A/24A

Parameter	Symbol	Pins	Conditions	VDD[V]	Limits			unit
					min.	typ.	max.	
Current consumption during HALT mode (Note 8)	IDDHALT(1)	VDD1=VDD2=VDD3	HALT mode • FmCF=12MHz Ceramic resonator oscillation • FsX'tal=32.768kHz crystal oscillation • System clock : CF 12MHz oscillation • Internal RC oscillation stopped. • Frequency variable RC oscillation stopped • Divider: 1/1	4.5–5.5				mA
	IDDHALT(2)			2.8–4.5				
	IDDHALT(3)		4.5–5.5					
	IDDHALT(4)		2.5–4.5					
	IDDHALT(3)		HALT mode • FmCF=8MHz Ceramic resonator oscillation • FsX'tal=32.768kHz crystal oscillation • System clock : CF 8MHz oscillation • Internal RC oscillation stopped. • Frequency variable RC oscillation stopped • Divider: 1/1	4.5–5.5				
	IDDHALT(4)	2.2–4.5						
	IDDHALT(3)		HALT mode • FmCF=4MHz Ceramic resonator oscillation • FsX'tal=32.768kHz crystal oscillation • System clock : CF 4MHz oscillation • Internal RC oscillation stopped. • Frequency variable RC oscillation stopped • Divider: 1/1	4.5–5.5				
	IDDHALT(4)	2.2–4.5						
	IDDHALT(5)		HALT mode • FmCF=0Hz (Oscillation stop) • FsX'tal=32.768kHz crystal oscillation • System clock : RC oscillation • Frequency variable RC oscillation stopped • Divider: 1/2	4.5–5.5				μA
	IDDHALT(6)	2.2–4.5						
	IDDHALT(7)		HALT mode •FmCF=0Hz (No oscillation) •FsX'tal=32.768kHz crystal oscillation •Internal RC oscillation stopped. •System clock: 1MHz with frequency variable RC oscillation •Divider :1/2	4.5–5.5				
	IDDHALT(8)	2.2–4.5						
IDDHALT(9)		HALT mode • FmCF=0Hz (Oscillation stop) • FsX'tal=32.768kHz crystal oscillation • System clock : 32.768kHz • Internal RC oscillation stopped. • Frequency variable RC oscillation stopped • Divider: 1/2	4.5–5.5					
IDDHALT(10)	2.2–4.5							

Continued

LC877BC8A/B2A/96A/80A/78A/72A/64A/56A/48A/40A/32A/24A

Parameter	Symbol	Pins	Conditions	Limits				
				VDD[V]	min.	typ.	max.	unit
Current consumption during HOLD mode	IDDHOLD(1)	VDD1	HOLD mode • CF1=VDD or open (when using external clock)	4.5–5.5				μA
	IDDHOLD(2)			2.2–4.5				
Current consumption during Date/time clock HOLD mode	IDDHOLD(3)	VDD1	Date/time clock HOLD mode • CF1=VDD or open (when using external clock) • FmX'tal=32.768kHz crystal oscillation	4.5–5.5				
	IDDHOLD(4)			2.2–4.5				

(Note 8) The currents through the output transistors and the pull-up MOS transistors are ignored.

Main system clock oscillation circuit characteristics

The characteristics in the table below is based on the following conditions:

1. Use the standard evaluation board SANYO has provided.
2. Use the peripheral parts with indicated value externally.
3. The peripheral parts value is a recommended value of oscillator manufacturer

Table 1. Main system clock oscillation circuit characteristics using ceramic resonator

Frequency	Manufacturer	Oscillator	Circuit parameters			Operating supply voltage range [V]	Oscillation stabilizing time		Notes
			C1 [pF]	C2 [pF]	Rd1 [Ω]		typ [mS]	max [mS]	

The oscillation stabilizing time is a period until the oscillation becomes stable after VDD becomes higher than minimum operating voltage. (Refer to Figure4)

Subsystem clock oscillation circuit characteristics

The characteristics in the table below is based on the following conditions:

1. Use the standard evaluation board SANYO has provided.
2. Use the peripheral parts with indicated value externally.
3. The peripheral parts value is a recommended value of oscillator manufacturer

Table 2. Subsystem clock oscillation circuit characteristics using crystal oscillator

Frequency	Manufacturer	Oscillator	Circuit parameters				Operating supply voltage range [V]	Oscillation stabilizing time		Notes
			C3 [pF]	C4 [pF]	Rf [Ω]	Rd2 [Ω]		typ [S]	max [S]	

The oscillation stabilizing time is a period until the oscillation becomes stable after executing the instruction which starts the sub-clock oscillation or after releasing the HOLD mode. (Refer to Figure4)

(Notes) • Since the circuit pattern affects the oscillation frequency, place the oscillation-related parts as close to the oscillation pins as possible with the shortest possible pattern length.

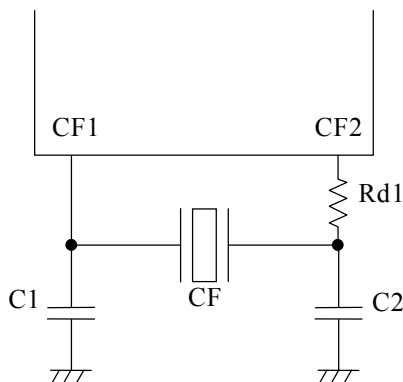


Figure 1 Ceramic oscillation circuit

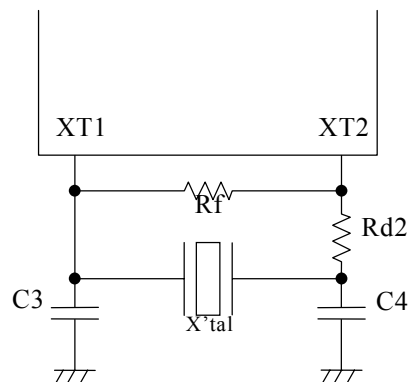


Figure 2 Crystal oscillation circuit




Figure 3 AC timing measurement point


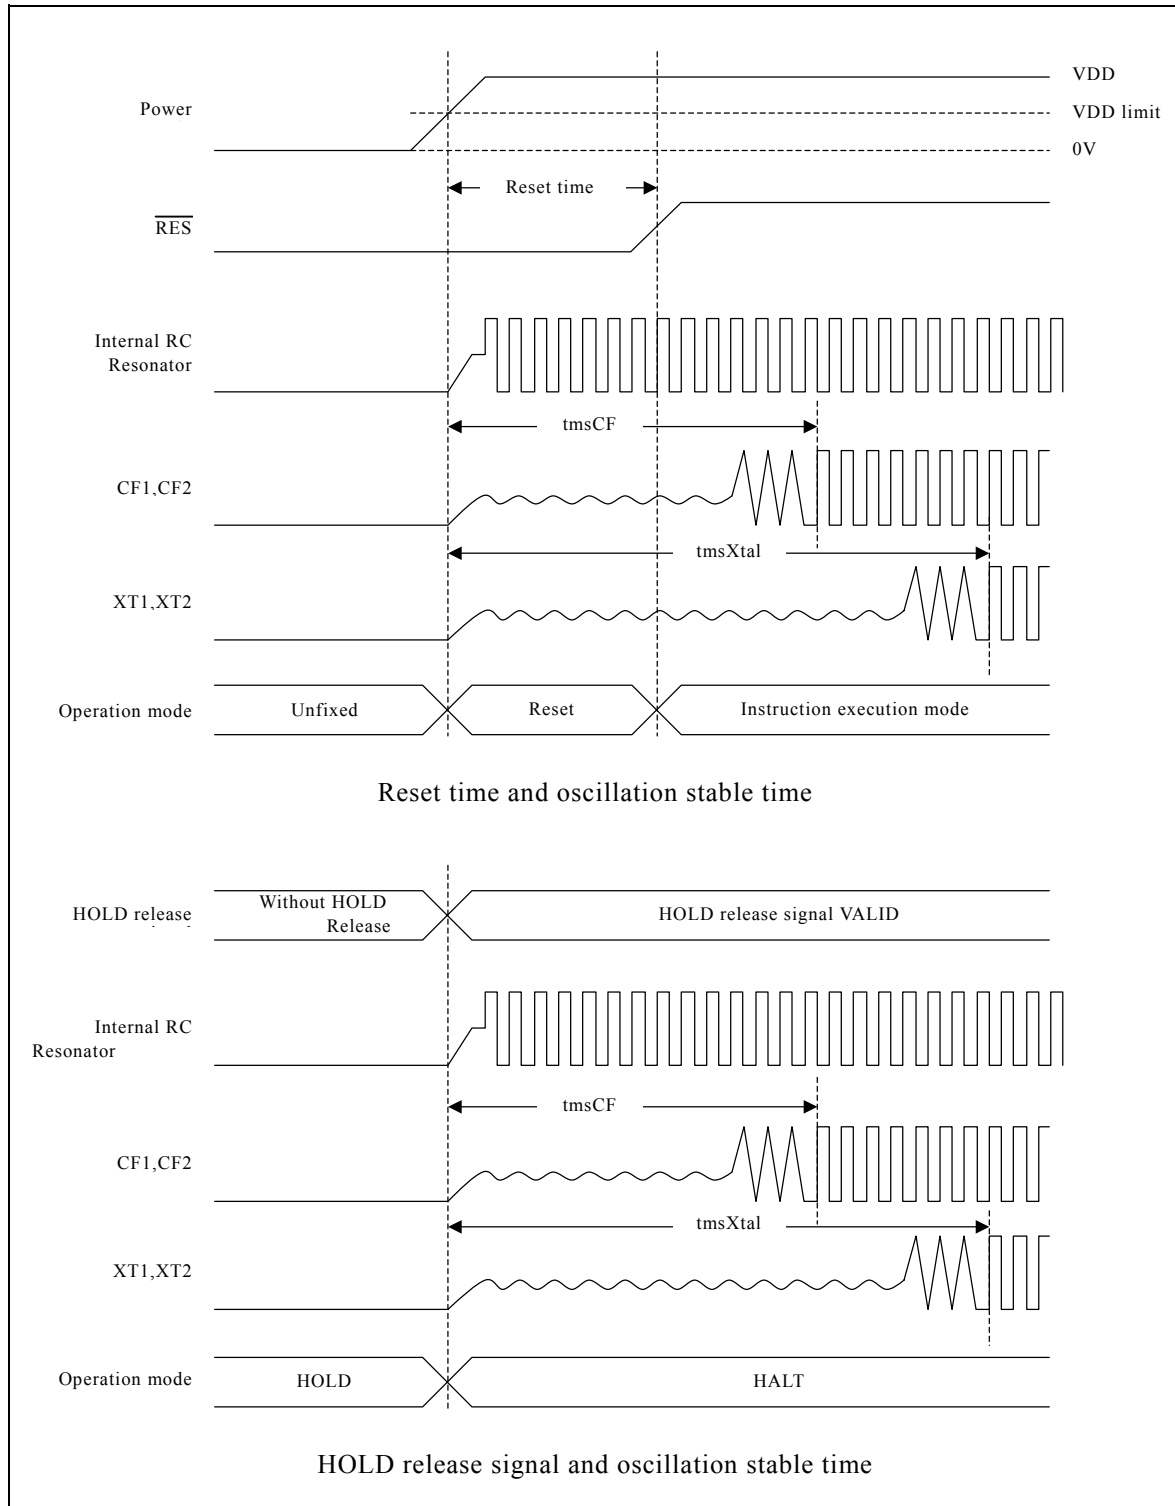


Figure 4 Oscillation stabilizing time

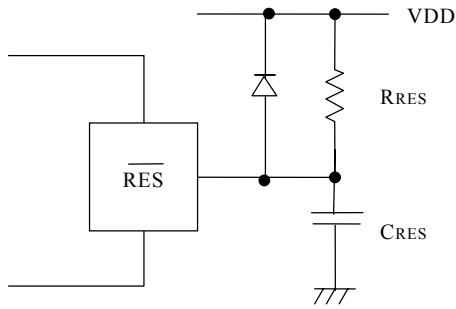

(Note)

Select C_{RES} and R_{RES} value to assure that at least $200\mu s$ reset time is generated after the VDD becomes higher than the minimum operating voltage.

Figure 5 Reset circuit

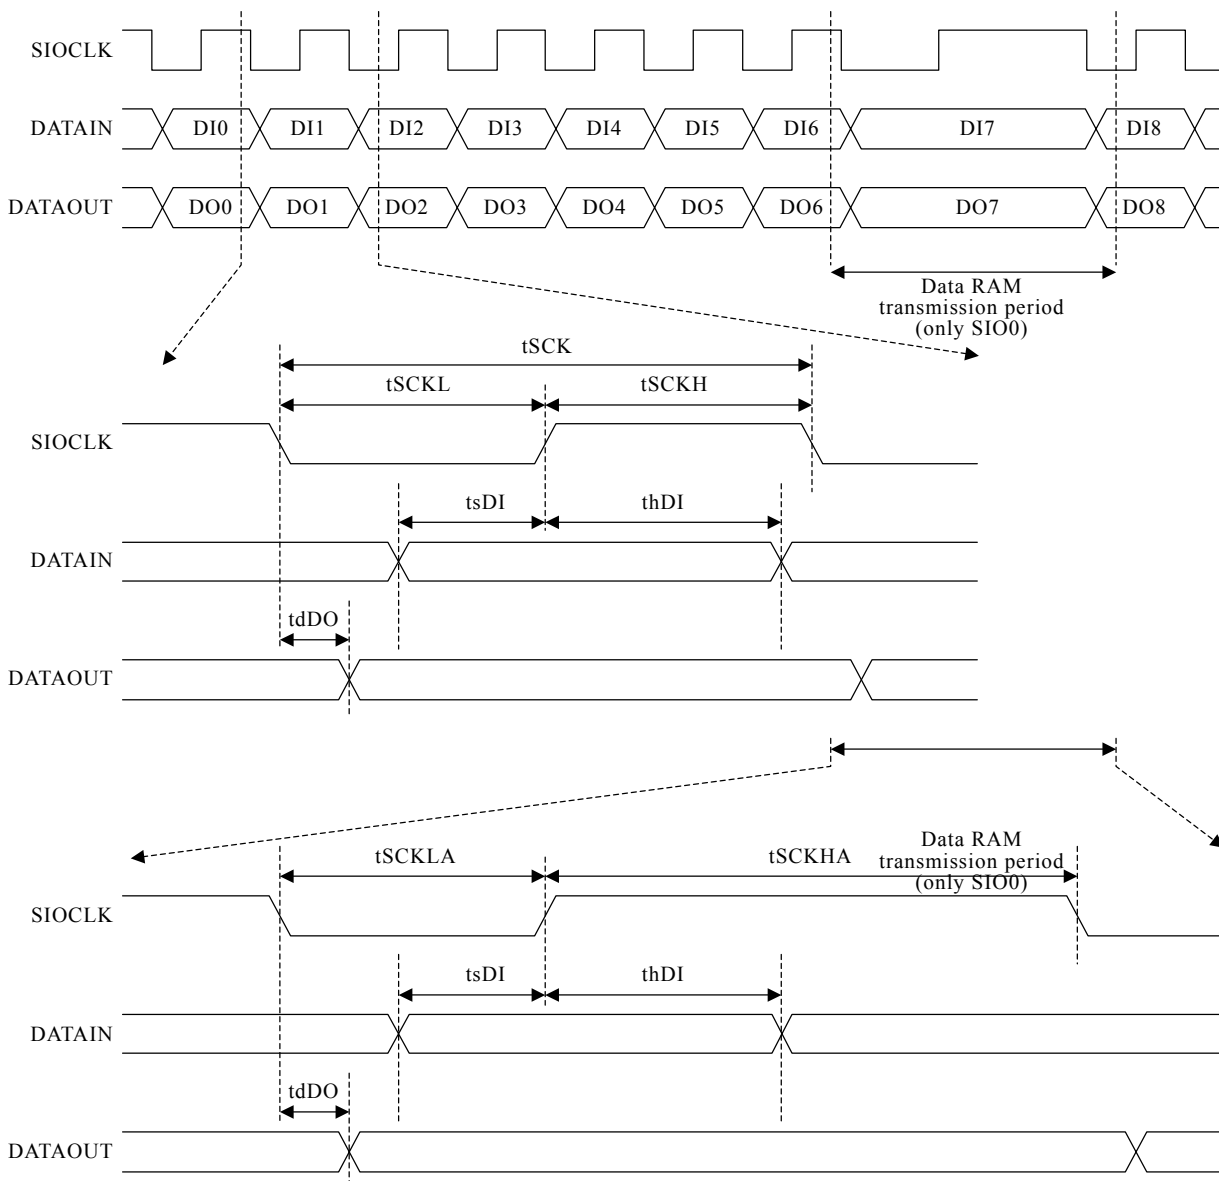


Figure 6 Serial input / output wave form

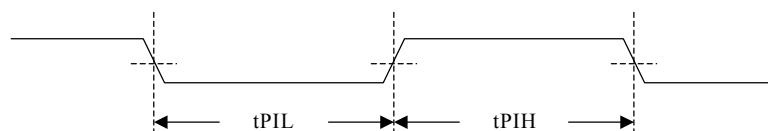


Figure 7 Pulse input timing

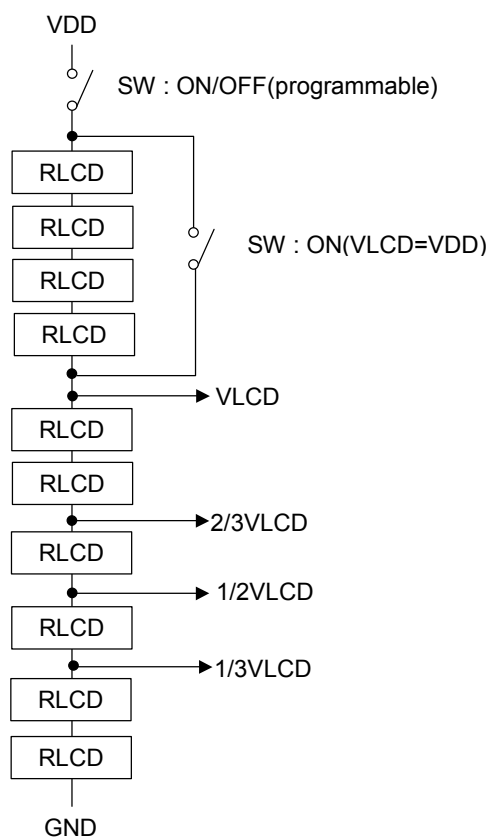


Figure 8 LCD bias resistor

Note:

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products(including technical data,services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of Nothing,Nothing. Specifications and information herein are subject to change without notice