Power Transistor (-60V, -3A) 2SB1184 / 2SB1243


● Features

- 1) Low VcE(sat). VcE(sat) = -0.5V (Typ.)(Ic/IB = -2A/-0.2A)
- 2) Complements the 2SD1760 / 2SD1864.

Structure

Epitaxial planar type PNP silicon transistor

●External dimensions (Unit : mm)

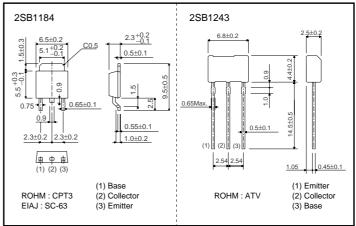

● Absolute maximum ratings (Ta=25°C)

Paramete	ər	Symbol	ol Limits U		
Collector-base voltage		Vсво	-60	V	
Collector-emitter voltage		Vceo	-50	V	
Emitter-base vo	ltage	VEBO	-5	V	
Collector curren	t	Ic	-3	A (DC)	
Collector power dissipation	2SB1184		1	W	
		Pc	15	W (Tc=25°C)	
	2SB1243		1	W *1	
Junction temperature		Tj	150	°C	
Storage temperature		Tstg	-55 to 150	°C	

^{*1} Printed circuit board, 1.7mm thick, collector copper plating 100mm² or larger.

●Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions	
Collector-base breakdown voltage	ВУсво	-60	_	_	V	Ic= -50μA	
Collector-emitter breakdown voltage	BVceo	-50	_	_	V	Ic= -1mA	
Emitter-base breakdown voltage	ВVево	-5	_	_	V	Iε= -50μA	
Collector cutoff current	Ісво	_	_	-1	μΑ	VcB= -40V	
Emitter cutoff current	ІЕВО	_	_	-1	μΑ	V _{EB} = -4V	
Collector-emitter saturation voltage	VCE(sat)	_	_	-1	V	Ic/I _B = -2A/ -0.2A	*
DC current transfer ratio	hfe	82	_	390	_	Vce= -3V, Ic= -0.5A	*
Transition frequency	f⊤	_	70	_	MHz	Vce= -5V, Ie=0.5A, f=30MHz	
Output capacitance	Cob	_	50	_	pF	Vcb= -10V, Ie=0A, f=1MHz	

^{*} Measured using pulse current.

●Packaging specifications and hfe

		Package	Taping	
		Code	TL	TV2
Туре	hfE	Basic ordering unit (pieces)	2500	2500
2SB1184	PQR		0	_
2SB1243	PQR		_	0

hFE values are classified as follows:

Item	Р	Q	R
hfe	82 to 180	120 to 270	180 to 390

•Electrical characteristic curves




Fig.1 Grounded emitter propagation characteristics




Fig.2 Grounded emitter output characteristics (I)




Fig.3 Grounded emitter output characteristics (II)

Rev.A




Fig.4 DC current gain vs. collector current (I)




Fig.5 DC current gain vs. collector current (II)




Fig.6 Collector-emitter saturation voltage vs.collector current




Fig.7 Collector-emitter saturation voltage vs. collector current

Base-emitter saturation voltage vs. collector current




Fig.8 Gain bandwidth product vs. emitter current




Fig.9 Collector output capacitance vs. collector base voltage




Fig.10 Safe operation area (2SB1184)




Fig.11 Safe operation area (2SB1243)

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any
 means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard
 use and operation. Please pay careful attention to the peripheral conditions when designing circuits
 and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or
 otherwise dispose of the same, no express or implied right or license to practice or commercially
 exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.

