

Using the TPS2492/3EVM Hot Swap Controller

User's Guide



Literature Number: SLUU425A
May 2010—Revised March 2011

Using the TPS2492/3 Hot Swap Controller

This User's Guide describes the setup and operation of the TPS2492/3 System Test Board.

1 Introduction

This User's Guide describes the features of the TPS2492/3EVM. The TPS2492/3 schematic, layout and List of Materials are provided.

2 Description

The EVM is a 9-V to 80-V module using the TPS2492/3 hot swap controller with external MOSFET. At power on, the output is power limited to control inrush current and protect the MOSFET. On an over-current condition, the controller interrupts power to the load at high speed and signals load status. Operating current, MOSFET power dissipation, and fault timer settings are hardware programmable.

2.1 Applications

- Server
 - Plug-In Circuit Boards
 - RAID / Disk Drive
- Telecom
 - ATCA
 - Micro-ATCA
- General Hot Plug

2.2 Features

- 9-V to 80-V Operation
- Controlled Inrush Current
- Fast Circuit Breaker Control
- Hardware Programmable
 - MOSFET Power Limit
 - Fault Current
 - Fault Timer to Avoid Nuisance Tripping
 - TPS2492 Latch Off or TPS2493 Retry
- LED Status Display
 - FAULT
 - POWER GOOD
- Slide Switch Controlling the ENABLE Signal.
- 25-A Nominal Operation with Thermal Characteristics for Proper MOSFET Operation
- On-Board transorb for Over-Voltage Input Protection
- Common Output Diode Prevents Negative Spiking if the Load is Removed While Powered On.
- IMON Output Signal Voltage Representing Load Current.
- Test Points for Circuit Operation Monitoring

2.3 Equipment supplied

- EVM-491
- The datasheet and this users guide is available on the TPS2492/3 product page at www.ti.com.

2.4 Equipment Required

- Power Supply is able to output twice the steady state current for pulse duration. For the 12-V factory set EVM, steady state power is 25-A nominal.
- Oscilloscope
- Current Probe

2.5 EVM Documentation

The manufacturing and engineering documentation for the EVM is shown in sections 3 to 6. The EVM is orderable in 12-V or 48-V configurations, latched off or retry on fault.

2.6 EVM Configuration

Components may be changed for operation at voltage or current not configured as supplied. The List of Materials, , shows the parts to change to configure the EVM to 48 V at 5-A operation. Configure the circuit board for other operating current to 50 A maximum. Changing the sense resistor, the power limit programming components, and possibly the number of MOSFETs as required.

Use the List of Material as a guide when changing module configurations. The TPS2492/93 datasheet has design example describing how to select parts based on specifications. A calculator tool is also available from the product page at www.ti.com.

2.7 Other EVM Options

There are EVM options not described in the other TPS2492/3 documentation. These are described in this section. They involve the not populated components of the EVM.

2.7.1 Trip Point Trim Resistors

R15 and R16 are added to fine tune the sense current when the required current cannot be achieved with standard sense resistors. These resistors form a divider across the sense main sense resistor to increase the trip point from the main sense setting. These are low power rated components. They should be kept below 100 Ω to minimize the set point error.

For example, to select 30 A nominal,

- Bracket the setpoint. A 0.001- Ω sense resistor selects 50 A and a 0.002 Ω selects 25 A.
- Use the larger value sense resistor. In this case 0.002 Ω .
- At 30 A, the voltage across the 0.002- Ω sense resistor is 60 mV.
- R15 and R16 make a standard voltage divider. Use the formula $(60 \text{ mV} \times R16) / (R15 + R16) = 50 \text{ mV}$.
- Let $R16 = 33 \Omega$, solve for R15. In this case, $R15 = 6.6 \Omega$, use standard value $R = 6.55 \Omega$.

2.7.2 dv/dt Control

When the VPROG calculates below the 0.4 V minimum, one option is to use dv/dt control to start the uncharged output capacitor. In this way, the power limiting is not used on power up. R11 and C4, (see schematic [Figure 2](#) for component reference), are normally not populated and control the power turn on with a dv/dt soft start. Recommendation for R11 is at 1 kΩ. C4 can be calculated by knowing the output capacitor, selecting the charge current and calculating the start time. Calculation is done by the capacitor V I relationship equation, $I = C \, dv/dt$.

- Assume a 12-V system with a 1000-μF output capacitor. Select the charge at 0.5 A. Use the formula to solve for time. $T = CV/I$, $T = 24 \, \text{ms}$.
- Since the output FET is a gate follower, the time calculated applies to the gate rise time. Use the same formula to solve for C_t but this time the current is the gate sourcing current in the datasheet specifications section, 22 μA nominal.
- The voltage, again from the datasheet is the output VGS, 14 V.
- $C_t = IT / V = 22 \, \mu\text{A} \times 24 \, \text{ms} / 14 = 37.7 \, \text{nF}$, use standard value 39 nF.

2.7.3 Disable Power Limit

It's not usually done, but sometimes because of high voltage with high current the power limit may be disabled on over load. TPS2492 can be configured to run in current limit only. To disable power limit remove R3 and install 47 kΩ in R2, (see schematic [Figure 2](#) for component reference). With power limit disabled, dv/dt start outlined in the previous section would be used for power on.

3 EVM Block Diagram TPS2492EVM-491

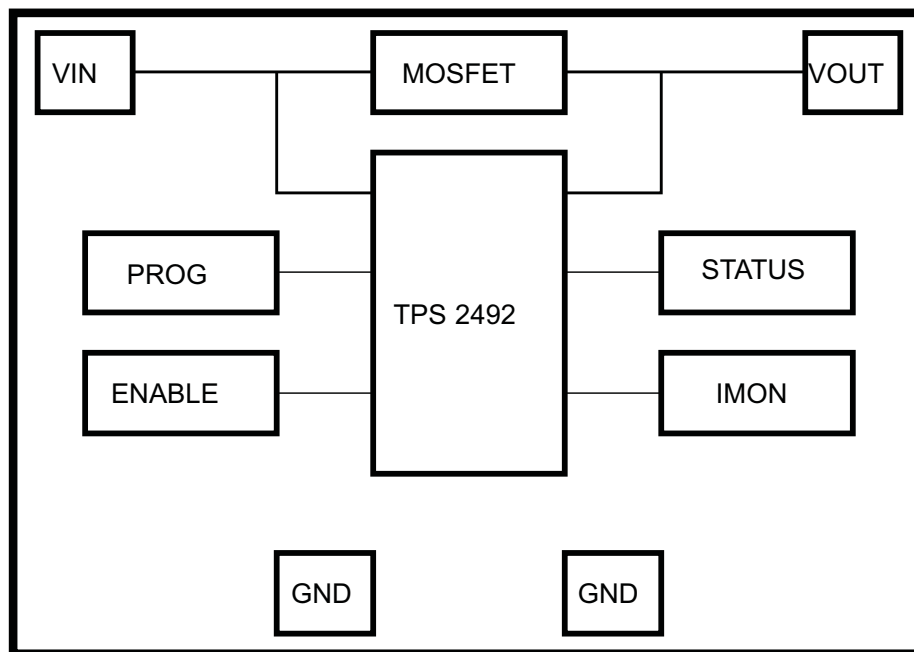


Figure 1. EVM Block Diagram

4 Schematic

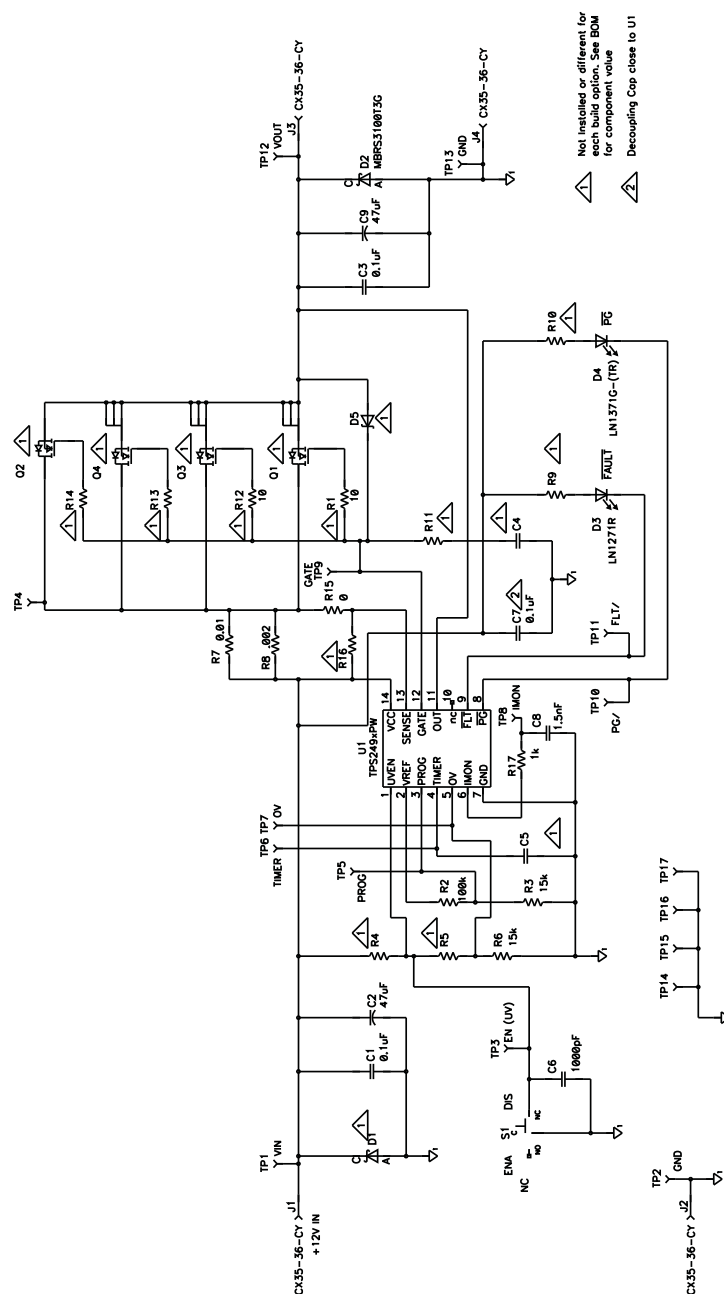


Figure 2. HPA270A Schematic, TPS2420EVM

5 Test Points

Table 1. TPS249xEVM Test Points

TEST POINT	NAME	DESCRIPTION
TP1	VIN	Input voltage power supply
TP2	GND	Ground
TP3	EN-UV	Enable signal, high true (and under-voltage detection)
TP4	None	
TP5	PROG	Program input
TP6	CT	Fault timer capacitor
TP7	OV	Over-voltage detection
TP8	IMON	Output current monitor
TP9	GATE	Gate output
TP10	$\overline{\text{PG}}$	Power good signal, low true
TP11	$\overline{\text{FLT}}$	Fault signal, low true
TP12	VOUT	Output voltage
TP13	GND	Scope ground test point
TP14	GND	Scope ground test point
TP15	GND	Scope ground test point
TP16	GND	Scope ground test point
TP17	GND	Scope ground test point
TP18	SENSE	Low-side sense resistor

6 Connectors

Table 2. Connectors

CONNECTOR	DESCRIPTION
J1	Main power input, VIN
J3	Main power ground, GND
J2	Load
J4	Load ground, GND

7 Jumpers

None.

8 Switches

8.1 Enable Switch, S1

The Enable slide switch turns on the hot plug controller to ramp the output voltage .When the switch is off, the output is off.

9 Indicators

- Green LED indicator for Power Good (PG)
- Red LED indicator for FAULT (FLT)

10 Board Outline

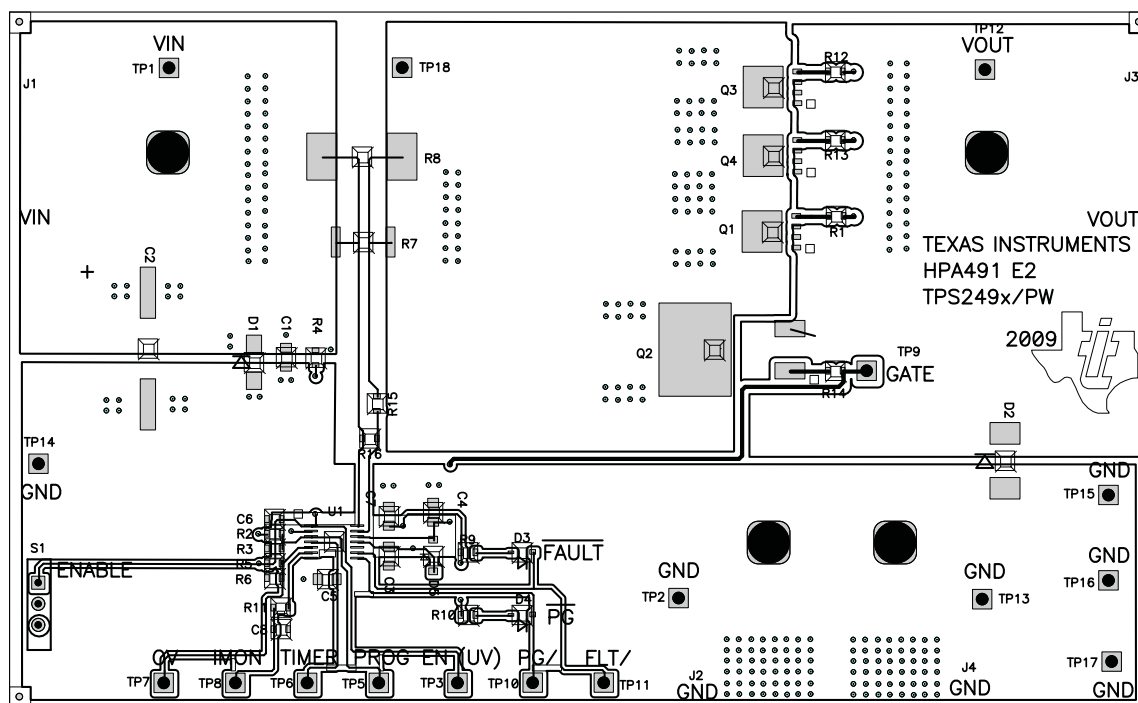


Figure 3. Board Outline (top view)

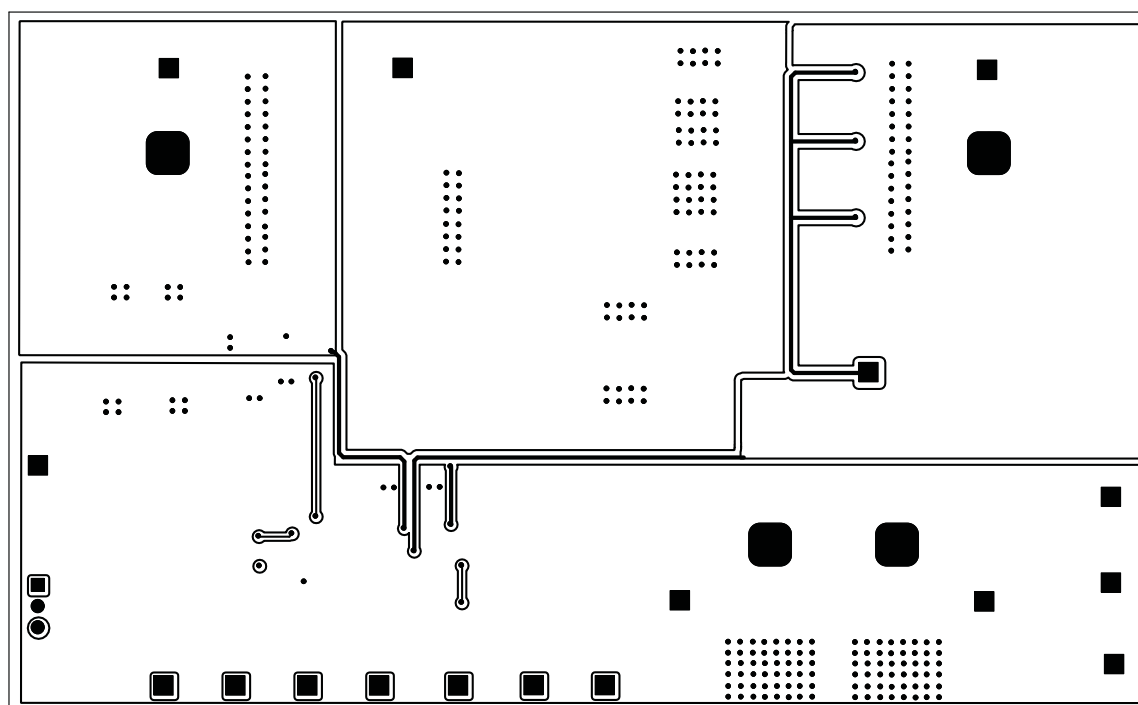


Figure 4. Board Outline (bottom view)

11 List of Materials

11.1 12-V TPS2492EVM-001/TPS2493EVM-002

This is the List of Material for the 12-V TPS2492EVM-001/TPS2493EVM-002.

Table 3. 12-V TPS2492EVM-001/TPS2493EVM-002 ⁽¹⁾⁽²⁾⁽³⁾⁽⁴⁾

-001	-002	REF DES	DESCRIPTION	PART NUMBER	MFR
3	3	C1, C3, C7	Capacitor, ceramic, 100 V, X7R, 10%, 0.1 μ F, 0805	Std	Std
1	1	C5	Capacitor, ceramic, 25 V, X7R, 10%, 3.3 nF, 0805	Std	Std
2	2	C2, C9	Capacitor, aluminum, 100 VDC, $\pm$ 20%, 47 μ F, 0.670 inch x 0.750 inch	EEVFK2A470Q	Panasonic
1	1	C6	Capacitor, ceramic, 25 V, X7R, 10%, 1000 pF, 0603	Std	Std
1	1	C8	Capacitor, ceramic, 25 V, X7R, 10%, 1.5 nF, 0603	Std	Std
1	1	D1	Diode, SMT TVS 400W, 1 A, 15 V, SMA	SMAJ15A-13F	Diodes
1	1	D2	Diode, Schottky 3 A, 100 V, SMC	MBRS3100T3G	On Semi
1	1	D3	Diode, LED, red, 20 mA, 0.9 mcd, 0.068 inch x 0.049 inch	LN1271R	Panasonic
1	1	D4	Diode, LED, green, 20 mA, 0.9 mcd, 0.068 inch x 0.049 inch	LN1371G-(TR)	Panasonic
4	4	J1, J2, J3, J4	Lug, copper, 35 A, 0.380 inch x 1.020 inch	CX35-36-CY	Panduit
2	2	Q1, Q3	MOSFET, N-channel, 25 V, 37 A, 1.3 m Ω , QFN 5X6 mm	CSD16401Q5A-R	Ciclon
2	2	R1, R12	Resistor, chip, 1/16 W, 1%, 10 Ω , 0603	Std	Std
1	1	R15	Resistor, chip, 1/16 W, 1%, 0 Ω , 0603	Std	Std
1	1	R17	Resistor, chip, 1/16 W, 1%, 1 k Ω , 0603	Std	Std
1	1	R2	Resistor, chip, 1/16 W, 1%, 100 k Ω , 0603	Std	Std
2	2	R3, R6	Resistor, chip, 1/16 W, 1%, 15 k Ω , 0603	Std	Std
1	1	R4	Resistor, chip, 1/16 W, 1%, 143 k Ω , 0603	Std	Std
1	1	R5	Resistor, chip, 1/16 W, 1%, 7.32 k Ω , 0603	Std	Std
1	1	R8	Resistor, power metal strip, 3 W, $\pm$ 1%, 0.002 Ω , 4527	WSR-32L000FEA	Vishay Dale
2	2	R9, R10	Resistor, chip, 1/16 W, 1%, 5.1 k Ω , 0603	Std	Std

⁽¹⁾ These assemblies are ESD sensitive, ESD precautions shall be observed.

⁽²⁾ These assemblies must be clean and free from flux and all contaminants. Use of no clean flux is not acceptable.

⁽³⁾ These assemblies must comply with workmanship standards IPC-A-610 Class 2.

⁽⁴⁾ Ref designators marked with an asterisk (**) cannot be substituted. All other components can be substituted with equivalent MFG's components.

Table 3. 12-V TPS2492EVM-001/TPS2493EVM-002⁽¹⁾⁽²⁾⁽³⁾⁽⁴⁾ (continued)

-001	-002	REF DES	DESCRIPTION	PART NUMBER	MFR
1	1	S1	Switch, SPDT, slide, PC mount, 500 mA, 0.400 inch x 0.100 inch	09.03201.02	EAO
17		TP1, TP2, TP3, TP4, TP5, TP6, TP7, TP8, TP9, TP10, TP11, TP12, TP13, TP14, TP15, TP16, TP17	Test point, white, thru hole, 5012, 0.125 inch x 0.125 inch	5012	Keystone
1	0	U1	Positive High-Voltage Power-Limiting Hotswap Controller, TSSOP-14	TPS2492PW	TI
0	1	U1	Positive High-Voltage Power-Limiting Hotswap Controller, TSSOP-14	TPS2493PW	TI
4	4		Screw, panhead	#10-32	0.500 inch
4	4		Washer, flat	#10	
4	4		Washer, split	M5	
4	4		Nut, hex	#10-32	
1	1	--	PCB, 5.4 inch x 3.3 inch x 0.06 inch	HPA491	Any
4	4	--	Bumpons, cylindrical, black	SJ5514-0	3M

12 48-V TPS2492EVM-003/TPS2493EVM-004

This is the List of Material for the 48-V TPS2492EVM-003/TPS2493EVM-004.

Table 4. 48-V TPS2492EVM-003/TPS2493EVM-004⁽¹⁾⁽²⁾⁽³⁾⁽⁴⁾

-003	-004	REF DES	DESCRIPTION	PART NUMBER	MFR
3	3	C1, C3, C7	Capacitor, ceramic, 100 V, X7R, 10%, 0.1 μ F, 0805	Std	Std
1	1	C5	Capacitor, ceramic, 25 V, X7R, 10%, 0.1 μ F, 0805	Std	Std
2	2	C2, C9	Capacitor, aluminum, 100 VDC, $\pm$ 20%, 47 μ F, 0.670 inch x 0.750 inch	EEVFK2A470Q	Panasonic
1	1	C6	Capacitor, ceramic, 25 V, X7R, 10%, 1000 pF, 0603	Std	Std
1	1	C8	Capacitor, ceramic, 25 V, X7R, 10%, 1.5 nF, 0603	Std	Std
1	1	D1	Diode, SMT TVS 400 W, 1 A, 70 V, SMA	SMAJ70A-13F	Diodes
1	1	D2	Diode, Schottky 3 A, 100 V, SMC	MBRS3100T3G	On Semi
1	1	D3	Diode, LED, red, 20 mA, 0.9 mcd, 0.068 inch x 0.049 inch	LN1271R	Panasonic
1	1	D4	Diode, LED, green, 20 mA, 0.9 mcd, 0.068 inch x 0.049 inch	LN1371G-(TR)	Panasonic
4	4	J1, J2, J3, J4	Lug, copper, 35 A, 0.380 inch x 1.020 inch	CX35-36-CY	Panduit
1	1	Q2	Transistor, NFET, 100 V, 33 A, 44 m Ω , D2PAK	IRF540NS-PBF	IR
1	1	R14	Resistor, chip, 1/16 W, 1%, 10 Ω , 0603	Std	Std
1	1	R15	Resistor, chip, 1/16 W, 1%, 0 Ω , 0603	Std	Std
1	1	R17	Resistor, chip, 1/16 W, 1%, 1 k Ω , 0603	Std	Std
1	1	R2	Resistor, chip, 1/16 W, 1%, 100 k Ω , 0603	Std	Std
2	2	R3, R6	Resistor, chip, 1/16 W, 1%, 15 k Ω , 0603	Std	Std
1	1	R4	Resistor, chip, 1/16 W, 1%, 604 k Ω , 0603	Std	Std
1	1	R5	Resistor, chip, 1/16 W, 1%, 4.42 k Ω , 0603	Std	Std
1	1	R7	Resistor, metal strip, 0.01 Ω , 2 W, 1%, 0.01, 2512	LRC-LRF2512LF-01-R010-F	IRC
2	2	R9, R10	Resistor, chip, 1/16 W, 1%, 20 k Ω , 0603	Std	Std

⁽¹⁾ These assemblies are ESD sensitive, ESD precautions shall be observed.

⁽²⁾ These assemblies must be clean and free from flux and all contaminants. Use of no clean flux is not acceptable.

⁽³⁾ These assemblies must comply with workmanship standards IPC-A-610 Class 2.

⁽⁴⁾ Ref designators marked with an asterisk ("**") cannot be substituted. All other components can be substituted with equivalent MFG's components.

Table 4. 48-V TPS2492EVM-003/TPS2493EVM-004⁽¹⁾⁽²⁾⁽³⁾⁽⁴⁾ (continued)

-003	-004	REF DES	DESCRIPTION	PART NUMBER	MFR
1	1	S1	Switch, SPDT, slide, PC mount, 500 mA, 0.400 inch x 0.100 inch	09.03201.02	EAO
		TP1, TP2, TP3, TP4, TP5, TP6, TP7, TP8, TP9, TP10, TP11, TP12, TP13, TP14, TP15, TP16, TP17	Test point, white, thru hole, 5012, 0.125 inch x 0.125 inch	5012	Keystone
1	0	U1	Positive High-Voltage Power-Limiting Hotswap Controller, TSSOP-14	TPS2492PW	TI
0	1	U1	Positive High-Voltage Power-Limiting Hotswap Controller, TSSOP-14	TPS2493PW	TI
4	4		Screw, panhead	#10-32	0.500 inch
4	4		Washer, flat	#10	
4	4		Washer, split	M5	
4	4		Nut, hex	#10-32	
1	1	--	PCB, 5.4 inch x 3.3 inch x 0.06 inch	HPA491	Any
4	4	--	Bumpons, cylindrical, black	SJ5514-0	3M

Evaluation Board/Kit Important Notice

Texas Instruments (TI) provides the enclosed product(s) under the following conditions:

This evaluation board/kit is intended for use for **ENGINEERING DEVELOPMENT, DEMONSTRATION, OR EVALUATION PURPOSES ONLY** and is not considered by TI to be a finished end-product fit for general consumer use. Persons handling the product(s) must have electronics training and observe good engineering practice standards. As such, the goods being provided are not intended to be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including product safety and environmental measures typically found in end products that incorporate such semiconductor components or circuit boards. This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and therefore may not meet the technical requirements of these directives or other related directives.

Should this evaluation board/kit not meet the specifications indicated in the User's Guide, the board/kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user indemnifies TI from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge.

EXCEPT TO THE EXTENT OF THE INDEMNITY SET FORTH ABOVE, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

TI currently deals with a variety of customers for products, and therefore our arrangement with the user **is not exclusive**.

TI assumes **no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein.**

Please read the User's Guide and, specifically, the Warnings and Restrictions notice in the User's Guide prior to handling the product. This notice contains important safety information about temperatures and voltages. For additional information on TI's environmental and/or safety programs, please contact the TI application engineer or visit www.ti.com/esh.

No license is granted under any patent right or other intellectual property right of TI covering or relating to any machine, process, or combination in which such TI products or services might be or are used.

FCC Warning

This evaluation board/kit is intended for use for **ENGINEERING DEVELOPMENT, DEMONSTRATION, OR EVALUATION PURPOSES ONLY** and is not considered by TI to be a finished end-product fit for general consumer use. It generates, uses, and can radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment in other environments may cause interference with radio communications, in which case the user at his own expense will be required to take whatever measures may be required to correct this interference.

EVM Warnings and Restrictions

It is important to operate this EVM within the input voltage range of 9 V to 80 V and the output voltage range of 9 V to 80 V .

Exceeding the specified input range may cause unexpected operation and/or irreversible damage to the EVM. If there are questions concerning the input range, please contact a TI field representative prior to connecting the input power.

Applying loads outside of the specified output range may result in unintended operation and/or possible permanent damage to the EVM. Please consult the EVM User's Guide prior to connecting any load to the EVM output. If there is uncertainty as to the load specification, please contact a TI field representative.

During normal operation, some circuit components may have case temperatures greater than 50° C. The EVM is designed to operate properly with certain components above 65° C as long as the input and output ranges are maintained. These components include but are not limited to linear regulators, switching transistors, pass transistors, and current sense resistors. These types of devices can be identified using the EVM schematic located in the EVM User's Guide. When placing measurement probes near these devices during operation, please be aware that these devices may be very warm to the touch.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
RF/IF and ZigBee® Solutions	www.ti.com/lprf

Applications

Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Transportation and Automotive	www.ti.com/automotive
Video and Imaging	www.ti.com/video
Wireless	www.ti.com/wireless-apps

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated