- 1.5 Amp Positive Step-Down Integrated Switching Regulator
- Very Small Footprint
- High Efficiency > 85%
- Self-Contained Inductor
- Internal Short-Circuit Protection
- Over-Temperature Protection
- Fast Transient Response
- Wide Input Range

The PT78ST100 is a series of wide-input range, 3-terminal regulators.

These ISRs have a maximum output current of 1.5 Amps and an output voltage that is laser trimmed to a variety of industry standard voltages.

These 78 series regulators have excellent line and load regulation with internal short- circuit and over-temperature protection, and are offered in a variety of standard output voltages. These ISRs are very flexible and may be used in a wide variety of applications.

Package Suffix

H = Horizontal

Mount

V = Vertical Mount


S = Surface Mount

Pin-Out Information

Pin	Function
1	$ m V_{in}$
2	GND
3	V_{out}

Vout

COM



Pkg Style 500

Ordering Information

PT78ST1 XX Y

Output Voltage

33 = 3.3 Volts

36 = 3.6 Volts **05** = 5.0 Volts

51 = 5.0 Volts **51** = 5.1 Volts **53** = 5.25 Volts

06 = 6.0 Volts **65** = 6.5 Volts

07 = 7.0 Volts **08** = 8.0 Volts

09 = 9.0 Volts **10** = 10.0 Volts

12 = 12.0 Volts

14 = 13.9 Volts **15** = 15.0 Volts

Specifications

C1

COM

Standard Application

PT78ST100

C1 = Optional 1μF ceramic C2 = Required 100μF electrolytic

C2

Characteristics (T _a = 25°C unless noted)	Symbols	Conditions	PT78ST100 SERIES			
			Min	Тур	Max	Units
Output Current	I_{o}	Over V _{in} range	0.1*	_	1.5	A
Short Circuit Current	I_{sc}	$V_{in} = V_{in} \min$	_	3.5	_	Apk
Input Voltage Range	$ m V_{in}$	$0.1 \le I_o \le 1.5A$ $V_o = 3.3V$ $V_o = 5V$ $V_o = 12V$	9 9 16	Ξ	26 38 38	V V V
Output Voltage Tolerance	$\Delta { m V_o}$	Over V_{in} range, I_o =1.5A T_a = 0°C to +60°C	_	±1.0	±2.0	%V _o
Line Regulation	Reg _{line}	Over V _{in} range	_	±0.2	±0.4	%Vo
Load Regulation	Reg_{load}	$0.1 \le I_o \le 1.5A$	_	±0.1	±0.2	%Vo
V _o Ripple/Noise	V_n	V_{in} = 9V, I_{o} = 1.5A V_{o} = 5V V_{in} = 16V, I_{o} = 1.5A V_{o} = 12V	_	65 90	_	${}^{mV_{pp}}_{mV_{pp}}$
Transient Response (with 100μF output cap)	t _{tr}	50% load change V _o over/undershoot	Ξ	100 5	=	μSec %Vo
Efficiency	η	$\begin{array}{lll} V_{\rm in}\!=\!10V,I_{\rm o}\!=\!1A & V_{\rm o}\!=\!3.3V \\ V_{\rm in}\!=\!10V,I_{\rm o}\!=\!1A & V_{\rm o}\!=\!5V \\ V_{\rm in}\!=\!17V,I_{\rm o}\!=\!1A & V_{\rm o}\!=\!12V \end{array}$	Ξ	80 85 90	=	% % %
Switching Frequency	f_{o}	Over V _{in} range, I _o =1.5A	600	650	700	kHz
Absolute Maximum Operating Temperature Range	T_a	_	-40	_	+85	°C
Recommended Operating Temperature Range	T_a	Free Air Convection, (40-60LFM) At V _{in} = 24V, I _o =1.0A	-40	_	+80**	°C
Thermal Resistance	θ_{ja}	Free Air Convection, (40-60LFM)	_	45	_	°C/W
Storage Temperature	T_s	_	-40		+125	°C
Mechanical Shock	_	Per Mil-STD-883D, Method 2002.3	_	500	_	G's
Mechanical Vibration	_	Per Mil-STD-883D, Method 2007.2, 20-2000 Hz, soldered in a PC board	_	5	-	G's
Weight	_	_	_	6.5	_	grams

*ISR will operate down to no load with reduced specifications.


**See Thermal Derating chart.

Note: The PT78ST100 Series requires a 100µF electrolytic or tantalum output capacitor for proper operation in all applications.



PT78ST100 Series

1.5 Amp Positive Step-Down **Integrated Switching Regulator**

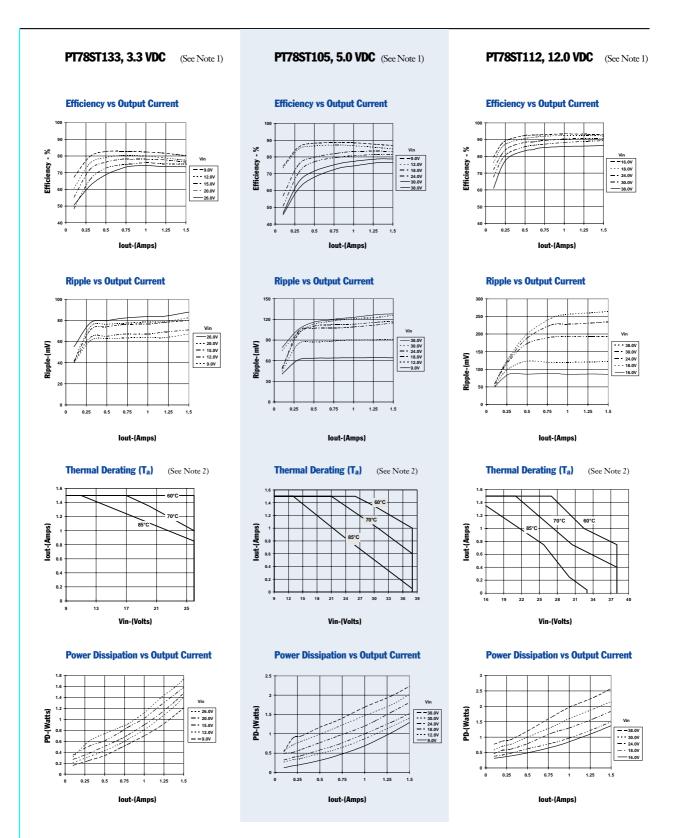

Note 1: All data listed in the above graphs, except for derating data, has been developed from actual products tested at 25°C. This data is considered typical data for the ISR. Note 2: Thermal derating graphs are developed in free air convection cooling of 40-60 LFM. (See Thermal Application Notes.)



IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.

Copyright © 2000, Texas Instruments Incorporated

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.

Copyright © 2000, Texas Instruments Incorporated