


Xinger®

Ultra Low Profile 0805 Balun 50Ω to 200Ω Balanced

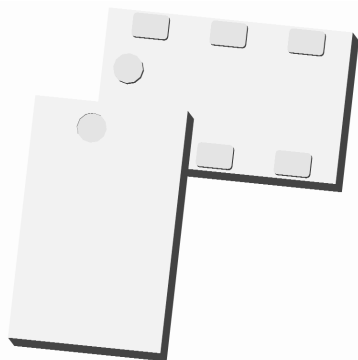

Description


The BD0826J50200AHF is a low profile sub-miniature balanced to unbalanced transformer designed for differential inputs and output locations on next generation wireless chipsets in an easy to use surface mount package covering the GSM, DCS, PCS, UMTS, CDMA and 802.11 b+g+n frequencies. The BD0826J50200AHF is ideal for high volume manufacturing and is higher performance than traditional ceramic, and lumped element baluns. The BD0826J50200AHF has an unbalanced port impedance of 50Ω and a 200Ω balanced port impedance. This transformation enables single ended signals to be applied to differential ports on modern integrated chipsets. The output ports have equal amplitude (-3dB) with 180 degree phase differential. The BD0826J50200AHF is available on tape and reel for pick and place high volume manufacturing.

Detailed Electrical Specifications: Specifications subject to change without notice.






Features:	Parameter	ROOM (25°C)			Unit
		Min.	Typ.	Max	
<ul style="list-style-type: none"> 800 – 2600 MHz 0.7mm Height Profile 50 Ohm to 2 x 100 Ohm GSM/DCS/PCS/UMTS/CDMA Low Insertion Loss Input to Output DC Isolation Surface Mountable Tape & Reel Non-conductive Surface RoHS Compliant Halogen Free 	Frequency	800		2600	MHz
	Unbalanced Port Impedance		50		Ω
	Balanced Port Impedance		200		Ω
	Return Loss	8.5	13		dB
	Insertion Loss*		1.2	1.5	dB
	Amplitude Balance		0.4	1.3	dB
	Phase Balance		3	7	Degrees
	CMRR		30		dB
	Power Handling			2	Watts
	Operating Temperature	-55		+85	°C

* Insertion Loss stated at room temperature (Insertion Loss is approximately 0.1 dB higher at +85 °C)






Outline Drawing

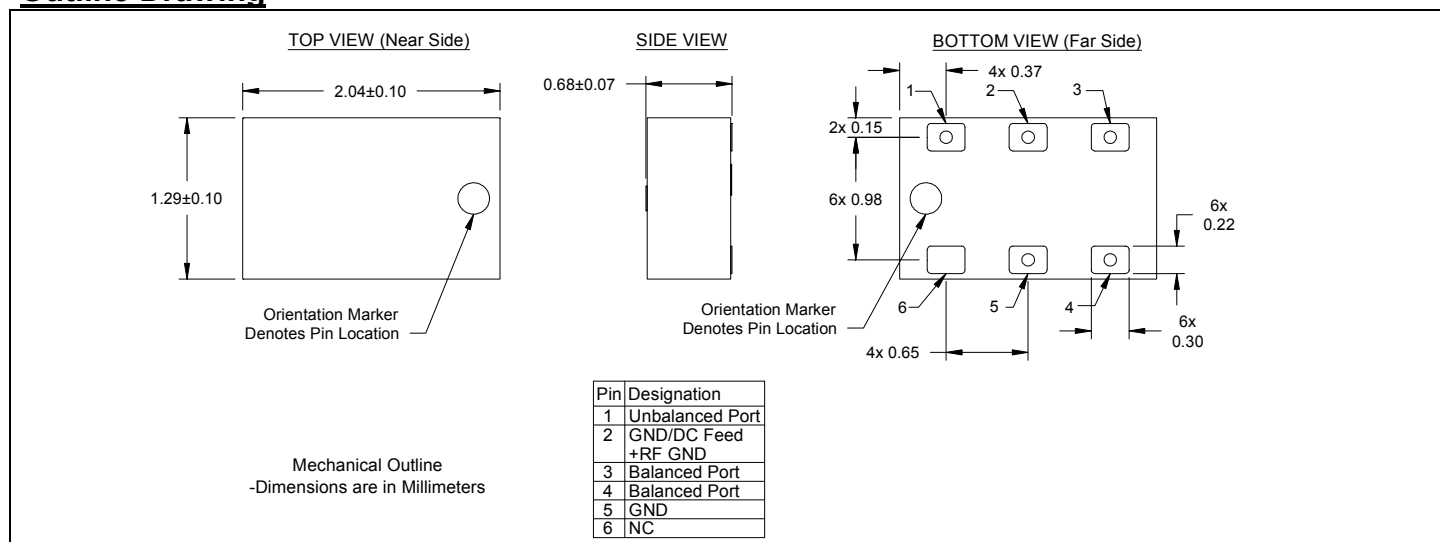

Typical Broadband Performance: 500 MHz. to 8.0 GHz.

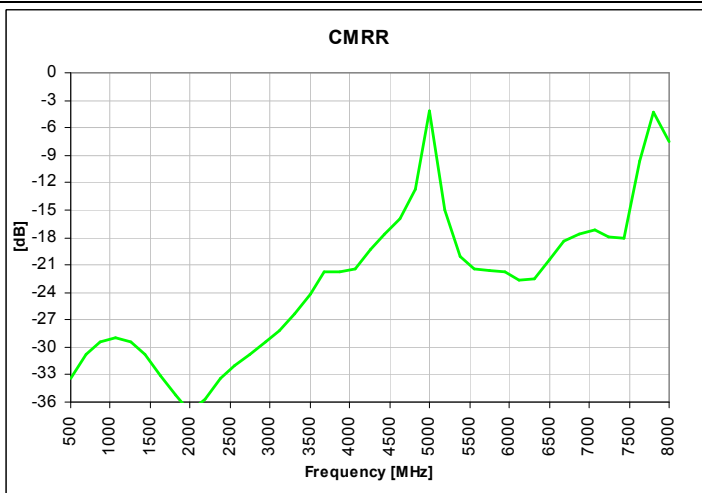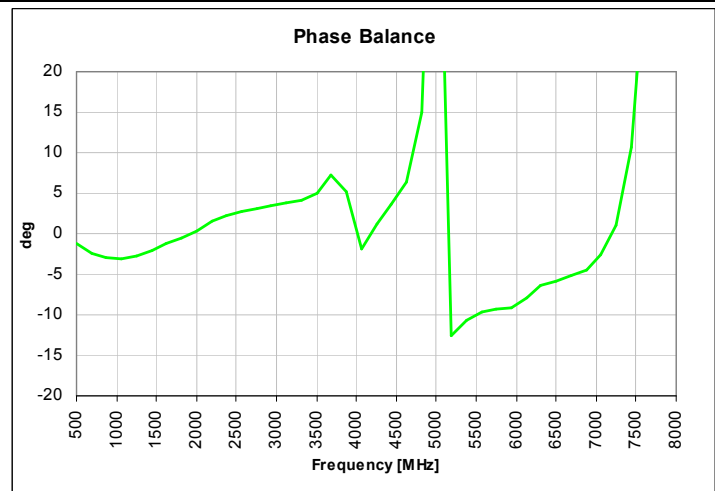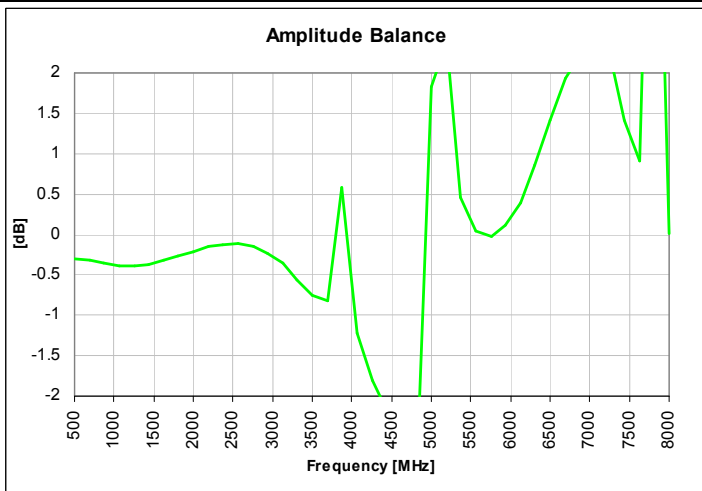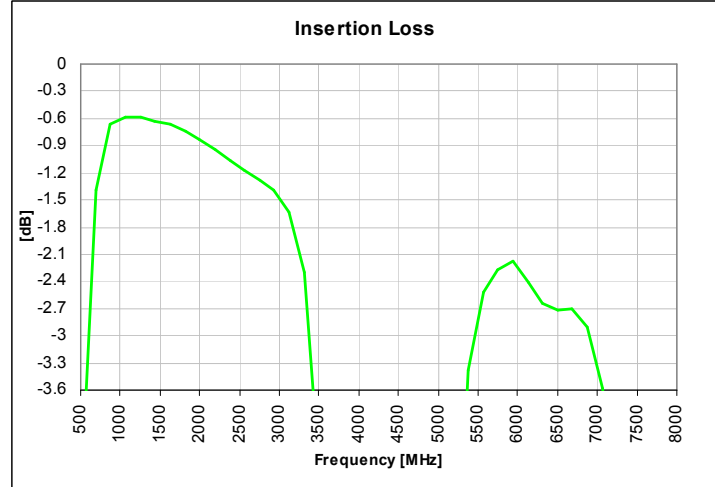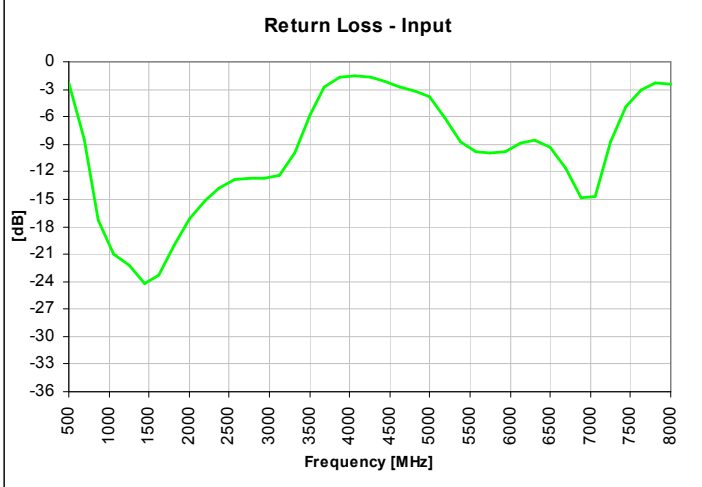

Typical Performance: 700 MHz. to 2700 MHz.

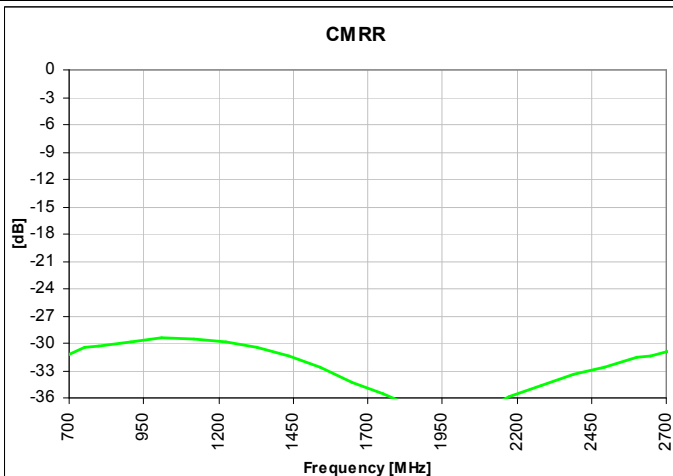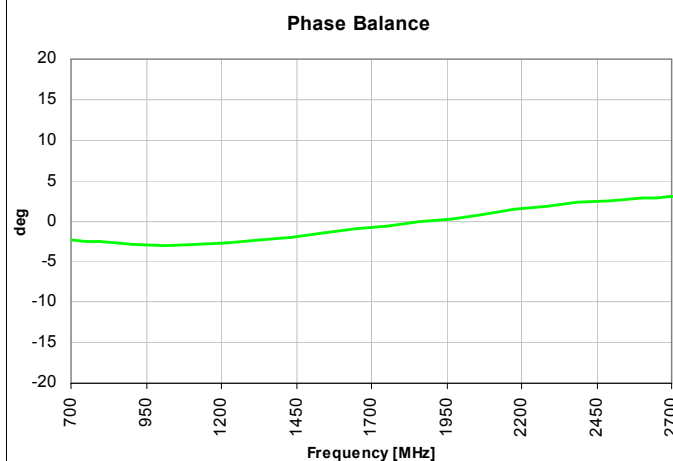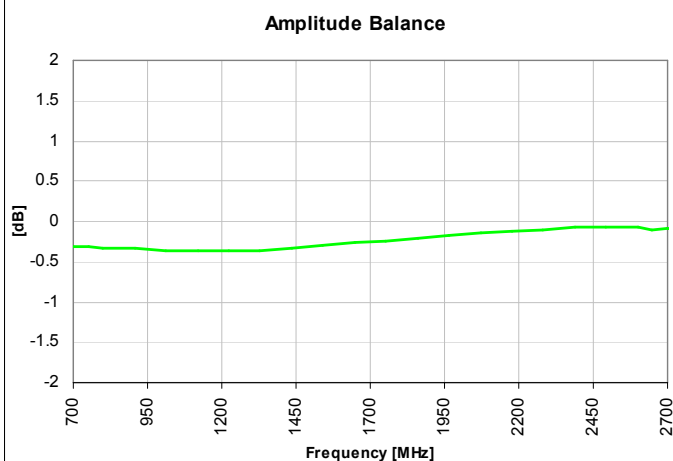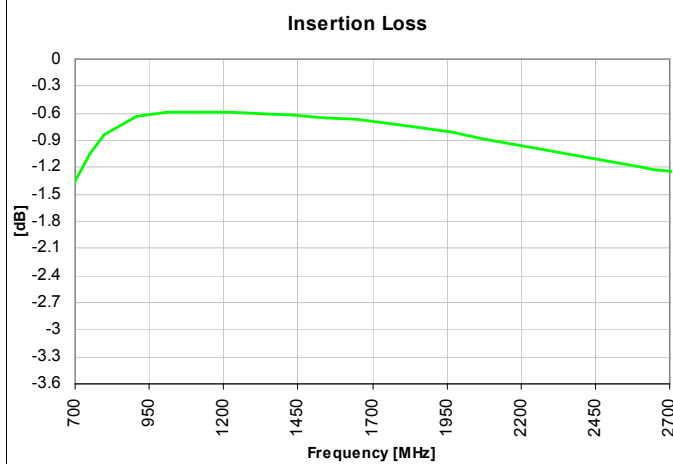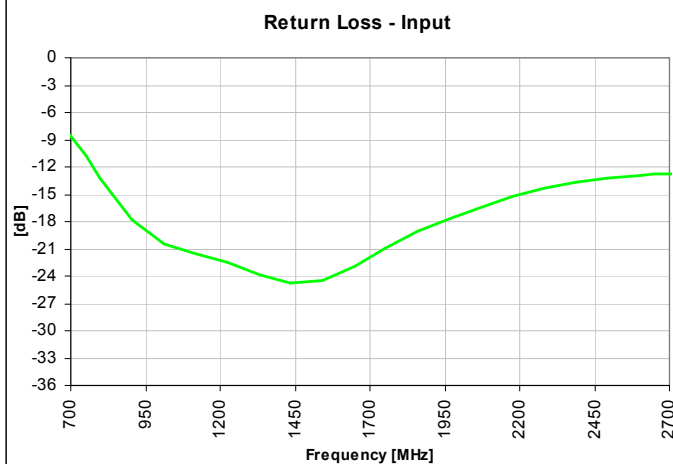

Mounting Configuration:

In order for Xinger surface mount components to work optimally, the proper impedance transmission lines must be used to connect to the RF ports. If this condition is not satisfied, insertion loss, Isolation and VSWR may not meet published specifications.


All of the Xinger components are constructed from organic PTFE based composites which possess excellent electrical and mechanical stability. Xinger components are compliant to a variety of ROHS and Green standards and ready for Pb-free soldering processes. Pads are Gold plated with a Nickel barrier.

An example of the PCB footprint used in the testing of these parts is shown below. An example of a DC-biased footprint is also shown below. In specific designs, the transmission line widths need to be adjusted to the unique dielectric coefficients and thicknesses as well as varying pick and place equipment tolerances.


No Bias Footprint

 Circuit Pattern


 Footprint Pad (s)

 Solder Resist


Dimensions are in Millimeters
Mounting Footprint

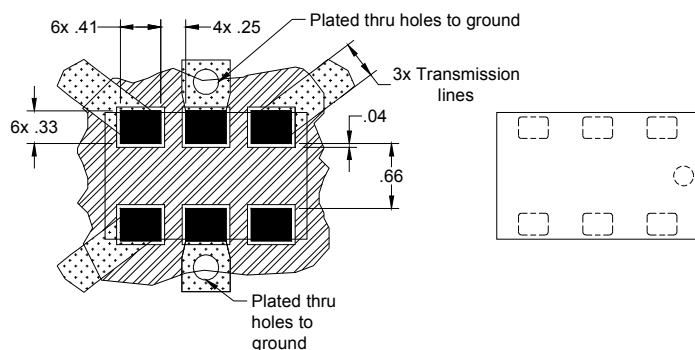

DC Bias Footprint

 Circuit Pattern

 Footprint Pad (s)

 Solder Resist

Dimensions are in Millimeters
Mounting Footprint

