

CM-4 / CM-4 kit 2 Tone Electronic chime

CM-4L / CM-4L kit Electronic Chime with LED light



Description

The CM-4 / CM-4L is a high quality electronic low profile door chime that can be used as a stand alone chime when activated with a push button, or can be integrated with AMSECO's complete line of people counters such as EBP-407C and EWP-202C.

The CM-4 is chime only and the CM-4L is chime with LED light. The CM-4L is specially designed for the hearing impaired, and can be used in noisy and restricted areas where only the light signal is effective.

Both can be powered with 12V DC or 12V AC supply.

Dimensions: inches (mm)

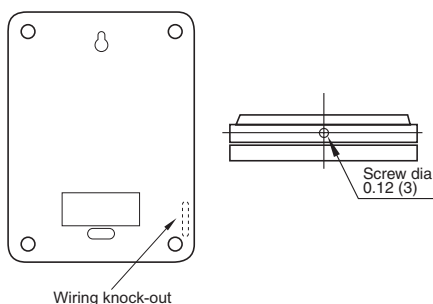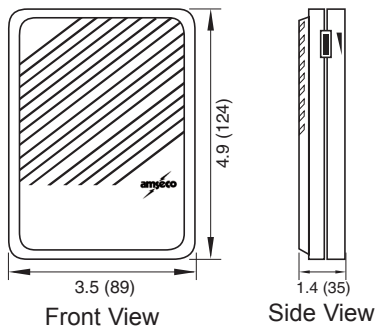

CM-4
Chime



CM-4L
Chime/LED light


Features

- Fully integrated electronic chime with volume control
- 2 selectable chime sounds for Entry/Exit
- Selectable High/Low open collector triggers output that can be utilized for external circuit
- Low power consumption
- Screw terminal for easy wiring
- Operated with 12 VDC or 12 VAC
- Stand-alone system or can be integrated with AMSECO People Counter series EBP-407C and EWP-202C
- Super bright (LED) light built-in (CM-4L Only)
Entry = flashing light
Exit = steady light

Specifications

Rated Voltage (AC/DC)	12V
Chime Sound Output	0 ~ 85 dB Volume Control
Rated Current Standby	17mA
Rated Current Activated	300mA
Wiring Terminals	Ground (-) Positive(+)
Trigger Signal (JP1)	ON: HIGH OFF: LOW
Light Source CM-4L	Super Bright L.E.D.'s
Operating Temperature Range	14 ~ 122°F (-10 ~ 50°C)

Wiring Diagram

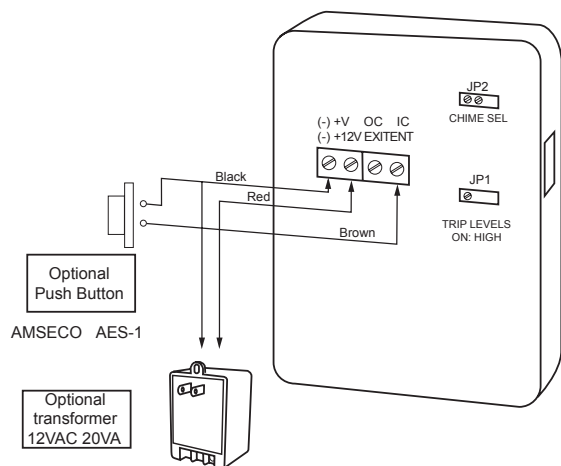

Note: CM-4 kit and CM-4L kit includes transformer, power cord, push button, installation wires, and hardware for complete installation.


Terminal Strip

(-): Negative terminal (connect the power supply negative lead here)

+V/+12V: Positive terminal (connect the power supply positive lead here)

IC/ENTRY: Generates a “DING DONG” sound when triggered with a positive or negative signal and flashes four times

OC/EXIT: Generates a “DING” sound when triggered with a positive or negative signal and flashes steady (3 sec.)



JP2 Chime Selector

The “JP2” jumper changes the tone of the chime from high frequency to low frequency

ON : High frequency (DING DONG)

OFF : Low frequency (DING DONG) factory setting

Note: The change of frequency will not affect the “DING” sound when the OC/EXIT terminal is triggered

JP1 Trip levels

The “JP1” jumper changes the signal for triggering the chime

ON : A high or positive signal is required to trigger chime

OFF: A low or negative signal is required to trigger the chime (factory setting)

Note: A steady uninterrupted signal to either trigger terminal will create a constant sound

Wiring to AMSECO's People Counters

