


## AE-P44-i51

---

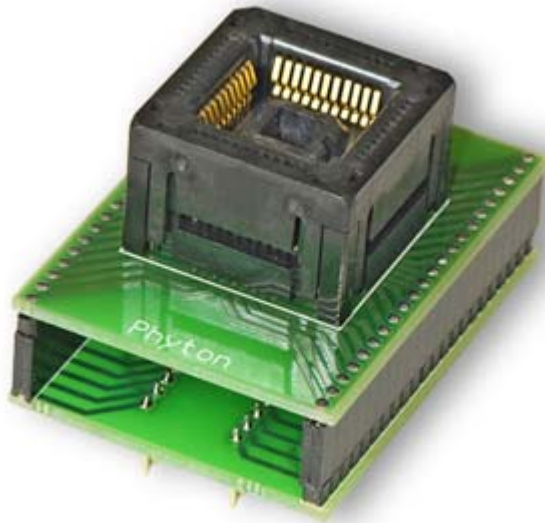

DIP40/PLCC44 specialized adapter for microcontrollers with open top socket.

**Click the programmer model below to get an appropriate list of the devices supported by the adapter:**

- [ChipProg+](#)
- [ChipProg-40](#)
- [ChipProg-48, ChipProg-G4](#)

**Adapter analogues supplied by third-party vendors:**

Logical Systems: PA51-44

**Adapter Wiring Diagram:**

| DIP-40 | PLCC-44 |
|--------|---------|
| 1      | 2       |
| 2      | 3       |
| 3      | 4       |
| 4      | 5       |
| 5      | 6       |
| 6      | 7       |
| 7      | 8       |
| 8      | 9       |
| 9      | 10      |
| 10     | 11      |
| 11     | 13      |
| 12     | 14      |

|    |    |
|----|----|
| 13 | 15 |
| 14 | 16 |
| 15 | 17 |
| 16 | 18 |
| 17 | 19 |
| 18 | 20 |
| 19 | 21 |
| 20 | 22 |
| 21 | 24 |
| 22 | 25 |
| 23 | 26 |
| 24 | 27 |
| 25 | 28 |
| 26 | 29 |
| 27 | 30 |
| 28 | 31 |
| 29 | 32 |
| 30 | 33 |
| 31 | 35 |
| 32 | 36 |
| 33 | 37 |
| 34 | 38 |
| 35 | 39 |
| 36 | 40 |
| 37 | 41 |
| 38 | 42 |
| 39 | 43 |
| 40 | 44 |