

TLK1221 Ethernet Transceiver Evaluation Module (EVM)

The Texas Instruments TLK1221 SERDES Evaluation Module (EVM) board is used to evaluate the TLK1221 device (40-pin 6-mm × 6-mm QFN PowerPAD™) for point-to-point data transmission applications. The board enables the system designer to connect 50-Ω parallel buses to both transmitter and receiver connectors. Using high-speed PLL technology, the TLK1221 serializes and transmits data along one differential pair. The receiver portion of the device de-serializes and presents data on the parallel bus. The high-speed (up to 1.3 Gbps) data lines interface to four 50-Ω controlled-impedance SMA connectors.

Contents

1	Introduction	2
2	TLK1221 EVM Kit Contents	2
3	TLK1221 EVM Board Configuration	2
4	Typical Test and Setup Configurations	4
5	Schematic, Bill of Materials, and Board Layouts	9

List of Figures

1	Parallel Signal Header Block	3
2	Parallel Signal Header Block	3
3	Parallel Loop Back with Static Data Pattern	4
4	TLK1221 EVM External Serial Loopback Test Configuration	5
5	TLK1221 EVM Serial PRBS 2 ⁷ -1 Self-Test Configuration	6
6	TLK1221 EVM Serial PRBS 2 ⁷ -1 Self-Test Configuration	7
7	TLK1221 EVM Serial PRBS 2 ⁷ -1 Test Configuration	8
8	TLK1221 EVM Schematic	9
9	TLK1221 Board Layout: Top (Layer 1)	11
10	TLK1221 Board Layout: GND (Layer 2)	12
11	TLK1221 EVM Board Layout: Internal Signal (Layer 3)	13
12	TLK1221 Board Layout: GND (Layers 4,6,8,9)	14
13	TLK1221 Board Layout: Internal Signal and VDDPLL (Layer 5)	15
14	TLK1221 Board Layout: VDDA and VDD (Layer 7)	16
15	TLK1221 Board Layout: Bottom (Layer 10)	17

List of Tables

1	Default Transceiver – Board Configuration as Shipped	4
2	Configuration Changes Necessary for DC-Coupling of the High-Speed Signals	4
3	TLK1221 EVM Bill of Materials	10
4	TLK1221 EVM PCB Layer Construction	18

1 Introduction

The Texas Instruments (TI) TLK1221 SERDES Evaluation Module (EVM) board is used to evaluate the TLK1221 device (40-pin 6-mm x 6-mm QFN PowerPAD). The board enables the designer to connect 50-Ω parallel buses to both the transmitter and receiver parallel connectors. Using high-speed PLL technology, the TLK1221 serializes data and transmits this data along a differential pair. The receiver part of the device de-serializes and presents the data on the parallel bus. For proper use of this device, users must provide dc-balanced encoded data on the parallel bus (that is, 8b/10b). The high-speed (up to 1.3 Gbps) data lines interface to four 50-Ω controlled-impedance SMA connectors. The board can be used to evaluate device parameters while acting as a guide for high-speed board layout. The evaluation board can be used as a daughter board that is plugged into new or existing designs. Since the TLK1221 operates over a wide range of frequencies, the system designer will need to optimize the design for the frequency of interest. Additionally, the designer may wish to use buried transmission lines and provide additional noise attenuation and EMI suppression to optimize the end product.

As the frequency of operation increases, the board designer must take special care to ensure that the highest signal integrity is maintained. To achieve this, the board's impedance is controlled to 50 Ω for both the high-speed differential serial and parallel data connections. In addition, board impedance mismatches are reduced by designing the component pad size to be as close as possible to the width of the connecting transmission lines. Vias are minimized and, when necessary, placed as close as possible to the device drivers. Since the board contains both serial and parallel transmission lines, care was taken to control both impedance and trace-length mismatch (board skew) to less than ± 1 MIL.

Overall, the board layout is designed and optimized to support high-speed operation. Thus, understanding impedance control and transmission-line effects is crucial when designing a high-speed board.

Some of the advanced features offered by this board include:

- PCB (printed-circuit board) is designed for high-speed signal integrity.
- SMA and parallel fixtures are easily connected to test equipment.
- All input/output signals are accessible for rapid prototyping.
- Analog and digital power planes can be supplied through separate banana jacks for isolation, or can be combined by placing jumpers on the supplied header pins.
- Onboard capacitors provide AC coupling of high-speed signals.

2 TLK1221 EVM Kit Contents

The TLK1221 EVM kit contains the following:

- TLK1221 EVM board
- TLK1221 EVM User's Guide (this document)

3 TLK1221 EVM Board Configuration

The TLK1221 EVM board gives the developer various options for operation, many of which are jumper-selectable. Other options can be either soldered into the EVM or connected through input connectors.

The TX and RX parallel connectors, (JMP6), of [Figure 1](#), provide a connection for both transmitted and received parallel data busing. The reference clock is supplied through SMA connector J5 and the high-speed serial data is transmitted through SMA connectors J1 and J2. The received recovered clocks (RBC0 and RBC1) are output through pins on the header JMP8 along with the SYNC pin. Received data connects through SMA connectors J3 and J4 of the board. Header JMP7 provides static control signals (normally pulled high) to configure the device for different modes of operation.

The power planes are split three ways to provide power to different parts of the board. This prevents coupling of switching noise between the analog and digital sections of the TLK1221, and provides voltage isolation for power consumption testing. The VDD, VDDA, and VDDPLL connectors require a nominal 2.5V and are joined together by removable jumpers on headers JMP9 and JMP10 that are installed in the default configuration. Thus only the VDD connection is necessary to energize the TLK1221 device in the default configuration. In all sections of the board, the ground planes are common and each ground plane is tied together at every component ground connection. See the Schematics and Board Layouts for detailed schematic and layout information.

The board is normally delivered in a default configuration that only requires power as well as an external clock and data inputs. The TLK1221 is shipped with jumpers for default operation. Table 1 shows the default configuration for sending data.

The parallel signals on the TLK1221 EVM have been routed to a 0.1 inch header block that is configured as in Figure 1. All RD pins (RD[9:0]) on the header block (JMP6), as well as all TD pins (TD[9:0]) on the header block (JMP6) have matched trace lengths to themselves ± 1 MIL. Due to routing constraints RXD and TXD trace lengths are not matched to each other, but only to themselves.

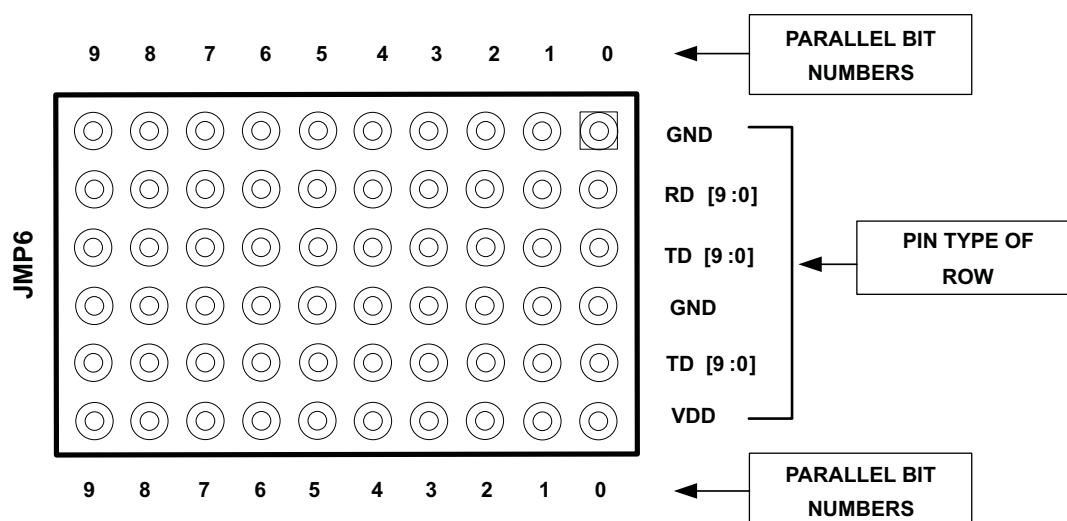


Figure 1. Parallel Signal Header Block

Parallel loop back, shown in Figure 2, can be easily implemented by placing jumpers on the RD/TD pins of the header. For example, placing a jumper on pins 2 and 3 of JMP6 will loop back TD[0] to RD[0].

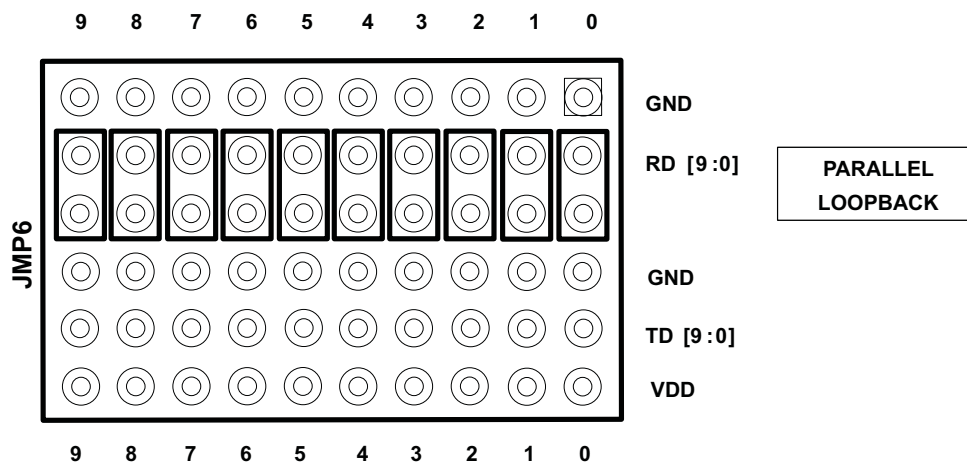


Figure 2. Parallel Signal Header Block

Additional GND and VDD pins have been added into the header block for several reasons. The GND pins

Typical Test and Setup Configurations

next to the RD and TD pins provide a convenient ground reference for a scope probe or coax cables. The additional TD row and VDD pins allow a static pattern to be driven into the TD bus by placing jumpers across either the TD and VDD pins for a HIGH, or TD and GND pins for a LOW eliminating the need for cables for quick tests. The extra row of TD can also be used to monitor the signals on the TD pins while simultaneously looping back into the RD pins. [Figure 3](#) shows a clock pattern (01010101) on TD[9:0] being looped back onto the RD[9:0] pins.

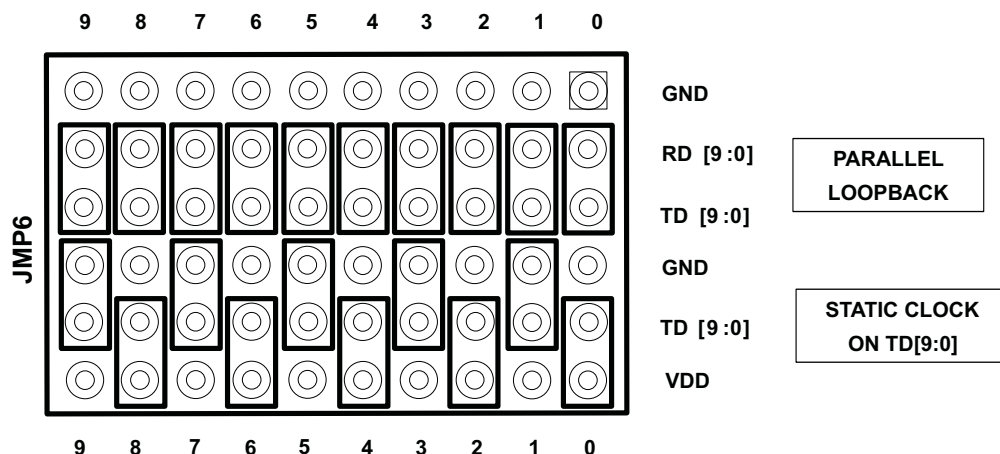


Figure 3. Parallel Loop Back with Static Data Pattern

Table 1. Default Transceiver – Board Configuration as Shipped

Designator	Function	Condition
JMP9	VDD and VDDPLL Bridge	Joins the VDD and VDDPLL power planes
JMP10	VDD and VDDA Bridge	Joins the VDD and VDDA power planes
JMP7	PRBSEN	Jumper installed (logic 0) – disables the TLK1221 PRBS internal production test mode
JMP7	SYNCEN	Jumper installed (logic 0) – disables the TLK1221 comma-detection circuitry
JMP7	ENABLE	Jumper not installed (logic 1) – this pulls up the enable pin for normal operation
JMP7	RBCMODE	Jumper not installed (logic 1) – for a 1/10 baud-rate clock on RBC0 (a non-DDR mode)
JMP7	LOOPEN	Jumper installed (logic 0) – disables the TLK1221 internal loopback mode
C1, C3	TX AC-Coupling Capacitors	These capacitors (normally installed) are provided to ac-couple the transmitted serial signal.
C2, C4	RX AC-Coupling Capacitors	These capacitors (normally installed) are provided to ac-couple the received serial signal.

Table 2. Configuration Changes Necessary for DC-Coupling of the High-Speed Signals

Designator	Function	Condition
C1, C3	TX AC-Coupling Capacitors	Remove capacitors and install 0-Ω resistors
C2, C4	RX AC-Coupling Capacitors	

4 Typical Test and Setup Configurations

This section presents the typical test and setup configuration used to evaluate and test the transceiver. The printed-circuit board construction and characteristics are included in chapter 5.

The following configurations are used to evaluate and test the TLK1221 transceiver. The first configuration is an external serial loopback of the high-speed signals shown in [Figure 4](#). The serial loopback allows the system designer to evaluate most of the functions of the transmitter and receiver sections of the TLK1221 device. To test a system, a parallel Bit Error Rate Tester (BERT) generates a predefined DC-balanced parallel bit pattern. The pattern is connected to the transmitter through parallel connectors TD0-TD9

(TD0-TD4 for DDR mode). The TLK1221 device serializes and presents the data on the high-speed serial pair (TXP/TXN). The serial TX data is then looped back to the receiver side and the device de-serializes and presents the data on the receiver side RD0–RD9 (RD0–RD4 for DDR mode). The data is received by the BERT and compared against the transmitted pattern and monitored for valid data and errors. If any bit errors are received, a bit-error rate is evaluated at the parallel-receive BERT.

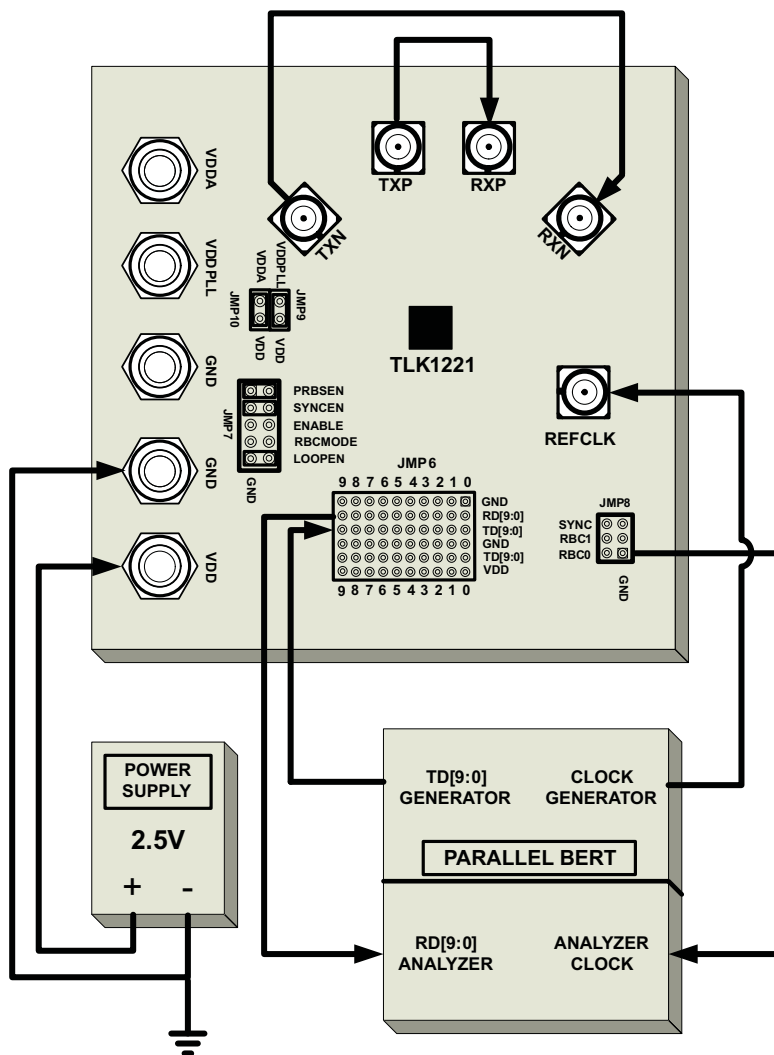


Figure 4. TLK1221 EVM External Serial Loopback Test Configuration

If a parallel data generator is not available, placing jumpers on the additional TD pins of the header block JMP6 will allow a static pattern to be received by the parallel TD bus, serialized, looped back into the serial receiver, and de-serialized where it can be viewed with an analyzer. However, unless the pattern jumpered onto the TD pins includes the comma pattern and the SYNCEN pin is high, the data will be unframed data and the values of the RD[9:0] pins may not be aligned with the corresponding TD[9:0] pins.

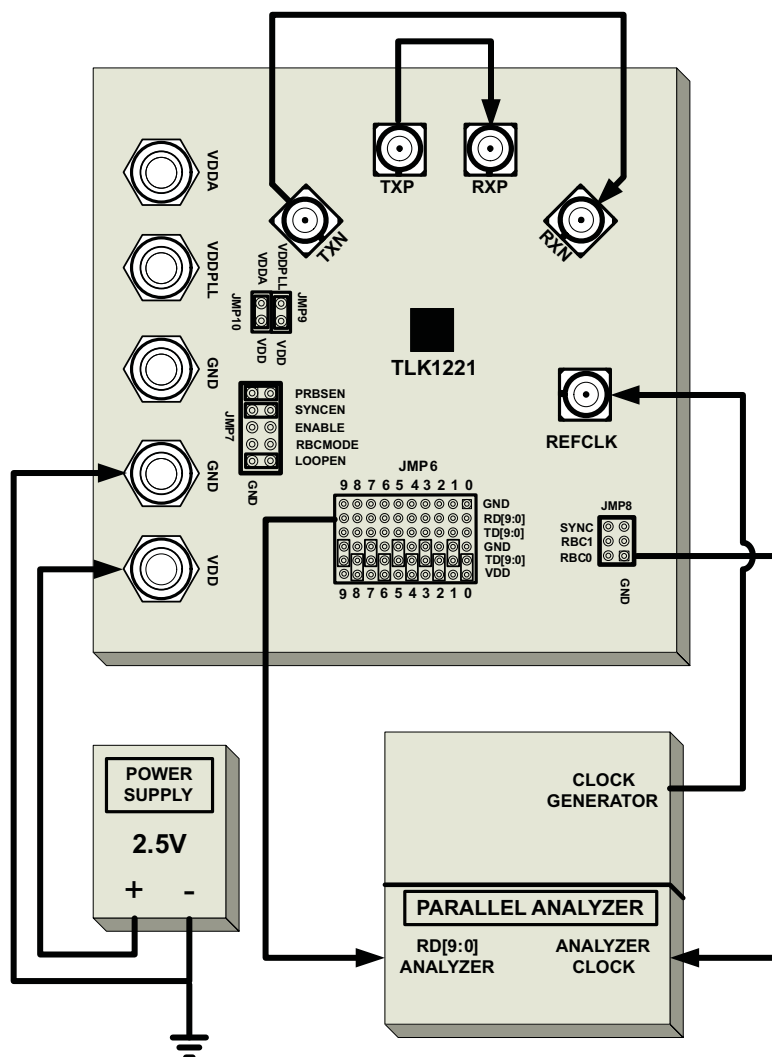


Figure 5. TLK1221 EVM Serial PRBS 2⁷-1 Self-Test Configuration

If a parallel BERT is not available, the system designer can take advantage of the built-in-test mode of the device, see [Figure 6](#). If the designer asserts the PRBSEN pin high, a Pseudo Random Bit Pattern will be transmitted. This pin also puts the receiver in a mode to detect a valid PRBS pattern. A valid pattern is indicated by the SYNC pin indicating high. This test only validates the high-speed serial portion of the device and the system interconnects. The PRBS pattern is compatible with most serial BERT test equipment. This function allows the operator to isolate and test the transmitter and receiver independently. A typical configuration is shown in [Figure 6](#). The dashed lines represent optional connections that can be made for monitoring eye patterns and measuring jitter.

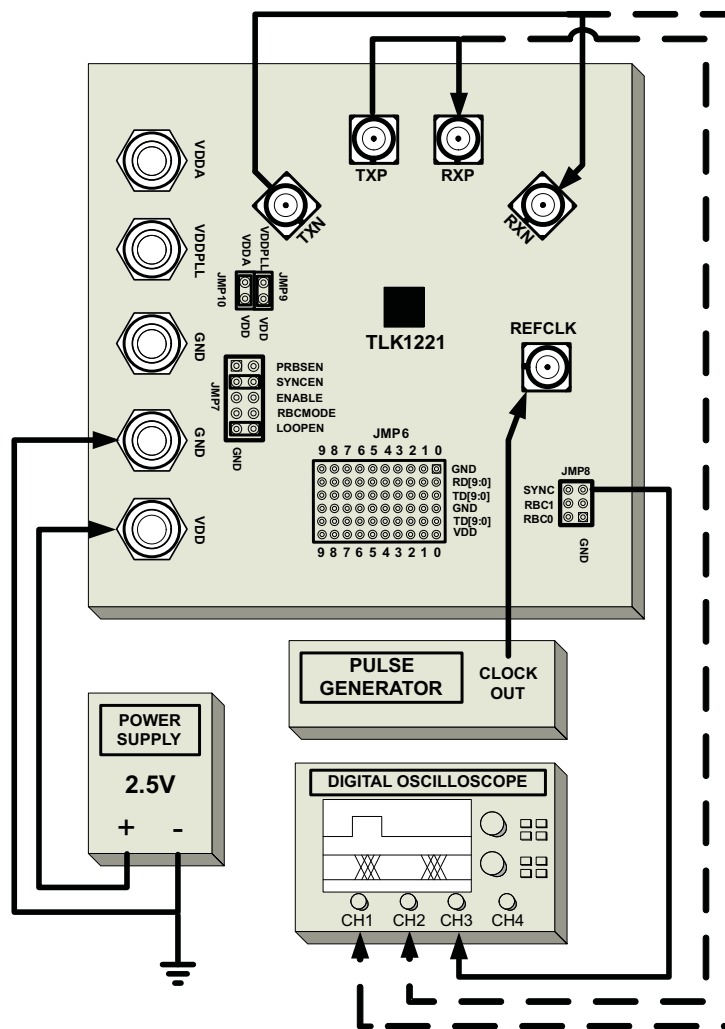


Figure 6. TLK1221 EVM Serial PRBS 2^7-1 Self-Test Configuration

If a serial BERT is available, the system designer can independently test both serial channels of the device with a PRBS 2^7-1 data pattern, see [Figure 7](#). If the designer asserts the PRBSEN pin high, a Pseudo Random Bit Pattern will be transmitted. This pin also puts the receiver in a mode to detect a valid PRBS pattern. A valid pattern is indicated by the SYNC pin indicating high. This test only validates the high-speed serial portion of the device and the system interconnects. The PRBS pattern is compatible with most serial BERT test equipment. This function allows the operator to isolate and test the transmitter and receiver independently. A typical configuration is shown in [Figure 7](#). The dashed lines represent optional connections that can be made for monitoring eye patterns and measuring jitter.

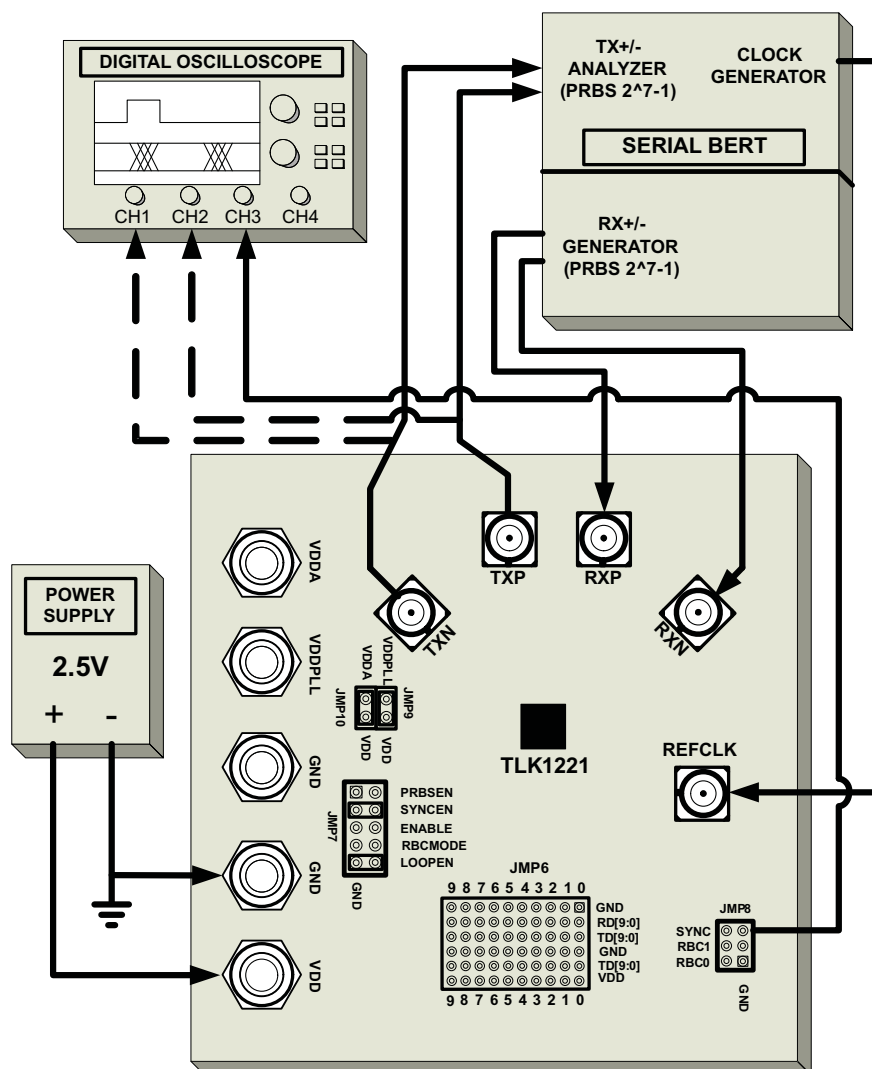



Figure 7. TLK1221 EVM Serial PRBS 2⁷-1 Test Configuration

5 Schematic, Bill of Materials, and Board Layouts

5.1 Schematic

Figure 8. TLK1221 EVM Schematic

The TLK1221 EVM schematic is shown on the following page.

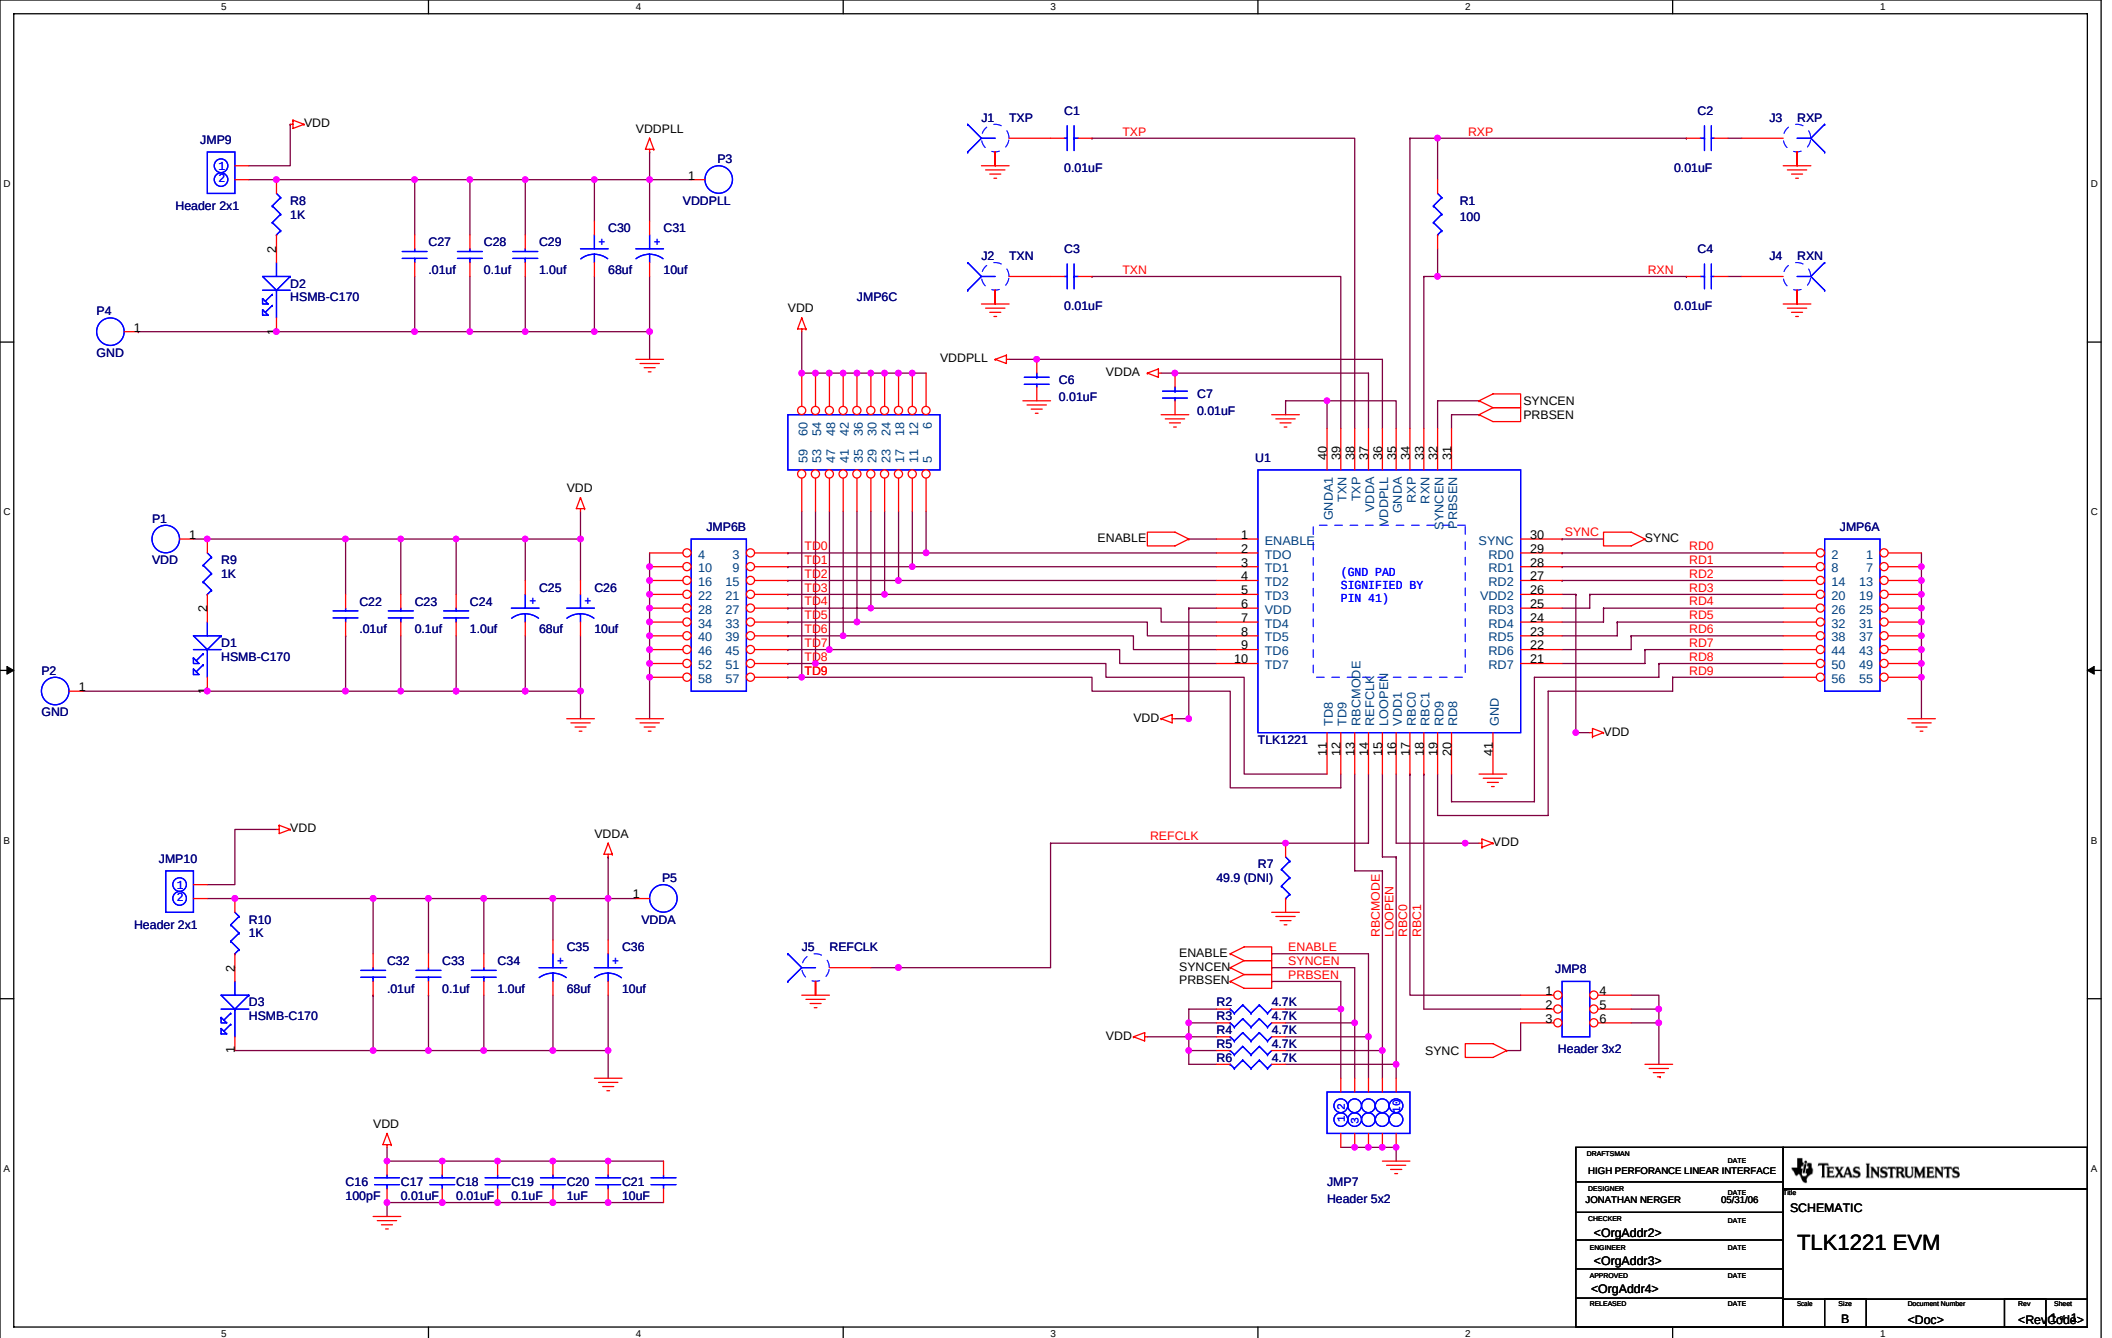

DRAFTSMAN		DATE		 TEXAS INSTRUMENTS				
HIGH PERFORMANCE LINEAR INTERFACE		05/31/06						
DESIGNER		DATE		SCHEMATIC				
JONATHAN NERGER		05/31/06						
CHECKER		DATE						
<OrgAddr2>		DATE						
ENGINEER		DATE		TLK1221 EVM				
<OrgAddr3>		DATE						
APPROVED		DATE						
<OrgAddr4>		DATE						
RELEASED		DATE		Scale	Size	Document Number	Rev	Sheet
				B	B	<Doc>	<Rev>	<Doc>

5.2 Bill of Materials

Table 3. TLK1221 EVM Bill of Materials

Item	Qty	Reference	Value	Part	Part Number	Manufacturer
1	8	C1–C4, C6, C7, C17, C18	0.01 μ F	0603 CAP	06031C102JAT2A	Avx Corporation
2	1	C16	100 pF	0603 CAP	06031A101JAT2A	Avx Corporation
3	3	C22, C27, C32	1 μ F	0603 CAP	0603YD105KAT2A	Avx Corporation
4	1	C21	10 μ F	0603 CAP	GRM188R60G106ME47D	Murata Electronics
5	1	C19	0.1 μ F	0603 CAP	C1206C104J5RACTU	Kemet
6	3	C25, C30, C35	68 μ F	7343 CAP	TA025TCM106KDR	Kemet
7	3	C26, C31, C36	10 μ F	7343 CAP	293D106X0035D2W	Venkel
8	3	C24, C29, C34	1.0 μ F	1206 CAP	C1206X7R250-105KNE	Venkel
9	3	C23, C28, C33	0.1 μ F	1206 CAP	C1206C104J5RACTU	Kemet
10	3	C22, C27, C32	0.01 μ F	0805 CAP	GRM21BR72A103KA01L	Murata Electronics
11	3	D1–D3	Red Diffused	0805 LED	HSMH-C170	Avago Technologies
12	2	JMP9, JMP10		2 Pin Header	HTSW-150-07-G-S	Samtec
13	1	JMP7		Header 5×2	HTSW-150-07-G-D	Samtec
14	1	JMP6		Header 10×6	HTSW-150-07-G-T	Samtec
15	1	JMP8		Header 3×2	HTSW-150-07-G-D	Samtec
16	5	J1–J5		SMA Connector	32K141-40ME4	Rosenberger
17	5	P1–P5		Banana Jack	108-0740-001	Emerson Network Power Co.
18	1	R1	100 Ω	0603 RES	ERJ-2RKF1000X	Panasonic – Ecg
19	5	R2–R6	4.7 k Ω	0603 RES	MCR03EZPFX4701	Rohm
20	1	R7	49.9 Ω (DNI)	0603 RES	ERJ-3EKF49R9V	Panasonic – Ecg
21	3	R8–R10	1 k Ω	0603 RES	ERJ-3EKF1001V	Panasonic – Ecg
22	1	U1	TLK1221	IC	TLK1221RHAT	TI

5.3 Board Layouts

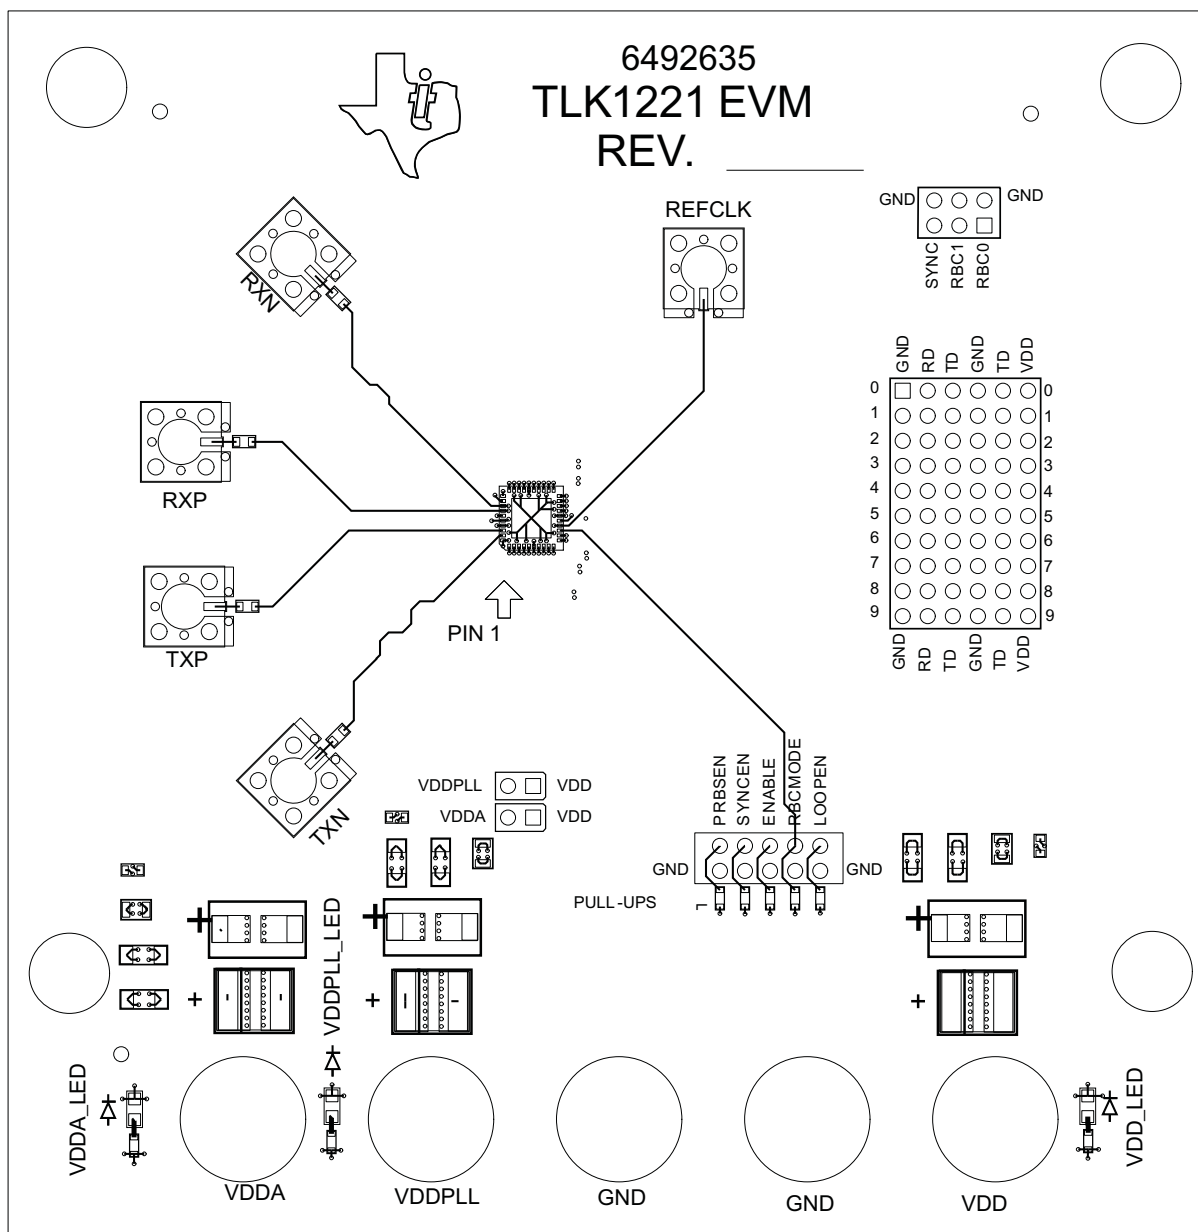


Figure 9. TLK1221 Board Layout: Top (Layer 1)

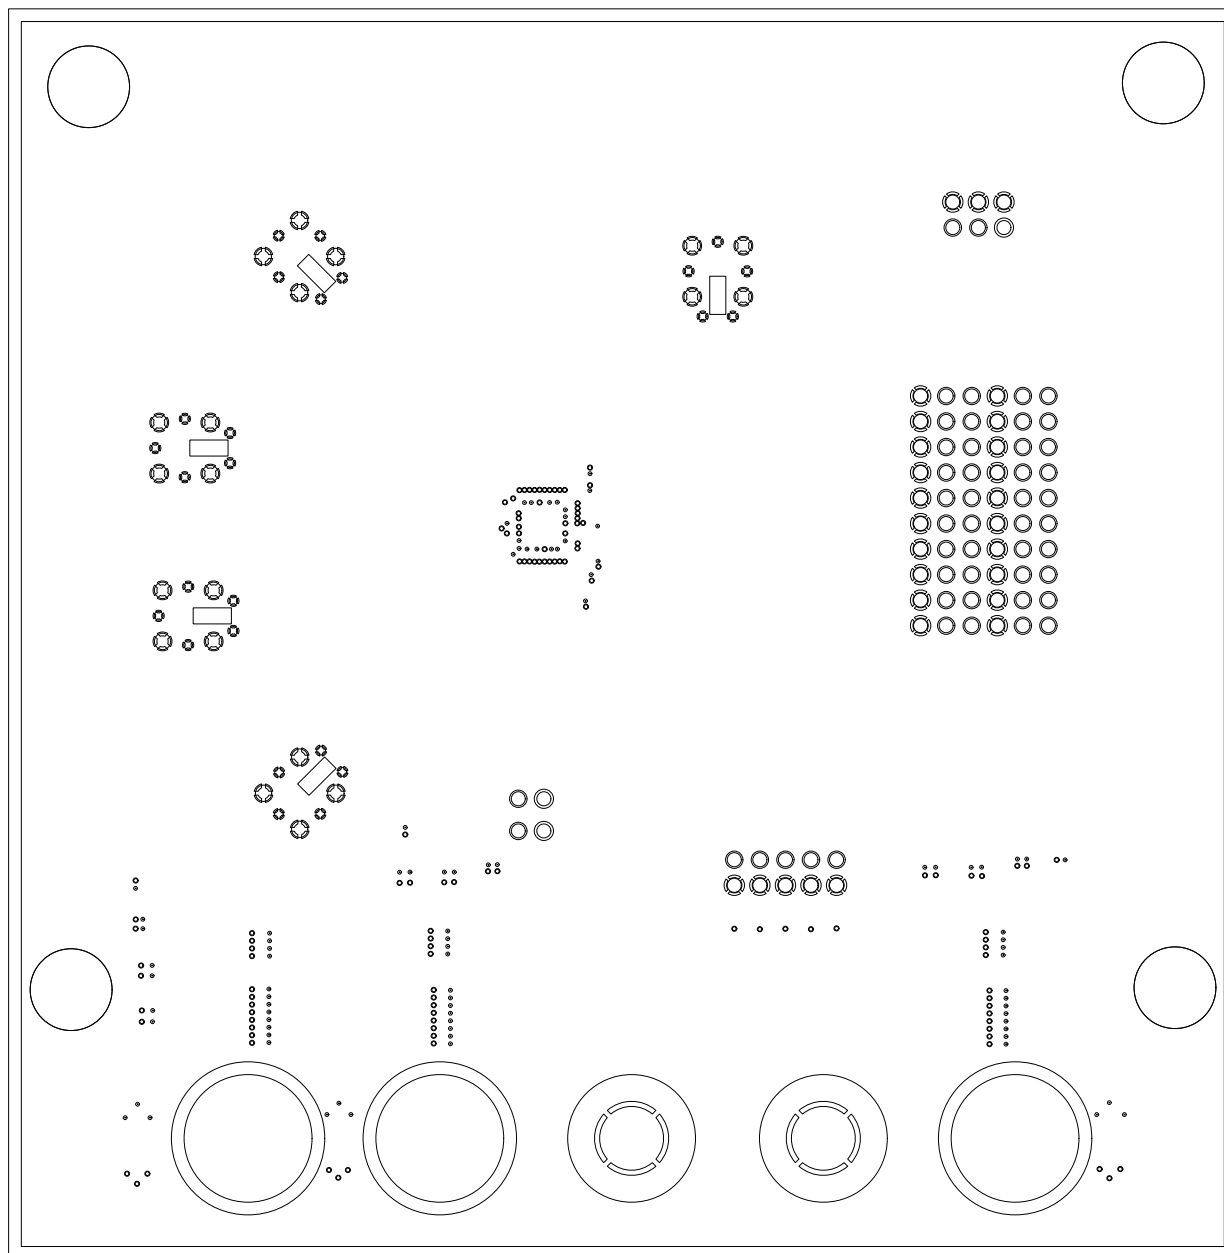


Figure 10. TLK1221 Board Layout: GND (Layer 2)

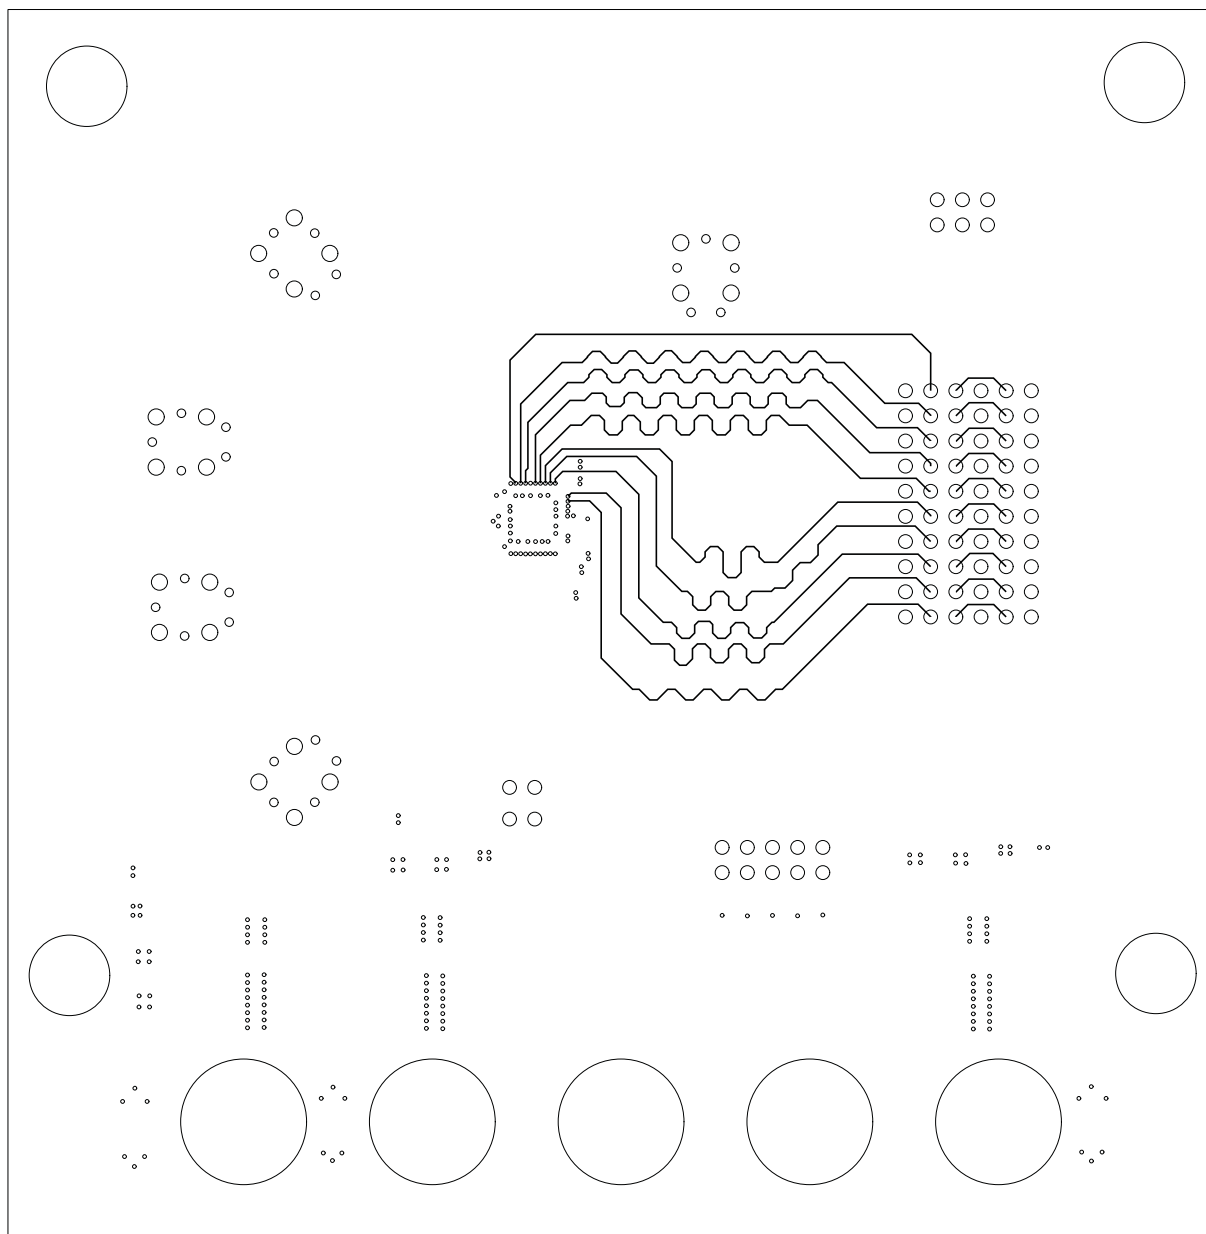


Figure 11. TLK1221 EVM Board Layout: Internal Signal (Layer 3)

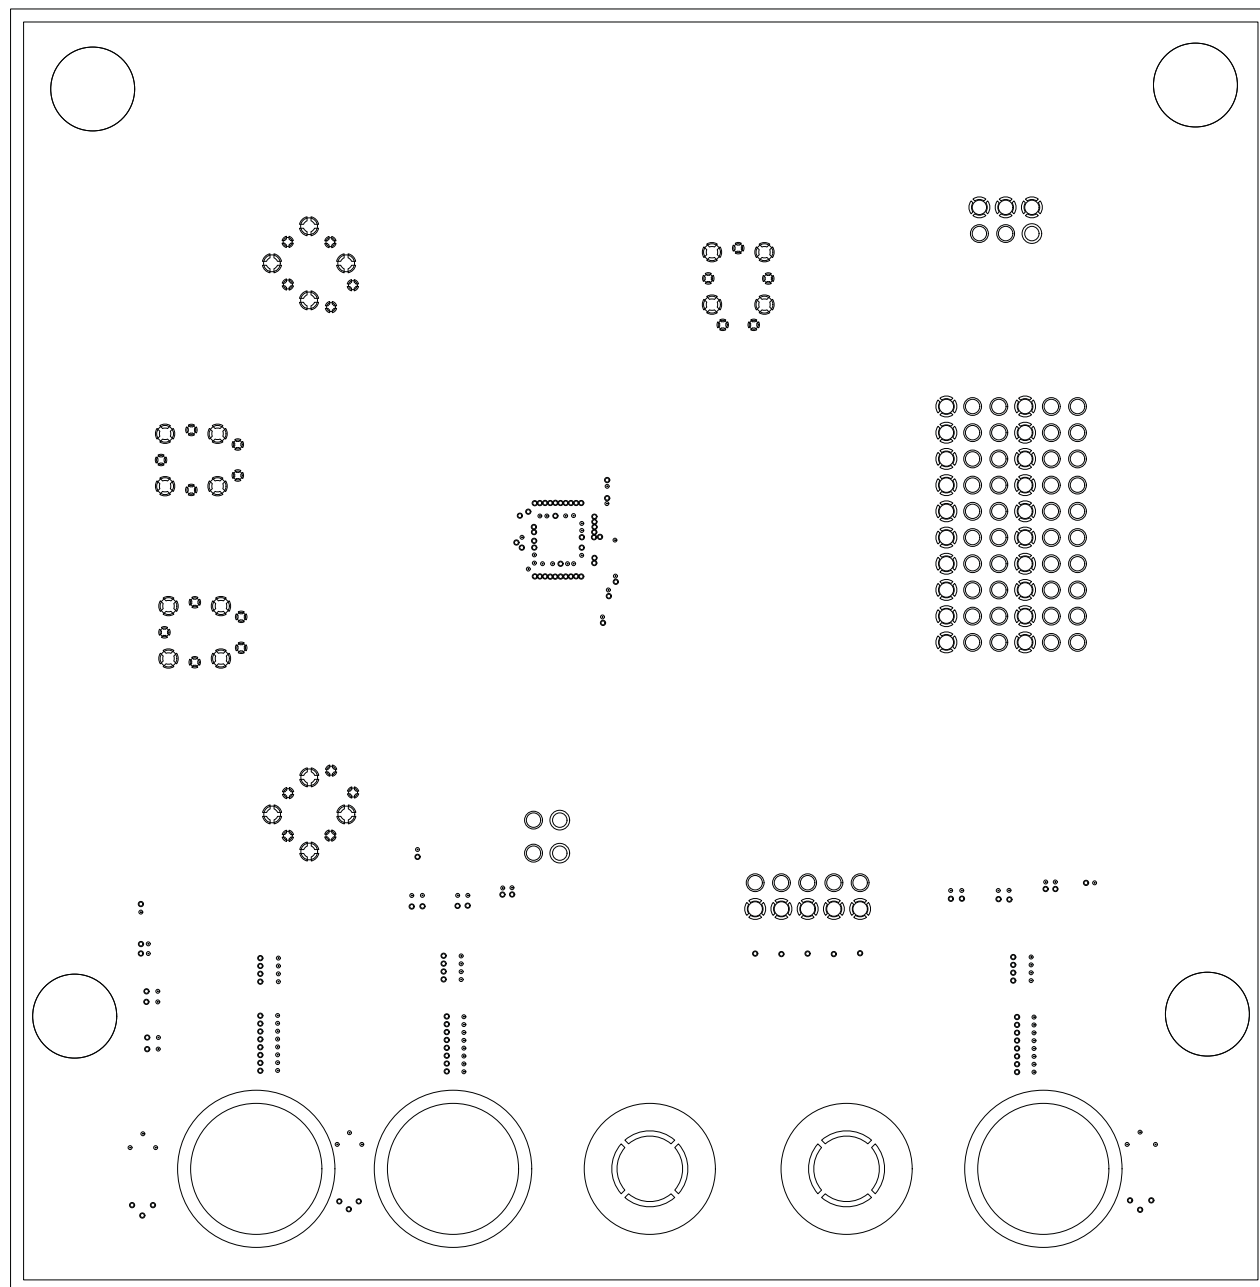


Figure 12. TLK1221 Board Layout: GND (Layers 4,6,8,9)

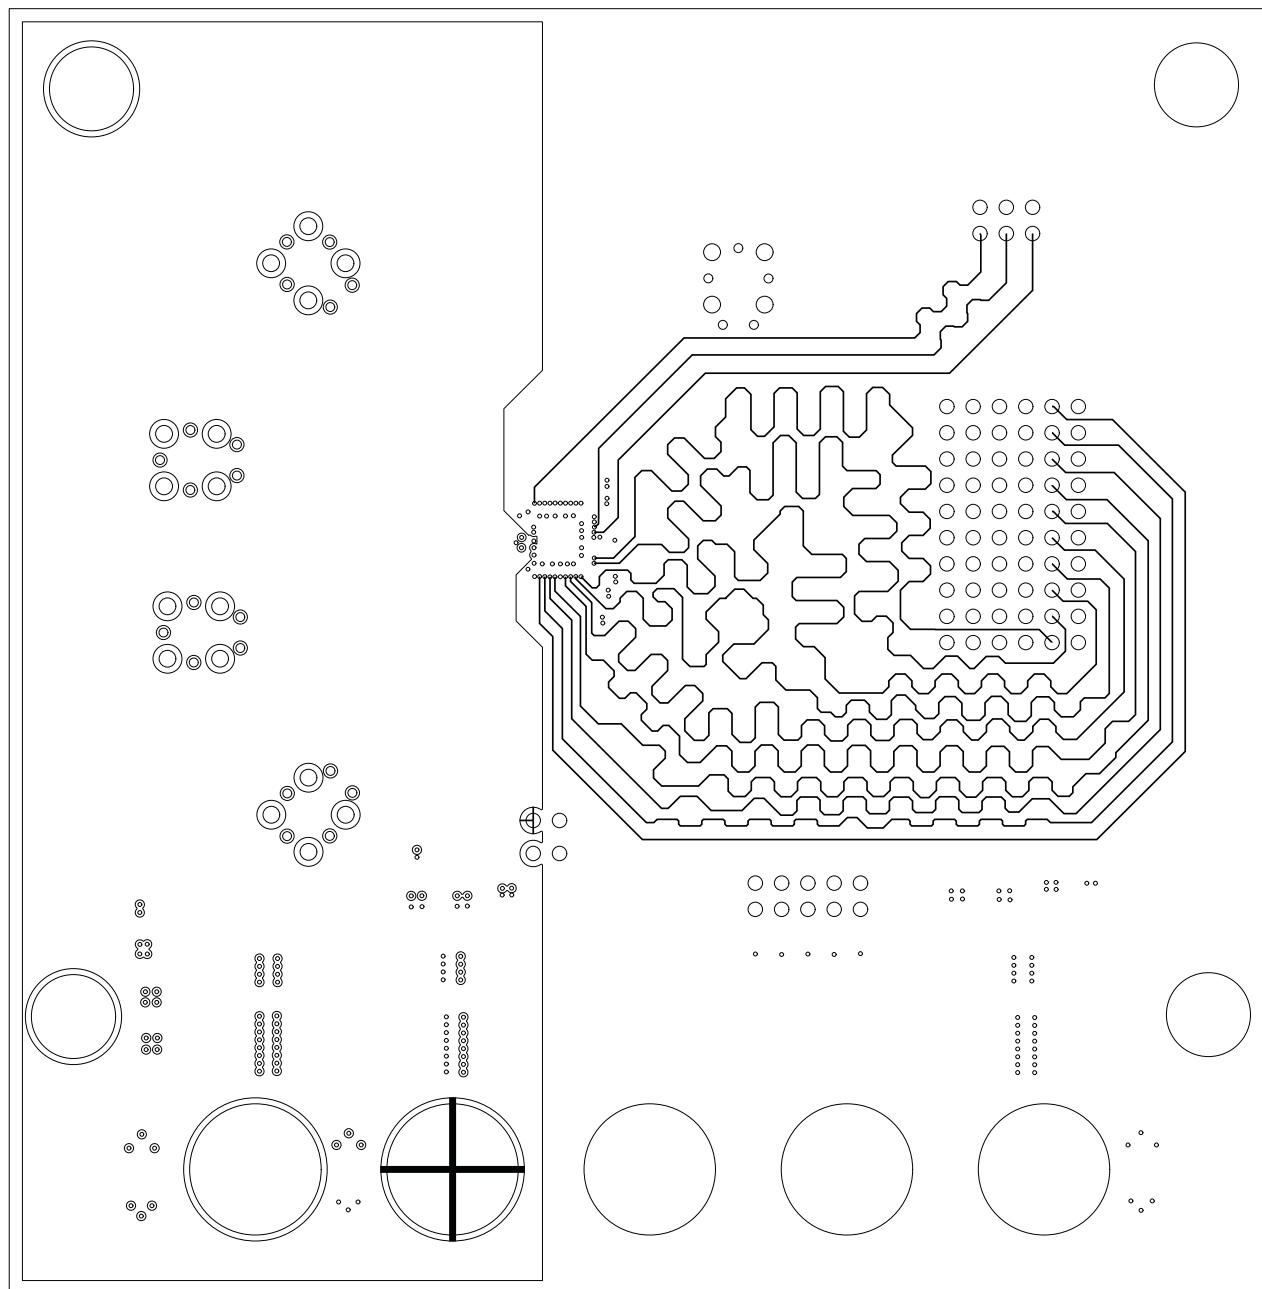


Figure 13. TLK1221 Board Layout: Internal Signal and VDDPLL (Layer 5)

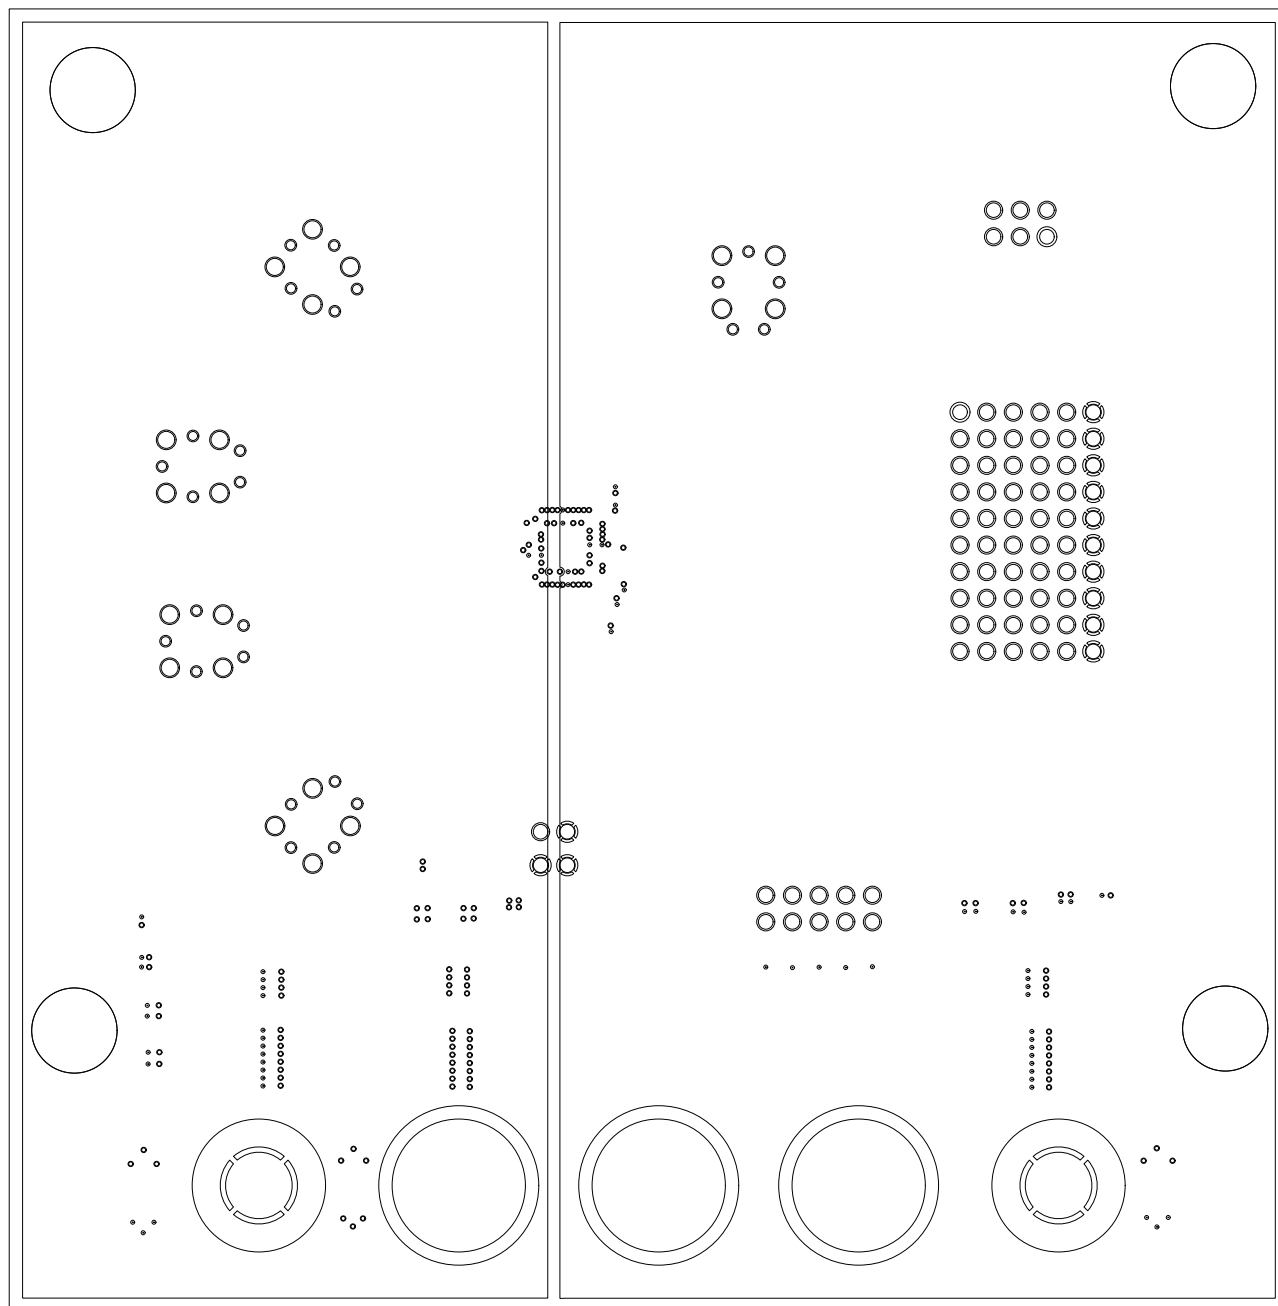


Figure 14. TLK1221 Board Layout: VDDA and VDD (Layer 7)

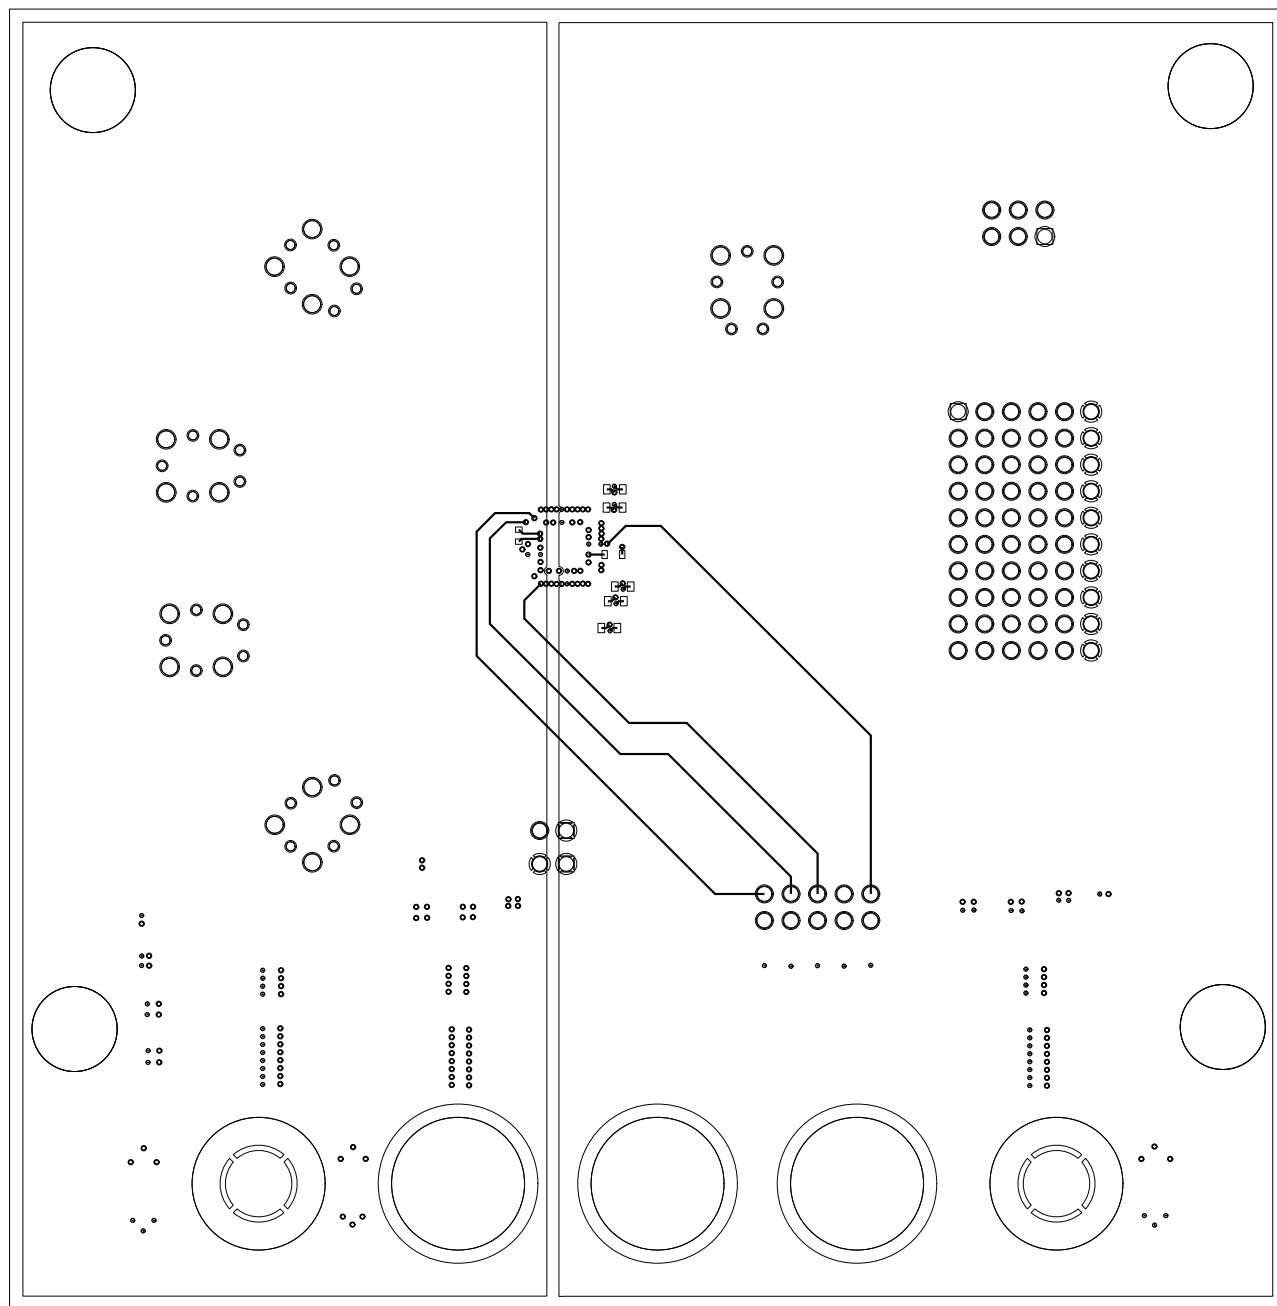


Figure 15. TLK1221 Board Layout: Bottom (Layer 10)

Table 4. TLK1221 EVM PCB Layer Construction

Subclass Name	Type	Material	Thickness (MIL)	Conductivity (mho/cm)	Dielectric Constant	Loss Tangent	Artwork	Width (MIL)	Impedance (Ω)
	SURFACE	AIR							
TOP	CONDUCTOR	COPPER	2.4	595900	1	0	POSITIVE	8	49.307
	DIELECTRIC	FR-4	4.5	0	4.1	0.035			
L2_GND	PLANE	COPPER	1.2	595900	1	0	NEGATIVE		
	DIELECTRIC	FR-4	7.5	0	4.1	0.035			
L3_SIG	CONDUCTOR	COPPER	1.2	595900	1	0	POSITIVE	6.5	50.349
	DIELECTRIC	FR-4	7.5	0	4.1	0.035			
L4_GND	PLANE	COPPER	1.2	595900	1	0	NEGATIVE		
	DIELECTRIC	FR-4	7.5	0	4.1	0.035			
L5_SIG/VDDPLL	CONDUCTOR	COPPER	1.2	595900	1	0	POSITIVE	6.5	50.349
	DIELECTRIC	FR-4	7.5	0	4.1	0.035			
L6_GND	PLANE	COPPER	1.2	595900	1	0	NEGATIVE		
	DIELECTRIC	FR-4	7.5	0	4.1	0.035			
L7_VDD/VDDA	PLANE	COPPER	1.2	595900	1	0	NEGATIVE		
	DIELECTRIC	FR-4	7.5	0	4.1	0.035			
L8_GND	PLANE	COPPER	1.2	595900	1	0	NEGATIVE		
	DIELECTRIC	FR-4	7.5	0	4.1	0.035			
L9_GND	PLANE	COPPER	1.2	595900	1	0	NEGATIVE		
	DIELECTRIC	FR-4	4.5	0	4.1	0.035			
BOTTOM	CONDUCTOR	COPPER	2.4	595900	1	0	POSITIVE	8	49.307
	SURFACE	AIR							

Note: Always consult with your board manufacturer for their process/design requirements to ensure the desired impedance is achieved.

EVALUATION BOARD/KIT IMPORTANT NOTICE

Texas Instruments (TI) provides the enclosed product(s) under the following conditions:

This evaluation board/kit is intended for use for **ENGINEERING DEVELOPMENT, DEMONSTRATION, OR EVALUATION PURPOSES ONLY** and is not considered by TI to be a finished end-product fit for general consumer use. Persons handling the product(s) must have electronics training and observe good engineering practice standards. As such, the goods being provided are not intended to be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including product safety and environmental measures typically found in end products that incorporate such semiconductor components or circuit boards. This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and therefore may not meet the technical requirements of these directives or other related directives.

Should this evaluation board/kit not meet the specifications indicated in the User's Guide, the board/kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user indemnifies TI from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge.

EXCEPT TO THE EXTENT OF THE INDEMNITY SET FORTH ABOVE, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

TI currently deals with a variety of customers for products, and therefore our arrangement with the user **is not exclusive**.

TI assumes **no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein.**

Please read the User's Guide and, specifically, the Warnings and Restrictions notice in the User's Guide prior to handling the product. This notice contains important safety information about temperatures and voltages. For additional information on TI's environmental and/or safety programs, please contact the TI application engineer or visit www.ti.com/esh.

No license is granted under any patent right or other intellectual property right of TI covering or relating to any machine, process, or combination in which such TI products or services might be or are used.

FCC Warning

This evaluation board/kit is intended for use for **ENGINEERING DEVELOPMENT, DEMONSTRATION, OR EVALUATION PURPOSES ONLY** and is not considered by TI to be a finished end-product fit for general consumer use. It generates, uses, and can radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment in other environments may cause interference with radio communications, in which case the user at his own expense will be required to take whatever measures may be required to correct this interference.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2007, Texas Instruments Incorporated

EVM WARNINGS AND RESTRICTIONS

It is important to operate this EVM within the input voltage range of 0 V to 3.6 V and the output voltage range of 0 V to 2.9 V or V_{DD} V.

Exceeding the specified input range may cause unexpected operation and/or irreversible damage to the EVM. If there are questions concerning the input range, please contact a TI field representative prior to connecting the input power.

Applying loads outside of the specified output range may result in unintended operation and/or possible permanent damage to the EVM. Please consult the EVM User's Guide prior to connecting any load to the EVM output. If there is uncertainty as to the load specification, please contact a TI field representative.

During normal operation, some circuit components may have case temperatures greater than 50°C. The EVM is designed to operate properly with certain components above 40°C as long as the input and output ranges are maintained. These components include but are not limited to linear regulators, switching transistors, pass transistors, and current sense resistors. These types of devices can be identified using the EVM schematic located in the EVM User's Guide. When placing measurement probes near these devices during operation, please be aware that these devices may be very warm to the touch.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2007, Texas Instruments Incorporated

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DSP	dsp.ti.com
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
Low Power Wireless	www.ti.com/lpw

Applications

Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2007, Texas Instruments Incorporated