


AE-P32-28

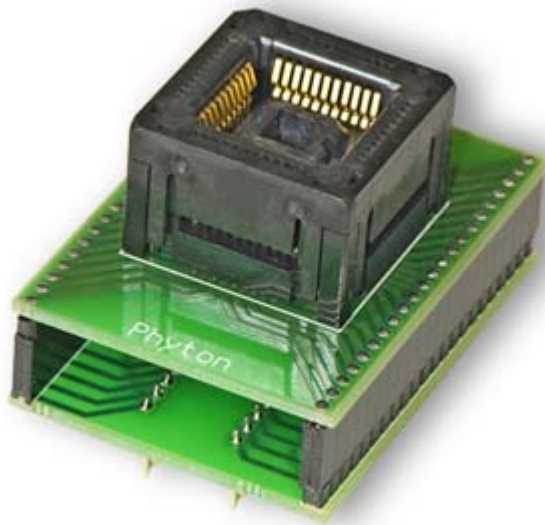

DIP28/PLCC32 specialized adapter for EPROM/FLASH with open top socket.

Click the programmer model below to get an appropriate list of the devices supported by the adapter:

- [ChipProg+](#)
- [ChipProg-40](#)
- [ChipProg-48, ChipProg-G4](#)

Adapter analogues supplied by third-party vendors:

Logical Systems: PA32-28

Adapter Wiring Diagram:

DIP-28	PLCC-32
1	2
2	3
3	4
4	5
5	6
6	7
7	8
8	9
9	10
10	11
11	13
12	14

13	15
14	16
15	18
16	19
17	20
18	21
19	22
20	23
21	24
22	25
23	27
24	28
25	29
26	30
27	31
28	32