

10 9 8 7 6 5 4 3 2 1

F







E

D



C

B

A

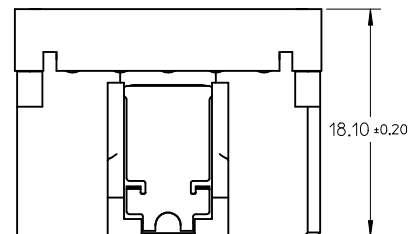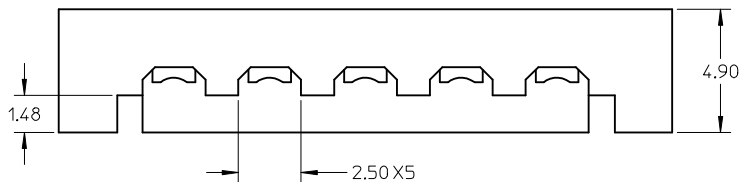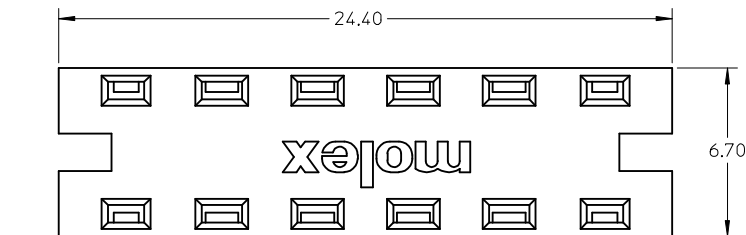

APPLICATION FOR WITH LATCH TYPE

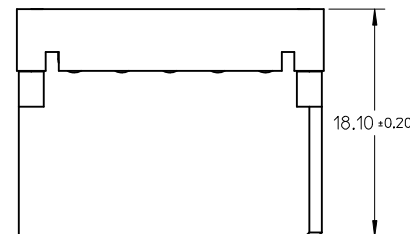

APPLICATION FOR WITHOUT LATCH TYPE

NOTE

- 1 MATERIAL: THERMAL PLASTIC, COLOR: BLACK UL94V-0.
- 2 THIS COVER IS FEED TO TYPE, IT IS AVAILABLE FOR 67926-000*/002*(WITH LATCH), 67926-001*(WITHOUT LATCH).
- 3 PACKAGE SPEC:
 - 3.1 1000 PCS IN ONE BAG.
 - 3.2 3000 PCS(3 PAGES) IN ONE INNER CARTON.
 - 3.3 12,000 PCS(4 INNER CARTONS) IN ONE OUTER CARTON.

P/N	REMARK
67926-0040	NON HALOGEN-FREE
67926-0840	HALOGEN-FREE

ADD PART NUMBER EC NO: SH2009-0536 DRAWN: XJ SONG 2009/05/05 CHKD: XJ SONG 2009/06/19 APPR: HWWANG 2009/06/23 REV	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		▽=0 ▽C=0		mm	INCH	DRAWN BY GRATE MA	DATE 2004/04/25	TITLE FEED TO COVER FOR SATA POWER CONNECTOR IDT TYPE			
			4 PLACES	± ---	± ---	CHECKED BY YA JUN	DATE 2004/04/25				
			3 PLACES	± ---	± ---	APPROVED BY SAM		DATE 2004/04/25			
			2 PLACES	± 0.15	± ---						
			1 PLACE	± 0.25	± ---						
		ANGULAR ± 1 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-67926-003		1 OF 1			
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											

9 8 7 6 5 4 3 2 1