

Delay On Break (OFF Delay) CT-AHD Timer Relay Output



- 17.5 mm Wide, 35 mm DIN Rail Mounting
- Universal Voltage
24 ... 240 V AC; 24...48 V DC
- 7 Time Ranges From 0.05s ... 100 h
- Repeat Accuracy $\leq \pm 0.5\%$
- 6 A Isolated SPDT Relay Output
- 2 LED's Indicate Status

Approvals: c US
LISTED


Operation

Delay On Break (OFF-delay with auxiliary voltage): Supply voltage must be applied before and during timing; the green LED glows. Upon closure of the initiate switch S1, the output relay energizes and the red LED glows. The time delay begins when S1 is opened. The output remains energized during timing and the green LED flashes. At the end of the time delay, the output de-energizes and the red LED is OFF. The output will energize if S1 is closed when supply voltage is applied.


Reset: Re-closing S1 during timing resets the time delay. Removing supply voltage resets the time delay and the output relay.

LED Operation	Green LED	Red LED
Voltage Applied	ON	N/A
Relay Energized	ON	ON
Timing	Flashing	ON
Voltage Removed	OFF	OFF

Connection




Wiring Diagrams

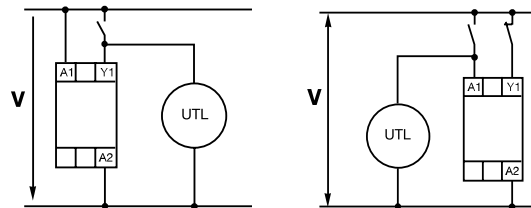

NOTE: An optional untimed parallel load can be connected to A1 or Y1 as shown.

Function

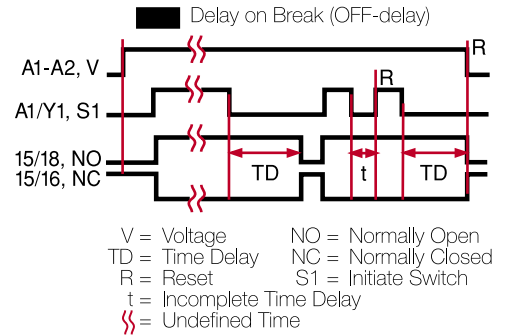

Accessories



Panel Mounting Adapter
22.5 mm
P/N: 1SVR 430 029 R 0100

See accessory pages for specifications.

Ordering Table


Supply Voltage	Time Ranges	Part Number
	0.05 ... 1 s	
	0.5 ... 10 s	
24 ... 240 V AC	5.0 ... 100 s	1SVR 500 110 R 0000
24...48 V DC	0.5 ... 10 m	
	5.0 ... 100 m	
	0.5 ... 10 h	
	5.0 ... 100 h	

Delay On Break (OFF Delay) **CT-AHD Timer** **Relay Output**


Technical Data

Input		
Voltage/Power Consumption	A1-A2	24 ... 240 V AC; 24...48 V DC/ $\approx$ 2.0 VA / W
Tolerance		-15% ... +10%
Frequency		50 ... 60 Hz
Initiate Time		$\geq$ 20 ms
Time Delay		
Range		0.05 s ... 100 h in 7 ranges
Reset Time		$\leq$ 50 ms
Repeat Accuracy		$\leq$ +/- 0.5%
Time Delay vs Input Voltage Tolerance		$\leq$ 0.5%
Time Delay vs Temperature		$\leq$ 0.06%/°C
Status Display		
Supply Voltage		LED green
Output Relay Energized		LED red
Output		
Rated Voltage	15-16/18 VDE 0100, IEC947-1	Isolated SPDT Relay
Rating		250 V
		6 A resistive @ 230 V AC (AC 12)
		3 A inductive @ 230 V AC (AC 15)
		6 A resistive @ 24 V DC (DC 12)
		2 A inductive @ 24 V DC (DC 13)
		$\leq$ 240 V AC
		$\leq$ 30 x 10 ⁶ operations
		$\leq$ 1 x 10 ⁵ operations
		$\leq$ 10 A fast acting
General		
Rated Impulse Withstand Voltage (Vimp)		4 kV/1.2 ... 50 μ S
Operating/Storage Temperature		-20°C ... +60°C / -40°C ... +85°C
Mounting on DIN Rail (EN 50022)		Snap-on mounting/Screw mounting with adaptor
Wire Size Stranded with Wire End Ferrule		2 x 14 AWG (2 x 2.5 mm ²)
Weight		$\approx$ 2.1 oz (60 g)
Dimensions (W x H x D)		0.69 x 2.76 x 2.48 in. (17.5 x 70 x 63 mm)

Face View



- ① – Time range selection switch, 7 ranges
- ② – Time delay adjustment
- ③ – LED Indicators
 - R-Red - Output relay energized
 - U-Green - Voltage applied
 - U-Green (Flashing) - Timing




The time range selection switch displays the longest time delay in the range in seconds, minutes, or hours.


The time delay adjustment has a 0.5 to 10 reference dial. Use the time range setting as a multiplier, 1s = x0.1, 100s = x10.

Load Limit Curves


AC Load (Resistive)

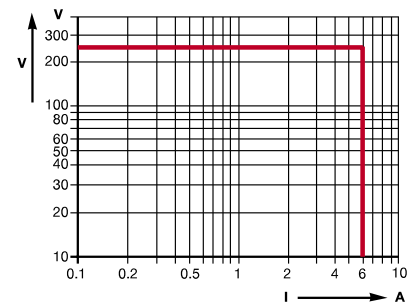


DC Load (Resistive)

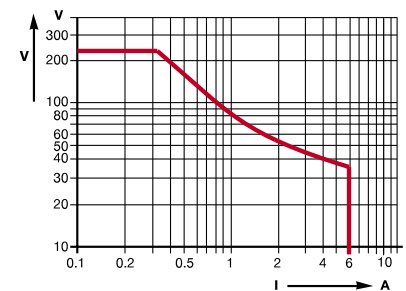

Reduction Factor for Inductive AC Load

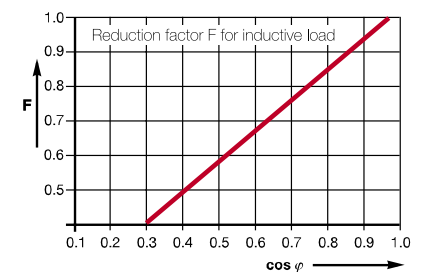

Contact Lifetime

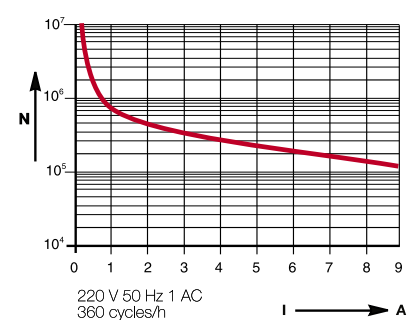

Mechanical View

