

# Square-law compression amplifiers

## BA6138 / BA6138F

The BA6138 and BA6138F are square-law compression amplifiers designed for use as level meters in component stereos and tape decks. Two square root amplifiers with good linearity are included on the IC, as well as a muting pin for easy handling of power on/off.

### ● Applications

Level meters for tape decks, component stereos, and high-end radio cassette players

### ● Features

- 1) Consists of two square-law compression amplifiers with good linearity.
- 2) Good balance between channels with minimal cross-talk.
- 3) Includes a muting pin for easy handling of power on/off.
- 4) Good stability with respect to power supply voltage fluctuations.
- 5) Operates on a single power supply.

### ● Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Limits	Unit
Power supply voltage	Vcc	18	V
Power dissipation	Pd	400*1	mW
BA6138		300*2	
Operating temperature	Topr	-20~+75	°C
Storage temperature	Tstg	-50~+125	°C


\*1 Reduced by 4mW for each increase in Ta of 1°C over 25°C.

\*2 Reduced by 3mW for each increase in Ta of 1°C over 25°C.

### ● Recommended operating conditions (Ta = 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Power supply voltage	Vcc	8.5	—	16	V

## ● Block diagram

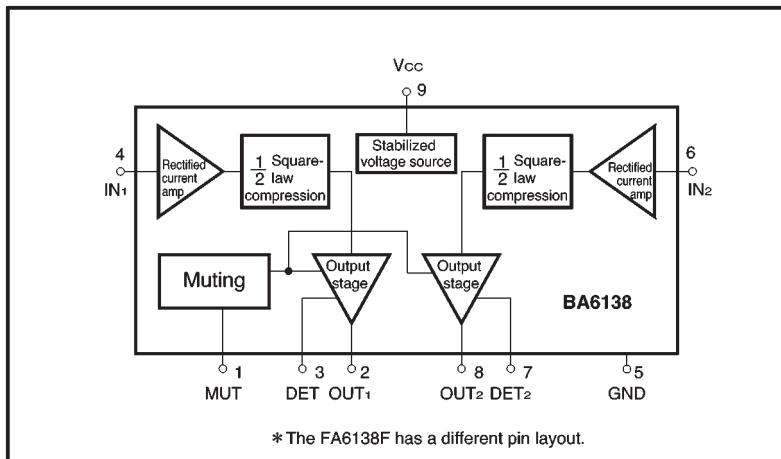● Electrical characteristics (unless otherwise noted,  $T_a = 25^\circ\text{C}$  and  $V_{cc} = 12\text{V}$ )

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Quiescent current	$I_o$	—	5	10	mA	$I_{IN}=0 \mu\text{A}$
Quiescent output voltage	$V_{OQ}$	—	30	100	mV	$I_{IN}=0 \mu\text{A}$
Input resistance	$R_{IN}$	1.5	2.1	3.2	k $\Omega$	$f=1\text{kHz}$
Maximum input current	$I_{IN \text{ Max.}}$	—	—	2	mA	—
Maximum output voltage	$V_{O \text{ Max.}}$	4.0	4.6	—	V	—
Output voltage	$V_o$	1.0	1.25	1.5	V	$I_{IN}=100 \mu\text{A}$
Crosstalk	CT	—	60	—	dB	$f=1\text{kHz}$
Output voltage difference between channels	$\Delta V_o$	—	0	$\pm 120$	mV	$I_{IN}=100 \mu\text{A}$
Output voltage linearity	$\Delta V/\Delta I$	720	800	880	mV	$I_{IN}=10 \sim 100 \mu\text{A}$

## ● Measurement circuit

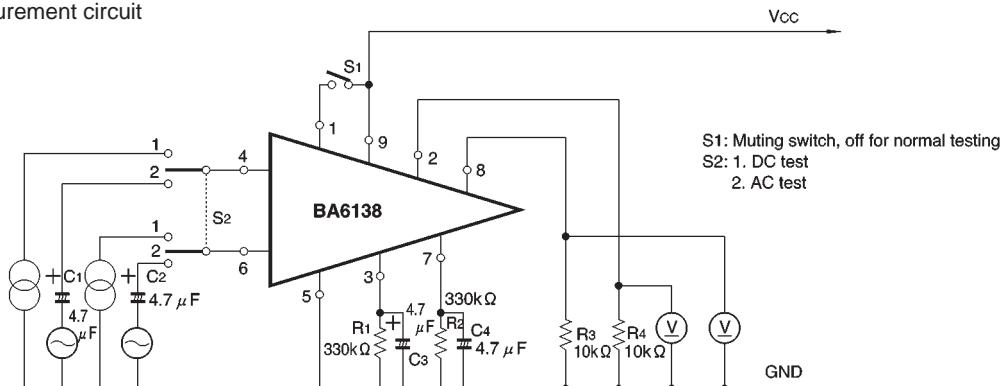


Fig. 1

$C_3$ ,  $R_2$ ,  $C_4$

These time constants determine the recovery time. With  $R_1 = R_2 = 330\text{k}\Omega$  and  $C_3 = C_4 = 4.7\mu\text{F}$  as in the application example, the recovery time is approximately 1 second.  $C_3$  and  $C_4$  can also be used as smoothing capacitors.

The attack time is related to the charging ability of the IC and the values of  $C_3$  and  $C_4$ . In the application example, it is approximately 1 ms.

Muting pin (Pin 1)

When Pin 1 is high, muting takes place.

The threshold voltage is approximately 1.5V (2V<sub>F</sub>).

## ● Application example

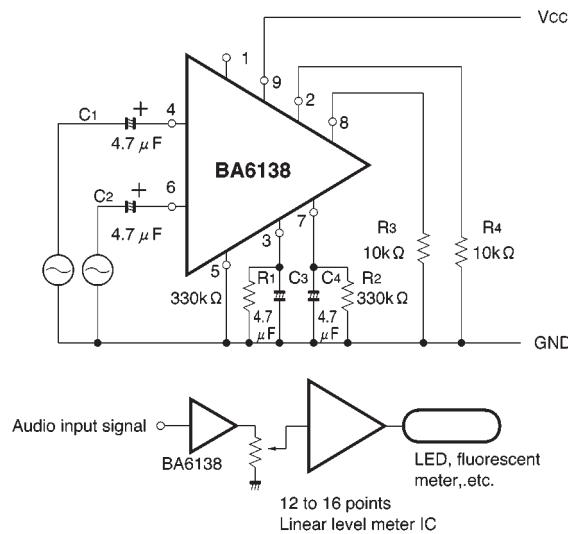


Fig. 2

If this pin is not used, open-circuit or ground it. A negative voltage of up to  $-10\text{V}$  can also be applied to this pin.

$R_3$ ,  $R_4$

These form the load resistance of the BA6138. By making this resistance extremely low, the recovery time will shorten, however, dispersion will increase.

In the application example, the resistance can go to about  $3.3\text{k}\Omega$ . If the recovery time has been fixed,  $R_1 = R_2$  can be decreased and  $C_3 = C_4$  can be increased to lower the load resistance.

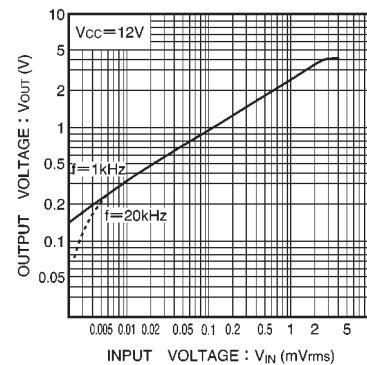


Fig. 3 Output voltage vs. input voltage

### ●Explanation of application circuit example

The application circuit shown in Fig. 2 is for the BA6138. The audio signal is compressed to its square root and generated to  $R_3$  and  $R_4$  as a DC output. By introducing the output voltage of  $R_3$  and  $R_4$  into the input of a linear level meter IC (12 to 16 points, LED or fluorescent drive level meter IC), a high precision level meter can be created.

The relation between the input voltage and output voltage of the application example of Fig. 2 is shown in Fig. 3.

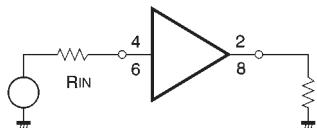


Fig. 4


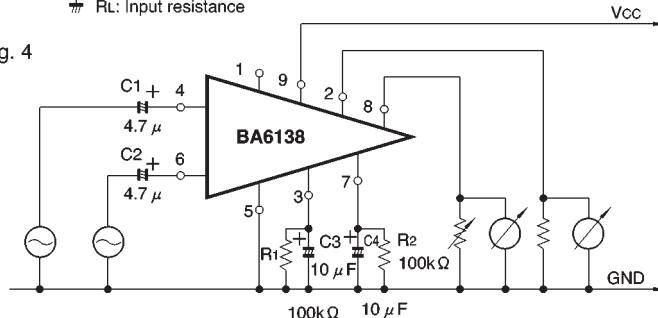


Fig. 5


### ●External dimensions (Units: mm)

BA6138

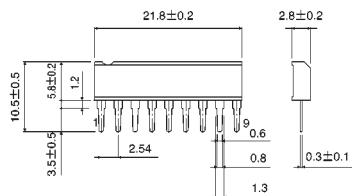

SIP9

BA6138F

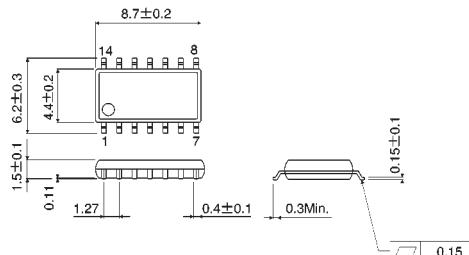

SOP14