

5


4

3

2

1

D

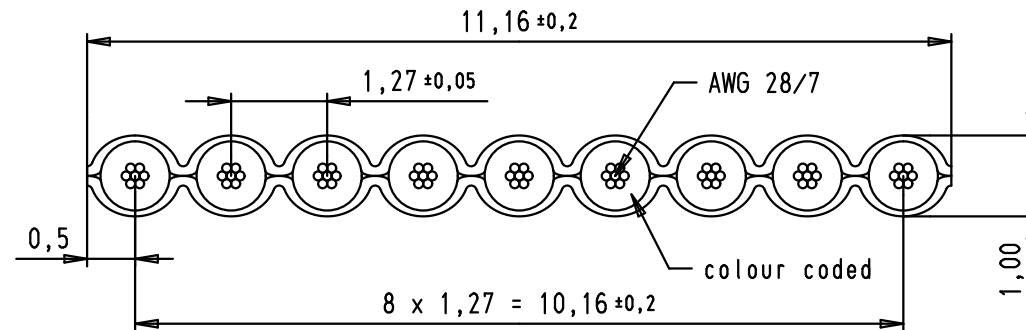

C

Wire _____ Cu tinned
Gauge _____ AWG 28/7
Voltage rating _____ 300 Vr.m.s
Current (Max) _____ 2,1A at 25°C
Conductor resistance _____ 221 mΩ/m

Colour code sequence (in 10 steps):

Capacity unbalanced _____ 42,7 pF/m
Impedance unbalanced _____ 105 Ω
Inductance unbalanced _____ 0,68 μH/m
Signal delay _____ 4,9 ns/m
Insulation material _____ PVC


-brown
-red
-orange
-yellow
-green
-blue
-violet
-grey
-white
-black

B

Temperature rating _____ -20°C (operating) to 105°C
_____ -30°C (static)
Flammability rating _____ UL: VW1
Insulation resistance _____ 100 MΩ/km

A

Approval _____ UL AWM style 2651

				Dat.	Name		SEK 18 rainbow Flat cable 9 poles, length per reel: 30,48 m IEC 918	Maßstab/ Scale 10:1
			Detail.	14/05/07	PK			
			Insp.					
			Stand.					
EC01446	22/02/10	SC	HARTING EURL F-95972 Paris				TB 09 18 009 7005	Blatt/ Page 1 / 1
33990	14/05/07	PK						
Mod.	Dat.	Name					Sub.	