

New Product


GLZ Series

Zener Diodes

V_Z Range 3.3 to 39V


Power Dissipation 500mW

MiniMELF (SOD-80C)

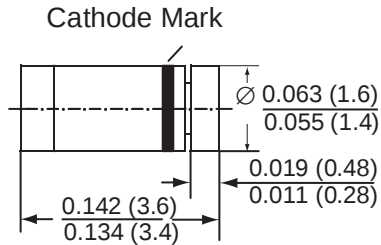

Dimensions in inches and (millimeters)

Mounting Pad Layout

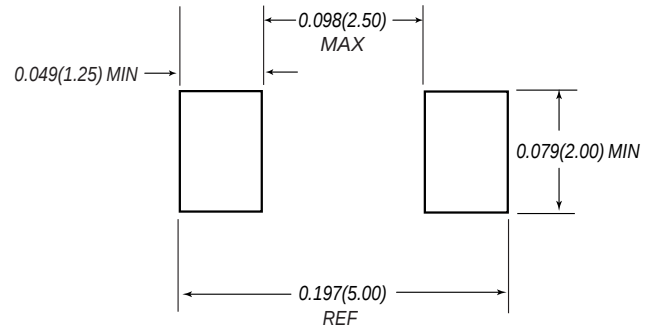

Mechanical Data

Case: MiniMELF Glass Case (SOD-80C)

Weight: approx. 0.05g

Packaging codes/options:

D1/10K per 13" reel (8mm tape), 20K/box

D2/2.5K per 7" reel (8mm tape), 20K/box

Features

- Silicon Planar Zener Diodes
- In MiniMELF case especially for automatic insertion
- The Zener voltages are graded according to voltage bands instead of by tolerance.
- Low Zener impedance and low leakage current
- Popular in Asian designs

Maximum Ratings and Thermal Characteristics (T_A = 25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Zener Current see Table "Characteristics"			
Power Dissipation (see fig. 1)	P _D	500 ⁽¹⁾	mW
Thermal Resistance Junction to Ambient Air	R _{θJA}	300 ⁽¹⁾	°C/W
Junction temperature	T _J	175	°C
Storage temperature range	T _S	-55 to +175	°C

Note:

(1) Valid provided that electrodes are kept at ambient temperature.

Type	Zener Voltage				Dynamic Resistance ⁽³⁾				Reverse Leakage Current	
	Rank	Vz (V) at IzT			Zz (Ω) at IzT		Zzk (Ω) at IzK		IR (μA)	
		Min	Max	IzT (mA)	Max	Iz (mA)	Max	IzK (mA)	Max.	VR (V)
GLZ3.3	A B	3.160 3.320	3.380 3.530	20	70	20	1000	1	20	1.0
GLZ3.6	A B	3.455 3.600	3.695 3.845	20	60	20	1000	1	10	1.0
GLZ3.9	A B	3.74 3.89	4.01 4.16	20	50	20	1000	1	5	1.0
GLZ4.3	A B C	4.04 4.17 4.30	4.29 4.43 4.57	20	40	20	1000	1	5	1.0
GLZ4.7	A B C	4.44 4.55 4.68	4.68 4.80 4.93	20	25	20	900	1	5	1.0
GLZ5.1	A B C	4.81 4.94 5.09	5.07 5.20 5.37	20	20	20	800	1	5	1.5
GLZ5.6	A B C	5.28 5.45 5.61	5.55 5.73 5.91	20	13	20	500	1	5	2.5
GLZ6.2	A B C	5.78 5.96 6.12	6.09 6.27 6.44	20	10	20	300	1	5	3.0
GLZ6.8	A B C	6.29 6.49 6.66	6.63 6.83 7.01	20	8	20	150	0.5	2	3.5
GLZ7.5	A B C	6.85 7.07 7.29	7.22 7.45 7.67	20	8	20	120	0.5	0.5	4.0
GLZ8.2	A B C	7.53 7.78 8.03	7.92 8.19 8.45	20	8	20	120	0.5	0.5	5.0
GLZ9.1	A B C	8.29 8.57 8.83	8.73 9.01 9.30	20	8	20	120	0.5	0.5	6.0
GLZ10	A B C D	9.12 9.41 9.70 9.94	9.59 9.90 10.20 10.44	20	8	20	120	0.5	0.2	7.0
GLZ11	A B C	10.18 10.50 10.82	10.71 11.05 11.38	10	10	10	120	0.5	0.2	8.0
GLZ12	A B C	11.13 11.44 11.74	11.71 12.03 12.35	10	12	10	110	0.5	0.2	9.0

Electrical Characteristics (T_A = 25°C unless otherwise noted)

Type	Zener Voltage				Dynamic Resistance ⁽³⁾				Reverse Leakage Current	
	Rank	V _Z (V) at I _{ZT}			Z _Z (Ω) at I _{ZT}		Z _{ZK} (Ω) at I _{ZK}		I _R (μA)	
		Min	Max	I _{ZT} (mA)	Max	I _Z (mA)	Max	I _{ZK} (mA)	Max.	V _R (V)
GLZ13	A	12.11	12.75	10	14	10	110	0.5	0.2	10
	B	12.55	13.21							
	C	12.99	13.66							
GLZ15	A	13.44	14.13	10	16	10	110	0.5	0.2	11
	B	13.89	14.62							
	C	14.35	15.09							
GLZ16	A	14.80	15.57	10	18	10	150	0.5	0.2	12
	B	15.25	16.04							
	C	15.69	16.51							
GLZ18	A	16.22	17.06	10	23	10	150	0.5	0.2	13
	B	16.82	17.70							
	C	17.42	18.33							
GLZ20	A	18.02	18.96	10	28	10	200	0.5	0.2	15
	B	18.63	19.59							
	C	19.23	20.22							
	D	19.72	20.72							
GLZ22	A	20.15	21.20	5	30	5	200	0.5	0.2	17
	B	20.64	21.71							
	C	21.08	22.17							
	D	21.52	22.63							
GLZ24	A	22.05	23.18	5	35	5	200	0.5	0.2	19
	B	22.61	23.77							
	C	23.12	24.31							
	D	23.63	24.85							
GLZ27	A	24.26	25.52	5	45	5	250	0.5	0.2	21
	B	24.97	26.26							
	C	25.63	26.95							
	D	26.29	27.64							
GLZ30	A	26.99	28.39	5	55	5	250	0.5	0.2	23
	B	27.70	29.13							
	C	28.36	29.82							
	D	29.02	30.51							
GLZ33	A	29.68	31.22	5	65	5	250	0.5	0.2	25
	B	30.32	31.88							
	C	30.90	32.50							
	D	31.49	33.11							
GLZ36	A	32.14	33.79	5	75	5	250	0.5	0.2	27
	B	32.79	34.49							
	C	33.40	35.13							
	D	34.01	35.77							
GLZ39	A	34.68	36.47	5	85	5	250	0.5	0.2	30
	B	35.36	37.19							
	C	36.00	37.85							
	D	36.63	38.52							

Notes: (1) The Zener voltage is measured 40ms after power is supplied.
(2) Specify Zener voltage rank (A, B, C, or D) when ordering parts
(3) Dynamic Zener resistance is measured with f = 1kHz

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 – Power Derating Curve

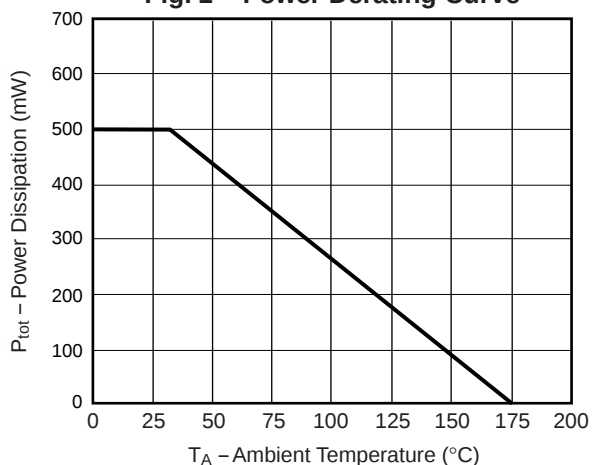


Fig. 2 – Typical Breakdown Characteristics

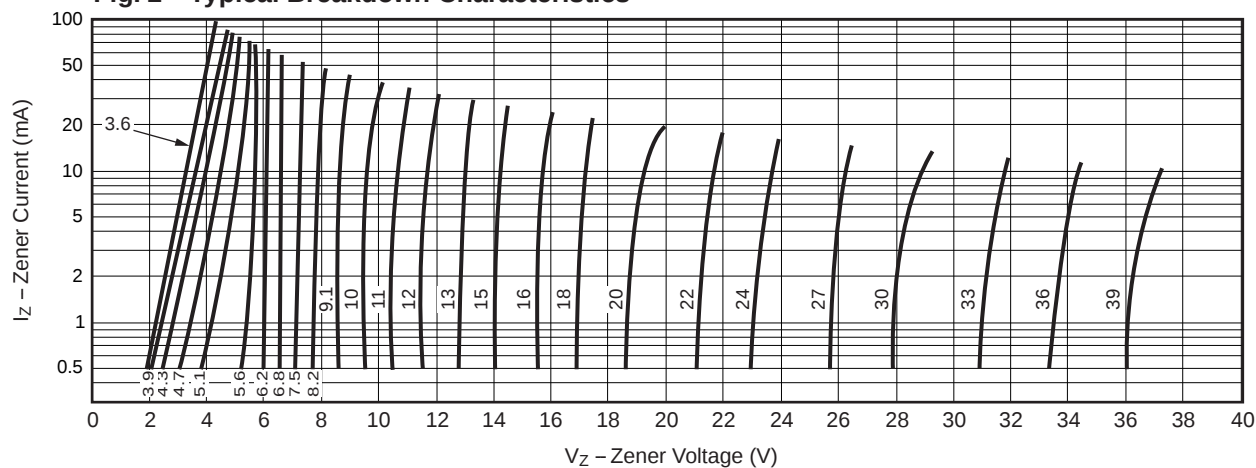


Fig. 3 – Typical R_Z vs. I_Z

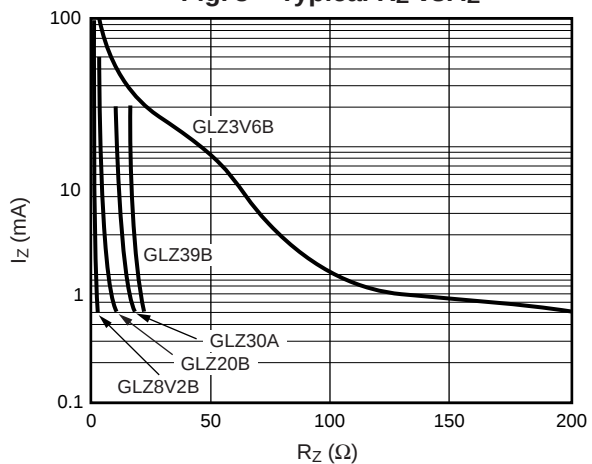


Fig. 4 – Typical Forward Characteristics

