

RF AMPLIFIER

Available as: QBH-2832-04-MKS, 080-22567-0001

MODEL QBH-2832-04-MKS

Features

- High Gain: 35.5 dB Typical
- High Power: +33 dBm Typical
- Replaces Old Motorola "2832" Design

Specifications²

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta=+25 °C
Frequency	1 - 200 MHz	1 - 200 MHz
Gain (dB)	35.5	34 Min/ 37 Max.
Gain vs. Temperature	—	—
Gain Flatness	±0.5	± 1.0 Max.
Reverse Isolation (dB)	45	—
VSWR	In 1.5:1 Out 1.5:1	2.0:1 Max. 2.0:1 Max.
1 dB Compression (dBm)	+33	+31 Min.
3rd Order Intercept (dBm)	+48	+45 Min.
Noise Figure (dB)	4.5	6.0 Max.
Power	Vdc +28 mA 435	+28 470 Max.


Notes:

1. Maximum operating temperature is defined as that temperature which, if exceeded for extended periods, could result in premature unit failure. This data is provided for user reliability information. This may or may not represent the maximum temperature for electrical parameter specifications.
2. Min/Max specifications are guaranteed when tested in a 50 Ohm system.







Absolute Maximum (No Damage) Ratings

Operating Temperature¹ -20 °C to +90 °C
 Storage Temperature -40 °C to + 100 °C
 DC Voltage + 30 Volts
 Continuous RF Input Power + 5 dBm
 Short Term RF Input Power 100 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.1 Watt (3 µsec Max.)

Outline Drawing: 080-22567-0001

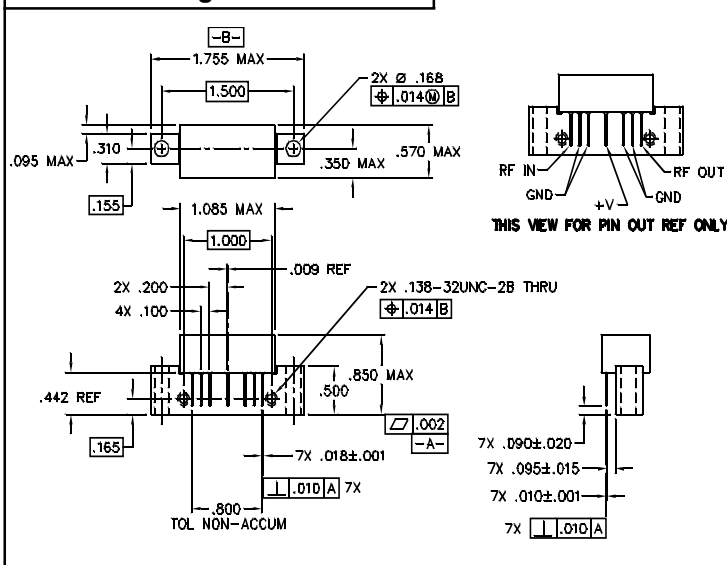

Typical Performance Data

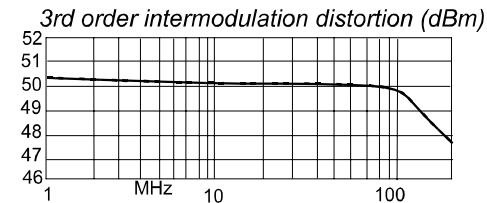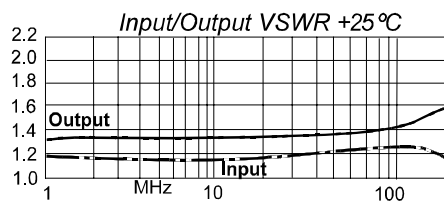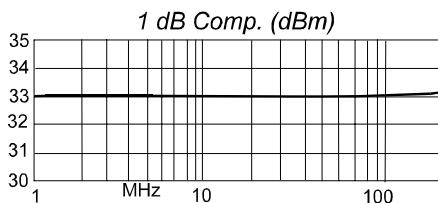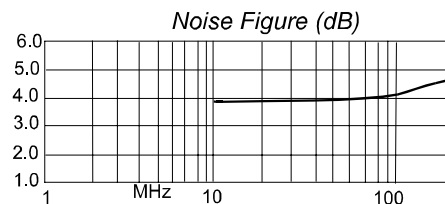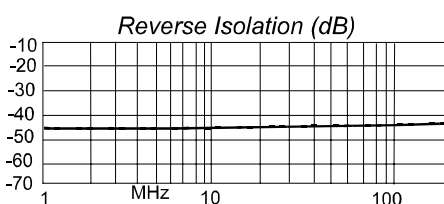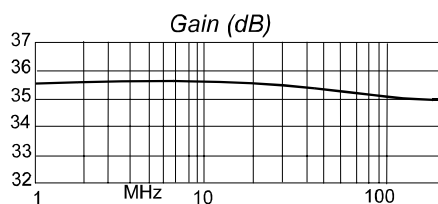

Legend ——— + 25 °C



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532

Rev.
3/14/11

www.SpectrumMicrowave.com Spectrum Microwave · 2707 Black Lake Place · Philadelphia, Pennsylvania 19154 · PH (215) 464-4000 · Fax (215) 464-4001