

Video switch for CANAL-Plus decoder

BA7632AF

The BA7632AF is an audio-switching ICs for decoders for scrambled pay channels used in France and other countries. The ICs include a five-input multiplexer, a four-input multiplexer and a two-input multiplexer, and allow decoder audio switching to be done with a single IC. When used in combination with the BA7630S common logic control can be used for audio and video switching.

○The BA7632AF has larger termination resistors on the inputs than the BA7631 and BA7631F.

●Applications

Video cassette recorders

●Features

- 1) All the audio-switching functions required for SECAM CANNAL-plus decoder integrated onto one chip.
- 2) Inputs terminated with 140k Ω resistors.
- 3) Built-in output buffer.
- 4) Wide supply voltage range (4.5V to 13.0V).
- 5) Low total harmonic distortion (Max. 0.005% Typ.).
- 6) Wide dynamic range (3.6V_{rms}, V_{CC} = 12V).
- 7) Same control logic as for the BA7630S can be used.

●Absolute maximum ratings (Ta = 25°C)


| Parameter | Symbol | Limits | Unit |
|-----------------------|------------------|--------------|------|
| Applied voltage | V _{CC} | 13.5 | V |
| Power dissipation | P _d | 500* | mW |
| Operating temperature | T _{opr} | – 25 ~ + 70 | °C |
| Storage temperature | T _{stg} | – 55 ~ + 125 | °C |

* Reduced by 5mW for each increase in Ta of 1°C over 25°C.

●Recommended operating conditions (Ta = 25°C)

| Parameter | Symbol | Limits | Unit |
|----------------------|-----------------|------------|------|
| Power supply voltage | V _{CC} | 4.5 ~ 13.0 | V |

●Block diagram

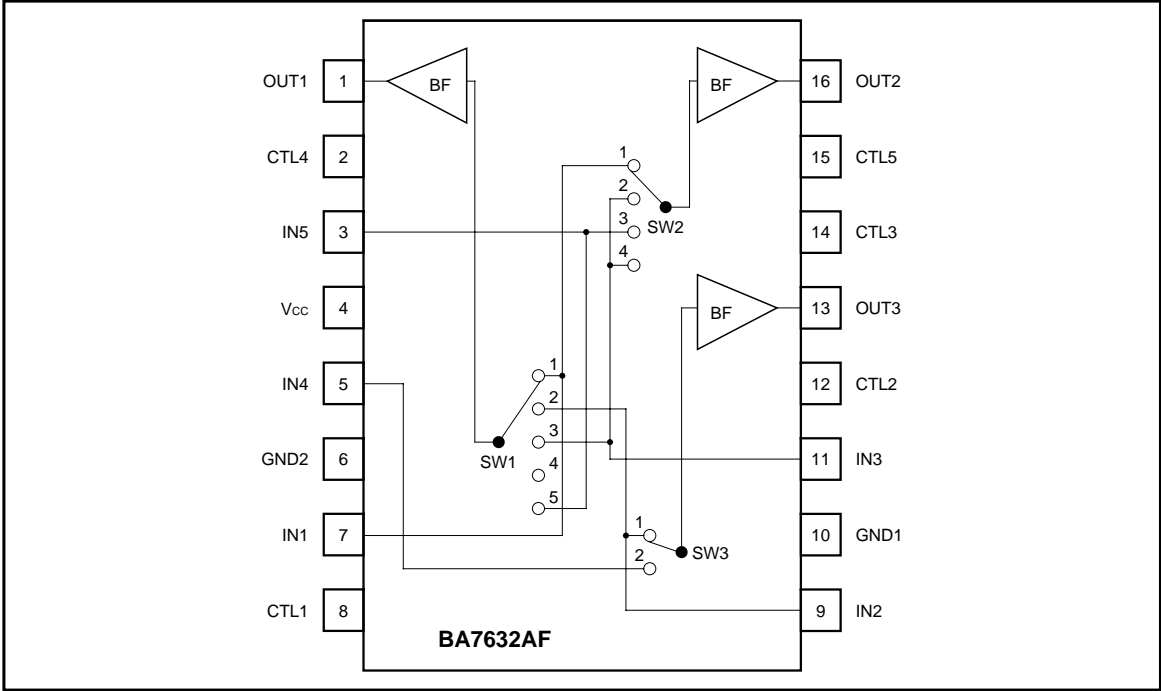

●Truth table

OUT1 SW1

| CTL1 | CTL2 | CTL5 | SELECT |
|------|------|------|--------|
| L | L | L | IN1 |
| L | H | L | IN2 |
| H | L | L | IN3 |
| H | H | L | MUTE |
| * | * | H | IN5 |

* Don't care

OUT2 SW2

| CTL3 | CTL5 | SELECT |
|------|------|--------|
| L | L | IN1 |
| H | L | IN3 |
| L | H | IN5 |
| H | H | IN3 |





OUT3 SW3

| CTL4 | SELECT |
|------|--------|
| L | IN2 |
| H | IN4 |

●Pin descriptions

| Pin No. | Pin Name | Function |
|---------|----------|-------------------|
| 1 | OUT1 | Output 1 |
| 2 | CTL4 | Control 4 |
| 3 | IN5 | Input 5 |
| 4 | Vcc | Power supply |
| 5 | IN4 | Input 4 |
| 6 | GND2 | GND (GND1 common) |
| 7 | IN1 | Input 1 |
| 8 | CTL1 | Control 1 |
| 9 | IN2 | Input 2 |
| 10 | GND1 | GND (GND2 common) |
| 11 | IN3 | Input 3 |
| 12 | CTL2 | Control 2 |
| 13 | OUT3 | Output 3 |
| 14 | CTL3 | Control 3 |
| 15 | CTL5 | Control 5 |
| 16 | OUT2 | Output 2 |

●Input / output circuits

●Electrical characteristics (unless otherwise noted, $T_a = 25^\circ\text{C}$ and $V_{CC} = 12\text{V}$)

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Conditions |
|--------------------------------|------------|------|-------|------|------------------|---|
| Recommended operating voltage | V_{CC} | 4.5 | 12.0 | 13.0 | V | — |
| Supply current | I_{CC} | — | 14.9 | 24.0 | mA | — |
| Maximum output level | V_{om} | 3.1 | 3.6 | — | V_{rms} | $f = 1\text{MHz}$, $\text{THD} = 0.5\%$ |
| Voltage gain | G_V | -0.5 | 0 | 0.5 | dB | $f = 1\text{kHz}$, $V_{IN} = 3.0\text{dBm}$ |
| Total harmonic distortion | THD | — | 0.005 | 0.1 | % | $f = 1\text{kHz}$, $V_{IN} = 3.0\text{dBm}$ |
| Interchannel crosstalk | C_{TM} | — | -75 | -60 | dB | $f = 10\text{kHz}$, $V_{IN} = 3.0\text{dBm}$ |
| Input conversion noise voltage | $V_{Min.}$ | — | 20.0 | 40.0 | μV_{rms} | 30kHz LPF, $R_g = 2.2\text{k}\Omega$ |
| CTL switch level | V_{TH} | 1.0 | 2.0 | 3.0 | V | — |
| Input impedance | Z_{IN} | 110 | 140 | 165 | $\text{k}\Omega$ | — |

○Not designed for radiation resistance.

●Circuit operation

The BA7632AF makes it easy to construct a decoder for the scrambled pay channels. They have been designed specifically for audio signal decoding. As shown in the application examples in Figs. 1 and 2, there are inputs for TV, VCR, decoder, and AUX, to

cover a wide range of applications. When the AUX input is not used, by setting CTL5 to "L", the system construction becomes the same as that of the BA7630S, and the BA7630S switching logic can be used as is.

●Application examples

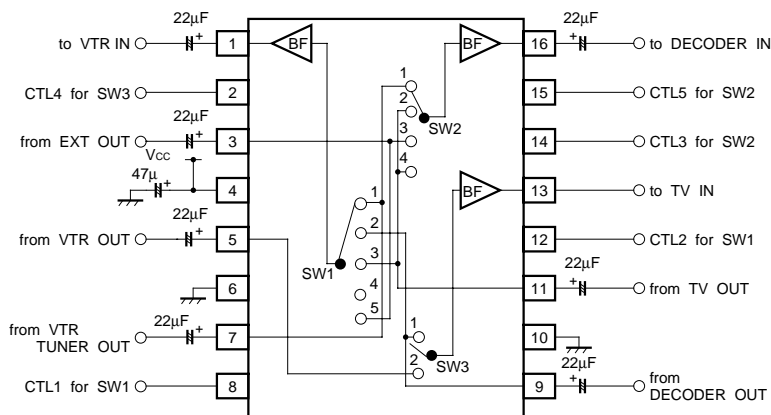


Fig.1

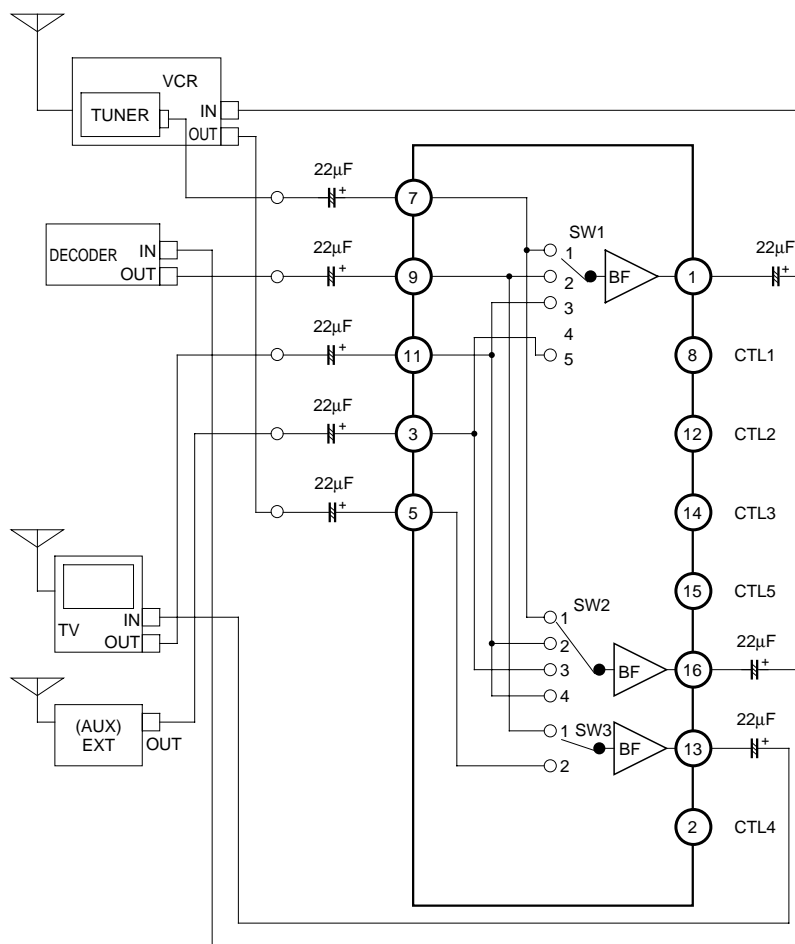


Fig.2

●Electrical characteristic curves

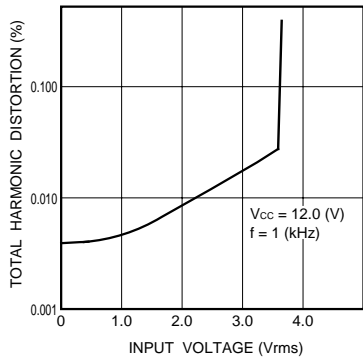


Fig. 3 Distortion characteristics


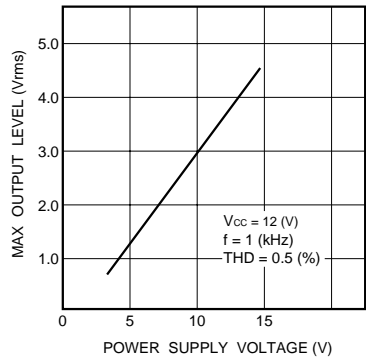


Fig. 4 Power supply voltage vs. dynamic range characteristics

●External dimensions (Units: mm)

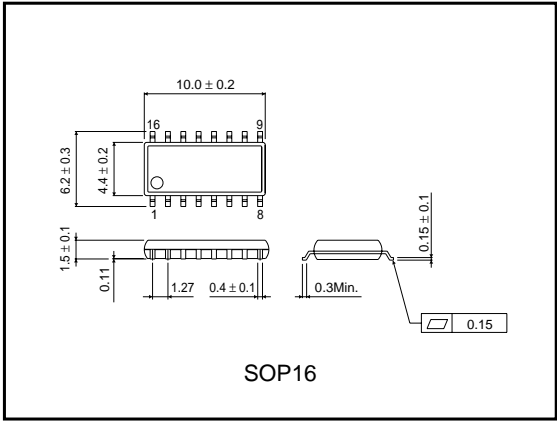

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document use silicon as a basic material.
Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.