

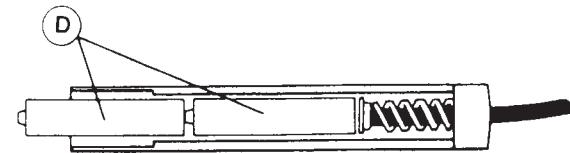







MODE 1



MODE 2



MODE 3

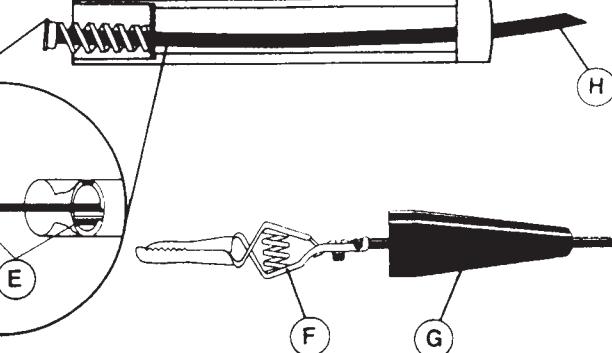

MODE 1 Continuity tester for unpowered circuits. 0-10 ohms, uses #35121 lamp with two AAA batteries (not supplied).

MODE 2 Voltage tester 60-600 volts AC or DC when #35121 lamp is used without batteries.

MODE 3 Voltage tester 0-60 volts AC or DC when various lamps are used without batteries.

- A. Probe tip is included. Item 00100 will also used any tip with 10-32 thread.
- B. #35121 3 volt lamp is included for use in Mode 1 and Mode 3. Operates from 2 to 3 volts in Mode 3.
- C. Gas lamp 60-600 volts for Mode 2 operation (included).
- D. Two AAA batteries for use in Mode 1 (not supplied).

- E. Three point washer rides on internal steps in handle. Slides to lower position for Mode 1, upper position for Modes 2 and 3.
- F. The other end of the 3 foot wire lead is terminated with a #85 Mueller ground clip.
- G. Black insulator over clip for high voltage applications.
- H. Wire is 3' long, high flex 105 strand copper, with black PVC insulated jacket.
- I. Clear butyrate "window" allows 360 view of indicator light at tip.



Tester, Continuity & Voltage Circuitracer®

MENDA

3651 WALNUT AVE., CHINO, CA 91710
PHONE: (909) 627-2453 • FAX: (951) 755-8848
WEBSITE: MendaPump.com

DRAWING NUMBER
35100

DATE:
October
2007

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Menda:](#)

[35100](#)