

#### 2.5V Drive Pch+SBD MOSFET

V <sub>DSS</sub>	-20V
R <sub>DS(on)</sub> (Max.)	340mΩ
I <sub>D</sub>	±1.5A
P <sub>D</sub>	1.25W

#### Features

- The QS5U27 combines Pch MOSFET with a Schottky barrier diode in a single TSMT5 package.
- 2) Low on-state resistance with fast swicthing
- 3) Low voltage drive (2.5V drive).
- 4) Built-in Low V<sub>F</sub> schottky barrier diode.
- 5) Pb-free lead plating; RoHS compliant.

#### Application


Load switch, DC/ DC conversion

### ● **Absolute maximum ratings** (T<sub>a</sub> = 25°C)


#### <MOSFET>

Parameter	Symbol	Value	Unit
Drain - Source voltage	V <sub>DSS</sub>	-20	V
Gate - Source voltage	V <sub>GSS</sub>	±12	V
Continuous drain current	I <sub>D</sub>	±1.5	А
Pulsed drain current	I <sub>D, pulse</sub> *1	±6.0	А
Continuous source current (body diode)	Is	-0.75	А
Pulsed source current (body diode)	I <sub>S, pulse</sub> *1	-3.0	А
Power dissipation	P <sub>D</sub> *3	0.9	W/elemen
Junction temperature	T <sub>j</sub>	150	°C

#### Outline

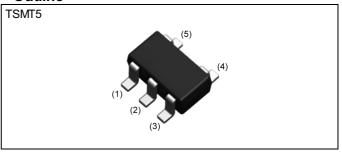

#### •Inner circuit



Packaging specifications

- 1 0011013	Jiiig opcomoduciio	
	Packing	Embossed Tape
	Reel size (mm)	180
Туре	Tape width (mm)	8
	Basic ordering unit (pcs)	3000
	Taping code	TR
	Marking	U27

## ● Absolute maximum ratings (T<sub>a</sub> = 25°C)

#### <SBD>

Parameter	Symbol	Value	Unit
Repetitive peak reverse voltage	$V_{RM}$	25	V
Reverse voltage	$V_{R}$	20	V
Forward current	I <sub>F</sub>	1.0	А
Forward current surge peak	I <sub>FSM</sub> *2	3.0	А
Power dissipation	P <sub>D</sub> *3	0.7	W/element
Junction temperature	T <sub>j</sub>	150	°C

#### <MOSFET + SBD>

Parameter	Symbol	Value	Unit	
Power dissipation	P <sub>D</sub> *3	1.25	W/total	
Range of storage temperature	T <sub>stg</sub>	-55 to +150	°C	

## ● Electrical characteristics (T<sub>a</sub> = 25°C)

#### <MOSFET>

Davamatav	Symbol Conditions		Values			Unit
Parameter	Symbol	Conditions	Min.	Тур.	Max.	Offic
Gate - Source leakage current	I <sub>GSS</sub>	$V_{GS} = \pm 12V, V_{DS} = 0V$	-	1	±10	μA
Drain - Source breakdown voltage	V <sub>(BR)DSS</sub>	$V_{GS} = 0V$ , $I_D = -1mA$	-20	-	-	V
Zero gate voltage drain current	I <sub>DSS</sub>	V <sub>DS</sub> = -20V, V <sub>GS</sub> = 0V	-	-	-1	μΑ
Gate threshold voltage	V <sub>GS(th)</sub>	$V_{DS} = -10V, I_{D} = -1mA$	-0.7	-	-2.0	V
		V <sub>GS</sub> = -4.5V, I <sub>D</sub> = -1.5A	-	160	200	
Static drain - source on - state resistance	R <sub>DS(on)</sub> *4	$V_{GS} = -4V, I_D = -1.5A$	-	180	240	mΩ
		V <sub>GS</sub> = -2.5V, I <sub>D</sub> = -0.75A	-	260	340	
Transconductance	9 <sub>fs</sub> *4	$V_{DS} = -10V, I_{D} = -0.75A$	1.0	-	-	S



## ● Electrical characteristics (T<sub>a</sub> = 25°C)

#### <MOSFET>

Daramatar	Cymah al	Conditions		Values		Lloit	
Parameter	Symbol	Conditions	Min.	Тур.	Max.	Unit	
Input capacitance	C <sub>iss</sub>	V <sub>GS</sub> = 0V	-	325	-		
Output capacitance	C <sub>oss</sub>	V <sub>DS</sub> = -10V	-	60	-	pF	
Reverse transfer capacitance	C <sub>rss</sub>	f = 1MHz	-	40	-		
Turn - on delay time	t <sub>d(on)</sub> *4	$V_{DD} \simeq$ -15V, $V_{GS} =$ -4.5V	-	10	-		
Rise time	t <sub>r</sub> *4	I <sub>D</sub> = -0.75A	-	10	-		
Turn - off delay time	t <sub>d(off)</sub> *4	$R_L = 20\Omega$	-	35	-	ns	
Fall time	t <sub>f</sub> *4	$R_G = 10\Omega$	-	10	-		

## • Gate charge characteristics ( $T_a = 25$ °C)

#### <MOSFET>

Darameter	Cumbal	Conditions		Values		Unit
Parameter	Symbol	Conditions	Min.	Тур.	Max.	Offic
Total gate charge	$Q_g^{*4}$		-	4.2	-	
Gate - Source charge	Q <sub>gs</sub> *4	$V_{DD} \simeq -15V, I_{D} = -1.5A$ $V_{GS} = -4.5V$	-	1.0	-	nC
Gate - Drain charge	Q <sub>gd</sub> *4	163	-	1.1	-	

## ● Body diode electirical characteristics (Source-Drain) (T<sub>a</sub> = 25°C)

#### <MOSFET>

Parameter	Symbol	Conditions	Values		Unit V	
raianetei	Symbol	Conditions	Min.	Тур.	Max.	Offic
Forward voltage	V <sub>SD</sub> *4	$V_{GS} = 0V, I_{S} = -0.75A$	-	-	-1.2	V



# ●Electrical characteristics (T<sub>a</sub> = 25°C)

#### <SBD>

Parameter	Cymahal	Conditions	Values			Lloit
raiametei	Symbol	Conditions	Min.	Тур.	Max.	Unit
Forward voltage	$V_{F}$	I <sub>F</sub> = 1.0A	-	-	0.45	V
Reverse current	I <sub>R</sub>	V <sub>R</sub> = 20V	-	-	200	μA

<sup>\*1</sup> Pw  $\leq$  10µs, Duty cycle  $\leq$  1%


<sup>\*2 60</sup>Hz-1 cycle

<sup>\*3</sup> Mounted on a ceramic board

<sup>\*4</sup> Pulsed


#### Electrical characteristic curves < MOSFET>

Fig.1 Typical Capacitance vs. Drain -Source Voltage

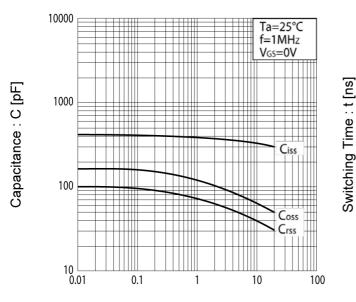

Drain - Source Voltage :  $-V_{DS}[V]$ 


Fig.2 Switching Characteristics



Drain Current: -ID [A]

Fig.4 Static Drain - Source On - State Resistance vs. Gate Source Voltage

Fig.3 Typical Transfer Characteristics




Static Drain - Source On-State Resistance  $: R_{DS(on)}$  [m $\Omega$ ]

400 Ta=25°C ID=-0.75A Pulsed 350 ID=-1.5A 300 250 200 150 100 50 0 \_ 2 6 8 10 12

Gate - Source Voltage : -V<sub>GS</sub> [V]


#### • Electrical characteristic curves < MOSFET>

Fig.5 Source Current vs. Source Drain Voltage



Source - Drain Voltage : -V<sub>SD</sub> [V]

Fig.6 Static Drain - Source On - State Resistance vs. Drain Current (I)



Drain Current: -ID [A]

Fig.7 Static Drain - Source On - State Resistance vs. Drain Current (II)



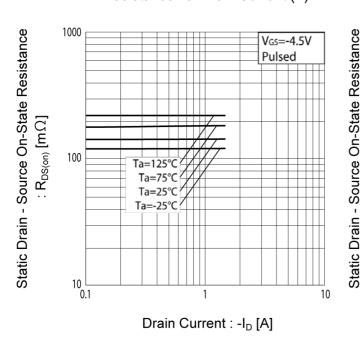


Fig.8 Static Drain - Source On - State Resistance vs. Drain Current (III)



### ● Electrical characteristic curves < MOSFET>

Fig.9 Static Drain - Source On - State Resistance vs. Drain Current (IV)



Drain Current : -I<sub>D</sub> [A]

#### • Electrical characteristic curves <SBD>

Fig.11 Forward Current vs. Forward Voltage





Fig.12 Reverse Current vs. Reverse Voltage



#### Notice

- SBD has a large reverse leak current compared to other type of diode. Therefore, it would raise a junction temperature, and increase a reverse power loss. Further rise of inside temperature would cause a thermal runaway. This built-in SBD has low V<sub>F</sub> characteristics and therefore, higher leak current. Please consider enough the surrounding temperature, generating heat of MOSFET and the reverse current.
- 2. This product might cause chip aging and breakdown under the large electrified environment. Please consider to design ESD protection circuit.

#### Measurement circuits

Fig.1-1 Switching Time Measurement Circuit




Fig.2-1 Gate Charge Measurement Circuit




Fig.1-2 Switching Waveforms






Fig.2-2 Gate Charge Waveform



ROHM

#### Dimensions

TSMT5

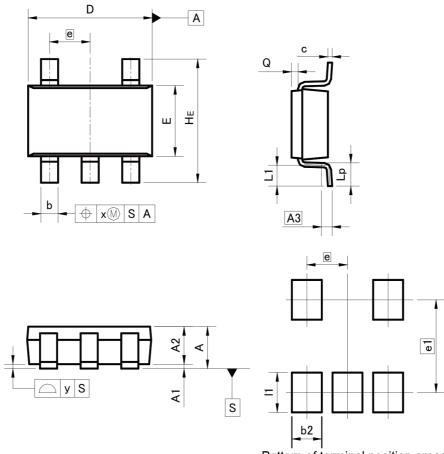

Pattern of terminal position areas
[Not a recommended pattern of soldering pads]

DIM	MILIM	ETERS	INC	HES	
DIM [	MIN	MAX		MAX	
Α	+	1.00	Н	0.039	
A1	0.00	0.10	0.000	0.004	
A2	0.75	0.95	0.030	0.037	
A3	0.3	25	0.0	10	
b	0.35	0.50	0.014	0.020	
С	0.10	0.26	0.004	0.010	
D	2.80	3.00	0.110	0.118	
E	1.50	1.80	0.059	0.071	
е	0.9	95	0.037		
HE	2.60	3.00	0.102	0.118	
L1	0.30	0.60	0.012	0.024	
Lp	0.40	0.70	0.016	0.028	
Q	0.05	0.25	0.002	0.010	
x	=	0.20	(-)	0.008	
у	445	0.10	7-1	0.004	

DIM	MILIM	MILIMETERS		INCHES		
DIM	MIN	MAX	MIN	MAX		
b2		0.70	-	0.028		
e1	2.	10	0.0	083		
11	<b>=</b> 5	0.90	-	0.035		

Dimension in mm/inches



#### Notes

- 1) The information contained herein is subject to change without notice.
- Before you use our Products, please contact our sales representative and verify the latest specifications:
- 3) Although ROHM is continuously working to improve product reliability and quality, semiconductors can break down and malfunction due to various factors.

  Therefore, in order to prevent personal injury or fire arising from failure, please take safety measures such as complying with the derating characteristics, implementing redundant and fire prevention designs, and utilizing backups and fail-safe procedures. ROHM shall have no responsibility for any damages arising out of the use of our Poducts beyond the rating specified by ROHM
- 4) Examples of application circuits, circuit constants and any other information contained herein are provided only to illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.
- 5) The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM or any other parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use of such technical information.
- 6) The Products are intended for use in general electronic equipment (i.e. AV/OA devices, communication, consumer systems, gaming/entertainment sets) as well as the applications indicated in this document.
- 7) The Products specified in this document are not designed to be radiation tolerant.
- 8) For use of our Products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a ROHM representative: transportation equipment (i.e. cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, servers, solar cells, and power transmission systems.
- Do not use our Products in applications requiring extremely high reliability, such as aerospace equipment, nuclear power control systems, and submarine repeaters.
- 10) ROHM shall have no responsibility for any damages or injury arising from non-compliance with the recommended usage conditions and specifications contained herein.
- 11) ROHM has used reasonable care to ensur the accuracy of the information contained in this document. However, ROHM does not warrants that such information is error-free, and ROHM shall have no responsibility for any damages arising from any inaccuracy or misprint of such information.
- 12) Please use the Products in accordance with any applicable environmental laws and regulations, such as the RoHS Directive. For more details, including RoHS compatibility, please contact a ROHM sales office. ROHM shall have no responsibility for any damages or losses resulting non-compliance with any applicable laws or regulations.
- 13) When providing our Products and technologies contained in this document to other countries, you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the US Export Administration Regulations and the Foreign Exchange and Foreign Trade Act.
- 14) This document, in part or in whole, may not be reprinted or reproduced without prior consent of ROHM.



Thank you for your accessing to ROHM product informations. More detail product informations and catalogs are available, please contact us.

#### **ROHM Customer Support System**

http://www.rohm.com/contact/