

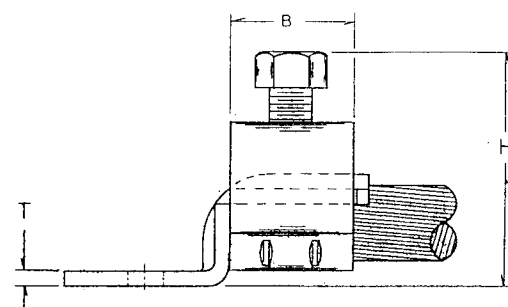
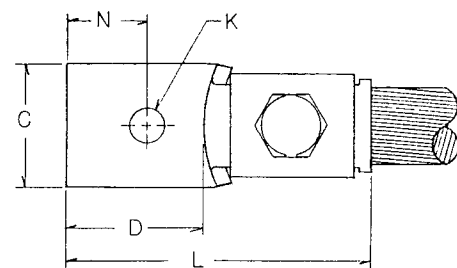


FIG. 1

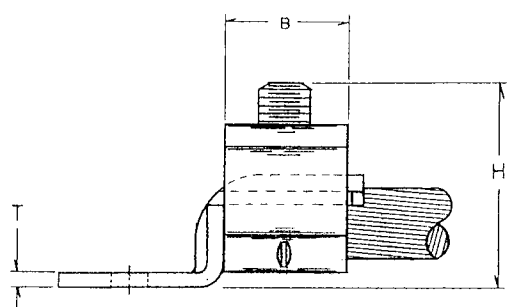
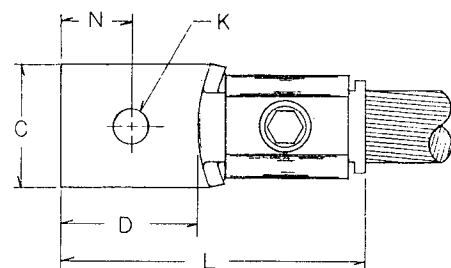


FIG. 2

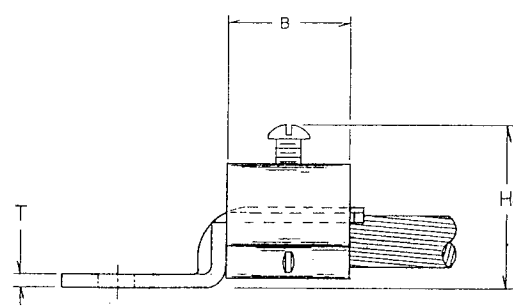
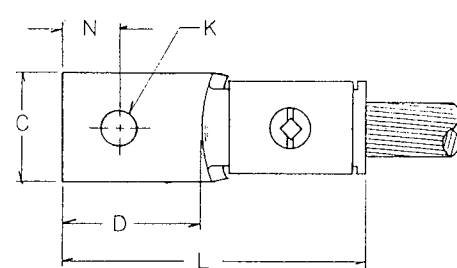


FIG. 3

CATALOG NUMBER	CONDUCTOR	FIG. NO.	B	C	D	REF. H	K	L	N	T	RECOMMENDED TIGHTENING TORQUE IN. LBS.	HARDWARE	STUD HOLE SIZE	QUANTITY/PACKAGE	STRIP LENGTH
KLU 25	14 SOL 1.63 (.064) DIA. TO	3	7.1	7.9	11.9	17.0	3.6	23.1	4.6	1.8	20	NO. 8-32 SLOT/ROBERTSON	1/8	100	7/16
KLU 25TP	10 SOL 2.60 (.102) DIA. CU		.28	.31	.47	.66	.14	.91	.18	.07					
KLU 35	14 SOL 1.63 (.064) DIA. TO		10.9	9.6	14.5	23.0	5.2	29.7	5.6	1.8	45	1/4" DIA. SLOT/ROBERTSON	3/16	100	5/8
KLU 35TP	6 STR 4.67 (.184) DIA. CU		.43	.38	.57	.91	.20	1.17	.22	.07					
KLU 70	8 SOL 3.28 (.129) DIA. TO		12.7	12.7	15.5	27.0	6.9	33.5	6.4	1.8	50	5/16" DIA. SLOT/ROBERTSON	1/4	100	3/4
KLU 70TP	2 STR 7.42 (.292) DIA. CU		.50	.50	.61	1.05	.27	1.32	.25	.07					
KLU 125	2 STR 7.42 (.292) DIA. TO	2	15.5	15.7	21.7	37.0	6.7	45.1	10.9	31.2	50	3/8" DIA. SLOT/ROBERTSON	1/4	25	15/16
KLU 125TP	1/0 STR 9.44 (.372) DIA. CU		.61	.62	.86	1.50	.26	1.78	.43	.12					
KLU 175	4 STR 5.89 (.232) DIA. TO		19.1	19.1	29.8	36.0	10.4	55.9	10.9	3.2	124	3/8" DIA. HEX. SOCKET	3/8	12	1
KLU 175TP	3/0 STR 11.94 (.470) DIA. CU		.75	.75	1.2	1.40	.41	2.20	.43	.12					
KLU 225	2 STR 7.42 (.292) DIA. TO		25.4	25.4	31.4	42.0	8.73	64.5	13.0	3.2	204	7/16" DIA. HEX. SOCKET	5/16	12	1 5/16
KLU 225TP	4/0 STR 13.4 (.528) DIA. CU		1.0	1.0	1.24	1.64	.34	2.54	.51	.12					
KLU 300	1/0 STR 9.44 (.372) DIA. TO	1	30.7	27.9	40.6	67.0	10.4	82.3	13.0	4.8	325	5/8" DIA. HEX. HEAD	3/8	6	1 5/8
KLU 300TP	350 MCM 17.30 (.681) DIA. CU		1.21	1.10	1.60	2.63	.41	3.25	.51	.19					
KLU 400	1/0 STR 9.44 (.372) DIA. TO		37.8	38.1	53.8	70.0	10.4	108.2	21.3	4.8	375	3/8" DIA. HEX. HEAD	3/8	3	2 5/32
KLU 400TP	500 MCM 20.7 (.813) DIA. CU		1.49	1.50	2.12	2.74	.41	4.26	.84	.19					
KLU 650	600 MCM 22.68 (.893) DIA. TO		47.8	50.8	48.3	94.7	13.5	117.1	30.0	6.4	500	3/4" DIA. HEX. HEAD	1/2	1	1 3/4
KLU 650TP	1000 MCM 29.26 (1.152) DIA. CU		1.88	2.0	1.90	3.73	.53	4.61	1.13	.25					

NOTES:

- 1 FINGER TIGHT TORQUE WITH MAXIMUM CONDUCTOR.
- 2 SUFFIX "TP" ON CATALOG NUMBER DENOTES TIN PLATE. EXAMPLE: KLU650TP
- 3 MATERIAL: COPPER ALLOY.

KLU-LUG(OFFSET PAD TERM. LUG)

CAT NO: KLU---TABLE

SCALE
NONE

DRAWN JSG 1/20/92

CHECKED: KH 1/23/92

DSGN APPVL: GP 3/10/92

MFG APPVL: BK 1/24/92

O.A. APPVL: AL 1/27/92

MKTG APPVL: LH 1/28/92

CAD FILE: N/A

PM REF: N/A

MDL REF: N/A

PROJECT:

an FCI Company

U.S. ELECTRICAL DIVISION
MANCHESTER, NH 03108

DRAWING NO.
SD207469

REV
1

SHEET 1 OF 1

REV: 11/1991