


MOUNTING PAD LAYOUT. REQUIRED SPACING FOR 'AAA' OR 'N' BATTERIES

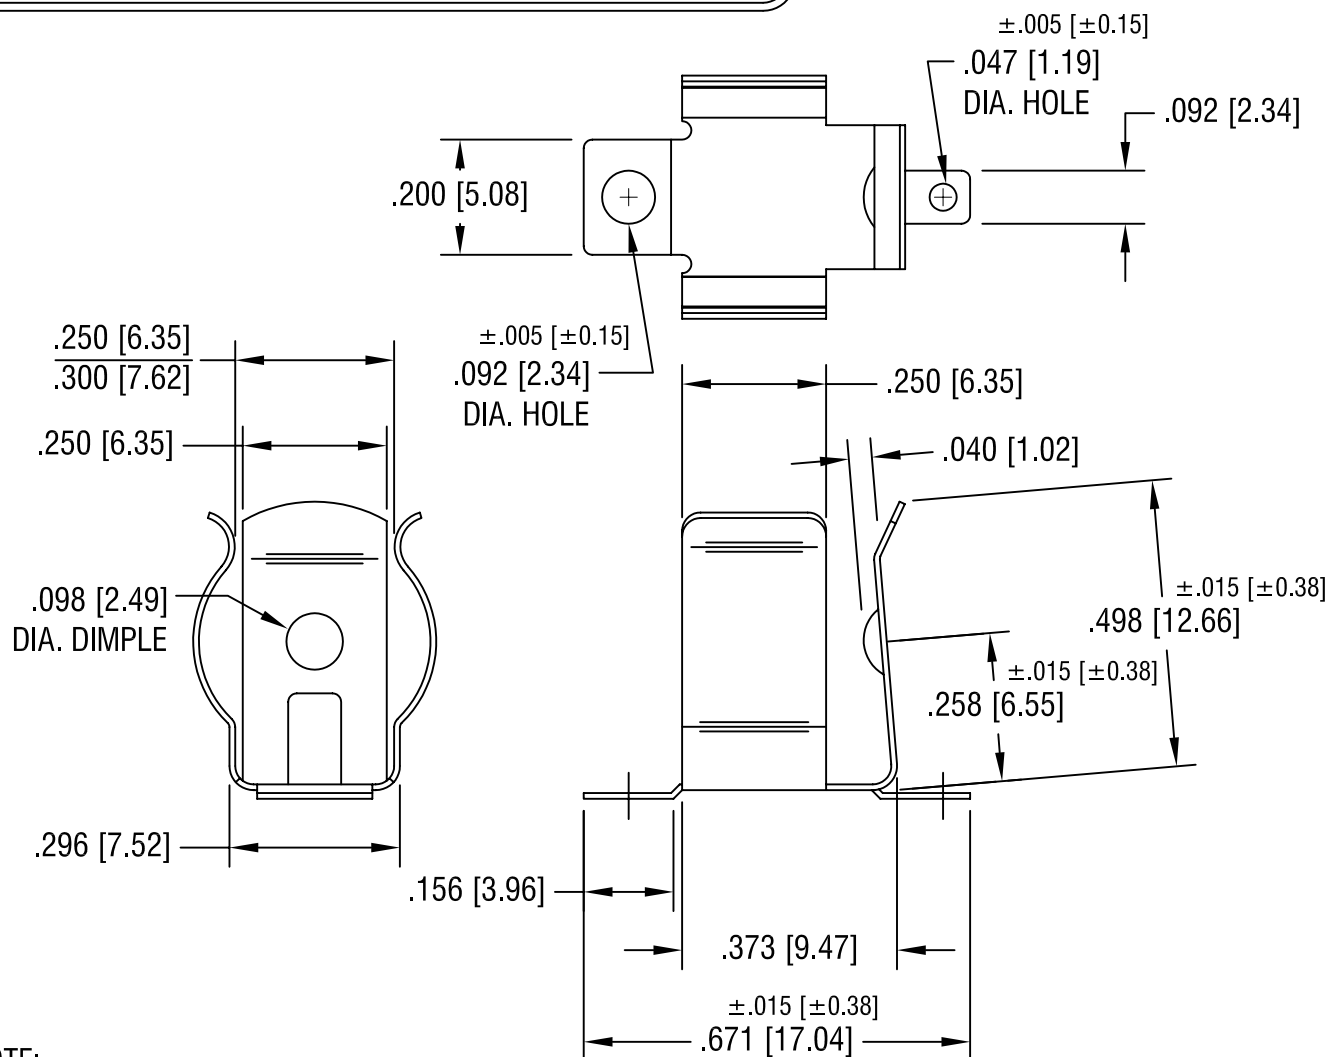

1. HEAT TREAT TO SPRING TEMPER.

ASTORIA, N.Y. 11105-2017

'AAA'-'N' SMT BATTERY CLIP

.010 [.25] TH'K ANNEALED SPRING STEEL

TIN NICKEL PLATE

BOONE

LN

SCALE

INCH [MM]

DWG NO

C

ANGULAR $\pm 1^\circ$
UNLESS OTHERWISE SPECIFIED

55

F

DESCRIPTION

REV.