

SJPJ-D3

Schottky Barrier Rectifier

Mar. 2008


General Description

SJPJ-D3 is a Schottky Barrier Diode, and has achieved low leakage current and low VF by selecting the best barrier metal.

Applications

- DC-DC converters
- AC adapter
- High frequency rectification circuit

Package

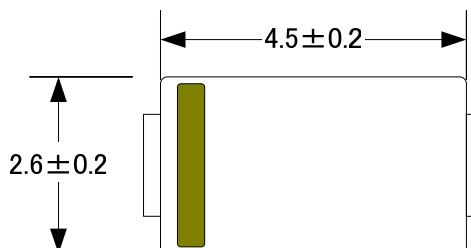



Features

- Super-high speed & low noise switching.
- Low forward voltage drop.

Key Specifications

Symbol	Unit	Rating	Conditions
V_{RM}	V	30	
V_F	V	0.45	$I_F=1.0A$
$I_{F(AV)}$	A	1.0	

Typical Characteristics

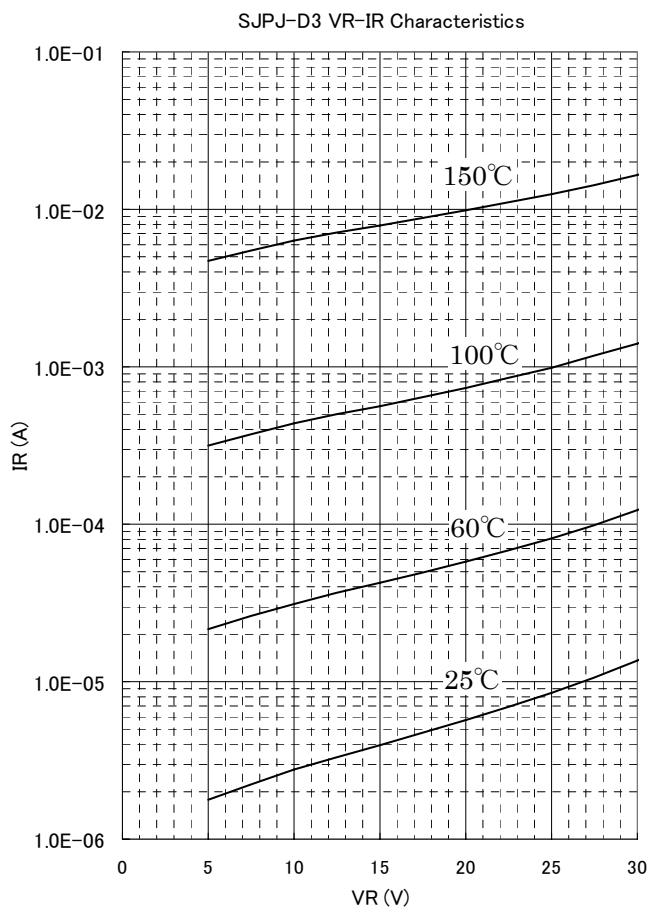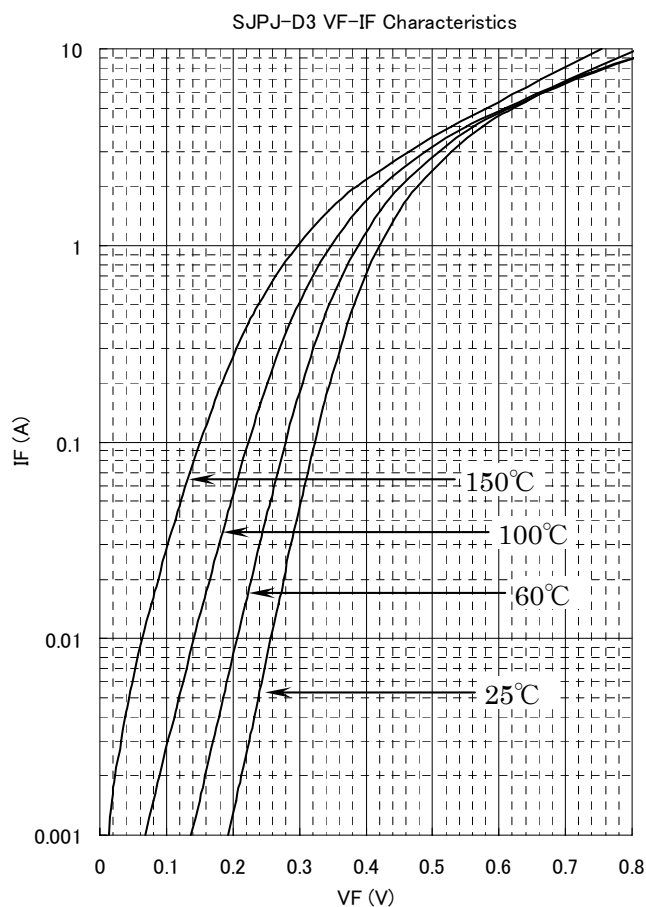

The information included herein is believed to be accurate and reliable. However, SANKEN ELECTRIC CO., LTD assumes no responsibility for its use ; nor for any infringements of patents or other rights of third parties that may result from its use.

SJPJ-D3

Mar. 2008

Schottky Barrier Rectifier

★ Absolute maximum ratings

No.	Parameter	Symbol	Unit	Rating	Conditions
1	Transient Peak Reverse Voltage	V_{RSM}	V	30	
2	Peak Reverse Voltage	V_{RM}	V	30	
3	Average Forward Current	$I_{F(AV)}$	A	1.0	
4	Peak Surge Forward Current	I_{FSM}	A	30	Half sinewave, one shot
5	I^2t Limiting Value	I^2t	A^2s	4.5	$1msec < t < 10msec$
6	Junction Temperature	T_j	°C	-40 to +150	
7	Storage Temperature	T_{stg}	°C	-40 to +150	

★ Electrical characteristics ($T_a=25^{\circ}C$, unless otherwise specified)

No.	Parameter	Symbol	Unit	Value	Conditions
1	Forward Voltage Drop	V_F	V	0.45 max.	$I_F=1.0A$
2	Reverse Leakage Current	I_R	μA	100 max.	$V_R=V_{RM}$
3	Reverse Leakage Current Under High Temperature	$H \cdot I_R$	mA	35 max.	$V_R=V_{RM}$, $T_j=150^{\circ}C$
4	Thermal Resistance	$R_{th(j-l)}$	°C/W	20 max.	Between Junction and Lead

The information included herein is believed to be accurate and reliable. However, SANKEN ELECTRIC CO., LTD assumes no responsibility for its use ; nor for any infringements of patents or other rights of third parties that may result from its use.


SJ PJ-D3

Schottky Barrier Rectifier


Mar. 2008

★ Characteristics

Forward Power Dissipation

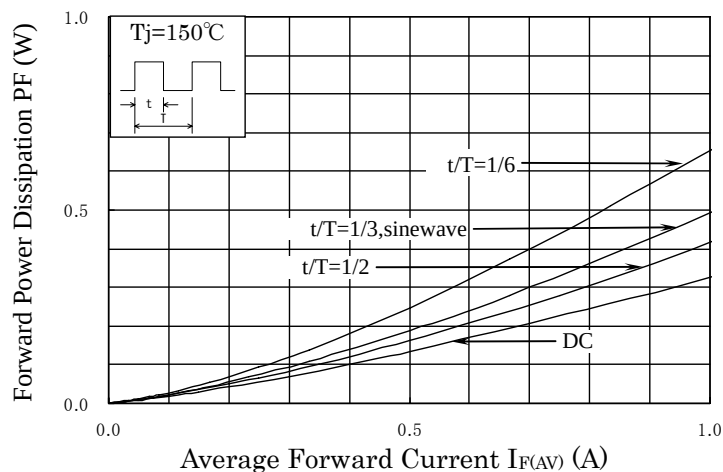


Reverse Power Dissipation

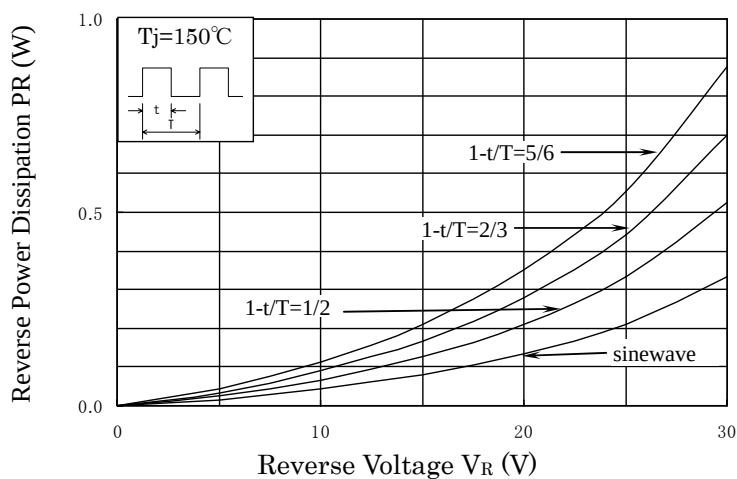

Current Derating

$V_R=30\text{V}$

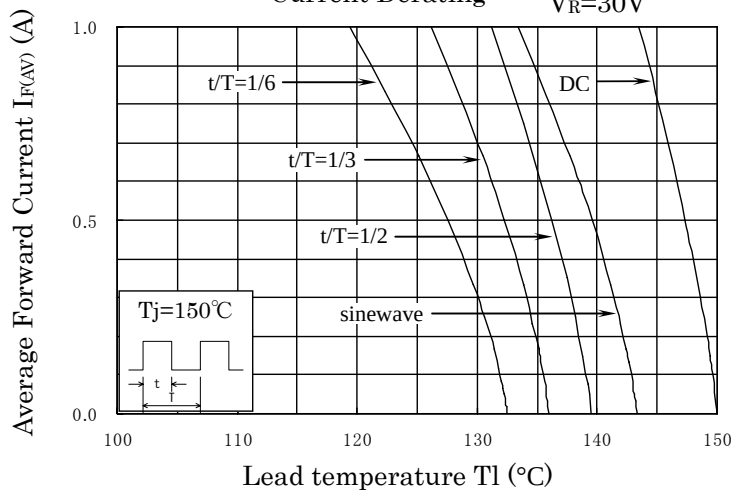


SJPJ-D3

Schottky Barrier Rectifier

Mar. 2008

★ Outline drawings, mm

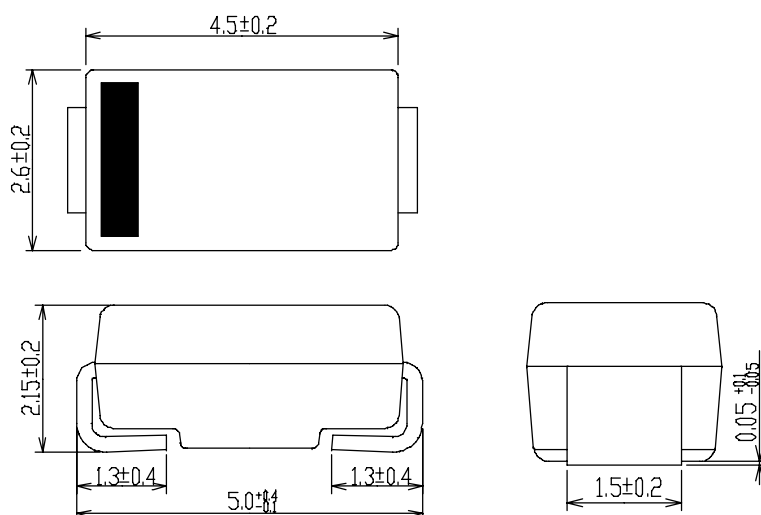

★ Connection Diagram

