

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

ALL RIGHTS RESERVED.

LOC  
ALDIST  
I

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD




F4

REVISED PER ECR-15-007190




14JUL2015

NK


EW

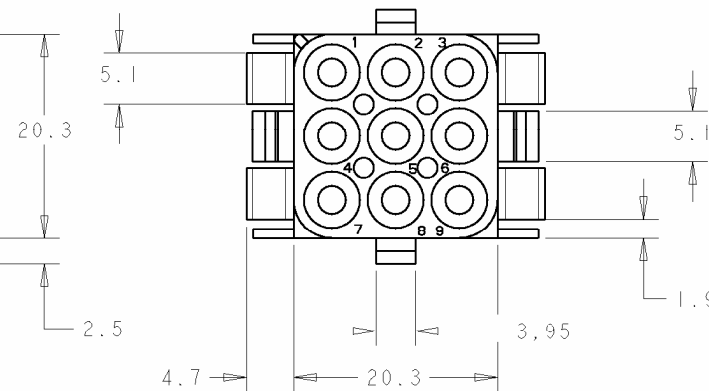

PANEL CUTOUT

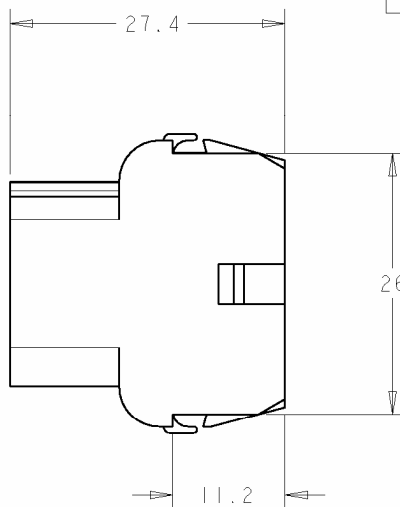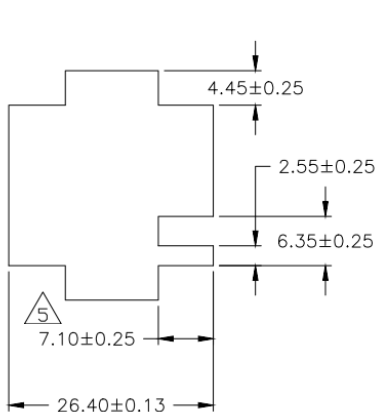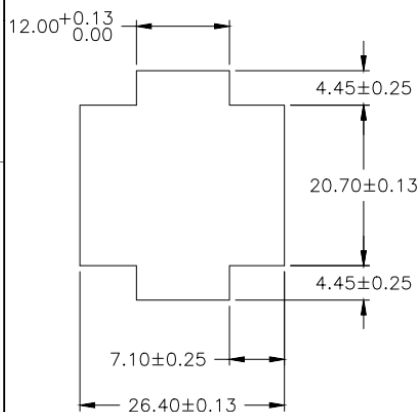PANEL CUTOUT  $\triangle 4$ 

SECTION A-A



1 SUITABLE FOR PIN AND FEMALE CONTACTS

2 RECOMMENDED SHEET METAL THICKNESS 0,75 - 2,3 mm.

3 HOUSING MUST BE INTRODUCED IN PUNCHING DIRECTION.

 $\triangle 4$  FOR CODED USING OF THE HOUSINGS $\triangle 5$  POSITION OF CAVITY 1 FOR CODED USING $\triangle 6$  NEW MATERIAL (PHOSPOR AND HALOGENEUS FREE). $\triangle 7$  GWT 750°C (WITHOUT FLAME) ACCORDING IEC 60335-1 EDITION 06/2001 $\triangle 8$  MATERIAL WITH GWT 850°C $\triangle 9$  PRELIMINARY PART NOT RELEASED FOR PRODUCTION

|                    |  |                                        |      |
|--------------------|--|----------------------------------------|------|
| DIMENSIONS:        |  | TOLERANCES UNLESS OTHERWISE SPECIFIED: |      |
| mm                 |  |                                        |      |
|                    |  | 0 PLC                                  | ±0,2 |
|                    |  | 1 PLC                                  | ±0,2 |
|                    |  | 2 PLC                                  | ±0,2 |
|                    |  | 3 PLC                                  | ±    |
|                    |  | 4 PLC                                  | ±    |
| MATERIAL SEE TABLE |  | FINISH                                 | -    |

|                  |           |
|------------------|-----------|
| DWN              | 05MAR2008 |
| CHK              | J. SALO   |
| APVD             | 06MAR2008 |
| CHK              | J. LAZARO |
| APVD             | 06MAR2008 |
| PRODUCT SPEC     | 108-1031  |
| APPLICATION SPEC | 114-18011 |
| WEIGHT           | -         |
| CUSTOMER DRAWING |           |

|          |               |                                 |
|----------|---------------|---------------------------------|
| 927231-7 | PA66 UL-94 V0 | NATURAL $\triangle$             |
| 927231-6 | PA6 UL-94 V0  | NATURAL $\triangle$             |
| 927231-5 | PA6 UL-94 V2  | NATURAL $\triangle$ $\triangle$ |
| 927231-4 | PA66 UL-94 V0 | WHITE                           |
| 927231-3 | PA66 UL-94 V0 | NATURAL $\triangle$             |
| 927231-2 | PA66 UL-94 V0 | BLACK                           |
| 927231-1 | PA66 UL-94 V0 | NATURAL                         |
| PN       | MATERIAL      | COLOUR                          |

TE Connectivity

|            |  |  |  |                        |  |  |  |
|------------|--|--|--|------------------------|--|--|--|
| NAME       |  |  |  | UMNL 9 WAY CAP HOUSING |  |  |  |
| SIZE       |  |  |  | RESTRICTED TO          |  |  |  |
| CAGE CODE  |  |  |  | -                      |  |  |  |
| DRAWING NO |  |  |  | -                      |  |  |  |
| A300779    |  |  |  | -                      |  |  |  |
| C- 927231  |  |  |  | -                      |  |  |  |
| SHEET      |  |  |  | REV                    |  |  |  |
| 2          |  |  |  | F4                     |  |  |  |