

Clock-pulse generator time delay relay

MFT IT14S



MFT IT14S

- 2 functions
- Zoomvoltage:
12 ... 240 Vac/dc
- 1 output contact

Function

T Cycling timer

- TP Cycling timer relay beginning on a pause
- TI Cycling timer relay beginning on a pulse

Time ranges

Adjustable 0,05 s ... 100 h

Output relay

1 changer potential free 250 Vac / 8 A

Indicators

- Green LED ON: indication of supply voltage
- Green LED flashes slowly: indication of time t1
- Green LED flashes fast: indication of time t2
- Yellow LED ON/OFF: indication of relay output

Supply voltage

12 ... 240 Vac/dc -10% +10%
AC 48 ... 63 Hz, 100% duration of operation

Reference data


Selectron® MFT	Article no.
MFT IT14S	41130007
(Order data see chapter 1)	

Clock-pulse generator time delay relay

MFT IT14S

Technical data		
Input circuit	MFT IT14S	
	12 ... 240 Vac/dc	4 VA / 1,5 W
	Residual ripple for dc	10%
	Drop-out voltage	>30% of minimum rated supply voltage
Control contact / Voltage controlled		
	Parallel switching of loads possible	
	Input not potential free	terminals A1 - B1
	Trigger level (sensitivity)	automatic adapted to supply voltage
	Max. line length	10 m
	Min. control pulse lenght	DC 50 ms / AC 100 ms
Accuracy		
	Base accuracy	±1% of the scale limit
	Repeatability of the scale limit	<0,5% or ±5 ms
	Adjustment accuracy	<5% of the scale limit
	Temperature influence	≤0,01% / °C
Reaction times		
	Recovery time	100 ms

Type key

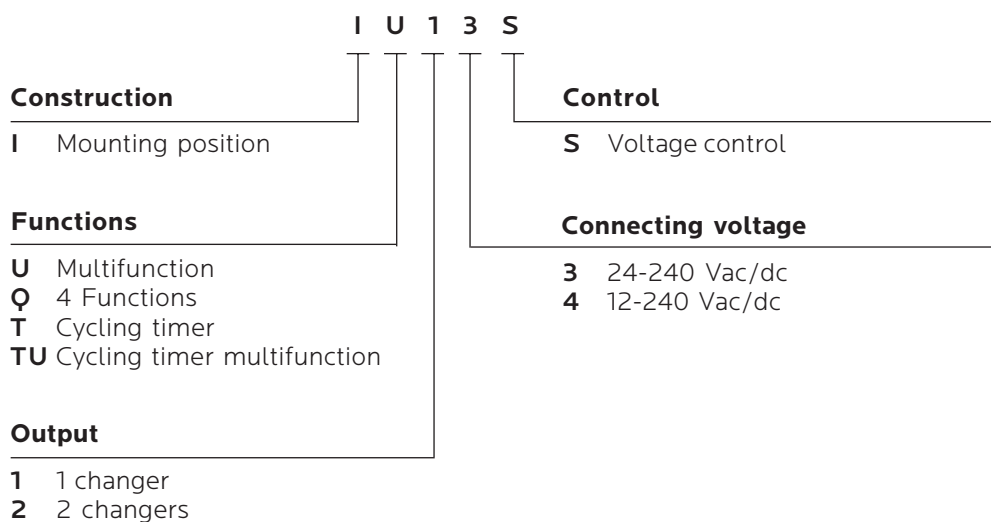

Clock-pulse generator time delay relay

MFT IT14S

Function descriptions

TP - Cycling timer relay beginning on a pause


When the supply voltage U is applied, the set interval t_1 begins (green LED U/t flashes slowly). After the interval t_1 has



expired, the output relay switches into on-position (yellow LED illuminated) and the set interval t_2 begins (green LED U/t flashes fast). After the interval t_2 has expired, the output relay switches into off-position (yellow LED not illuminated). The output relay is triggered in the ratio of the two set intervals until the supply voltage is interrupted.

TI - Cycling timer relay beginning on a pulse

When the supply voltage is applied, the output relay R switches into on-position (yellow LED illuminated) and the set




interval t_1 begins (green LED U/t flashes slowly). After the interval t_1 has expired, the output relay switches into off-position (yellow LED not illuminated) and the set interval t_2 begins (green LED U/t flashes fast). After the interval t_2 has expired, the output relay switches into on-position again (yellow LED illuminated). The output relay is triggered in the ratio of the two set intervals until the supply voltage is interrupted.

Clock-pulse generator time delay relay

MFT IT14S


Connection

MFT IT14S

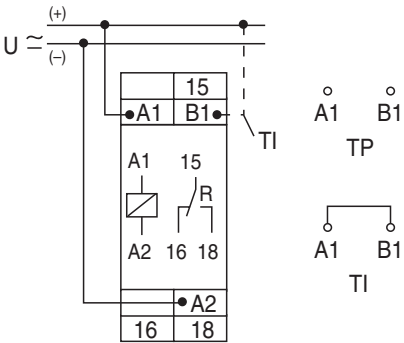

Load limit curves

MFT IT14S

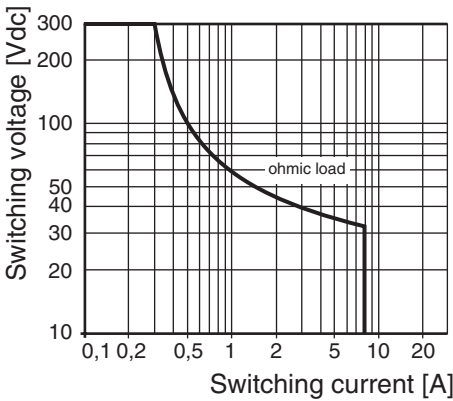

Dimensions

