# HIGH FREQUENCY WIRE WOUND TRANSFORMERS

### El22 Platforms - THT





- AC/DC and DC/DC Switching Transformers
- Reinforced Insulation
- 3000Vrms Hi-Pot
- Topology: Flyback
- Custom Design Available

	Electr	ical Specifications @ 25°C — Ope	erating T	emperature	e-40°C to 130°C <sup>1</sup>	
PA2653NL	Pri. Inductance	(3 - 1)	910 μH ± 10%		50	
	Lk. Inductance	(3 - 1)	15 μH MAX		AUX 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	
	w/	(4, 5, 8, 9)	shorted		40-33	
		(3-1)	875		N/C SEC 24V@800mA	
	DCR	(5-4)	17.5	m Ω Max	<b>₹</b>   ⊁ ⊁	
		(9-8)	75		PRI 85-253VAC 3	
	Hi-Pot	Pri-Sec	3000 Vrms		CM - FLYBACK TRANSFORMER	
	K1 Factor	3616.8				
PA2813NL	Pri. Inductance	(4 - 5)	1200 μH ± 10%			
	Lk. Inductance	(4 - 5)	20 μH MAX		5 0 85-270 VAC 7	
	w/	(1, 2, 7, 8)	shorted		115KH7 <  (• (•	
		(4-5)	2500		\$ SEC 4 0 12V@0.5A	
	DCR	(1-2)	200	m Ω Max	AUX 3	
		(7-8)	60		12 V 1 •————————————————————————————————————	
	Hi-Pot	Pri-Sec Pri-Sec	3000	Vrms	FLYBACK TRANSFORMER	
	K1 Factor	5148				

### NOTES:

- The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
- The above transformers and inductors have been tested and approved by Pulse's power IC partners and are sited in the appropriate datasheet or evaluation board documentation at these companies. To determine which IC andIC partners are matched with the above Pulse part numbers please consult the IC Cross Reference on the Pulse website.
- For flyback topology applications, it is necessary to ensure that the transformer will not saturate in the application. The peak flux density (Bpk) should remain below 2700Gauss. To calculate the peak flux density use the following formula:

Bpk (Gauss) = K1\_Factor \* Ipk(A)

4. In high volt-usec applications, it is important to calculate the core loss of the transformer. Approximate transformer core loss can be calculated as: CoreLoss (W) = 4.1769x10 <sup>-7</sup> x(Freq\_kHz)<sup>^1.62</sup> x (DB\_Gauss)<sup>^2.65</sup> where DB can be calculated as:

For Flyback Topology: DB = K1\_Factor \* D(A) For Forward Topology: DB = K1\_Factor \* Volt-µsec


The "NL" suffix indicates an RoHS-compliant part number. Non-NL suffixed
parts are not necessarily RoHS compliant, but are electrically and mechanically equivalent to NL versions. If a part number does not have the "NL"
suffix, but an RoHS compliant version is required, please contact Pulse for
availability.

# HIGH FREQUENCY WIRE WOUND TRANSFORMERS El22 Platforms - THT




### **Mechanical**



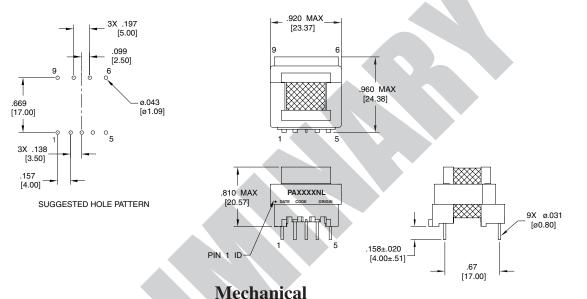

## Mechani

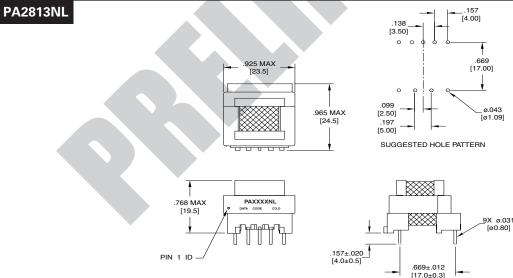

#### **For More Information:**

Pulse North America Headquarters 12220 World Trade Dr. San Diego, CA 92128 U.S.A.	Pulse European Headquarters Einsteinstrasse 1 D-71083 Herrenberg Germany	Pulse China Headquarters B402, Shenzhen Academy of Aerospace Technology Bldg. 10th Kejinan Rd. High-Tech Zone Nanshan District Shenzen, PR China 518057	Pulse North China Room 1503 XinYin Building No. 888 YiShan Rd. Shanghai 200233 China	Pulse South Asia 150 Kampong Ampat #07-01/02 KA Centre Singapore 368324	Pulse North Asia No. 26 Kao Ching Rd. Yang Mei Chen Taoyuan Hsien Taiwan, R. O. C. 32667			
TEL: 858 674 8100	TEL: 49 7032 7806 0	TEL: 86 755 33966678	TEL: 86 21 32181071	TEL: 65 6287 8998	TEL: 886 3 4643715			
FAX: 858 674 8262	FAX: 49 7032 7806 12	FAX: 86 755 33966700	FAX: 86 21 32181396	FAX: 65 6280 0080	FAX: 886 3 4641911			

This is a "Preliminary" product data sheet. Products mentioned on this data sheet are in development and in the process of being qualified. These products are not fully released nor are they in production. Features, specifications and performance of products offered are subject to change without notice. Other brand and product names mentioned herein may be products and/or registered trademarks of their respective owners. For current information on this product, please contact the Pulse office nearest you and ask for the "Power Applications Engineer." Pulse and the Squarewave logo are trademarks of Pulse Electronics, Inc., registered in the U.S. and other countries.

2

© Copyright, 2010. Pulse Electronics, Inc. All rights reserved.